Mitutoyo

EN 20009

MEASURING INSTRUMENTS CATALOG

2026 - 2027



Competence and customer proximity on one spot

Throughout Europe, the name Mitutoyo represents innovational power as well as outstanding quality in the field of sophisticated dimensional measuring solutions. In order to strengthen and synchronise the concerted pan-European activities, Mitutoyo established the European headquarters named Mitutoyo Europe GmbH in Neuss near Düsseldorf/ Germany in January 2010.

The headquarters oversees all the activities of Mitutoyo's sales, service and production facilities throughout Europe and adjacent markets, e.g. of Turkey. It also plans and implements the medium and long term business strategies of such European operations. A Mitutoyo Europe GmbH key objective is to promote coordination amongst its European group companies in order to optimise its sales and technical support services in the best interests of customer satisfaction.

More than 260 highly skilled members of staff work for the benefit of our customers in development, service, sales and administration. They are supported by the specialists of Mitutoyo CTL Germany GmbH in Oberndorf on the River Neckar, which focuses solely on developing ground-breakingly powerful and easy to use software for three-coordinate measurement technology. The peripheral fields of coordinate measuring machines, jigging and loading systems and thermal cabins are covered by KOMEG company based in Saarland.

In addition to top-level measuring and testing equipment, the range of products also includes a wide selection of accessories and – as a further area of focus – sophisticated, high-performance software for coordinate measuring machines and vision measuring systems as well as surface roughness, hardness and form measurement.

The Mitutoyo Information Center of Metrology (MIM) has been demonstrating the manufacturer's commitment to advanced training in all fields of dimensional measurement technology since 1999. The MIM is open to anyone working in the fields of manufacturing, service, science and research. Mitutoyo Europe GmbH is, moreover, a corporate member of "Ausbildung Koordinatenmesstechnik e. V. (AUKOM)". This association is dedicated to providing training schemes for coordinate measuring technology with the aim of ensuring a neutral, comprehensive and state of the art training concept.

Germany has also been home to the Mitutoyo M³ Solutions Europe division since 2004. The abbreviation M³ stands for Mitutoyo Measurement Metrology and, as such, for the concept of special measuring solutions developed by Mitutoyo to meet the particular requirements of its customers across the whole breadth of length, form and surface measurement technology. The Mitutoyo Europe GmbH in Neuss offers sample configurations in the 400 m² M³ Solution Center Europe to demonstrate the numerous possibilities. The center also presents the smooth and seamlss integration of peripheral systems, such as jigs or feed and climate control systems from KOMEG alongside the measuring equipment.

The range of products offered by Mitutoyo in Europe is divided into eight groups:

- Coordinate Measuring Machines
- Vision Measuring Systems
- Form Measurement
- Optical Measuring
- Sensor Systems
- Test Equipment and Seismometers
- Digital Scale and DRO Systems
- Small Tool Instruments and Data Management

PRECISION IS IN OUR DNA :

Mitutoyo

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Highlights

Special Purpose Items



Absolute Digimatic Indicator ID-F



QuantuMike



Linear Height LH-600F/FG



MF Microscope



Surftest SJ-220



Formtracer Avant FTA-H3000



Roundtracer Extreme RTX



HR-620B



SmartMeasure-AL



MACH Ko-ga-me Series



STRATO-Active Series



QM-Fit



CNC Vision



Fixtures



Styli



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Mitutoyo

Table of Contents

Data Management

Quality Management Software
Digimatic Mini Processor
Signal Cables
Wireless Data Transmission
etc.

14 - 34



Height Gauges

Height Gauge
Height Gauge Accessories
Height Gauge with Data Processing Unit

212 - 226



Micrometers

Digimatic Micrometers and Mechanical Micrometers
Micrometers Accessories
Micrometer Heads
Micrometer Head Accessories

35 - 126



Indicators

ABSOLUTE Digimatic Indicator
Dial Indicator
Accessories for Indicator
Dial Test Indicator
etc.

227 - 291



Inside Measuring Instruments

Inside Micrometer
Bore Gauges
Inside Measuring Instruments Accessories

127 - 159



Auxiliary Equipment and Miscellaneous

Stands, Bench Tools, Vices, V-Blocks, Plates, Protectors, Levels, Squares, Rules, Spring Calipers

292 - 312



Calipers

Absolute Digimatic Caliper
Analog Caliper
Special Purpose Caliper
Caliper Accessories

160 - 197



Calibration Instructions

Height Master
Check Master
Calibration Tools

313 - 327



Depth Measuring Instruments

Depth Measuring Instruments

198 - 211



Gauge Blocks

Steel Gauge Block Sets
Steel Individual Gauge Blocks
CERA Gauge Block Sets
CERA Individual Gauge Blocks
etc.


328 - 351



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Sensor Systems and Laser Scan Micrometers

Linear Gauges
Counters and Display Units
LITEMATIC
Laser Scan Micrometer



352 - 374

Coordinate Measuring Machines

CMM Software
Mobile 3D Systems & Manual CMMs
Small- and Medium Size CMMs
Large Size CMMs
Styli & Modular Fixture Products



530 - 567

Scale Units and Linear Scales

Scale Units
Linear Scale
NC-Scales



375 - 396

Vision Measuring Machines


Vison Measuring Machines
Manual 2D VMM Quick Image
Manual 2.5D VMM Quick Scope
CNC VMM Quick Vison, MiSCAN
Modular Fixtures



568 - 587

Optical Measuring

Optical Measuring
Magnifiers
Measuring Microscopes
Objectives
Measuring Projectors



397 - 448

For better communication with our customers

Mitutoyo's Domestic Network
Mitutoyo's Overseas Network
M³ Solution Centers



588 - 592

Form Measurement


Surface Roughness -,
Contour-,
Form Measuring Instruments



449 - 506

Indexes

INDEXES



593 - 600

Hardness Testing

Hardness Testing Machines




507 - 529

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Offering Reliable Traceability Worldwide


Mitutoyo has built a network for comprehensive calibration support of precision measuring products in the global market. To provide calibration services on a global scale, Mitutoyo has gained ISO/IEC 17025 certification from the accreditation body in each country, and has issued calibration certificates carrying the mark of each accreditation body. In addition, the calibration certificates issued by each calibration laboratory are mutually recognized in the countries and commercial areas signed in the MRA (Mutual Recognition Arrangement) of ILAC (International Laboratory Accreditation Cooperation) and APAC (Asia Pacific Accreditation Cooperation), or the MLA (Multilateral Agreement) of EA (European co-operation for Accreditation).

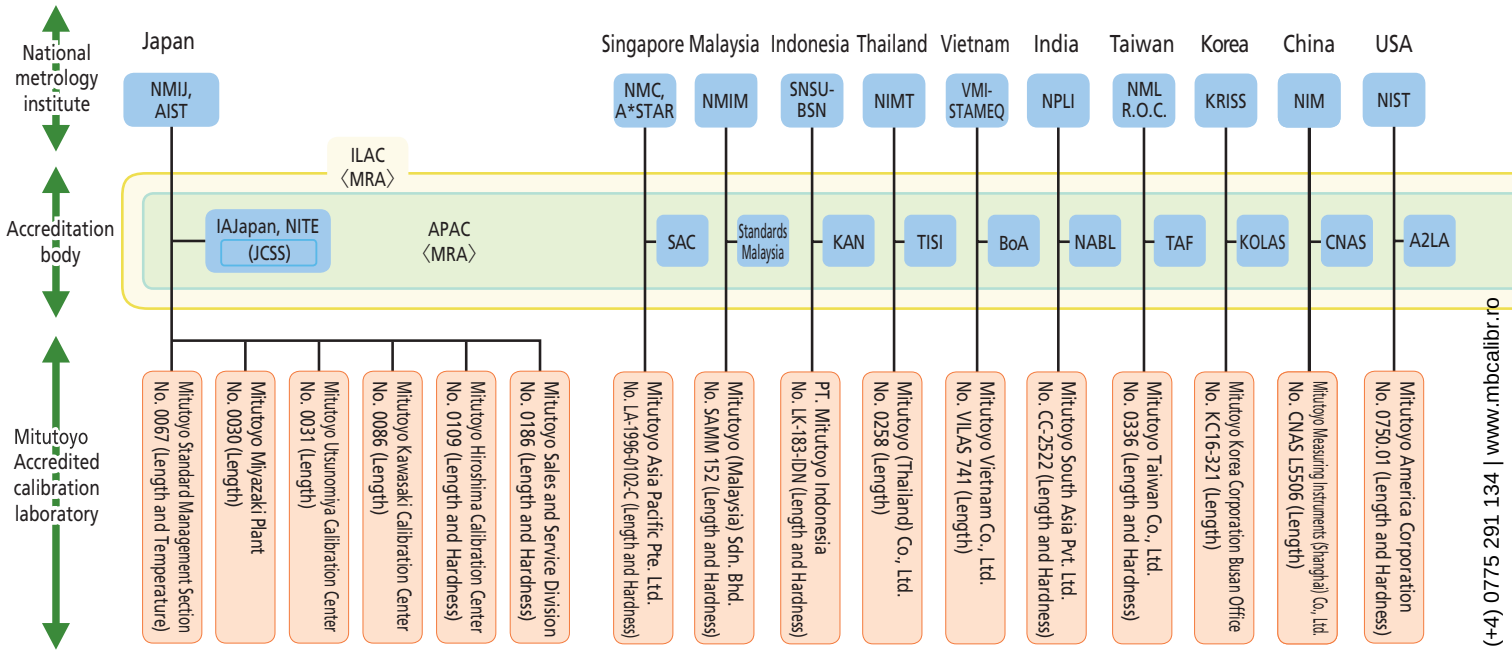

- Japan
  - AIST : National Institute of Advanced Industrial Science and Technology
  - NMIJ : National Metrology Institute of Japan
  - NITE : National Institute of Technology and Evaluation
  - IAJapan : International Accreditation Japan
  - JCSS : Japan Calibration Service System
- Singapore
  - NMC, A*STAR : National Metrology Centre/Agency for Science, Technology and Research
  - SAC : Singapore Accreditation Council
- Malaysia
  - NMIM : National Metrology Institute of Malaysia
  - Standards Malaysia : Standards Malaysia
- Indonesia
  - SNSU-BSN : National Standardization Agency of Indonesia
  - KAN : Komite Akreditasi Nasional
- Thailand
  - NIMT : National Institute of Metrology (Thailand)
  - TISI : Thai Industrial Standard Institute
- Vietnam
  - VMI-STAMEQ : Vietnam Metrology Institute, Directorate for Standards and Quality
  - BoA : BUREAU OF ACCREDITATION
- India
  - NPLI : National Physical Laboratory of India
  - NABL : National Accreditation Board for Testing and Calibration Laboratories
- Taiwan
  - NML R.O.C. : National Measurement Laboratory R.O.C.
  - TAF : Taiwan Accreditation Foundation
- Korea
  - KRISS : Korea Research Institute of Standards and Science
  - KOLAS : Korea Laboratory Accreditation Scheme
- China
  - NIM : National Institute of Metrology
  - CNAS : China National Accreditation Service for Conformity Assesment
- U.S.A.
  - NIST : National Institute of Standards and Technology
  - A2LA : American Association for Laboratory Accreditation
- Canada
  - NRC : National Research Council Canada/Institute for National Measurement Standards
  - SCC : Calibration Laboratory Assessment Service/Standards Council of Canada
- Mexico
  - CENAM : Centro Nacional de Metrología
  - ema : Entidad Mexicana de Acreditación, a.c.
- Germany
  - PTB : Physikalisch-Technische Bundesanstalt
  - DAkkS : Deutsche Akkreditierungsstelle GmbH
- Austria
  - BEV : Bundesamt für Eich- und Vermessungswesen
  - AA : Akkreditierung Austria
- U.K.
  - NPL : National Physical Laboratory
  - UKAS : United Kingdom Accreditation Service
- France
  - LNE : Laboratorie national de metrologie et d'essais
  - Cofrac : Comité français d'accréditation

Note: The above are domestic and international locations where Mitutoyo provides ISO/IEC 17025 accredited calibration services.
(As of July, 2025)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

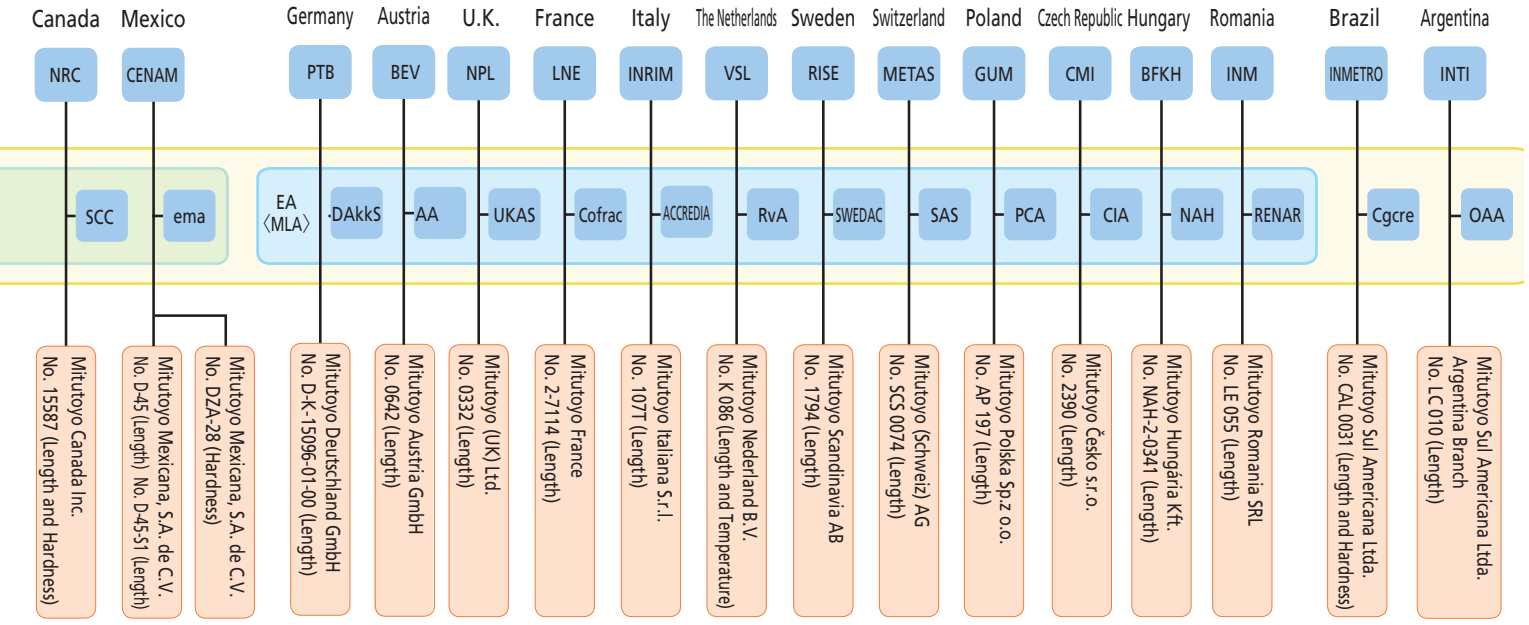

- Italy
  - INRIM : Istituto Nazionale di Ricerca Metrologica
  - ACCREDIA : L'ENTE ITALIANO DI ACCREDITAMENTO
- The Netherlands
  - VSL : Van Swinden Laboratorium
  - RvA : Raad voor Accreditatie
- Sweden
  - RISE : RISE Research Institutes of Sweden AB
  - SWEDAC : Swedish Board for Accreditation and Conformity Assessment
- Switzerland
  - METAS : The Federal Institute of Metrology
  - SAS : Swiss Accreditation Service
- Poland
  - GUM : Główny Urząd Miar - the National Metrology Institute in Poland
  - PCA : Polskie Centrum Akredytacji
- Czech Republic
  - CMI : Český Metrologický Institut
  - CIA : Český Institut pro Akreditaci
- Hungary
  - BFKH : Government Office of the Capital City Budapest
  - NAH : Nemzeti Akkreditáló Hatóság
- Romania
  - INM : Institutul National de Metrologie
  - RENAR : Asociaţia de Acreditare din România

- Brazil
  - INMETRO : Instituto Nacional de Metrologia Qualidade e Tecnologia
  - Cgcre : Coordenação Geral de Acreditação do INMETRO
- Argentina
  - INTI : Instituto Nacional de Tecnologia Industrial
  - OAA : Organismo Argentino de Acreditación

ILAC : International Laboratory Accreditation Cooperation
APAC : Asia Pacific Accreditation Cooperation
MRA : Mutual Recognition Arrangement
EA : European co-operation for Accreditation
MLA : Multilateral Agreement

Name of each National metrology institute and Accreditation body are based on our survey.



Certificate of DAkkS accredited laboratory (Mitutoyo Deutschland in Germany)



Cerificate of SAC accredited laboratory (Mitutoyo Asia Pacific in Singapore)



Certificate of A2LA accredited laboratory (Mitutoyo America in U.S.A.)



Certificate of RvA accredited laboratory (Mitutoyo Nederland in the Netherlands)



Certificate of CNAS accredited laboratory (Mitutoyo Measuring Instruments (Shanghai) in China)



Certificate of Cgcre accredited laboratory (Mitutoyo Sul Americana in Brazil)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Offering High-level Calibration Services Worldwide


Based on highest measurement capabilities of the same level as national standards

Mitutoyo ensures and maintains traceability of various types of precision measuring instruments by holding standards of length and other physical quantities that are directly traceable to the national standards for use in calibrating the working standards used for the calibration of measuring instrument products supplied to industry. Furthermore, Mitutoyo offers a temperature calibration service which is indispensable for high-accuracy length measurement.

The Mitutoyo traceability system with the optical frequency comb at the top level, ensuring performance equivalent to that of the Japan's national standard, and the calibration technology supporting this system are the basis of highly accurate and reliable products offered to customers.



Certificate of JCSS accredited laboratory (Mitutoyo Standard Management Section)

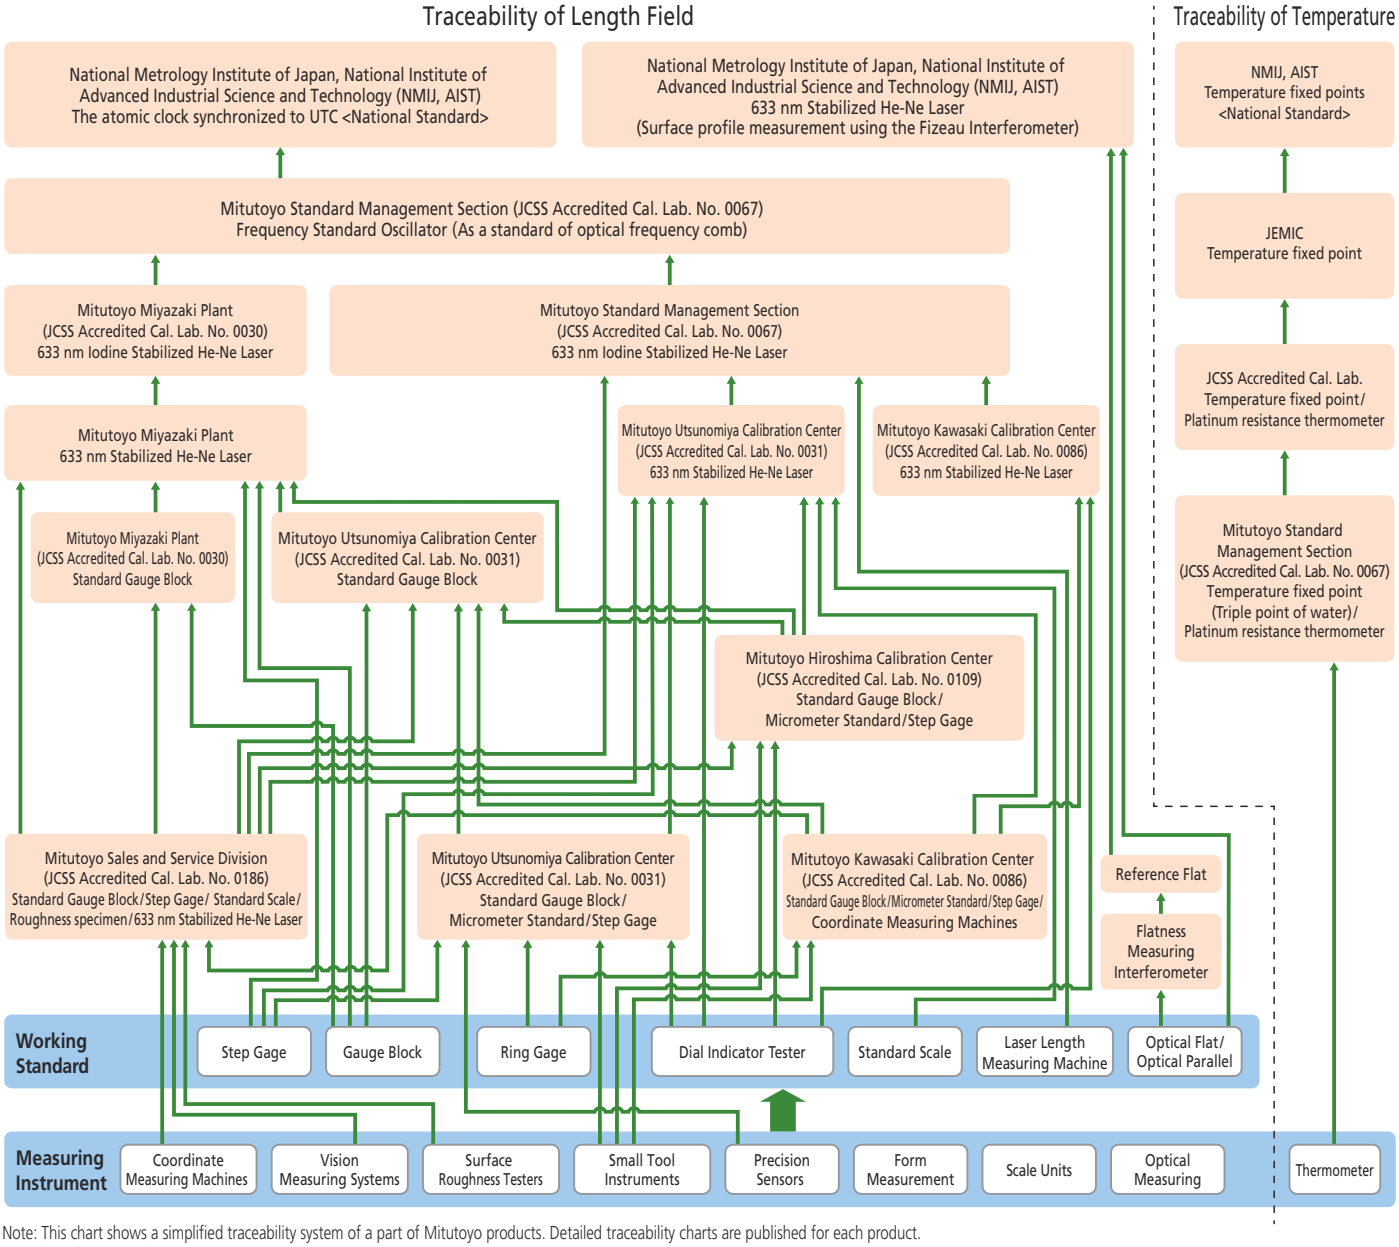


Note: This chart shows a simplified traceability system of a part of Mitutoyo products. Detailed traceability charts are published for each product.
(As of July, 2025)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

CE Marking Directives

Traceability of Hardness Field

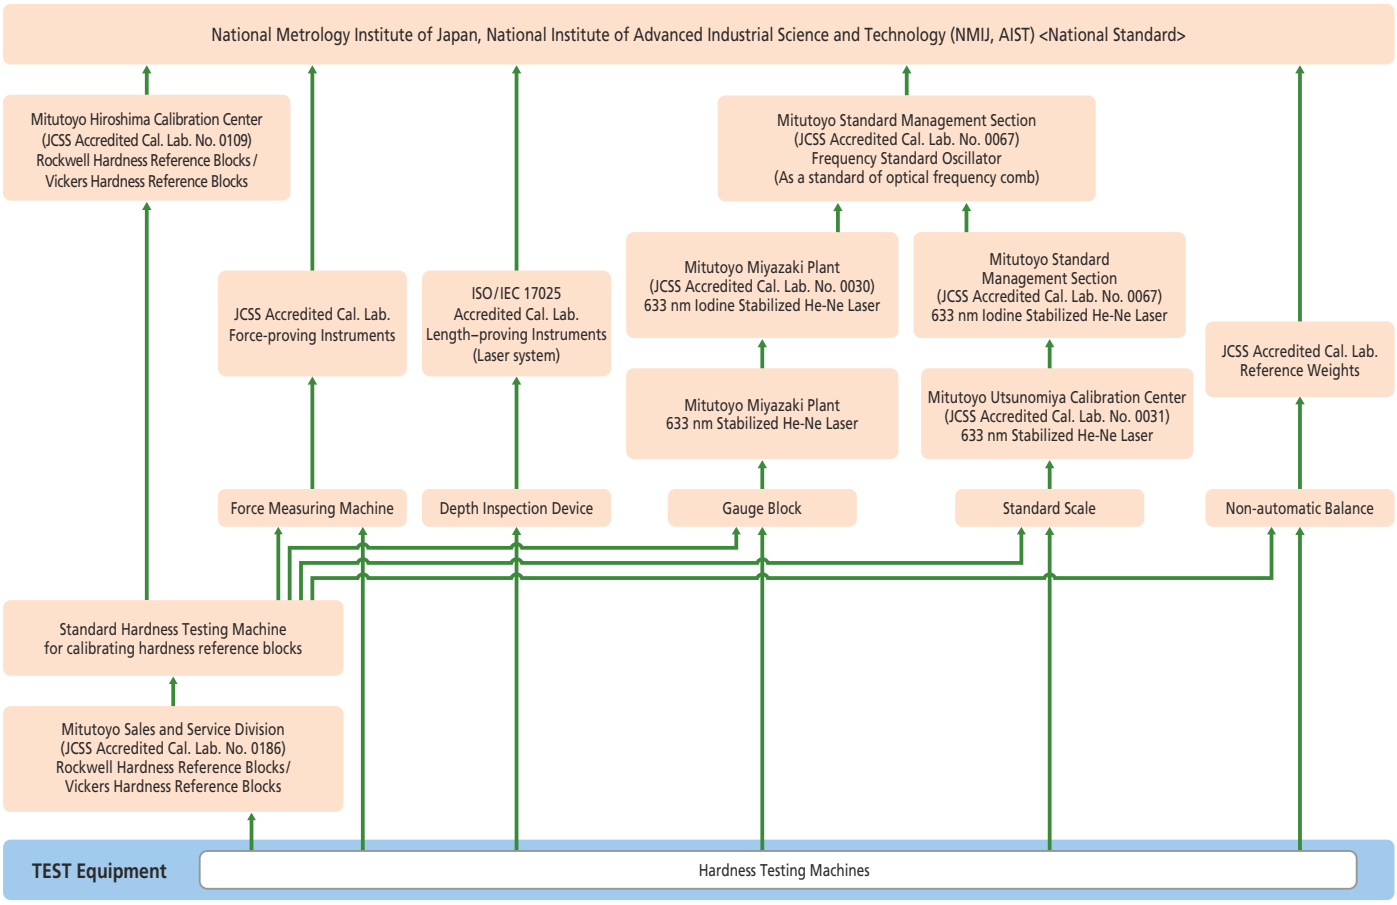

Note: This chart shows a simplified traceability system of a part of Mitutoyo products. Detailed traceability charts are published for each product.
(As of July, 2025)

Video

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Meaning of Symbols

ABSOLUTE®

ABSOLUTE Linear Encoder

Mitutoyo's technology has realised the absolute position method (absolute method). With this method, you do not have to reset the system to zero after turning it off and then turning it on. The position information recorded on the scale is read every time. The following three types of absolute encoders are available: electrostatic capacitance model, electromagnetic induction model and model combining the electrostatic capacitance and optical methods. These encoders are widely used in a variety of measuring instruments as the length measuring system that can generate highly reliable measurement data.**Advantages:**

1. No count error occurs even if you move the slider or spindle extremely rapidly.
2. You do not have to reset the system to zero when turning on the system after turning it off*1.
3. As this type of encoder can drive with less power than the incremental encoder, the battery life is prolonged to about 3.5 years (continuous operation of 18,000 hours)*2 under normal use.

*1: Unless the battery is removed
*2: In the case of the ABSOLUTE AOS Digimatic caliper (electromagnetic encoder model)

Measuring Instruments Shipped with Inspection Certificate

Mitutoyo guarantees product quality as a leading precision measuring instrument manufacturer and ships measuring instruments with an inspection certificate that includes inspection data so that customers can use them with confidence. Mitutoyo also calibrates the purchased measuring instrument and issues, for a fee, a calibration certificate that proves traceability to the relevant standard.

* For the meaning of the inspection marks shown at left, refer to the detailed description of each product

Installation of Main Unit Startup System

Main Unit Startup System

As a part of the enhancement of our export control system, the CNC measuring machines (all the CNC Coordinate Measuring Machines, Vision Measuring Systems, and Form Measuring Machines) are equipped with a Main Unit Startup System (relocation detecting system). This system is designed to take a machine out of operation upon detecting the mechanical shock that accompanies relocation. If you intend to relocate a measuring machine fitted with this system, please contact us beforehand so that our service engineers can assist you. On the other hand, the system may be triggered in the event of a natural event such as a powerful earthquake. In this case, our service engineers will deal with the situation at the earliest opportunity.

IP65

IP66

IP67

IP67G

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000021605

First characteristic numeral	Degrees of protection against solid foreign objects	
	Brief description	Definition
0	Unprotected	—
1	Protected against solid foreign objects of Sø50 mm and greater	A Sø50 mm object probe shall not fully penetrate enclosure*
2	Protected against solid foreign objects of Sø12.5 mm and greater	A Sø12.5 mm object probe shall not fully penetrate enclosure*
3	Protected against solid foreign objects of Sø2.5 mm and greater	A Sø2.5 mm object probe shall not fully penetrate enclosure*
4	Protected against solid foreign objects of Sø1.0 mm and greater	A Sø1.0 mm object probe shall not fully penetrate enclosure*
5	Protected against dust	Ingress of dust is not totally prevented, but dust that does penetrate must not interfere with satisfactory operation of the apparatus or impair safety.
6	Dust-proof	No ingress of dust allowed.

* The full diameter of the object probe shall not pass through an opening of the enclosure.

For details of the test conditions used in evaluating each degree of protection, please refer to IEC 60529 (JIS C 0920).

Second characteristic numeral	Degrees of protection against water	
	Brief description	Definition
0	Unprotected	—
1	Protected against vertical water drops	Vertically falling water drops shall have no harmful effects.
2	Protected against vertical water drops within a tilt angle of 15°	Vertically falling water drops shall have no harmful effects when the enclosure is tilted at any angle up to 15° on either side of the vertical.
3	Protected against spraying water	Water sprayed at an angle up to 60° either side of the vertical shall have no harmful effects.
4	Protected against splashing water	Water splashed against the enclosure from any direction shall have no harmful effects.
5	Protected against water jets	Water projected in jets against the enclosure from any direction shall have no harmful effects.
6	Protected against powerful water jets	Water projected in powerful jets against the enclosure from any direction shall have no harmful effects.
7	Protection against water penetration	Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.
8	Protected against the effects of continuous immersion in water	Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be agreed between manufacturer and user but which are more severe than for IPX7.

Supplementary letter	Degrees of protection against oil	
	Abstract	
F	Oil-resistant	Drops or splashes of oil from any direction cause no harmful effects.
G	Oil-proof	Protection against entry of oil droplets or splashes from all directions.

The protection levels against oil are specified only in the appendix of JIS C 0920.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Features of Mitutoyo Small Tool Instruments



High-accuracy Digimatic Micrometer SERIES 293 with digital step of 0.0001 mm

The High-accuracy Digimatic Micrometer utilizes Mitutoyo's innovative 0,1 µm digital step ABS (ABSOLUTE) rotary sensor and high-accuracy screw machining technology to achieve the E_{MPE} of ±0,5 µm, delivering 0,1 µm resolution measurements without sacrificing operability.

COOLANT PROOF

COOLANT PROOF is the universal term for Mitutoyo Digimatic Small Tool Instruments that are not only resistant to dust and water ingress (rated to IP65 or better) but also to deterioration of materials due to contact with the cutting oil or coolant fluids in normal use.

Note: Some types of aggressive cutting oil or coolant may degrade the sealing materials over time.





QuantuMike with 2 mm/rev Spindle Feed

Faster measurement is achieved by using a finer thread which feeds the spindle by 2 mm per revolution of the thimble instead of the standard 0,5 mm. This increase of spindle feed has been made possible thanks to new high precision thread-cutting and testing techniques.
In addition, the ratchet thimble mechanism helps ensure repeatable results and enables easy operation- even when making measurement one-handed.


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Example of Measurement Data Management System Design

A system for recording and analyzing measurement results from various Mitutoyo measuring instruments for quality assurance purposes.

Recording measurement results

No more transcribing

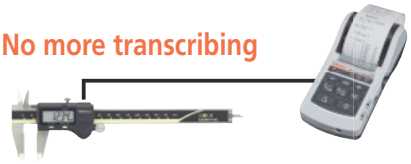

Equipped with the data logger function, it allows batch transfer of stored data to a PC with a USB cable.

DP-1VA LOGGER

Direct data input to a PC

Connection cable-integrated **USB-ITN**



USB Input Tool Direct


Lineup of two models with different output specifications

IT-020U/IT-007R



Input Tool SERIES


Connect to a RS-232C interface PC with 4 channels and a sequencer

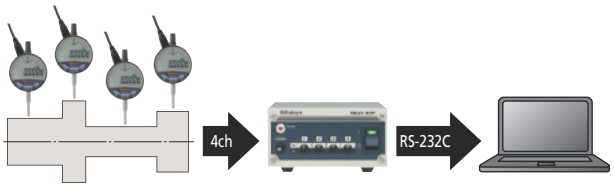

Multiplexer MUX-10F

Wireless




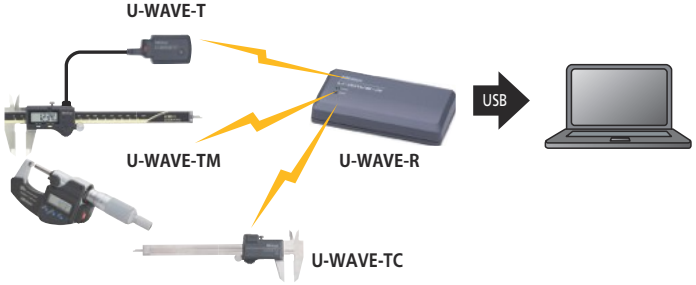


Software dedicated to inspection and quality control

Inspection certificate creation

Measurement data from calipers and micrometers are imported into an Excel spreadsheet.

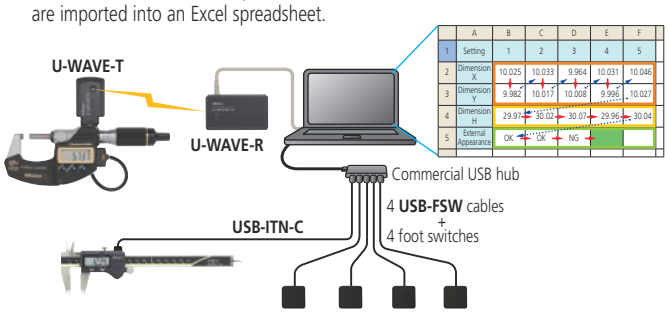


USB-ITPAK

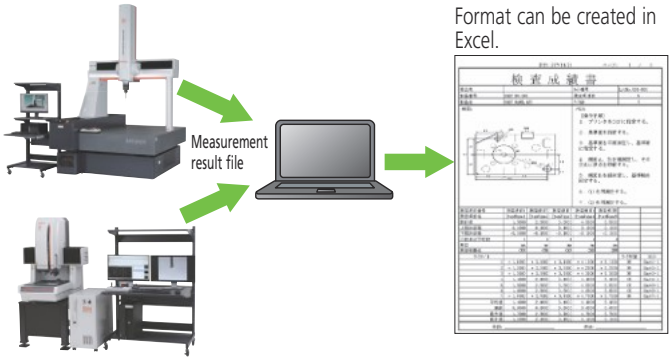

MeasureReport

Statistical Process Control

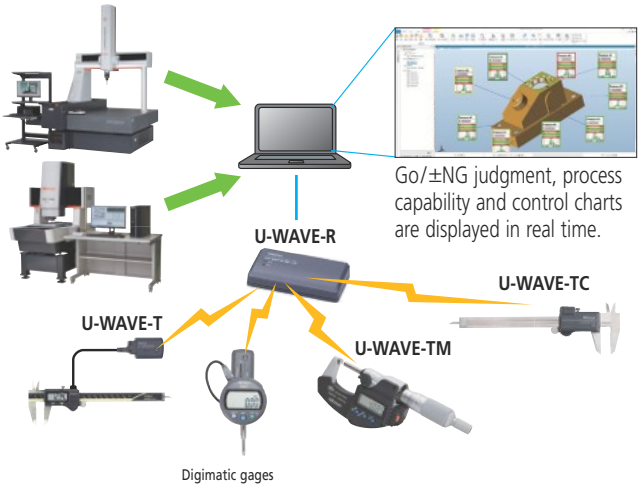


Go/±NG judgment, process capability and control charts are displayed in real time.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Network quality control information throughout the entire factory

Unify and control the measurement results through the network

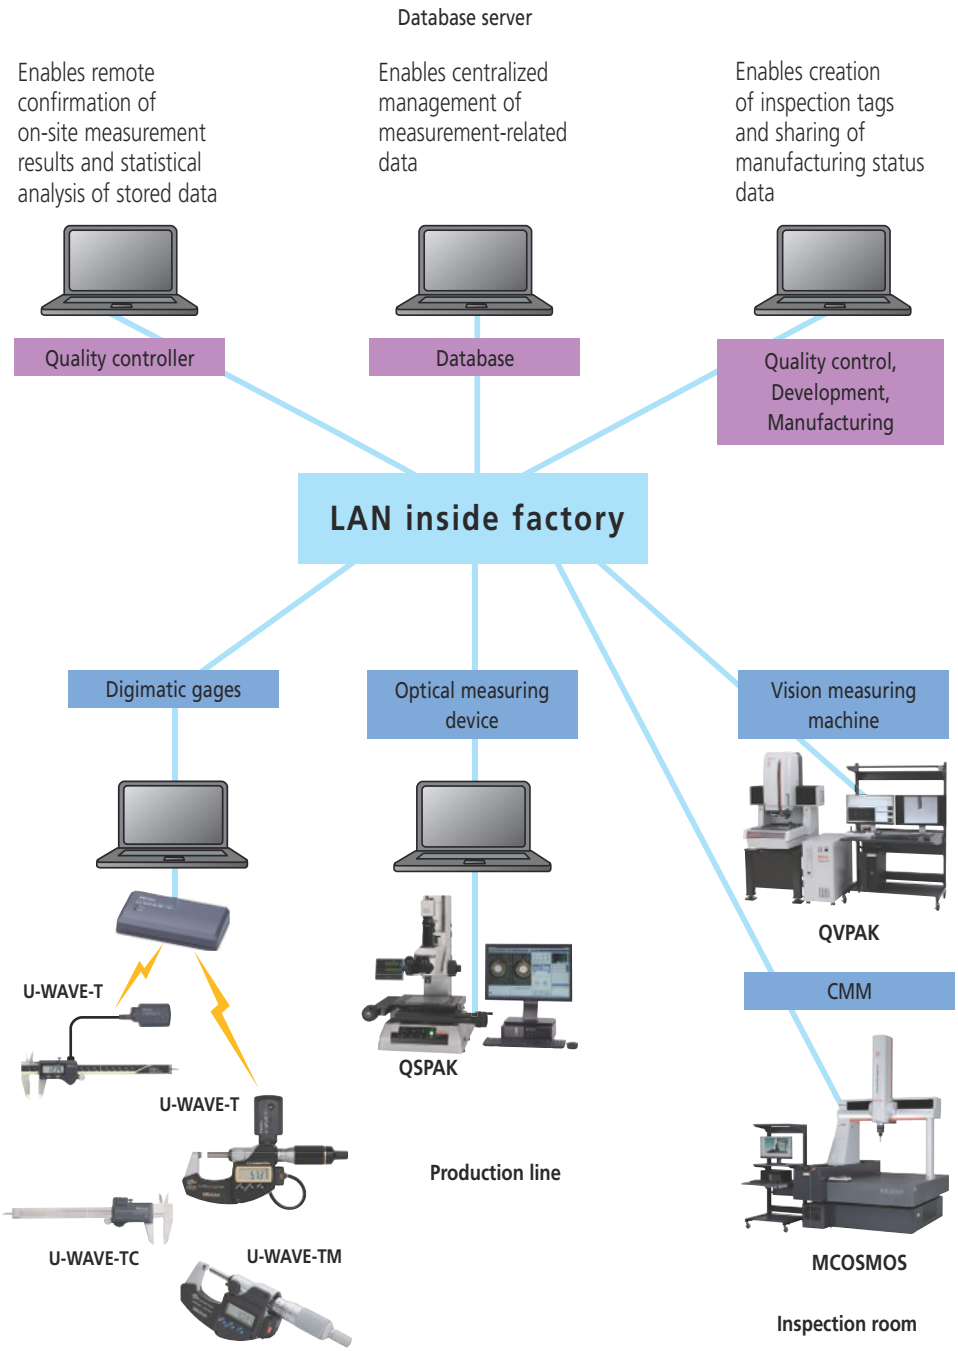

Other peripheral devices and software

Monitoring Service

Conduct preventive maintenance through CMM status monitoring



Status Monitor

Can remotely monitor measuring machines




Note: For details on the above, contact your local Mitutoyo sales office.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Quality Management Software
Page 15



Digimatic Mini Processors
Page 20



Signal Cables
Page 21



Wireless Communication System U-WAVE
Page 24



Digimatic Interface
Page 29




Timerbox, Digimatic Switch Box
Page 34





M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


MeasurLink 10

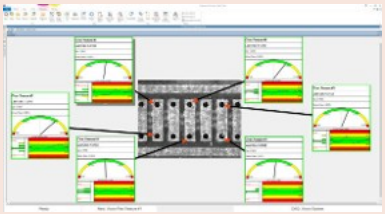

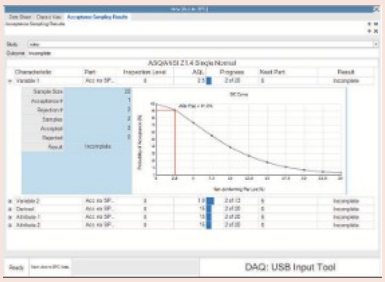

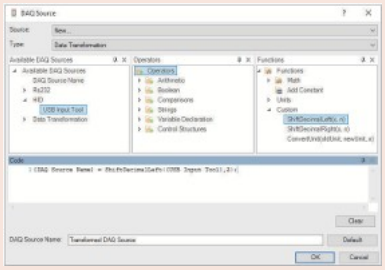

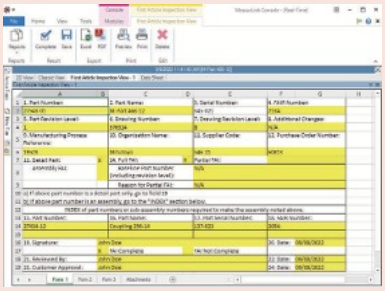

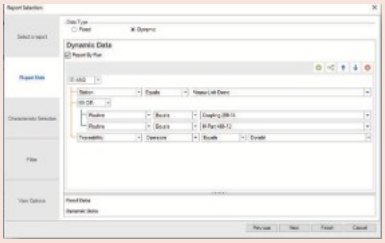

MeasurLink brochure available on request

An Integrated Solution for Quality Data Management


Most of Mitutoyo's electronic instruments can output data via optional connecting cables or wireless transmitters & receivers in the form of the Digimatic code. The Digimatic code can also be converted in RS-232C format by any of several available gage multiplexers. In this way, digital data can be sent to PCs for data acquisition and advanced statistical analysis.

As a client/server application, MeasurLink gives you the performance you need through distributed processing. Combined with a multi-user relational database, MeasurLink delivers a safe and organized data warehousing system making quality data available for viewing and analysis by any member of the production, engineering and managerial staff throughout your company. Inspection in the factory produces data for analysis, corrective action, and various reporting needs. As the backbone of your quality efforts, MeasurLink is guaranteed to reduce your production costs and increase your buttom line.

MeasurLink is capable of linking and managing multiple "islands" of inspection into a common database of part information, statistical data, gage information, process, etc. Information is shared across an entire manufacturing facility.

Group Licensing

MeasurLink is available in several modules offering you a wide range of solutions, from data acquisition to manager views and gage management. Details about all modules can be found on the next pages. However, you can create your own package and combine modules by choosing one of the following license bundles:

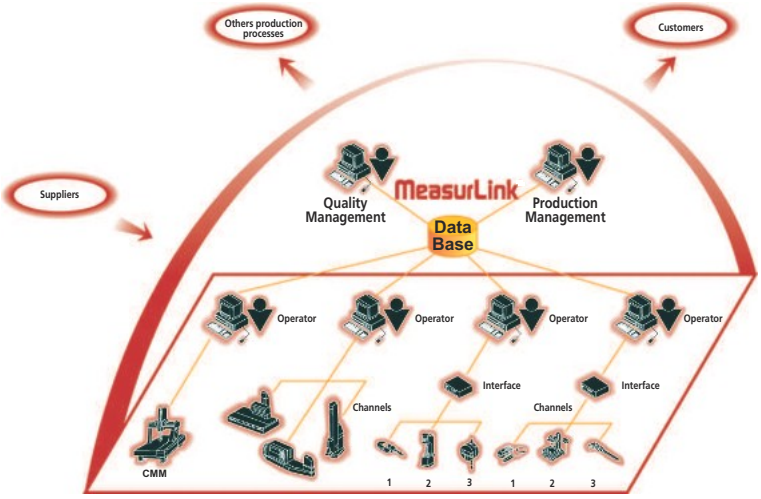

No.	Description
64AAB843R	MeasurLink 10 Site License - 30 Licenses*
64AAB844R	MeasurLink 10 Workgroup License - 15 Licenses*
64AAB846R	MeasurLink 10 Workgroup License - 10 Licenses*
64AAB847R	MeasurLink 10 Workgroup License - 5 Licenses*
64AAB845R	MeasurLink 10 Additional Site License - 1 License after 30 Licenses*
64AAB848R	MeasurLink 10 Academic License - 20 Licenses*
64AAB843R-U	MeasurLink 10 Site License Upgrade - 30 Licenses*
64AAB844R-U	MeasurLink 10 Workgroup License Upgrade - 15 Licenses*
64AAB846R-U	MeasurLink 10 Workgroup License Upgrade - 10 Licenses*
64AAB847R-U	MeasurLink 10 Workgroup License Upgrade - 5 Licenses*
64AAB845R-U	MeasurLink 10 Additional Site License Upgrade - 1 License after 30 Licenses*
64AAB848R-U	MeasurLink 10 Academic License Upgrade - 20 Licenses*

*Real-Time Professional 3D is not included

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

MeasurLink 10


MeasurLink Real-Time Standard Edition

MeasurLink 10 Real-Time Standard Edition is designed for customers that do not need to connect to major instruments such as CMMs, Vision and Form, etc. systems via DDE or ASCII file import.

It has basic views to allow the user to create Parts, Characteristics with nominal and tolerance, Traceability lists, etc. The data collection interface provides real-time graphics for Run charts, Control charts, Histograms, Statistics, etc. Standard views include the Datasheet (observations and charts), the Classic View (chart windows), and the 2D view (pictures with callouts that include charts and statistical data). This application does not support data filters. Full reporting functionality with templates is provided.

Supported data sources include keyboard, RS232C, HID, MTConnect, OPC UA and MQTT devices.

No.	Description
64AAB836R	MeasurLink 10 Real-Time Standard
64AAB836R-U	MeasurLink 10 Real-Time Standard Upgrade

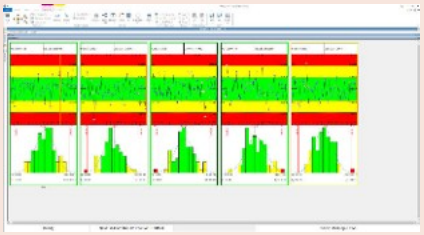

MeasurLink Real-Time Professional Edition

MeasurLink 10 Real-Time Professional Edition is designed for customers that do need to connect to major instruments such as CMMs, Vision and Form, etc. systems via DDE or ASCII file import.


It has basic views to allow the user to create Parts, Characteristics with nominal and tolerance, Traceability lists, etc. The data collection interface provides real-time graphics for Run charts, Control charts, Histograms, Statistics, etc. Standard views include the Datasheet (observations and charts), the Classic View (chart windows), and the 2D view (pictures with callouts that include charts and statistical data). This application does support data filters. Full reporting functionality with templates is provided.

Supported data sources include keyboard, RS232C and HID devices, MTConnect, OPC UA, MQTT, DDE, ASCII and QIF (xml-based) file imports.

No.	Description
64AAB837R	MeasurLink 10 Real-Time Professional
64AAB837R-U	MeasurLink 10 Real-Time Professional Upgrade

Optional accessories

No.	Description
937179T	Footswitch for SPC
63AAA424	USB-Space Footswitch Interface, for MeasurLink

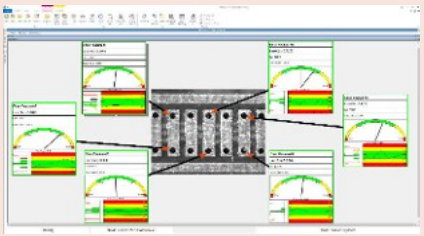

MeasurLink Real-Time Professional 3D Edition

MeasurLink 10 Real-Time Professional 3D Edition is designed for customers that wish to collect data using the Hoops 3D graphics view.


It has basic views to allow the user to create Parts, Characteristics with nominal and tolerance, Traceability lists, etc. The data collection interface provides real-time graphics for Run charts, Control charts, Histograms, Statistics, etc. Standard views include the Datasheet (observations and charts), the Classic View (chart windows), and the 2D view (pictures with callouts that include charts and statistical data). This application does support data filters. Full reporting functionality with templates is provided.

Supported data sources include keyboard, RS232C and HID devices, MTConnect, OPC UA, MQTT, DDE, ASCII and QIF (xml-based) file imports.

No.	Description
64AAB838R	MeasurLink 10 Real-Time Professional 3D
64AAB838R-U	MeasurLink 10 Real-Time Professional 3D Upgrade

Optional accessories


No.	Description
63AAA424	USB-Space Footswitch Interface, for MeasurLink
937179T	Footswitch for SPC

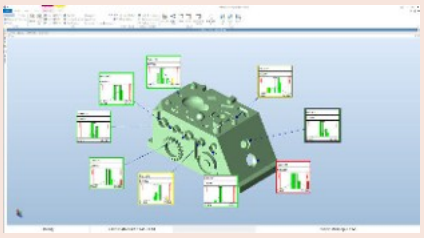

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MeasurLink 10

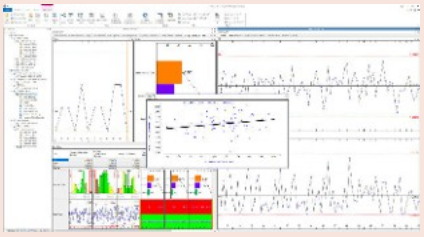


MeasurLink Process Analyse Professional Edition

MeasurLink 10 Process Analyzer Professional Edition is designed for Quality Engineers. Offline viewing of Real-Time data in a networked environment, all views supported by Real-Time Standard edition are supported. Full reporting is provided.

Data is organized by Station, Part or Routine. Merging, Filtering, What-if scenarios and advanced statistical treatments are supported.

No.	Description
64AAB839R	MeasurLink 10 Process Analyzer Professional
64AAB839R-U	MeasurLink 10 Process Analyzer Professional Upgrade

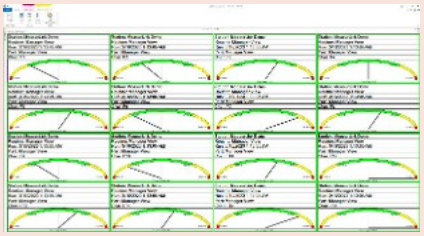


MeasurLink Process Manager Standard Edition

MeasurLink 10 Process Manager is a dashboard view of the current shop floor activity from a single computer. It displays those characteristics that are most in need of attention or adjustment.

The view automatically updates to show a current state of measurement activity.


No.	Description
64AAB840R	MeasurLink 10 Process Manager
64AAB840R-U	MeasurLink 10 Process Manager Upgrade

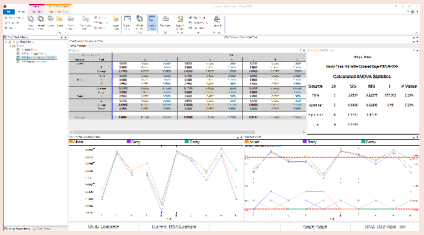

MeasurLink Gage R&R

MeasurLink 10 Gage R&R is a collection of techniques whose purpose is to measure the capability of a measurement system for a measurement task.


No.	Description
64AAB841R	MeasurLink 10 Gage R&R
64AAB841R-U	MeasurLink 10 Gage R&R Upgrade

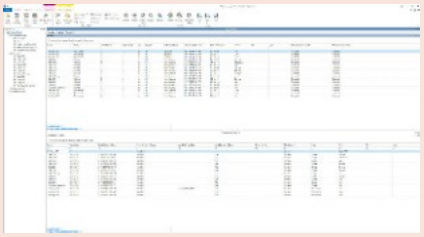

MeasurLink Gage Management

MeasurLink 10 Gage Management is designed for Gage inventory management with Calibration procedures and recall methods.

No.	Description
64AAB842R	MeasurLink 10 Gage Management
64AAB842R-U	MeasurLink 10 Gage Management Upgrade

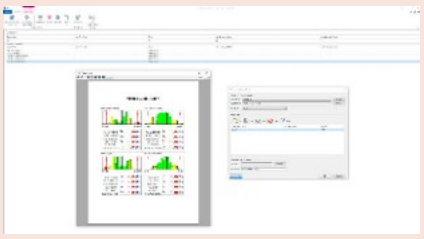

MeasurLink Report Scheduler V10

MeasurLink 10 Report Scheduler is a tool that can be used to schedule MeasurLink reports for print, export or email as Adobe PDF files.

No.	Description
64AAB853R	MeasurLink 10 Report Scheduler
64AAB853R-U	MeasurLink 10 Report Scheduler Upgrade

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


USB-ITPAK


Series 06


USB-ITPAK Version 3 is software for collecting data from measuring instruments with Digimatic, Digimatic 2 and Digimatic S1 output to Excel by using USB Input Tool Interface, USB Input Tool Direct cables, U-WAVE wireless system and DP-1VA pinter/logger

- Supports bidirectional serial communication provided by e.g. ID-F/ ID-C Indicator (2022 model), Height Gauge LH-600F/FG and QuantuMike Micrometer (2024 model)
- Various settings are available like zero set, preset, unit, counting direction, tolerance setting, calibration date setting a.s.o.
- Measurement status information can be read like serial number, code number, calibration date, user control number a.s.o.
- USB-ITPAK Version 3 simple version is available online free of charge
- In order to use the full functionality of the software, no. 06AGR543 must be ordered
- Compatible OS Microsoft® Windows® 10 (64 bit) and 11
- For Microsoft® Excel® version 2010, 2013, 2016 and Microsoft 365



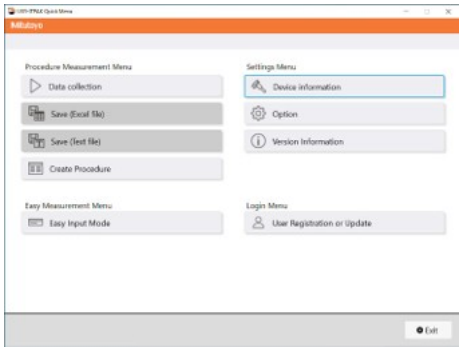

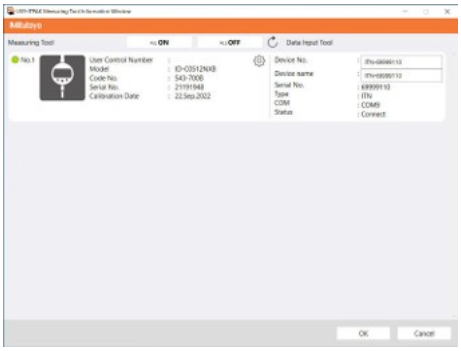

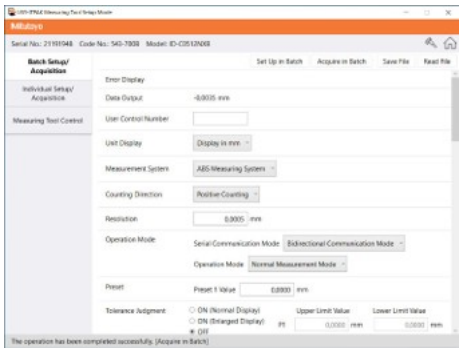

No.	Remarks
06AGR543	Version 3 can be used for Wireless Communication (U-WAVE and U-WAVE Bluetooth), USB Input Tool Direct Cable, USB-Input Tool No. 264-16-10 and 264-20 and DP-1 VA printer/logger. Supports bidirectional serial communication provided by e.g. ID-F/ ID-C Indicator (2022 model), LH-600 F/FG and QuantuMike Micrometer (2024 model).

Specifications

OS compatibility	Windows® 10 (64bit), 11
Applicable MS Excel Version	Excel 2010/2013/2016/2021, MS 365
Language for display	English, German, French, Italian, Spanish, Turkish, Czech, Polish, Hungarian, Swedish, Russian, Japanese, Korean, Simplified Chinese, Traditional Chinese, Dutch, Portuguese
Functions	• Create Microsoft® Excel® input procedures (workbook, worksheet, cell range a.s.o.) • Bidirectional communication (Digimatic S1) compatible (Vers. 3 only) • Information reading of measuring tools e.g. serial number, code number etc. (Vers. 3 only) • Settings and operations of measuring tools e.g. preset, power ON/OFF, etc. (Vers. 3 only) • Enter measured data in the quick entry mode (Vers. 3 only) • Enter measured data in a specified sequence (sequencial mode) • Enter measured data all at once (batch mode) • Enter measured data individually (individual mode) • Automatically enter measurement data periodically • Enter a string with your foot • Enter measurement data with foot switch, keyboard/mouse, data switch • Enter data into an arbitrary application • Enter log data from DP-1VA LOGGER
Delivered	License key (software can be downloaded from our website)


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


USB-ITPAK

Optional accessories


No.	Description
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
06AFM380E	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Round 6-Pin Type
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
06AFM380G	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight for ID-N/ID-B
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/ Digimatic S1 Interface
06AGQ001A	USB Input Tool Direct (Digimatic USB), 2m, Digimatic/ Digimatic 2/ Digimatic S1 Interface, IP Type
06ADV384	USB Input Tool Direct, Footswitch Adapter
264-020	USB Input Tool Interface Box, Digimatic/ Digimatic 2/Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/ Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-505D	Statistic Processing Printer DP-1VA, Data Printer and Logger CEE Type

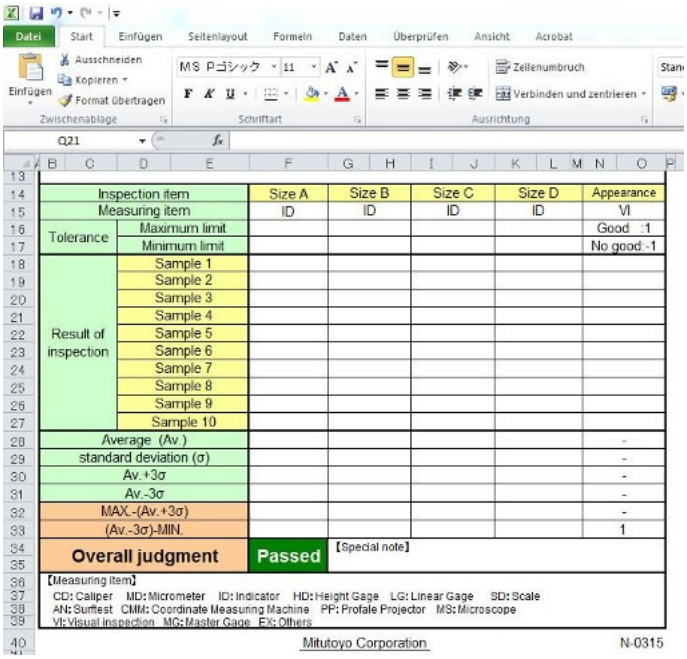

Microsoft® Excel® Worksheet waiting for data

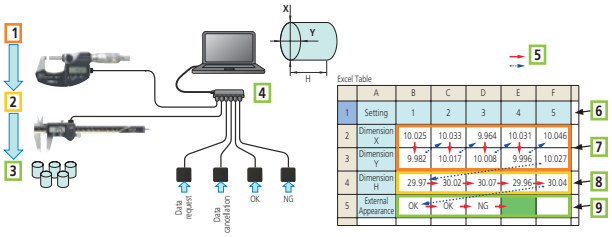

Sequential Measurement
1: Micrometer for diameters X and Y
2: Caliper for height measurement H
3: Inspection by attributes OK/NG with foot switch e.g.scratches in the surface
4: standard USB-HUB
5: Measurement direction
6: Workpiece No.
7: Measuring result X/Y
8: Measuring result H
9: OK/NG judgement (e.g. scratches)

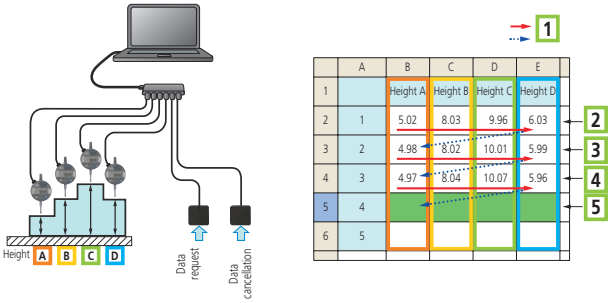

Simultaneous Measurement
1: Measurement direction
2: First measurement: press foot switch once = 4 complete data batches
3: second measurement: press foot switch once = 4 complete data batches
4: third measurement: press foot switch once = 4 complete data batches
5: is waiting for the next batch measurement

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Mini Processor DP-1VA LOGGER

Series 264


This DP-1VA printer allows you to print measuring data, statistical evaluations a.s.o.

- Digimatic 2 support. 8 digits output for data printing and analysis even from high resolution or long stroke instruments.
- Statistical evaluations, and data printout from calipers, micrometers and other measuring devices equipped with a Digimatic port.
- Excellent printing speed, prints upon one-touch start and at low noise level. The thermosensitive paper has outstanding durability and chemical resistance for long-term storage.
- Timer function for timed measurement data loading
- Easy data transfer from printer to PC. USB (VCP/HID) output for PC (USB IT-PAK Vers. 2.1 or later, MeasurLink, Excel a.s.o.)
- Data Logger Function. Saves up to 1000 data records with time and date. Data can be saved even after the power is turned off.



264-506D

No.	Mass [g]
264-506D	390

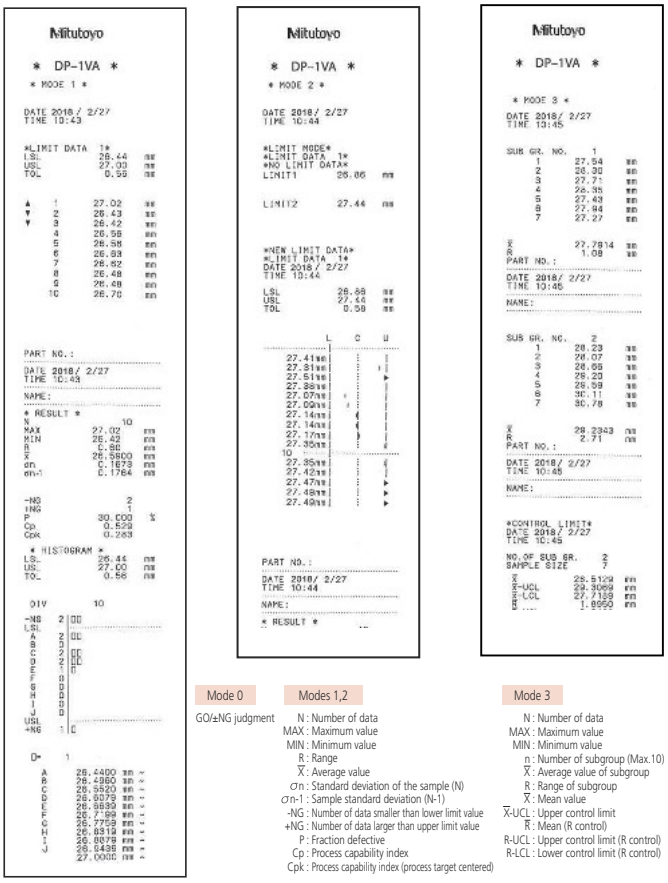

Mode 0
GO/±NG judgment

Modes 1,2
N : Number of data
MAX : Maximum value
MIN : Minimum value
R : Range
$\bar{X}$: Average value
σn : Standard deviation of the sample (N)
σn-1 : Sample standard deviation (N-1)
-NG : Number of data smaller than lower limit value
+NG : Number of data larger than upper limit value
P : Fraction defective
Cp : Process capability index
Cpk : Process capability index (process target centered)

Mode 3
N : Number of data
MAX : Maximum value
MIN : Minimum value
n : Number of subgroup (Max.10)
$\bar{X}$: Average value of subgroup
R : Range of subgroup
$\bar{\bar{X}}$: Mean value
$\bar{X}$-UCL : Upper control limit
$\bar{\bar{X}}$: Mean (R control)
R-UCL : Upper control limit (R control)
R-LCL : Lower control limit (R control)

Specifications

Power supply	AC adapter 6V, battery: LR6 x 4 (alkaline) or AA x 4 Ni-MH (rechargeable, battery is not charged in the device)
Data input	Digimatic, Digimatic 2, RS-232C Input (KA-Counter only)
Printer type	Thermal line printer
Printer speed	6,5 mm/s (using AC adapter)
Printer line number	7000 lines/roll (with large font) 10000 lines/roll (with normal font)
Printer paper	Width: 58 mm, length: 48 m
Processing capacity	Mode 0: 100000 data entries Mode 1/2: 9999 data entries Mode 3: sample size 10x subgroup 9999 = total number of data entries 99990
Logging of the measurement data (to store)	Max. 1000 points
Data output	USB, RS-232C at TTL level, tolerance judgment result (-NG, GO, +NG)
Battery life	Appr. 10000 lines (with 1600 mA Ni-MH and print 1 time/5 s)
Timer function	0,25 s; 1 s; 5 s; 30 s; 1 min; 30 min; 60 min (0,25 s only statistical function)
Delivered	With AC adapter, printer paper (1 roll), strap

Standard accessories

No.	Description
06AGZ369D	AC-Adapter, DC 6V 2A, CEE version Germany (Europe)
09EAA069D	Thermal Printer Paper DP1-VR/-VA, 1 Roll

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
09EAA084	RS-232C Cable, DP-1VR/VA to PC, 1m, 9 Pin Connector
06AFZ050	USB Cable 1m, DP-1VA to PC etc., USB Type A to Micro USB Type B Plug
965516	GO/±NG judgement cable, for external device, 2m
09EAA094	RS-232C Cable, DP1-VR/-VA to KA-Counter, 1m, 25 Pin Connector
937179T	Footswitch for SPC
09EAA082-5	Thermal Printer Paper DP1-VR/-VA, 5 Rolls
011037	Battery, LR6, 1,5V, 4 pcs.

09EAA084 and 965516 can not be used simultaneously.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


USB Input Tool Direct (Digimatic-USB Cable)

Specifications


Cable length	2 m
Output	USB: HID (keyboard format) or VCP (virtual COM-Port)
Max connectable devices	20 cables

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
06ADV384	USB Input Tool Direct, Footswitch Adapter
937179T	Footswitch for SPC



937179T and 06ADV384



Common USB Hub



06AFM380A



06AFM380B



06AFM380C



06AFM380D



06AFM380E



06AFM380F



06AFM380G



06AGQ001F



06AGQ001A

Scan QR Code with your mobile device and watch our product videos on YouTube

For more information about cable connectors see the end of this chapter.

Digimatic-USB Cable

This input tool allows you to directly connect Digimatic measuring devices to the USB interface of a PC, without needing additional software. Measurement data is then converted into keyboard codes, enabling interaction with any software such as Microsoft® Excel® working with keyboard entries (HID).

When using the VCP (virtual COM-Port) driver which is part of USB-ITPAK Vers. 3 (easy input mode version), a fixed COM-Port assignment in Microsoft® Windows® is possible. A VCP can be used e.g. for professional SPC software like Mitutoyo MeasurLink. The driver is available online, free of charge.

The following additional features are made available by adding the optional USB-ITPAK Vers. 3 (full version) to your workstation:

- Creation of worksheets and multi-channel input for measurement values to Microsoft® Excel®
- Automatic calling of said Excel® sheet for data input
- Cursor movement after data input can be set to enable automatic input
- Configuration of measuring methods, such as sequential measurement, batch measurement, individual measurement, and more
- Timed data requests





06AFM380C

No.	Model	OS compatibility	Remarks
06AFM380A	A	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable Straight With Data Switch (2m), e.g. for IP67 Caliper
06AFM380B	B	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable Back Side With Data Switch (2m); e.g. for IP65 Micrometer
06AFM380C	C	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable Straight With Data Switch (2m); e.g. for Standard Absolute Caliper
06AFM380D	D	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable Plain (2m) e.g. for ID-H Indicator
06AFM380E	E	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable Round (2m) e.g. for Caliper Gauge Series 209
06AFM380F	F	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable Straight (2m) e.g. for ID-S Indicator
06AFM380G	G	Windows® 2000, XP, Vista, 7, 8/8.1, 10, 11	USB Input Tool Direct Cable ID-N/ID-B (2m)
06AGQ001A	SA	Windows® 10 (64 bit) / Windows® 11	USB Input Tool Direct Cable for QuantuMike (2024 model) with Digimatic S1 bidirectional interface
06AGQ001F	SF	Windows® 10 (64 bit) / Windows® 11	USB Input Tool Direct Cable for Linear Height LH-600 F/FG, Digital Indicator ID-F/ID-C (2022 model) with Digimatic S1 bidirectional interface

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Digimatic Data Cables

Digimatic Cables This is an overview of available data cables, and how you can connect measuring devices with data


This is an overview of available data cables, and how you can connect measuring devices with data output e.g. to a PC.
output e.g. to a PC.

The cables listed are used to connect the measuring devices directly via USB (USB Input Tool Direct Cables), indirectly via standard Digimatic cables and inte
Cables), indirectly via standard Digimatic cables and interface box (e.g. DMX box or USB Input
Tool Box), or the U-WAVE-T wireless transmitters (box version) to a PC.Please


Please find the appropriate cable for your particular Digimatic measuring instrument in the "Optional Accessories" section of its product entry.

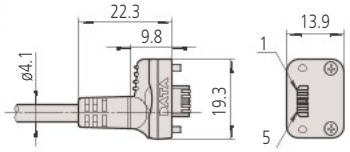


(1) 06AFM380A
(2) 05CZA624 (1 m), 05CZA625 (2 m)
(3) 02AZD790A (Standard), 02AZE140A (FSW)

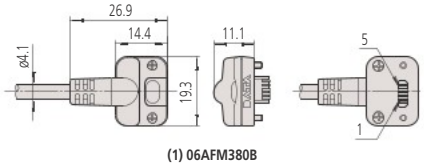


(1) 06AFM380B
(2) 05CZA662 (1 m), 05CZA663 (2 m)
(3) 02AZD790B (Standard), 02AZE140B (FSW)

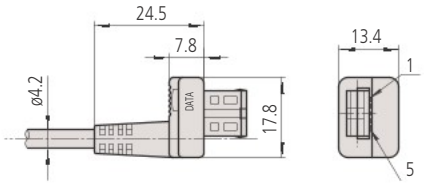


(1) 06AFM380C
(2) 959149 (1 m), 959150 (2 m)
(3) 02AZD790C (Standard), 02AZE140C (FSW)

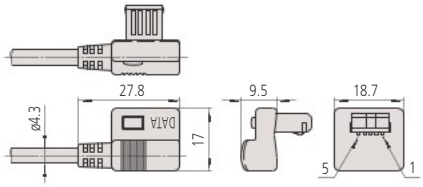


(1) No applicable Models
(2) 04AZB512 (1 m), 04AZB513 (2 m)
(3) No applicable Models

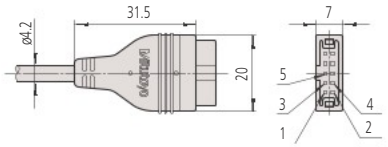


(1) 06AFM380D
(2) 936937 (1 m), 965014 (2 m)
(3) 02AZD790D (Standard), 02AZE140D (FSW)

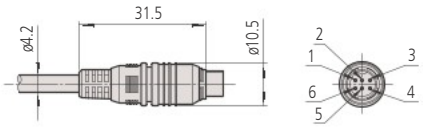


(1) 06AFM380E
(2) 937387 (1 m), 965013 (2 m)
(3) 02AZD790E (Standard), 02AZE140E (FSW)

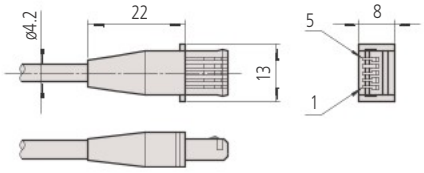


(1) 06AFM380F
(2) 905338 (1 m), 905409 (2 m)
(3) 02AZD790F (Standard), 02AZE140F (FSW)

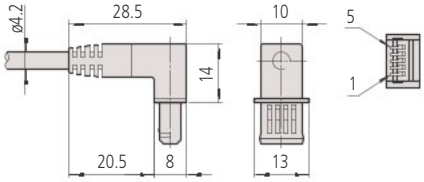


(1) No applicable Models
(2) 905689 (1 m), 905690 (2 m)
(3) No applicable Models

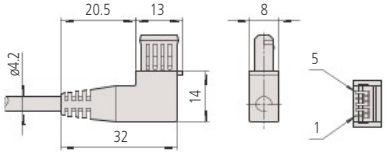


(1) No applicable Models
(2) 905691 (1 m), 905692 (2 m)
(3) No applicable Models

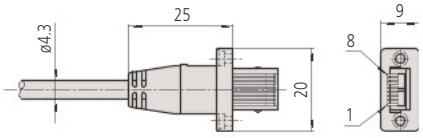

(1) 06AFM380G
(2) 21EAA194 (1 m), 21EAA190 (2 m)
(3) 02AZD790G (Standard), 02AZE140G (FSW)

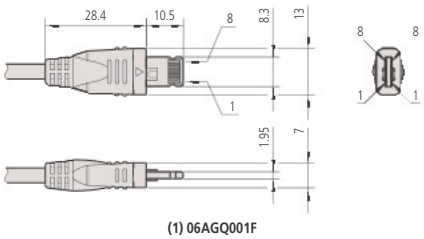


(1) 06AGQ001F
(2) 06AGL011 (1 m), 06AGL021 (2 m)
(3) 02AZG011 (Standard), 02AZG021 (FSW)

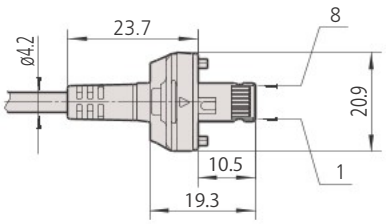

(1) 06AGQ001A
(2) 06AGL111 (1 m), 06AGL121 (2 m)
(3) No applicable Models



(1)
USB Input Tool Direct Cable2 m
2 m



(2)
Standard Digimatic Cable1 m or 2 m
1 m or 2 m



(3)
U-WAVE Connection Cable
(Standard)



(3)
U-WAVE Connection Cablewith Footswitch Connector
with Footswitch Connector(FSW)
(FSW)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Digimatic Extension Cables

Optional accessories

No.	Description
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m

Extension Cables for Digimatic Cables


These extension cables allow you to extend Digimatic data cables up to 14 m, extending the working distance between a measuring instrument and an external device such as a PC or DP-1VA Logger/Printer.



63AAA036

Digimatic Extension Cable

No.	Length [m]
63AAA034	5
63AAA035	8
63AAA036	10

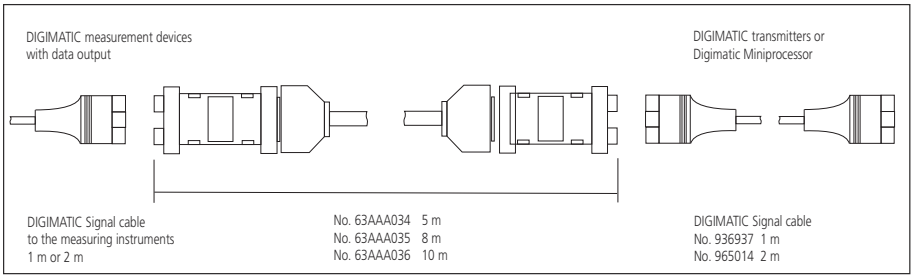

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

U-WAVE Bluetooth

U-WAVE fit Bluetooth

- Bluetooth® communication allows for wireless transmission of measurement data from digimatic micrometers and calipers to PCs, smartphones, tablets, and other terminals alike.
- U-WAVE is now available with Bluetooth® wireless technology. With no receiver required, one PC can connect up to seven units with Mitutoyo U-WAVE Bluetooth®. For tougher shop floor usage, dust / water-proof models are also available.
- Bluetooth® communication not only allows for cost reduction, as it does not require the conventional dedicated receiver unit, but it also improves operability.
- Communication distance of approx. 16 m in an open space and approx. 10 m in a factory environment.
- The application software for transferring measurement data to smartphones, tablets, or PCs

U-WAVEPAK-BM

Available for both Android and iOS, U-WAVEPAK-BM provides users to make use of simple process control with its measurement data import function.

U-WAVEPAK-BW

For use on computers, U-WAVEPAK-BW communicates directly with your measuring instrument, allowing you to transfer measurement data to your computer's software. This software can be downloaded for free on our company's website.



264-626 + 02AZF310
U-WAVE-TMB + Connection Unit



264-625 + 02AZF310
U-WAVE-TCB + Connection Unit

U-WAVE Bluetooth (Transmitter)

No.	Type	Measuring Instruments	Data reception indication	Remarks	Mass [g]
264-624	U-WAVE-TCB (U-WAVE fit Bluetooth)	100, 150, 200, 300 mm IP67 caliper/standard caliper	LED (green, red, orange)	IP67	20
264-625	U-WAVE-TCB (U-WAVE fit Bluetooth)	100, 150, 200, 300 mm IP67 caliper/standard caliper	Buzzer and LED (green, red, orange)	Standard	20
264-626	U-WAVE-TMB (U-WAVE fit Bluetooth)	COOLANT PROOF (IP65) micrometer, indicator	LED (green, red, orange)	IP67	20
264-627	U-WAVE-TMB (U-WAVE fit Bluetooth)	COOLANT PROOF (IP65) micrometer, indicator	Buzzer and LED (green, red, orange)	Standard	20

For details of connectable measuring instruments please contact Mitutoyo or distributor





Specifications

Wireless communication protocol	Bluetooth 4.2 Low energy
Modulation method	FH-SS (frequency-hopping spread spectrum)
Communication distance	Approx. 16 m (line of sight) Approx. 10 m (in factory environment)
Communication with measuring tool	Digimatic (6 digits), Digimatic 2 (8 digits) automatic identification
Transmission output	3,2 mW (5 dBm) or less (Class 2)

Standard accessories

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
02AZF300	Connection Unit for Standard Caliper, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
02AZF960	Connection Unit for IP Micrometer, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface









U-WAVEPAK-BM
available on App Store and Google Play

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

U-WAVE

U-WAVE and U-WAVE fit - Wireless Data transmission system

- Approx. 20 m (within visible range).
- Communication frequency: 2.4GHz wireless system for reliable and secure data transmission.
- Easy data export to Easy data export to Microsoft® Excel® or other professional SPC software applications like Mitutoyo MeasurLink.
- Transmitter confirms data transfer by a buzzer sound or a red/green LED signal.
- Low power consumption: 400000 data transmissions with one battery.
- U-WAVE Event will also support a data request from a PC. This is ideal if the system is installed at an inaccessible side.

Specifications

Wireless communication protocol	Proprietary (2,4 GHz by original specification based on IEEE 802.15.4)
Modulation method	DS-SS (Direct Sequence Spread Spectrum)
Communication distance	Approx. 20 m (within visible range)
Communication speed kbps	250
Communication frequency	2,4 GHz band (2,405-2,475 GHz, 15 channels (5 MHz interval)
Communication with measuring tool	Digimatic (6 digits), Digimatic 2 (8 digits) automatic identification
OS compatibility	Windows® 2000 Professional (≥SP4), Windows® XP Professional (≥SP2), Windows® XP Home Edition (≥SP2), Windows Vista®, Windows® 7 (32bit, 64bit), Windows® 8, 8. 1, 10 (32bit, 64bit), 11

Standard accessories

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.



PC with U-WAVE-R (Receiver)



02AZD810D
U-WAVE-R (Receiver)



For Caliper U-WAVE-TC (U-WAVE fit transmitter) with Connection Unit



For Micrometer U-WAVE-TM (U-WAVE fit transmitter) with Connection Unit

U-WAVE (Transmitter)

No.	Type	Measuring Instruments	Data reception indication	Transmission output	Remarks	Mass [g]
264-620	U-WAVE-TC (U-WAVE fit)	100, 150, 200, 300 mm IP67 caliper/standard caliper	LED (green, red, orange)	2,5 mW (4 dBm) or below	IP67	20
264-621	U-WAVE-TC (U-WAVE fit)	100, 150, 200, 300 mm IP67 caliper/standard caliper	Buzzer and LED (green, red, orange)	2,5 mW (4 dBm) or below	Standard	20
264-622	U-WAVE-TM (U-WAVE fit)	COOLANT PROOF (IP65) micrometer, indicator	LED (green, red, orange)	2,5 mW (4 dBm) or below	IP67	20
264-623	U-WAVE-TM (U-WAVE fit)	COOLANT PROOF (IP65) micrometer, indicator	Buzzer and LED (green, red, orange)	2,5 mW (4 dBm) or below	Standard	20
02AZD730G	U-WAVE-T for miscellaneous instruments	Indicator, 3-Point Inside Micrometer, Carbon Fibre Caliper, Height Gauge, a.s.o	LED (green, red, orange)	2,5 mW (4 dBm) or below	IP67	23
02AZD880G	U-WAVE-T for miscellaneous instruments	Indicator, 3-Point Inside Micrometer, Carbon Fibre Caliper, Height Gauge, a.s.o	Buzzer and LED (green, red, orange)	2,5 mW (4 dBm) or below	Standard	23

U-WAVE-R (Receiver) for all Mitutoyo U-WAVE Transmitter (except U-WAVE Bluetooth)

No.	Type	Number of U-WAVE-R units that can be connected to PC	Number of U-Wave-T units that can be connected	Transmission output	Remarks	Mass [g]
02AZD810D	U-WAVE-R	Up to 16	Up to 100	1 mW (0 dBm) or below	Setup software (U-WAVEPAK) is available online	130


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

U-WAVE



For miscellaneous measuring instruments U-WAVE-T (Transmitter) with Connection Cable

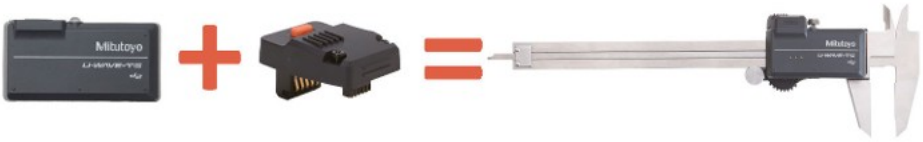


Transmitter and Connection Unit (see next page) for Caliper (U-WAVE-TC + 02AZF300)



Transmitter and Connection Unit (see next page) for Micrometer (U-WAVE-TM + 02AZF310)



Transmitter and Connection Cables (see next page) e.g. for Digital Indicator









264-620 + 02AZF310
U-WAVE-TC (Transmitter) + Connection Unit



264-622 + 02AZF310
U-WAVE-TM (Transmitter) + Connection Unit



02AZD730G + 02AZD790A
U-WAVE-T (Transmitter) + Connection Cable

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
02AZF300	Connection Unit for Standard Caliper, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
02AZF960	Connection Unit for IP Micrometer, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
02AZD790E	Connection Cable E for U-WAVE, Round 6-Pin Type
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
02AZD790G	Connection Cable G for U-WAVE, for IP66 Indicators ID-N and ID-B
02AZG011	Connection Cable SF for U-WAVE, for U-WAVE-T and Instruments with Digimatic S1 Interface
63BAA057	U-WAVE T External Power Supply Adapter
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZF675	U-WAVE fit Transmitter Mounting Plate, for ID-N Digital Indicator
02AZE200	U-WAVE Transmitter Mounting Plate, Universal Type
02AZE990	U-WAVE Transmitter Mounting Plate, for QM-Height
12AAY486	U-WAVE-T Transmitter Mounting Plate, for LH-600F/FG

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

U-WAVE Connection Cables and Connection Units

Standard accessories

No.	Description
05CZA619	Screw Driver

Optional accessories

No.	Description
02AZE200	U-WAVE Transmitter Mounting Plate, Universal Type
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZF675	U-WAVE fit Transmitter Mounting Plate, for ID-N Digital Indicator
02AZE990	U-WAVE Transmitter Mounting Plate, for QM-Height
12AAY486	U-WAVE-T Transmitter Mounting Plate, for LH-600F/FG

Connections Transmitter and Instrument

- This connecting part connects a measuring tool to its U-WAVE unit. Choose the appropriate connection unit or cable for your measuring tool.



Connection unit 02AZF300/ 02AZF310 for U-WAVE fit transmitter (optional)



Connection unit 02AZF700 for U-WAVE fit transmitter (optional)



Connection cable without foot switch connector and transmitter (optional)



Connection cable with foot switch connector and transmitter + foot switch (optional)

1. Connection Unit for U-WAVE fit and U-WAVE fit Bluetooth

No.	Remarks	Mass [g]
02AZF300	For U-WAVE-TC and U-WAVE TCB Transmitter e.g. for ABS AOS Standard Caliper	6
02AZF310	For U-WAVE-TC/U-WAVE-TCB and U-WAVE-TM/U-WAVE-TMB e.g. IP67 Caliper, COOLANT PROOF (IP65) Micrometer	6
02AZF700	For U-WAVE-TM and U-WAVE TMB Transmitter and Digital Indicator ID-C/ID-F 12,7 mm/0,5" range (2022 model)	10
02AZF960	For U-WAVE-TM and U-WAVE-TMB Transmitter and Outside Micrometer QuantuMike (2024 model)	14

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

U-WAVE Connection Cables and Connection Units


2. Connection cable without foot switch connector

No.	Model	Remarks	Mass [g]
02AZD790A	A	IP U-WAVE Data Cable Straight with Data Switch e.g. for IP66 Carbon Fibre Caliper	10
02AZD790B	B	IP U-WAVE Data Cable Back Side with Data Switch e.g. for IP65 Holtest	10
02AZD790C	C	U-WAVE Data Cable Straight with Data Switch e.g. for Height Gauge	10
02AZD790D	D	U-WAVE Data Cable Plain e.g. for ID-H/ID-F Indicator	10
02AZD790E	E	U-WAVE Data Cable Round e.g. for Digital Caliper Gauge Series 209	10
02AZD790F	F	U-WAVE Data Cable Straight e.g. for ID-C/ID-S Indidator	10
02AZD790G	G	IP U-WAVE Data Cable e.g. for ID-N/ID-B Indicator	10
02AZG011	SF	U-WAVE Data Cable Straight for Instruments with Digimatic S1 Interface e.g. for ID-C, ID-F Indicator and LH-600F/FG	10

3. Connection cable with foot switch connector

No.	Model	Remarks	Mass [g]
02AZE140A	A	IP U-WAVE Data Cable Straight with Data Switch/Foot Switch Connector e.g. for IP66 Carbon Fibre Caliper	34
02AZE140B	B	IP U-WAVE Data Cable Back Side with Data Switch/Foot Switch Connector e.g. for IP65 Holtest	34
02AZE140C	C	U-WAVE Data Cable Straight with Data Switch/Foot Switch Connector e.g. for Height Gauge	34
02AZE140D	D	U-WAVE Data Cable Plain with Foot Switch Connector e.g. for ID-H/ID-F Indicator	34
02AZE140E	E	U-WAVE Data Cable Round with Foot Switch Connector e.g. for Digital Caliper Gauge Series 209	34
02AZE140F	F	U-WAVE Data Cable Straight with Foot Switch Connector e.g. for ID-C/ID-S Indicator	34
02AZE140G	G	IP U-WAVE Data Cable with Foot Switch Connector e.g. for ID-N/ID-B Indicator	34
02AZG021	SF	U-WAVE Data Cable Straight with Foot Switch Connector for Instruments with Digimatic S1 Interface e.g. for ID-C, ID-F Indicator and LH-600F/FG	35

8 types of connector

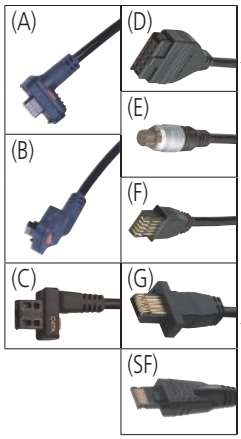

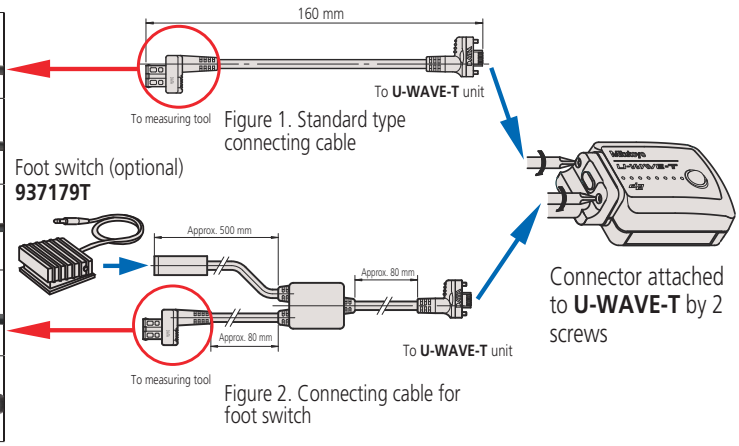


Figure 1. Standard type connecting cable

Figure 2. Connecting cable for foot switch

For more information about cable ends see page 21



02AZE200
U-WAVE-T
02AZD790F



02AZF670
U-WAVE-TM
02AZD790F

02AZF675
U-WAVE-TM
02AZD790G



02AZE990
U-WAVE-T
02AZD790D



12AAY486
U-WAVE-T
02AZG011

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

USB Input Tool

Series 264 - Keyboard Interface

The input tool allows you to directly connect Digimatic measuring devices to a USB interface, without needing additional software.
The USB Input Tool Direct offers the following benefits:


- Measurement data is converted into keyboard codes, enabling interaction with any program working with keyboard entries. (HID)
- You can also connect to a USB with fixed COM assignment in Microsoft Windows as a channel identification (VCP).
- The driver for creating the VCP is part of USB-ITPAK and is available online.
- The USB-ITPAK software lets you easily create Microsoft Excel worksheets.

Specifications

Dimensions (WxDxH)	38 x 64 x 21 mm
Power supply	5 V from the USB
Max. connectable devices	Microsoft® Windows® 2000, XP: 100 cables, Windows® Vista®, 7, 8, 8. 1, 10, 11: 20 cables
OS compatibility	Microsoft® Windows® 2000, XP, Vista®, 7, 8, 8. 1, 10 (32bit, 64bit), 11
Delivered	with 1 m USB cable

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
937179T	Footswitch for SPC

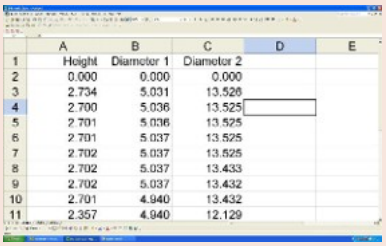

	A	B	C	D	E
1	Height	Diameter 1	Diameter 2		
2	0.000	0.000	0.000		
3	2.734	5.031	13.526		
4	2.700	5.036	13.525		
5	2.701	5.036	13.525		
6	2.701	5.037	13.525		
7	2.702	5.037	13.525		
8	2.702	5.037	13.433		
9	2.702	5.037	13.432		
10	2.701	4.940	13.432		
11	2.357	4.940	12.129		



264-020



No.	Data output	Data input	Output decimal mark	Footswitch connector	Mass [g]
264-020	USB Virtual COM-Port (VCP) with VCP driver (available online). USB keyboard signal (HID)	1x Digimatic, Digimatic 2 or Digimatic S1	Emulates the local Windows setting	Yes	54

DMX-3T / FS2 USB

Series 63 - Keyboard Interface


- The DMX-3 T/FS2 USB is a keyboard interface that transmits measurement data from measuring instruments equipped with Digimatic interfaces to a PC. Measurement data is converted into keyboard codes, allowing you to easily access it with any program working with keyboard entries, regardless of the operating system. The USB and data conversation interfaces also allow you to directly input the measurement data into a spreadsheet.

Specifications

Power supply	5 V from the USB
Dimensions (WxDxH)	112 x 122 x 45 mm
Timer function	0-99 s (1s step) or 0-99 min
OS compatibility	Microsoft® Windows® 2000, XP, Vista®, 7, 8, 8. 1, 10 (32bit, 64bit), 11
Delivered	with 1,8 m USB cable

Optional accessories

No.	Description
63AAA105	Link Cabel DMX-3T/FS2
937179T	Footswitch for SPC

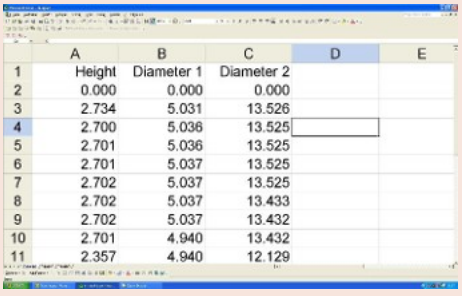

	A	B	C	D	E
1	Height	Diameter 1	Diameter 2		
2	0.000	0.000	0.000		
3	2.734	5.031	13.526		
4	2.700	5.036	13.525		
5	2.701	5.036	13.525		
6	2.701	5.037	13.525		
7	2.702	5.037	13.525		
8	2.702	5.037	13.433		
9	2.702	5.037	13.432		
10	2.701	4.940	13.432		
11	2.357	4.940	12.129		



63AAA041



rear panel

No.	Data output	Data input	Output decimal mark	Footswitch connector	Mass [g]
63AAA041	USB keyboard signal (HID)	3 x Digimatic	point or comma (selectable)	Yes	330

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

DMX-1

Series 63

This D-SUB9 serial interface is a microcontrolled interface for connecting one single measurement device, with Digimatic output, to the RS-232C interface of a computer. It offers you the following benefits:

- Easily connect a measuring device to a computer's RS-232C serial port.
- No external power supply is needed, as the small level of power needed is supplied by the hand-shake lines RTS and DTR.

No.	Data input	Data output	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
63AAA029	1 x Digimatic	RS-232C	D-SUB 9	Yes	9600	8	1	none

Specifications

Dimensions (WxDxH)	58 x 62 x 18 mm

Optional accessories

No.	Description
937179T	Footswitch for SPC
63AAA027	RS-232C Signal Cable, D-Sub9-D-Sub9, 2m



63AAA029

DMX-1 USB

Series 63

- The DMX-1 USB is a microcontrolled interface for connecting 1 Digimatic-output measurement device to the USB interface of a computer. The device appears as a virtual COM-PORT (VCP) to the computer.



63AAA040-1



rear panel

No.	Data output	Data input	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
63AAA040-1	USB virtual COM-Port (VCP)	1 x Digimatic	USB Type Mini-B	No	9600	8	1	none

Specifications

Power supply	5 V from the USB
OS compatibility	Microsoft® Windows® 2000, XP, Vista®, 7, 8, 8. 1, 10 (32bit, 64bit), 11
Dimensions (WxDxH)	33 x 57 x 20 mm
Delivered	with 1,8 m USB cable driver software available online

Optional accessories

No.	Description
937179T	Footswitch for SPC

DMX-2 S

Series 63

This DMX-2 S D-SUB5 serial interface is a microcontrolled interface for connecting two measurement devices, with Digimatic output, to the RS-232C serial port of a computer.
The DMX-2 S offers the following benefits:

- Easily connect two measuring devices to a computer's RS-232C serial port.
- No external power supply is needed, as the small level of power needed is supplied by the handshake lines RTS and DTR.



63AAA038


No.	Data input	Data output	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
63AAA038	2 x Digimatic	RS-232C	D-SUB 25	Yes	9600	8	1	none

Specifications

Dimensions (WxDxH)	58 x 62 x 18 mm

Optional accessories

No.	Description
937179T	Footswitch for SPC
63AAA108	RS-232C Signal Cable, D-Sub-25-D-Sub-9, 2m
63AAA028	Adapter D-Sub25-D-Sub9, 0,2m

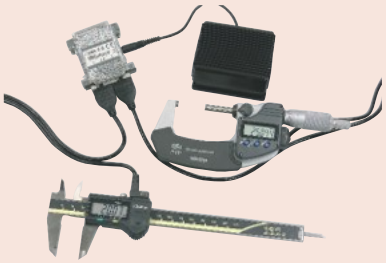

Sample application with footswitch (optional accessory)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

DMX-2 USB

Series 63

Connecting two measurement devices, with Digimatic-output, to a USB port.
The DMX-2 USB offers the following benefits:

- It appears either as a virtual COM-Port (VCP) or as a keyboard (HID) on the computer.
- It has a mode switch available to easily swap between keyboard format (HID) and virtual COM-Port (VCP).

Specifications

Power supply	5 V from the USB
OS compatibility	Microsoft® Windows® 2000, XP, Vista®, 7, 8, 8.1, 10 (32bit, 64bit), 11
Output decimal mark (HID)	point or comma
Dimensions (WxDxH)	61 x 76 x 35 mm
Delivered	with 1,8 m USB cable driver software available online

Optional accessories

No.	Description
937179T	Footswitch for SPC



63AAA037-1



rear panel

No.	Data input	Data output	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
63AAA037-1	2 x Digimatic	USB virtual COM-Port (VCP) USB keyboard signal (HID) switchable on the box	USB Type Mini-B	Yes	9600	8	1	none

DMX-3 USB

Series 63

The DMX-3 is a 3 channel microcontrolled interface that connects three measurement devices, with Digimatic output, to either the RS-232C serial port or USB port of a computer.
The DMX-3 USB offers the following benefits:

- If the USB output is used, the measuring device will appear as a virtual COM-Port (VCP) on the computer.
- Power is supplied by an AC-Adapter, which is a standard accessory only required for serial cable D-SUB-9 connection.

Specifications

Power supply	5 V from the USB or AC-Adapter (for serial connection)
OS compatibility	Microsoft® Windows® 2000, XP, Vista®, 7, 8, 8.1, 10 (32bit, 64bit), 11
Dimensions (WxDxH)	170 x 128 x 55 mm
Delivered	with 1,8 m USB cable driver software available online AC Adapter (only for serial cable connection)

Optional accessories

No.	Description
63AAA027	RS-232C Signal Cable, D-Sub9-D-Sub9, 2m
937179T	Footswitch for SPC



63AAA039-1



rear panel

No.	Data input	Data output	Interface cable connection	Foot-switch connector	Baud rate	Data bits	Stop bits	Parity
63AAA039-1	3 x Digimatic	USB virtual COM-Port (VCP), RS-232C	Serial cable: D-SUB 9 or USB: Type B	Yes	1200 or 9600 (adjustable with jumper)	8	1	none

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

MUX-10F

Series 264

The MUX-10F is a 4 channel D-SUB 9 serial interface is a microcontrolled interface that connects four measurement devices, with Digimatic output, to the RS-232C serial port of a computer.



264-002D



rear panel

No.	Data input	Data output	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
264-002D	4 x Digimatic	RS-232C	D-SUB 9	Yes	300, 600, 1200, 2400, 4800, 9600, 19200	8	1	none

Specifications

Power supply	AC-Adapter, 9V 500mA
Dimensions (WxDxH)	91,4 x 92,5 x 50,4 mm
Delivered	with AC Adapter

Optional accessories

No.	Description
12AAA882D	RS-232C Signal Cable, D-Sub9-D-Sub9, 2m, for MUX-10F and Surftest SJ
937179T	Footswitch for SPC

DMX-8/2

Series 63

The DMX-8/2 is a 8 channel D-SUB9 microcontrolled serial interface for connecting eight measurement devices, with Digimatic output, to the RS-232C serial port of a computer. The DMX-8/2 model provides power and an ABS/Zero button to operate Series 575 ABS Linear Gauges.



63AAA033



rear panel

No.	Data input	Data output	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
63AAA033	8 x Digimatic	RS-232C	D-SUB 9	Yes	9600	8	1	none

Specifications

Power supply	220-240V 50Hz
Dimensions (WxDxH)	158 x 204 x 66 mm
Delivered	With power cable

Optional accessories

No.	Description
63AAA027	RS-232C Signal Cable, D-Sub9-D-Sub9, 2m
937179T	Footswitch for SPC

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

DMX-16 / DMX-16C

Series 63

- The DMX-16/16C is a micro controlled Interface for connecting 16 Digimatic output measurement devices to the RS-232C interface of a computer
- DMX-16C features integrated microprocessors for data processing, thus enabling simultaneous input and output from all measurement instruments and increasing data processing speed.
- The DMX-16 and DMX-16C provides power and an ABS/ZERO button to operate Series 575 ABS Linear Gauges



63AAA026 or 63AAA106



rear panel

No.	Type	Data input	Data output	Interface cable connection	Foot-switch connector	Remarks	Baud rate	Data bits	Stop bits	Parity
63AAA026	DMX-16	16 x Digimatic	RS-232C	D-SUB 9	Yes	successive data reception	9600	8	1	none
63AAA106	DMX-16C	16 x Digimatic	RS-232C	D-SUB 9	Yes	simultaneous data reception	9600	8	1	none

Specifications

Power supply	220-240 V 50 Hz
Dimensions (WxDxH)	225 x 204 x 75 mm
Delivered	with power cable

Optional accessories

No.	Description
63AAA027	RS-232C Signal Cable, D-Sub9-D-Sub9, 2m
937179T	Footswitch for SPC

DMX-0-1 USB / DMX-3-2 USB

Series 63

These interfaces enable the connection of measuring devices with RS-232C data output (such as the Mitutoyo QM-Data 200 or LH-600) with the USB port of a computer.

- The ability to connect over 70 different measuring instruments with RS-232C output, this includes not only Mitutoyo devices but other brands as well (a list is available upon request).
- The interface converts the different signals from the connected measuring instruments into the same format: keyboard signal (HID).
- The DMX-0-1 USB has one RS-232C input while the DMX-3-2 has two RS-232C inputs and also 3 Digimatic inputs for connecting Mitutoyo handheld measuring devices.
- The DMX-3-2 additionally has a virtual COM-Port (VCP) with MUX-10 or MUX-50 format.



63AAA043



63AAA042-1



rear panel

No.	Data input	Data output	Interface cable connection	Footswitch connector	Baud rate	Data bits	Stop bits	Parity
63AAA043	1 x RS-232C	USB keyboard signal (HID)	USB Type B	Yes				
63AAA042-1	3 x Digimatic 2 x RS-232C	USB virtual COM-Port (VCP), USB keyboard signal (HID)	USB Type B	Yes	9600	8	1	none

Specifications

Power supply	5 V from the USB
Timer function	interval 0-99 s or 0-99 min
Mitutoyo measuring instruments with RS232C ouput	KA-Counter Protractor Series 950 EH-Counter Printer DP1-VA Linear Height LH-600 E/EG and older LH models QM-Data 200 Litematic VL-50 Laser Scan Micrometer LSM QM-Height MF-Microscope Series PJ A3000 Projector PJ H30 Projector ID-H Indicator
OS compatibility	Microsoft® Windows® 2000, XP, Vista®, 7, 8, 8. 1, 10 (32bit, 64bit), 11
Output decimal mark (HID)	point or comma
Delivered	with 1,8 m USB cable driver software available online

Optional accessories

No.	Description
63AAA105	Link Cabel DMX-3T/FS2
937179T	Footswitch for SPC

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Timerbox

Series 63

This timerbox allows you to connect to the footswitch connector of a Mitutoyo interface to trigger data transfer, based on a time interval.

- It can be used with all Mitutoyo interfaces featuring 3,5 mm TRS Foot switch connectors (Mono) such as USB Input Tool Direct Footswitch Adapter. It works as a time-controlled footswitch.



63AAA107



Sample application with USB Input Tool Direct

No.	Delivered
63AAA107	In a carton box with USB cable (0,8 m), AC-Adapter, footswitch cable TTB1 (0,52 m)

Specifications

Power supply	AC-Adapter, 10 V 120 mA or 5 V from the USB
Timer function	1 s-99 h 59 min 59 s (100 h)
Timer tolerance	±8 s/24 h
Dimensions (WxDxH)	55 x 58 x 31 mm
Mass	84 g



Sample application with DMX Box

Digimatic Switch Box

Series 63/939

This switch box is a distribution box that connects 3 or 5 Digimatic tools to one channel interface (for example a DMX-1 USB or a USB Input Tool).




63AAA030



939039

No.	Data output	Data input	Footswitch connector	Delivered
63AAA030	1 x Digimatic (1 channel)	5 x Digimatic	Yes	In a carton box with AC-Adapter (CEE-type)
939039	1 x Digimatic (1 channel)	3 x Digimatic	No	with AC Adapter (63AAA30)

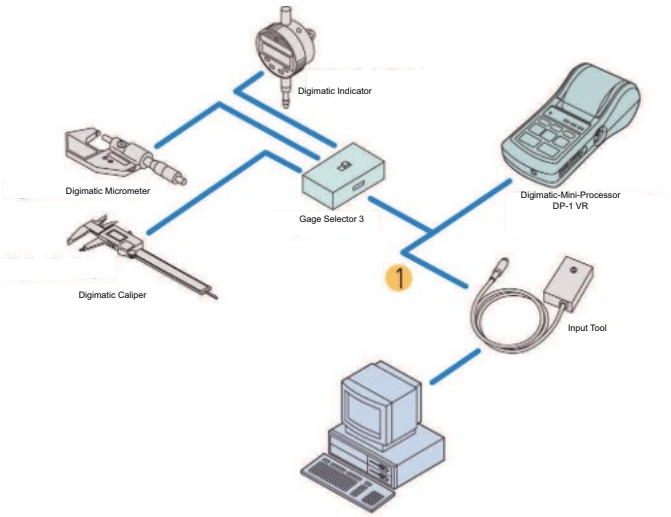

1: cable 936937 (1 m), 965014 (2 m)

Optional accessories

No.	Description
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
937179T	Footswitch for SPC

937179T for 63AAA030 only

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micrometers and Micrometer Heads



Digimatic Micrometers and Mechanical Micrometers
Page 36



Micrometer Accessories
Page 98



Micrometer Heads
Page 106

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

High Accuracy Digital Micrometers

Series 293

ABSOLUTE®

This Micrometer enables 0,1 µm resolution measurements and is ideal for customers who need to make highly accurate measurements with a hand-held tool.

The Absolute High-Accuracy Micrometer offers the following benefits:


- It delivers higher accuracy without sacrificing operability, by using Mitutoyo's innovative 0,1 µm resolution ABS (absolute) rotary sensor and high accuracy screw machining technology which reduces the length measurement error to just 0,5 µm.
- This Outside Micrometer complies with accuracy class 0 according to EN ISO 3611:2023
- Its highly rigid frame and high-performance constant-force mechanism (7-9 N) enable more stable measurement.




293-100-20

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	Mass [g]
293-100-20	0–25	0,1 µm / 0,5 µm	±0,5 µm	0,6 µm	Class 0	7-9	400

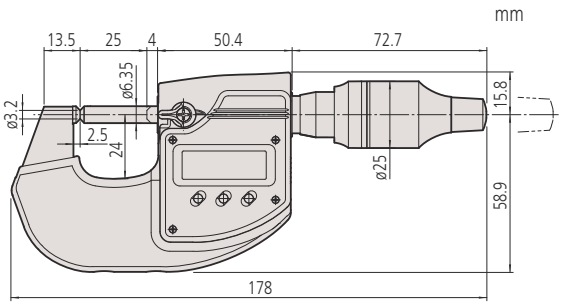

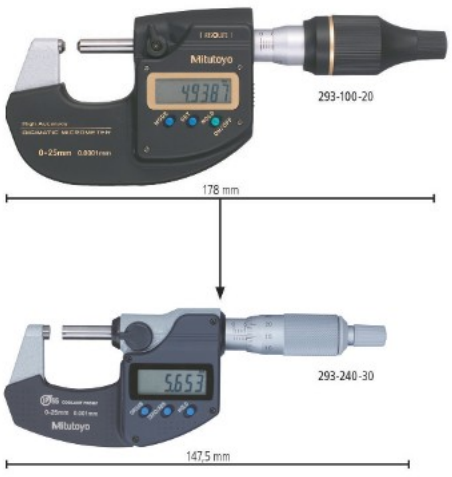

Comparative sizes:
High Accuracy-Micrometer with a highly rigid frame and a common Micrometer with a standard frame

Scan QR Code with your mobile device and watch our product videos on YouTube

Functions	Series 293
Data output	●
ON/OFF	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
PRESET	●
Resolution switching	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish, Ø 3,2 mm
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 lithium battery CR-2032
Battery life	Approx. 2 years
Delivered	Including box, key, driver, 1 battery, heat insulating cover, cleaning paper, certificate of inspection

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.



0,1 µm digital step





M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers QuantuMike IP65

Series 293

QuantuMike

Dust- and Water-Protected

www.tuv.com ID

PROPRIETARY INSPECTION CERTIFICATE

Only for 0-25, 25-50 mm

IP65

This is an IP65 micrometer offering movement four times as fast as a standard micrometer.It presents you with the following
It presents you with the following benefits:

- Faster measurement is achieved by using a coarser thread which feeds the spindle by 2 mm per thimble rotation.
- Bidirectional communication e.g. to perform parameter setting from a PC (Digimatic S 1 data output) is possible.
- Ratched thimble mechanism and a small design ensures easy single-handed or stand operation.
- Equipped with a calibration schedule warning function.
- GO/±NG judgement is performed by setting the upper and lower tolerance limits.
- Approach speed warning function for reliable measurements.
- Extraordinary battery life of 2 years (4000 h).
- Outstanding accuracy refer to EN ISO 3611 E_{MPE} ±1 µm (0-25, 25-50 mm model).
- Excellent resistance against water and dust (IP65 protection level) enables this micrometer to be used in machining situations that include splashing coolant that include splashing coolant fluid.
- A function lock protects the display against unauthorized use.
- Visibility is improved by enlarging the display unit.

Functions	Series 293
Data output	●
ON/OFF	●
ORIGIN (until 100 mm)	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
PRESET	●
GO/±NG judgement	●
Calculation function (with formula)	●
Customizing keys	●
Calibration warning function	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6.35 mm, spindle pitch 2 mm
Power supply	1 battery CR2032
Battery life	Approx. 2 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward) (from 25 mm upward)certificate certificate of inspection (0-50 mm range)

Optional accessories

No.	Description
06AGL111	Digimatic Cable with Data Button IP Type, 1 m, Digimatic/ Digimatic 2/ Digi-matic S1 Interface matic S1 Interface
06AGL121	Digimatic Cable with Data Button IP Type, 2 m, Digimatic/ Digimatic 2/ Digi-matic S1 Interface matic S1 Interface
06AGQ001A	USB Input Tool Direct (Digimatic USB), 2m, Digimatic/ Digimatic 2/ Digimatic S 2m, Digimatic/ Digimatic 2/ Digimatic S1 Interface, IP Type
02AZF960	Connection Unit for IP Micrometer, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indica-tor tor
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator Indicator
04GAA899	Colour Speeder, for Ratchet Thimble Black Black
04GAA900	Colour Speeder, for Ratchet Thimble Red
04GAA901	Colour Speeder, for Ratchet Thimble Yel-low low
04GAA902	Colour Speeder, for Ratchet Thimble Green Green
04GAA903	Colour Speeder, for Ratchet Thimble Blue Blue
04AAB208	Colour Speeder, for Ratchet Thimble Grey Grey
156-105-10	Micrometer Stand, 45° Angle Type, for Micrometer 0-50mm/0-2" Micrometer 0-50mm/0-2"
156-101-10	Micrometer Stand, Adjustable Angle Type, for Micrometer 0-100mm/0-4"

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.



293-140-40



293-141-40




293-142-40




293-143-40

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611 ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	Mass [g]
293-140-40	0–25	0,001 mm	±1 µm	1 µm	Class 1	7-12	0	9	25	265
293-141-40	25–50	0,001 mm	±1 µm	1 µm	Class 1	7-12	25	9,8	32,5	325
293-142-40	50–75	0,001 mm	±2 µm	2 µm	Class 1	7-12	50	12,6	47	465
293-143-40	75–100	0,001 mm	±2 µm	2 µm	Class 1	7-12	75	14	60	620

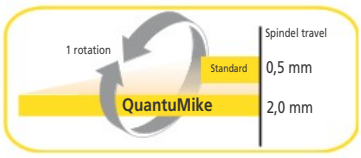

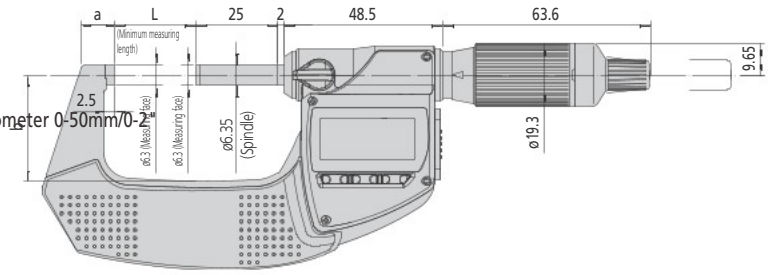

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Micrometers IP65 Metric

Series 293 - Individual Range with Data Output

This IP65 micrometer offers outstanding accuracy, with data output, is highly robust and offers the following benefits:

- Oil-resistant material used for all plastic parts
- Extraordinary battery life of 2,4 years
- Excellent resistance against water and dust enables this micrometer to be used in machining situations that include splashing coolant fluid.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

PROPRIETARY INSPECTION CERTIFICATE

Only for 0-25, 25-50 mm

IP65



293-234-30 with ratched thimble



293-230-30 with ratched stop



293-252-30



293-237-30

Metric

With ratchet stop

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]
293-230-30	0–25	0,001 mm	±1 µm	1 µm	Class 1	5-10
293-231-30	25–50	0,001 mm	±1 µm	1 µm	Class 1	5-10
293-232-30	50–75	0,001 mm	±2 µm	2 µm	Class 1	5-10
293-233-30	75–100	0,001 mm	±2 µm	2 µm	Class 1	5-10
293-250-30	100–125	0,001 mm	±2 µm	5 µm	Class 1	5-10
293-251-30	125–150	0,001 mm	±2 µm	5 µm	Class 1	5-10
293-252-30	150–175	0,001 mm	±3 µm	5 µm	Class 1	5-10
293-253-30	175–200	0,001 mm	±3 µm	5 µm	Class 1	5-10
293-254-30	200–225	0,001 mm	±3 µm	5 µm	Class 1	5-10
293-255-30	225–250	0,001 mm	±4 µm	5 µm	Class 1	5-10
293-256-30	250–275	0,001 mm	±4 µm	5 µm	Class 1	5-10
293-257-30	275–300	0,001 mm	±4 µm	5 µm	Class 1	5-10

No.	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
293-230-30	0	6,5	25	2,5	270
293-231-30	25	7,3	32,5	2,5	330
293-232-30	50	10,1	47	2,5	470
293-233-30	75	11,5	60	2,5	625
293-250-30	100	16,7	76	5,3	600
293-251-30	125	18,8	90	5,7	740
293-252-30	150	19,1	103	6,1	800
293-253-30	175	18,2	115	6,3	970
293-254-30	200	16,8	126	6,7	1100
293-255-30	225	18	139	5,5	1270
293-256-30	250	18	152	6,5	1340
293-257-30	275	18	166	6,5	1540

Functions	Series 293 - Individual Range with Data Output
Data output	●
ORIGIN (until 100 mm)	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET (over 100 mm)	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years, 1,2 years (range >100 mm)
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward) certificate of inspection (0-50 mm range)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers IP65 Metric

Metric

With ratchet thimble

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]
293-234-30	0–25	0,001 mm	±1 µm	1 µm	Class 1	5-10
293-235-30	25–50	0,001 mm	±1 µm	1 µm	Class 1	5-10
293-236-30	50–75	0,001 mm	±2 µm	2 µm	Class 1	5-10
293-237-30	75–100	0,001 mm	±2 µm	2 µm	Class 1	5-10

No.	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
293-234-30	0	6,5	25	2,5	270
293-235-30	25	7,3	32,5	2,5	330
293-236-30	50	10,1	47	2,5	470
293-237-30	75	11,5	60	2,5	625




Excellent resistance against water and dust IP65




With Wireless System U-WAVE fit


Scan QR Code with your mobile device and watch our product videos on YouTube

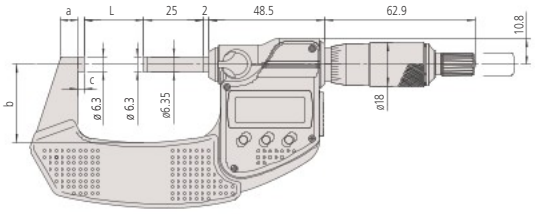

Ratchet stop

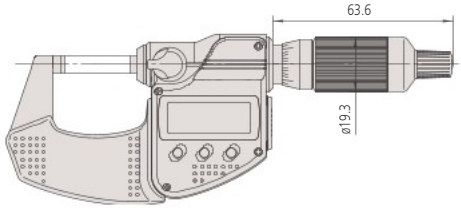

Ratchet thimble

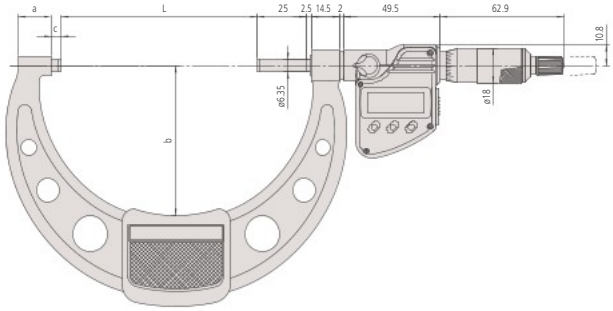

Ratchet stop over 100 mm range

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Micrometers IP65 Metric

Series 293 - Individual Range without Data Output

This IP65 micrometer offers outstanding accuracy, without data output, is highly robust and offers the following benefits:

- Oil-resistant material used for all plastic parts
- Extraordinary battery life of 2,4 years
- Excellent resistance against water and dust enables this micrometer to be used in machining situations that include splashing coolant fluid.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000040191

PROPRIETARY INSPECTION CERTIFICATE

Only for 0-25, 25-50 mm

IP65



293-240-30 with ratched stop



293-244-30 with ratchet thimble

Metric With ratchet stop

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
293-240-30	0–25	0,001 mm	±1 µm	1 µm	Class 1	5-10	0	6,5	25	2,5	270
293-241-30	25–50	0,001 mm	±1 µm	1 µm	Class 1	5-10	25	7,3	32,5	2,5	330
293-242-30	50–75	0,001 mm	±2 µm	2 µm	Class 1	5-10	50	10,1	47	2,5	470
293-243-30	75–100	0,001 mm	±2 µm	2 µm	Class 1	5-10	75	11,5	60	2,5	625

Metric With ratchet thimble

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
293-244-30	0–25	0,001 mm	±1 µm	1 µm	Class 1	7-12	0	6,5	25	2,5	270
293-245-30	25–50	0,001 mm	±1 µm	1 µm	Class 1	7-12	25	7,3	32,5	2,5	330
293-246-30	50–75	0,001 mm	±2 µm	2 µm	Class 1	7-12	50	10,1	47	2,5	470
293-247-30	75–100	0,001 mm	±2 µm	2 µm	Class 1	7-12	75	11,5	60	2,5	625

Functions	Series 293 - Individual Range without Data Output
ORIGIN (until 100 mm)	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward) certificate of inspection (0-50 mm range)

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Excellent resistance against water and dust IP65

Scan QR Code with your mobile device and watch our product videos on YouTube

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers IP65 Metric

Functions	Series 293 - Micrometer Set
Data output	●
ORIGIN (until 100 mm)	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward) certificate of inspection (0-50 mm range)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



With Wireless System U-WAVE fit

Series 293 - Micrometer Set

This IP65 Micrometer offers outstanding accuracy, with data output, is highly robust and offers the following benefits:

- Oil-resistant material used for all plastic parts
- Extraordinary battery life of 2,4 years
- Excellent resistance against water and dust enables this micrometer to be used in machining situations that include splashing coolant fluid.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

PROPRIETARY INSPECTION CERTIFICATE

only for 0-25, 25-50 mm

IP65



293-963-30

Metric

Set/With ratchet stop

No.	Range [mm]	Digital step	Measuring force [N]	Content of Set	Mass [g]
293-966-30	0–50	0,001 mm	5-10	293-230-30 / 293-231-30 + setting standard 25 mm (ceramic gauge block grade 1)	1030
293-962-30	0–75	0,001 mm	5-10	293-230-30 / 293-231-30 / 293-232-30 + setting standard 25 mm and 50 mm	1640
293-963-30	0–100	0,001 mm	5-10	293-230-30 / 293-231-30 / 293-232-30 / 293-233-30 + setting standard 25 mm, 50 mm and 75 mm	2725

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Wide Range Micrometers

Series 293

This Wide Measuring Range Digimatic Micrometer with data output offers the following benefits:


- The micrometer's 330° rotatable display unit enables easy reading in all measurement positions.
- With Carbide-tipped measuring faces



293-582

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	b [mm]	Mass [g]
293-582	300–325	0,001 mm	±6 µm	5 µm	Class 2	10-14	353	187	2000
293-583	325–350	0,001 mm	±6 µm	5 µm	Class 2	10-14	378	199	2150
293-584	350–375	0,001 mm	±6 µm	5 µm	Class 2	10-14	403	212	2300
293-585	375–400	0,001 mm	±7 µm	6 µm	Class 2	10-14	428	224	2450
293-586	400–425	0,001 mm	±7 µm	6 µm	Class 2	10-14	453	236	2600
293-587	425–450	0,001 mm	±7 µm	6 µm	Class 2	10-14	478	248	2750
293-588	450–475	0,001 mm	±8 µm	6 µm	Class 2	10-14	503	261	2900
293-589	475–500	0,001 mm	±8 µm	7 µm	Class 2	10-14	528	273	3100

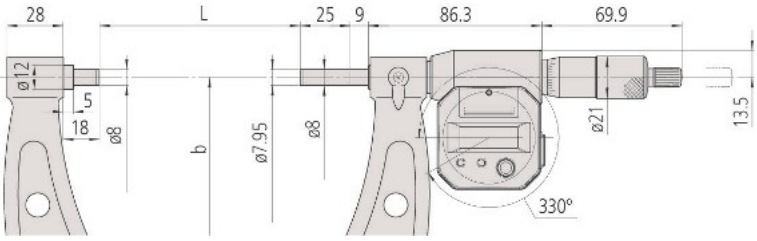



The display is 330° rotatable

Functions	Series 293
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications


Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 8 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	2 batteries SR-44
Battery life	Approx. 1,8 years
Delivered	Including box, key, setting standard, 2 batteries

Optional accessories


No.	Description
04AZB512	Digimatic Cable with Data Button, 1 m, Flat L-Shape Left Type
04AZB513	Digimatic Cable, Straight, Data Button, 2 m, Flat L-Shape Left Type
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

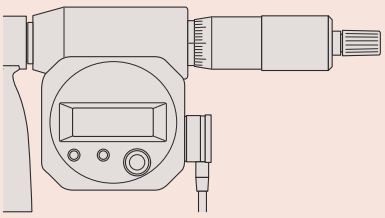

Cable orientation downwards
04AZB512, 04AZB513

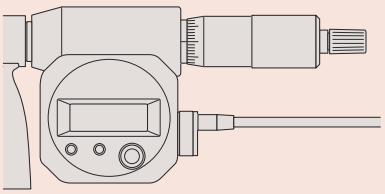

Cable orientation in thimble direction
959149, 959150

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers

Functions	Series 293
ORIGIN	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, certificate of inspection

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 293

This Standard Digimatic Micrometer is an affordable device that offers the following benefits:

- It is cost-effective with simplified functionality for standard applications.
- Extraordinary battery life of 2,4 years. Without data output.
- Constant measuring force




293-821-30

Metric

With ratchet stop

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	Mass [g]
293-821-30	0–25	0,001 mm	±2 µm	1 µm	Class 2	5-10	275

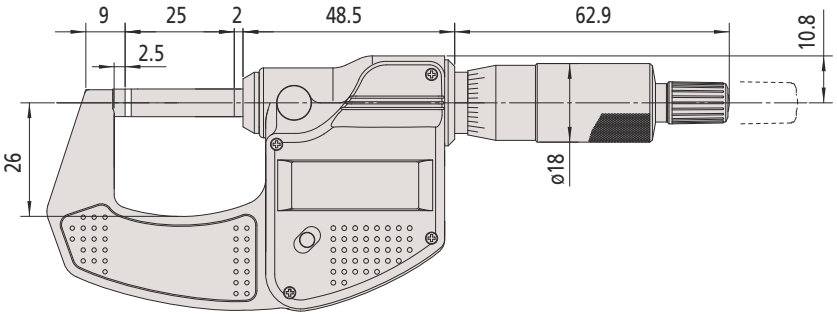

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers with Non-Rotating Spindle

Series 406

This Micrometer features a non-rotating spindle, and offers the following benefits:


- Sliding spindle, not rotating.
- Ratchet stop.
- Data output.




406-250-30

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
406-250-30	0–25	0,001 mm	±3 µm	3 µm	3-8	0	7	32	2,8	330
406-251-30	25–50	0,001 mm	±3 µm	3 µm	3-8	25	9,8	47	2,8	470
406-252-30	50–75	0,001 mm	±3 µm	3 µm	3-8	50	11,2	60	2,8	625
406-253-30	75–100	0,001 mm	±4 µm	3 µm	3-8	75	14,6	57	2,3	460

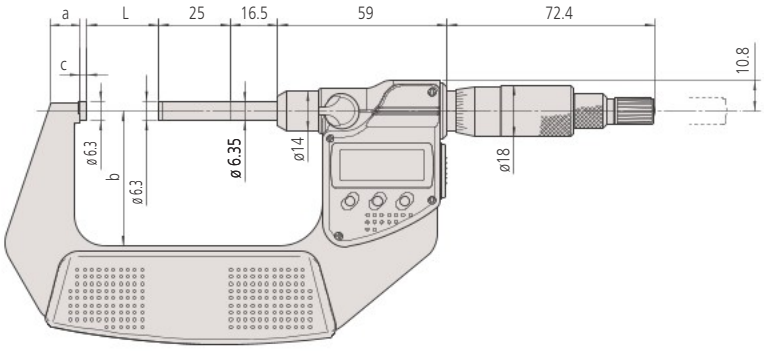

0 - 75 mm

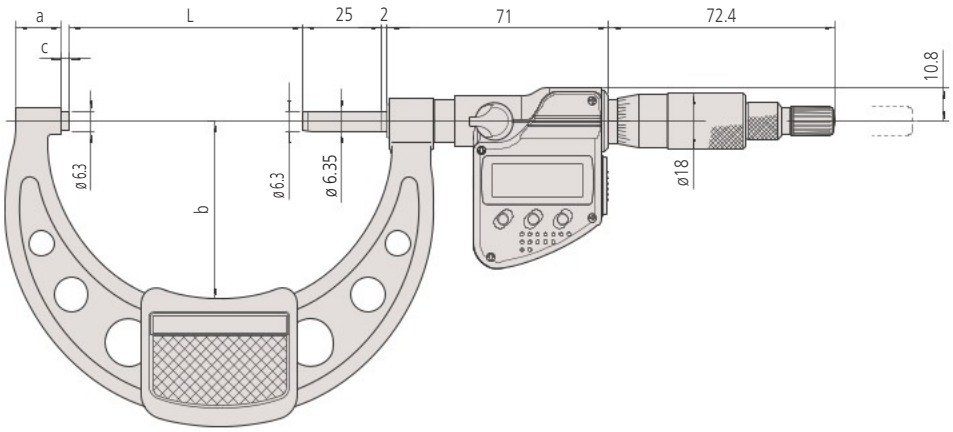

75 - 100 mm

Functions	Series 406
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm (from 25 mm upward)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m cab USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indica-tor tor
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



With Wireless System U-WAVE fit

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

ABSOLUTE Digimatic Micrometers Quickmike

Series 293

Dust- and Water-Protected

This Quickmike, with a non-rotating spindle, delivers much faster movement than standard models.
The ABSOLUTE Digimatic Micrometer Quickmike offers the following benefits:

- With 10 mm feed per thimble rotation, it delivers twenty times as fast as standard devices.
- Excellent resistance against water and dust (IP65) enables this micrometer to be used in machining situations that include splashing coolant fluid.
- ABSOLUTE linear scale means no restriction on adjustment speed.
- Larger measuring range - 30 mm compared with 25 mm - than standard micrometer.

	Series 293
Functions	
Data output	●
ON/OFF	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 10 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	Non-rotating, spindle feed 10 mm
Power supply	1 battery SR-44
Battery life	Approx. 5 years
Delivered	Including box, setting standard (from 25 mm upward), 1 battery

Optional accessories


No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



293-666-20 with micrometer stand 156-101-10 (optional accessories)

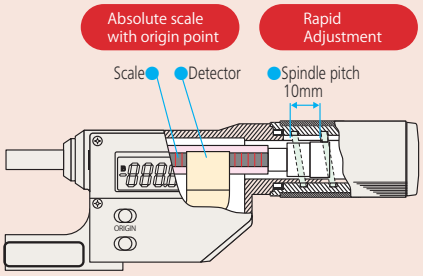

This micrometer has a spindle mechanism enabling a spindle drive of 10 mm/rev.
The drive rate is therefore twenty times as fast as conventional micrometers.



293-666-20



293-667-20




293-668-20



293-669-20

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
293-666-20	0–30	0,001 mm	±2 µm	2 µm	Class 2	5-12	0	7	25	2	275
293-667-20	25–55	0,001 mm	±2 µm	2 µm	Class 2	5-12	25	8,5	36	2,8	340
293-668-20	50–80	0,001 mm	±3 µm	2 µm	Class 2	5-12	50	10,3	47	2,8	480
293-669-20	75–105	0,001 mm	±3 µm	3 µm	Class 2	5-12	75	10,7	60	2,8	585

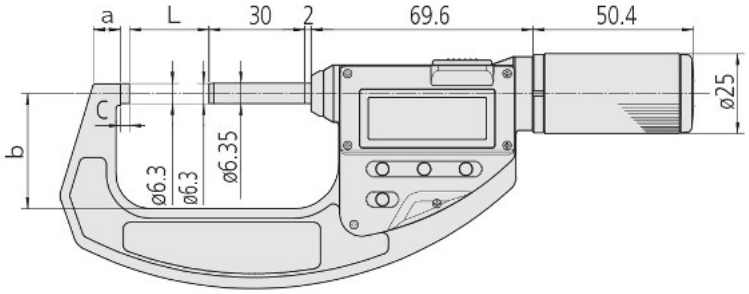

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Micrometers Quickmike

Series 227

ABSOLUTE®

This Quickmike has an adjustable measuring force to suit various kinds of workpieces.
The ABSOLUTE Digimatic Micrometer Quickmike offers the following benefits:

- It's dedicated to applications requiring a constant/low measuring force such as measuring wire, paper and plastic/rubber parts.
- Constant and low measuring force mechanism in the thimble.
- Non-rotating spindle.
- Speedy spindle feed of 10 mm per thimble rotation.




227-201-20

Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force settings [N]	Measuring force accuracy (1) [N]	Mass [g]
227-201-20	0–15	0,001 mm	±2 µm	2 µm	Class 2	0,5; 1; 1,5; 2; 2,5	±0,1 + (force setting/10)	300
227-203-20	15–30	0,001 mm	±2 µm	2 µm	Class 2	0,5; 1; 1,5; 2; 2,5	±0,1 + (force setting/10)	380
227-205-20	0–10	0,001 mm	±2 µm	2 µm	Class 2	2; 4; 6; 8; 10	±0,4 + (force setting/10)	345
227-206-20	10–20	0,001 mm	±2 µm	2 µm	Class 2	2; 4; 6; 8; 10	±0,4 + (force setting/10)	425
227-207-20	20–30	0,001 mm	±2 µm	2 µm	Class 2	2; 4; 6; 8; 10	±0,4 + (force setting/10)	415

(1) Only valid for instrument orientation within ±3 degrees of horizontal when measuring.

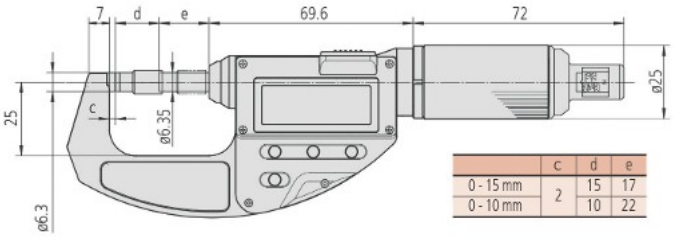

	c	d	e
0 - 15 mm	2	15	17
0 - 10 mm		10	22

227-201-20, 227-205-20

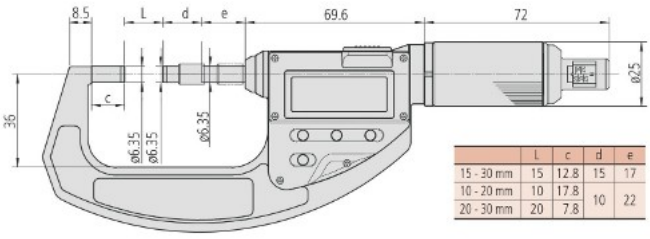

	L	c	d	e
15 - 30 mm	15	12.8	15	17
10 - 20 mm	10	17.8	10	22
20 - 30 mm	20	7.8		

227-203-20, 227-206-20, 227-207-20

	Series 227
Functions	
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
Function lock	●
HOLD	●
PRESET	●

Specifications

Display	LCD, character height 10 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	ø6,35 mm, non-rotating, spindle feed 10 mm
Power supply	1 battery SR-44
Battery life	Approx. 5 years
Delivered	Including box, setting standard (for 10-30 mm models), screwdriver, 1 battery

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V







Adjustable Measuring Force

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ratchet Thimble Micrometers

Series 102

This Ratchet Thimble Micrometer has a mechanism that ensures consistent and reliable measurements. It offers you the following benefits:

- It works both from the thimble and the speeder, enabling easy, one-handed operation.
- Ratchet's clearly audible operation provides reassurance that measurements are being taken at a constant, preset measuring force.
- Heat insulating frame.

Specifications

Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø19 mm
Delivered	Including box, key, setting standard (from 25 mm upward), certificate of inspection

Optional accessories

No.	Description
04GAA899	Colour Speeder, for Ratchet Thimble Black
04GAA900	Colour Speeder, for Ratchet Thimble Red
04AAB208	Colour Speeder, for Ratchet Thimble Grey
04GAA901	Colour Speeder, for Ratchet Thimble Yellow
04GAA902	Colour Speeder, for Ratchet Thimble Green
04GAA903	Colour Speeder, for Ratchet Thimble Blue










102-707




102-702

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	Mass [g]
102-701	0–25	0,01 mm	±2 µm	2 µm	Class 2	5-10	180
102-707	0–25	0,001 mm	±2 µm	2 µm	Class 2	5-10	180
102-702	25–50	0,01 mm	±2 µm	2 µm	Class 2	5-10	270
102-708	25–50	0,001 mm	±2 µm	2 µm	Class 2	5-10	270

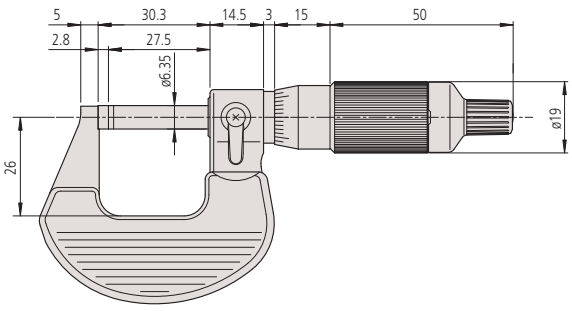

0-25 mm

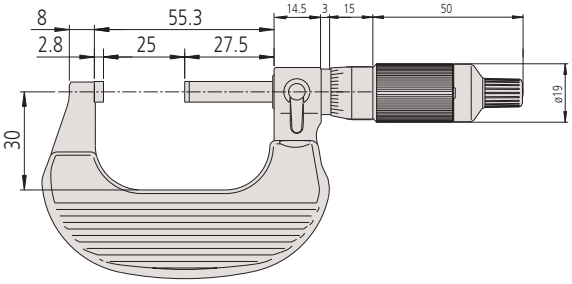

25-50 mm



Coloured ratchet caps (optional accessories)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Outside Micrometer with Thermally Insulating Plate

Series 102

Cut-away frame behind anvil for measuring in hard to reach places. A ratchet stop or friction thimble guarantees repeatable measurement.

Only for 0-25, 25-50 mm




102-301



102-911-40

Specifications

Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, key, setting standard (from 25 mm upward), certificate of inspection (0-50 mm range)

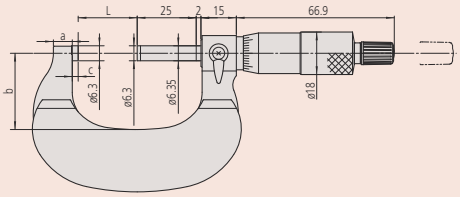

Metric

Graduation 0.001 mm is obtained with vernier on sleeve

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Remarks	Measuring force [N]
102-311	0–25	0,001 mm	±1 µm	2 µm	Class 1	Ratched Stop	5-10
102-312	25–50	0,001 mm	±1 µm	1 µm	Class 1	Ratched Stop	5-10
102-313	0–25	0,001 mm	±1 µm	1 µm	Class 1	Friction Thimble	5-10

No.	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
102-311	0	5	26	2,5	180
102-312	25	7,8	32	2,5	270
102-313	0	5	26	2,5	180

Metric

Graduation 0.01 mm

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Remarks	Measuring force [N]
102-301	0–25	0,01 mm	±2 µm	2 µm	Class 2	Ratched Stop	5-10
102-302	25–50	0,01 mm	±2 µm	2 µm	Class 2	Ratched Stop	5-10
102-303	50–75	0,01 mm	±2 µm	2 µm	Class 1	Ratched Stop	5-10
102-304	75–100	0,01 mm	±3 µm	3 µm	Class 2	Ratched Stop	5-10

No.	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
102-301	0	5	26	2,5	180
102-302	25	7,8	32	2,5	270
102-303	50	10,6	45	2,5	375
102-304	75	11	58	2,5	490

Metric

Micrometer set

No.	Range [mm]	Graduation	Remarks	Content of Set	Mass [g]
102-911-40	0–100	0,01 mm	Ratched Stop	102-301, 102-302, 102-303, 102-304, 3 setting standards	1200

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Analog Outside Micrometers Metric

Series 103


Lightweight workshop design with baked-enamel-finished frame.

- Equipped with Ratchet Stop for constant measuring force.


Only for 0-25, 25-50 mm

Specifications


Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm (21 mm models >300 mm)
Delivered	Including box, key, setting standard (from 25 mm upward), certificate of inspection (0-50 mm range)

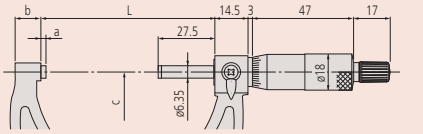


Models up to 50 mm

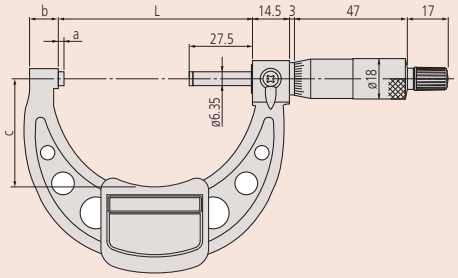

Models 50 mm to 300 mm with insulating plate

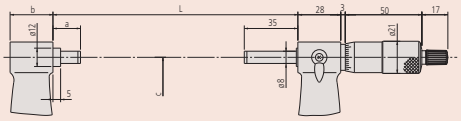

Models over 300 mm

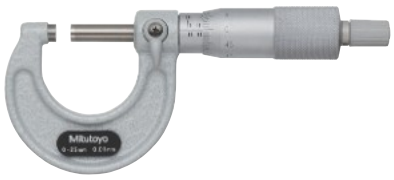

103-137



103-139-10

Metric

Graduation 0.001 mm is obtained with vernier on sleeve

No.	Range [mm]	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
103-129	0–25	±2 µm	2 µm	Class 2	5-10	30,3	2,8	9	28	175
103-130	25–50	±2 µm	2 µm	Class 2	5-10	55,3	2,8	10	38	215

Metric

Graduation 0.01 mm

No.	Range [mm]	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
103-137	0–25	±2 µm	2 µm	Class 2	5-10	30,3	2,8	9	28	175
103-138	25–50	±2 µm	2 µm	Class 2	5-10	55,3	2,8	10	38	215
103-139-10	50–75	±2 µm	2 µm	Class 1	5-10	80,3	2,8	12	46	315
103-140-10	75–100	±3 µm	3 µm	Class 2	5-10	105,3	2,8	14	57	375
103-141-10	100–125	±3 µm	3 µm	Class 2	5-10	132,8	5,3	17	76	515
103-142-10	125–150	±3 µm	3 µm	Class 2	5-10	158,2	5,7	19	90	665
103-143-10	150–175	±4 µm	3 µm	Class 2	5-10	183,6	6,1	20	102	720
103-144-10	175–200	±4 µm	4 µm	Class 2	5-10	208,8	6,3	19	115	920
103-145-10	200–225	±4 µm	4 µm	Class 2	5-10	234,2	6,7	18	127	1080
103-146-10	225–250	±5 µm	4 µm	Class 2	5-10	258	5,5	18	139	1255
103-147-10	250–275	±5 µm	4 µm	Class 2	5-10	284	6,5	18	152	1405
103-148-10	275–300	±5 µm	5 µm	Class 2	5-10	309	6,5	18	166	1565
103-149	300–325	±6 µm	5 µm	Class 2	10-15	353	18	28	187	1985
103-150	325–350	±6 µm	5 µm	Class 2	10-15	378	18	28	199	2155
103-151	350–375	±6 µm	5 µm	Class 2	10-15	403	18	28	212	2305
103-152	375–400	±7 µm	6 µm	Class 2	10-15	428	18	28	224	2455
103-153	400–425	±7 µm	6 µm	Class 2	10-15	453	18	28	236	2715
103-154	425–450	±7 µm	6 µm	Class 2	10-15	478	18	28	248	2965
103-155	450–475	±8 µm	6 µm	Class 2	10-15	503	18	28	261	3215
103-156	475–500	±8 µm	7 µm	Class 2	10-15	528	18	28	273	3450

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Analog Outside Micrometers in Set

Series 103

Lightweight workshop design with baked-enamel-finished frame.

- Equipped with Ratchet Stop for constant measuring force.

Only for 0-25, 25-50 mm

Specifications

Measuring face	Carbide tipped, micro-lap finish
Measuring spindle	With spindle lock, ø6,35 mm , spindle pitch 0,5 mm
Delivered	Including box, key, setting standard (from 25 mm upward),



103-927-10



103-913-50



103-914-50



Setting standards
103-914-50

Metric

Micrometer set

No.	Range [mm]	Graduation	Content of Set	Mass [g]
103-927-10	0–75	0,01 mm	103-137, 103-138, 103-139-10, 2 setting standards	750
103-913-50	0–150	0,01 mm	103-137, 103-138, 103-139-10, 103-140-10, 103-141-10, 103-142-10, 5 setting standards	2260
103-915-10	150–300	0,01 mm	103-143-10, 103-144-10, 103-145-10, 103-146-10, 103-147-10, 103-148-10, 6 setting standards	7695
103-914-50	0–300	0,01 mm	103-137, 103-138, 103-139-10, 103-140-10, 103-141-10, 103-142-10, 103-143-10, 103-144-10, 103-145-10, 103-146-10, 103-147-10, 103-148-10, 11 setting standards	9300

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digit Outside Micrometers

Series 193

This Digit Outside Micrometer comes with a mechanical counter and offers you the following benefits:


- Mechanical Digit counter
- Quick and easy reading

Specifications

Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key



193-902

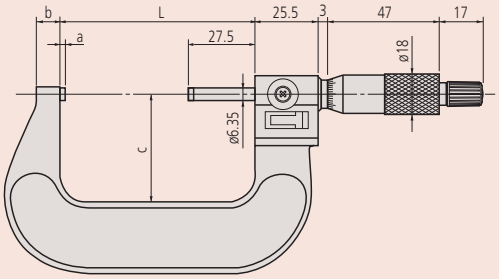

193-112



193-101

Metric — Graduation 0.001 mm is obtained with vernier on sleeve

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
193-111	0–25	0,001 mm	±2 µm	2 µm	Class 2	5-15	30	2,5	5	26	224
193-112	25–50	0,001 mm	±2 µm	2 µm	Class 2	5-15	55	2	8	32	275
193-113	50–75	0,001 mm	±2 µm	2 µm	Class 1	5-15	80	2	9	45	379
193-114	75–100	0,001 mm	±3 µm	3 µm	Class 2	5-15	105	2	9	57	489

Metric — Graduation 0.01 mm

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Class EN ISO 3611	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
193-101	0–25	0,01 mm	±2 µm	2 µm	Class 2	5-15	30	2,5	5	26	224
193-102	25–50	0,01 mm	±2 µm	2 µm	Class 2	5-15	55	2	8	32	275
193-103	50–75	0,01 mm	±2 µm	2 µm	Class 1	5-15	80	2	9	45	379
193-104	75–100	0,01 mm	±3 µm	3 µm	Class 2	5-15	105	2	9	57	489

Metric — Micrometer set

No.	Range [mm]	Graduation	Measuring force [N]	Content of Set	Mass [g]
193-901	0–75	0,01 mm	5-15	193-101, 193-102, 193-103, 2 setting standards	820
193-902	0–100	0,01 mm	5-15	193-101, 193-102, 193-103, 193-104, 3 setting standards	1367

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers with Interchangeable Anvils

Series 340

This Digimatic Micrometer offers you an extra wide measuring range, and has the following benefits:

- Easy, interchangeable anvils allow a wide range of measurements.
- Ratchet stop for constant force.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

IP65

up 300 mm




340-251-30 (IP65 up to 300 mm Range)



340-520 (not IP65 protected >300 mm Range)

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	Setting standard	Interchangeable anvils	Mass [kg]
340-251-30	0–150	0,001 mm	±6 µm	3 µm	5-10	5 (25, 50, 75, 100, 125 mm)	6	0,96
340-252-30	150–300	0,001 mm	±8 µm	5 µm	5-10	6 (150, 175, 200, 225, 250, 275 mm)	6	1,88
340-520	300–400	0,001 mm	±10 µm	6 µm	10-15	4 (300, 325, 350, 375 mm)	4	2,6
340-521	400–500	0,001 mm	±11 µm	7 µm	10-15	4 (400, 425, 450, 475 mm)	4	4,1
340-522	500–600	0,001 mm	±12 µm	8 µm	10-15	4 (500, 525, 550, 575 mm)	4	5,5
340-523	600–700	0,001 mm	±14 µm	9 µm	10-15	4 (600, 625, 650, 675 mm)	4	6,8
340-524	700–800	0,001 mm	±15 µm	10 µm	10-15	4 (700, 725, 750, 775 mm)	4	8,2
340-525	800–900	0,001 mm	±16 µm	11 µm	10-15	4 (800, 825, 850, 875 mm)	4	9,5
340-526	900–1000	0,001 mm	±18 µm	12 µm	10-15	4 (900, 925, 950, 975 mm)	4	10,9

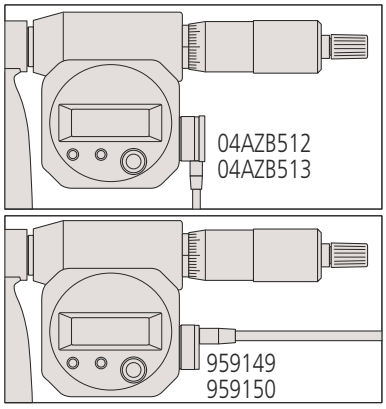

Models over 300 mm



	Series 340
Functions	
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped spindle, hardened anvil
Measuring spindle	With spindle lock, ø 6,35 mm, ø8 mm (over 300 mm)
Scale	Thimble and sleeve satin chrome finish
Power supply	Battery SR-44
Battery life	Approx. 2,4 years, 1,8 years (range >300 mm)
Delivered	Including box, setting standard, anvils, key, 1 battery (2 batteries > 300 mm)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
04AZB512	Digimatic Cable with Data Button, 1 m, Flat L-Shape Left Type
04AZB513	Digimatic Cable, Straight, Data Button, 2 m, Flat L-Shape Left Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button

05CZA662, 05CZA663, 06AFM380B, 264-622, 264-623, 264-626, 264-627, 02AZF310 for models up to 300 mm
959149, 959150, 04AZB512, 04AZB513O, 6AFM380C, 02AZD730G, 02AZD880G, 02AZD790C for models over 300 mm

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Outside Micrometers with Interchangeable Anvils

Series 104


This Outside Micrometer offers you an extra wide measuring range with the following benefits:
- Easy, interchangeable anvils allow a wide range of measurements.

Specifications

Measuring face	Hardened, lapped (anvil), carbide tipped, lapped (spindle side)
Measuring spindle	With spindle lock, ø 6,35 mm (up to 300 mm) ø8 mm (over 300 mm), spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm (ø21 mm >300 mm)
Delivered	Including box, setting standard, anvils, key



104-171

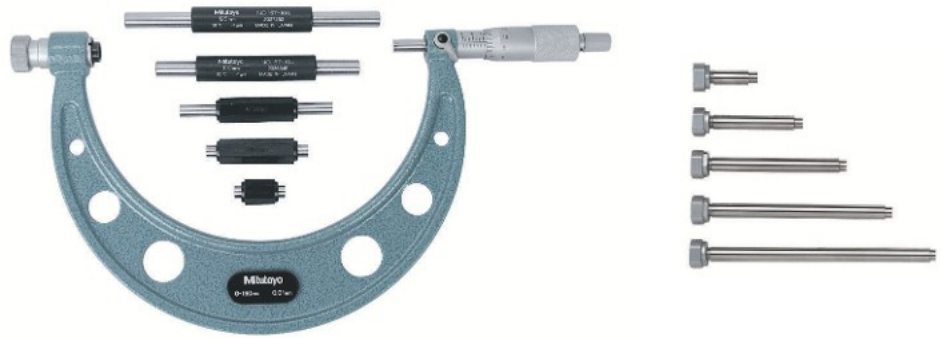

104-135A

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	Setting standard	Interchangeable anvils	Mass [kg]
104-171	0–50	0,01 mm	±5 µm	2 µm	5-10	1 (25 mm)	1	0,32
104-135A	0–150	0,01 mm	±6 µm	3 µm	5-10	5 (25, 50, 75, 100, 125 mm)	6	1,35
104-140A	100–200	0,01 mm	±7 µm	4 µm	5-10	4 (100, 125, 150, 175 mm)	4	1,38
104-136A	150–300	0,01 mm	±8 µm	5 µm	5-10	6 (150, 175, 200, 225, 250, 275 mm)	6	2,65
104-142A	300–400	0,01 mm	±10 µm	6 µm	10-14	4 (300, 325, 350, 375 mm)	4	3,31
104-143A	400–500	0,01 mm	±11 µm	7 µm	10-14	4 (400, 425, 450, 475 mm)	4	4,81
104-144A	500–600	0,01 mm	±12 µm	8 µm	10-14	4 (500, 525, 550, 575 mm)	4	6,35
104-145A	600–700	0,01 mm	±14 µm	9 µm	10-14	4 (600, 625, 650, 675 mm)	4	7,72
104-146A	700–800	0,01 mm	±15 µm	10 µm	10-14	4 (700, 725, 750, 775 mm)	4	9,08
104-147A	800–900	0,01 mm	±16 µm	11 µm	10-14	4 (800, 825, 850, 875 mm)	4	10,41
104-148A	900–1000	0,01 mm	±18 µm	12 µm	10-14	4 (900, 925, 950, 975 mm)	4	11,78

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Sheet Metal Micrometers

Series 389

This Digimatic Sheet Metal Micrometer is designed with a deep frame, for measuring the thickness of sheet material.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000040191

IP65 except 389-514




389-261-30




389-514

Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle	Measuring force [N]	Throat depth [mm]	Mass [g]
389-251-30	0–25	0,001 mm	±4 µm	3 µm	Type A, flat/flat	3-8	160	840
389-261-30	0–25	0,001 mm	±4 µm		Type B, spherical/flat	3-8	160	840
389-271-30	0–25	0,001 mm	±4 µm		Type C, spherical/ spherical	3-8	160	840
389-514	0–25	0,001 mm	±5 µm	3 µm	Type A, flat/flat	10-14	330	2750
389-252-30	25–50	0,001 mm	±4 µm	3 µm	Type A, flat/flat	3-8	160	920
389-262-30	25–50	0,001 mm	±4 µm		Type B, spherical/flat	3-8	160	920
389-272-30	25–50	0,001 mm	±4 µm		Type C, spherical/ spherical	3-8	160	920

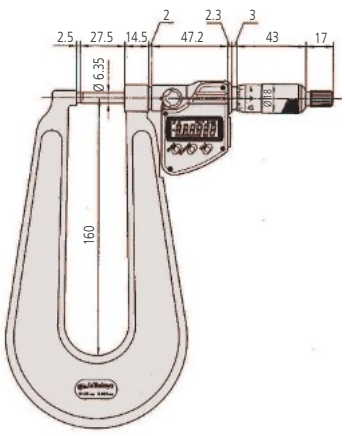


0-25 mm

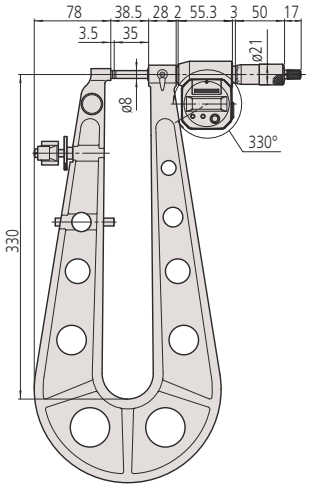

389-514





Digimatic cable for 389-514

Functions	Series 389
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm/ø 8 mm (389-514), spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	Battery SR-44
Battery life	Approx. 2,4 years, approx. 1,8 years (389-514)
Delivered	Including box, key, 1 battery, 2 batteries (389-514)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/ Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
959150	Digimatic Cable, Straight, Data Button, 2 m
959149	Digimatic Cable, Straight, Data Button, 1 m
04AZB512	Digimatic Cable with Data Button, 1 m, Flat L-Shape Left Type
04AZB513	Digimatic Cable, Straight, Data Button, 2 m, Flat L-Shape Left Type
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button

959149, 959150, 04AZB512, 04AZB513 06AFM380C, 02AZD880G, 02AZD730G, 02AZD790C for 389-514

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Sheet Metal Micrometers

Series 118


This Sheet Metal Micrometer is designed with a deep frame for measuring the thickness of sheet material.

Specifications


Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, throat depth up to 150 mm : ø 6.35 mm throat depth up to 300 mm : ø 8 mm, spindle pitch 0.5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm (118-103 ø21 mm)
Delivered	Including box, key, setting standard (from 25 mm upward)




Type A
Flat-Flat



Type B
Spherical-Flat



Type C
Spherical-Spherical

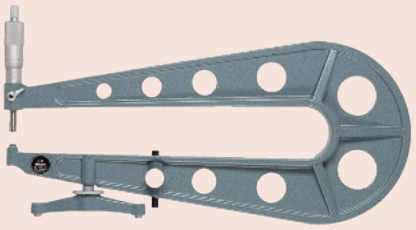

118-103



118-101





118-102

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle	Measuring force [N]	L [mm]
118-101	0–25	0,01 mm	±4 µm	3 µm	Type A, flat/flat	3-8	30,3
118-102	0–25	0,01 mm	±4 µm	3 µm	Type A, flat/flat	3-8	30,3
118-103	0–25	0,01 mm	±5 µm	3 µm	Type A, flat/flat	10-14	38,5
118-110	25–50	0,01 mm	±4 µm	3 µm	Type A, flat/flat	3-8	55,3
118-114	0–25	0,01 mm	±4 µm		Type B, spherical/flat	3-8	30,3
118-118	0–25	0,01 mm	±4 µm		Type C, spherical/spherical	3-8	30,3
118-126	25–50	0,01 mm	±4 µm		Type C, spherical/spherical	3-8	55,3

No.	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	Mass [g]
118-101	110	27,5	2,5	18	6,35	14,5	34	445
118-102	160	27,5	2,5	18	6,35	14,5	43	740
118-103	330	35	3,5	21	8	28	84	2650
118-110	165	27,5	2,5	18	6,35	14,5	41	820
118-114	160	27,5	2,5	18	6,35	14,5	43	740
118-118	160	27,5	2,5	18	6,35	14,5	43	740
118-126	165	27,5	2,5	18	6,35	14,5	41	820

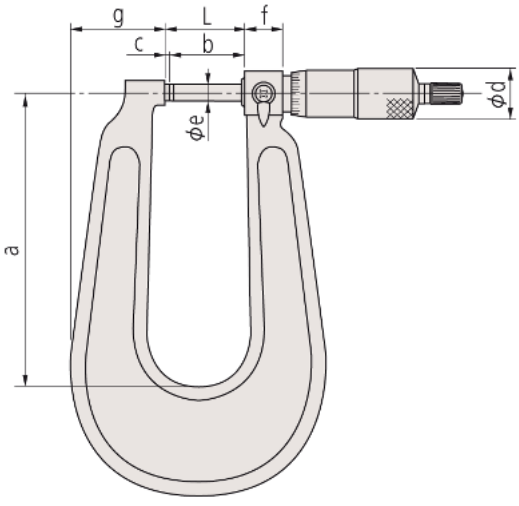

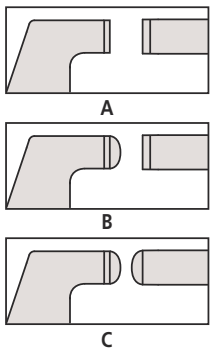

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Sheet Metal Micrometers Graduated Dial

Series 119

This Sheet Metal Micrometer comes with a graduated dial.
It offers you the following features:

- A deep frame that enables you to measure the thickness of sheet material.
- Easy-to-read graduated dial.




119-202

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Measuring force [N]	Mass [g]
119-202	0–25	0,01 mm	±4 µm	5-10	305

mm

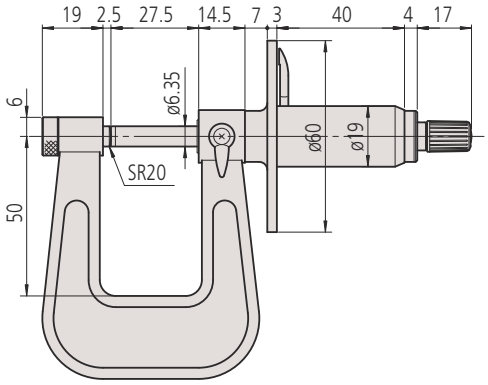

Specifications

Measuring face	Convex anvil and flat spindle, carbide-tipped
Measuring spindle	With spindle lock, ø 6,35 mm
Delivered	Including box

Optional accessories

No.	Description
156-105-10	Micrometer Stand, 45° Angle Type, for Micrometer 0-50mm/0-2"
156-101-10	Micrometer Stand, Adjustable Angle Type, for Micrometer 0-100mm/0-4"



The Series 119 is provided with a dial for making easy and quick reading.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Caliper Jaw Micrometers

Functions	Series 343
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Series 343

This Digimatic Caliper Jaw Micrometer has been specially designed for measuring in hard-to-reach places.





343-250-30

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	L [mm]
343-250-30	0–25	0,001 mm	±5 µm	3 µm	1-6	0
343-251-30	25–50	0,001 mm	±6 µm	3 µm	1-6	25
343-252-30	50–75	0,001 mm	±7 µm	4 µm	1-6	50
343-253-30	75–100	0,001 mm	±8 µm	4 µm	1-6	75

No.	a [mm]	b [mm]	c [mm]	Mass [g]
343-250-30	16	10,6	32,9	320
343-251-30	16	10,6	32,9	340
343-252-30	16	10,6	32,9	390
343-253-30	16	10,6	32,9	440

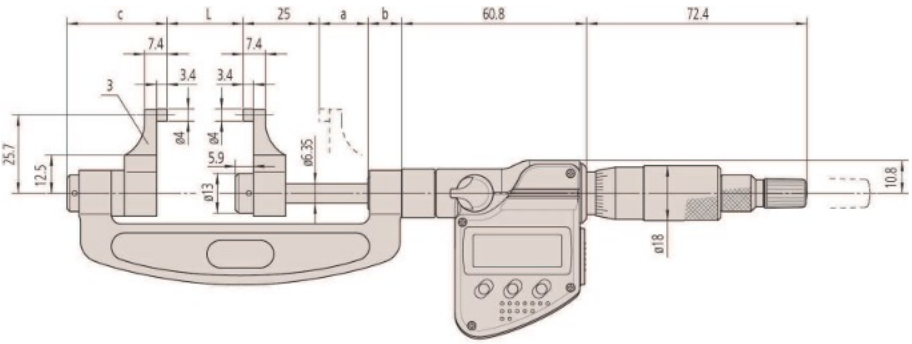

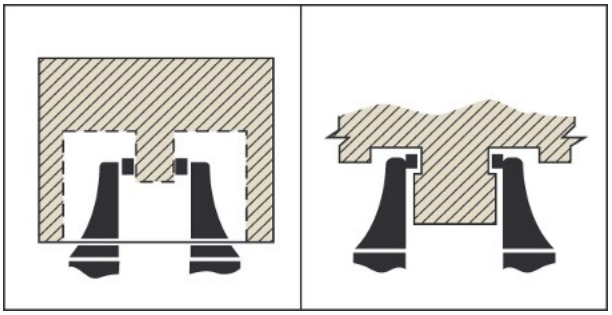

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Caliper Jaw Micrometers

Series 143


This Caliper Jaw Micrometer has been specially designed for measuring in hard-to-reach places.



143-102

Specifications


Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	ø6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, key, setting standard (from 25 mm upward)



Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	L [mm]
143-101	0–25	0,01 mm	±5 µm	3 µm	1-6	0
143-102	25–50	0,01 mm	±6 µm	3 µm	1-6	25
143-103	50–75	0,01 mm	±7 µm	4 µm	1-6	50
143-104	75–100	0,01 mm	±8 µm	4 µm	1-6	75
143-105	100–125	0,01 mm	±9 µm	4 µm	1-6	100
143-106	125–150	0,01 mm	±9 µm	5 µm	1-6	125
143-107	150–175	0,01 mm	±10 µm	5 µm	1-6	150
143-108	175–200	0,01 mm	±10 µm	5 µm	1-6	175
143-109	200–225	0,01 mm	±11 µm	6 µm	1-6	200
143-110	225–250	0,01 mm	±11 µm	6 µm	1-6	225
143-111	250–275	0,01 mm	±12 µm	6 µm	1-6	250
143-112	275–300	0,01 mm	±12 µm	7 µm	1-6	275

No.	a [mm]	b [mm]	c [mm]	Mass [g]
143-101	31,8	10,6	28,6	210
143-102	31,8	10,6	28,6	230
143-103	31,8	10,6	28,6	280
143-104	31,8	10,6	28,6	330
143-105	31,8	10,6	28,6	400
143-106	31,8	10,6	28,6	450
143-107	31,8	10,6	28,6	520
143-108	31,8	10,6	28,6	600
143-109	27,8	14,5	32,5	690
143-110	27,8	14,5	32,5	790
143-111	27,8	14,5	32,5	900
143-112	27,8	14,5	32,5	920

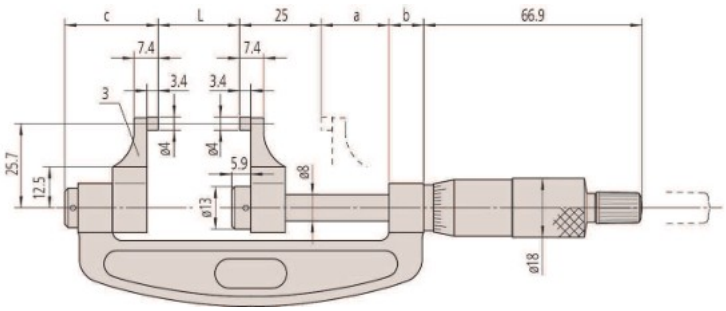

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Screw Thread Micrometers with Interchangeable Tips

Functions	Series 326
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Interchangeable anvil/ spindle inserts (optional)
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward) interchangeable tips are optional

Standard accessories

No.	Description
167-261	Setting Standard Screw Thread Micrometer, 60°, Length: 25mm
167-262	Setting Standard Screw Thread Micrometer, 60°, Length: 50mm
167-263	Setting Standard Screw Thread Micrometer, 60°, Length: 75mm

Series 326

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

IP65

This Digimatic Screw Thread Micrometer should be used with optional, interchangeable, anvils/spindle-tips that allow you to measure a wide range of metric/unified and Whitworth screw-thread pitch diameters.

A metric (unified) 60° setting standard is included with all models except those measuring range from 0-25 mm.



326-251-30 with optional accessories



Interchangeable anvils/spindle tips in matching pairs (optional accessories)

Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Measuring force [N]	A [mm]	B [mm]	Mass [g]
326-251-30	0–25	0,001 mm	±4 µm	5-10	39,5	25	350
326-252-30	25–50	0,001 mm	±4 µm	5-10	64,5	32	380
326-253-30	50–75	0,001 mm	±4 µm	5-10	90	45	470
326-254-30	75–100	0,001 mm	±5 µm	5-10	115,6	65	510

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Screw Thread Micrometers with Inter-changeable Tips changeable Tips

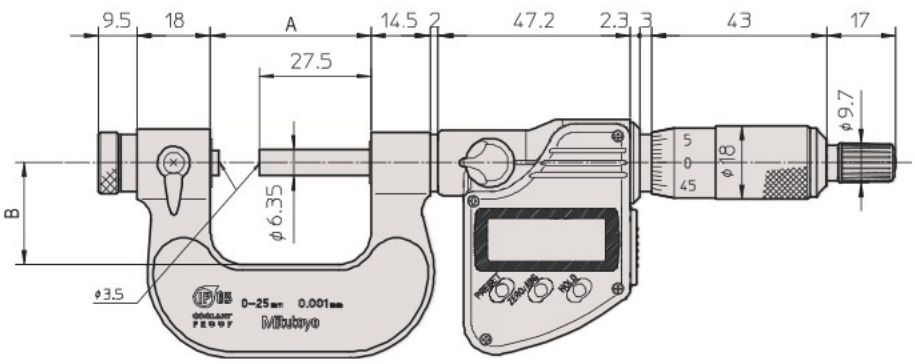

0-75 mm

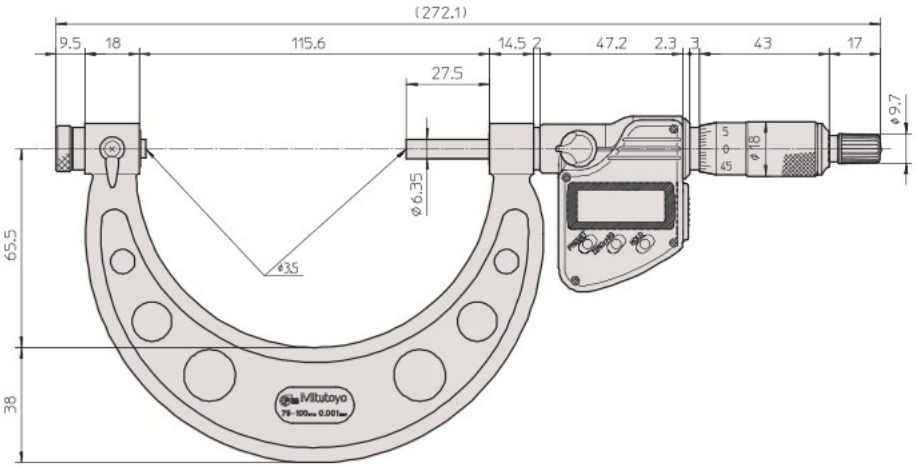

75-100 mm

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cab USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Trans-mitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Trans-mitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wire-less Transmitter for Micrometer/Indica-tor tor
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator Indicator
02AZF310	Connection Unit for IP Caliper, Microme-ter, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
167-272	Setting Standard Screw Thread Micro-meter, 55°, Length: 25mm
167-273	Setting Standard Screw Thread Micro-meter, 55°, Length: 50mm
167-274	Setting Standard Screw Thread Micro-meter, 55°, Length: 75mm
167-275	Setting Standard Screw Thread Micro-meter, 55°, Length: 100mm
126-800	Interchangeable Tip Set (Metric/UNF), 6 pairs pairs
126-810	Interchangeable Tip Set (Whitworth), 10 pairs 10 pairs
126-801	Interchangeable Tips, 0,4-0,5mm/64-48TPI 64-48TPI
126-802	Interchangeable Tips, 0,6-0,9mm/44-28TPI 44-28TPI
126-803	Interchangeable Tips, 1-1,75mm/24-14TPI 24-14TPI
126-804	Interchangeable Tips, 2-3mm/13-9TPI
126-805	Interchangeable Tips, 3,5-5mm/8-5TPI
126-806	Interchangeable Tips, 5,5-7mm/4,5-3,5TPI 4,5-3,5TPI
126-811	Interchangeable Tips, 60-48 TPI
126-812	Interchangeable Tips, 48-40 TPI
126-813	Interchangeable Tips, 40-32 TPI
126-814	Interchangeable Tips, 32-24 TPI
126-815	Interchangeable Tips, 24-18 TPI
126-816	Interchangeable Tips, 18-14 TPI
126-817	Interchangeable Tips, 14-10 TPI
126-818	Interchangeable Tips, 10-7 TPI
126-819	Interchangeable Tips, 7-4,5 TPI
126-820	Interchangeable Tips, 7-5-3,5 TPI

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4)0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-itly agreed upon.

on. Product descriptions,

Screw Thread Micrometers with Interchangeable Tips

Series 126

This Screw Thread Micrometer should be used with optional, interchangeable, anvils/spindle-tips that allow you to measure a wide range of metric/unified and whitworth screw-thread pitch diameters.

A metric (unified) 60° setting standard is included with all models except those measuring range from 0-25 mm.

Specifications

Measuring face	Interchangeable anvil/ spindle inserts (optional)
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (60°) (from 25 mm upward), key Interchangeable anvils/spindle tips not included

Standard accessories

No.	Description
167-261	Setting Standard Screw Thread Micrometer, 60°, Length: 25mm
167-262	Setting Standard Screw Thread Micrometer, 60°, Length: 50mm
167-263	Setting Standard Screw Thread Micrometer, 60°, Length: 75mm
167-264	Setting Standard Screw Thread Micrometer, 60°, Length: 100mm
167-265	Setting Standard Screw Thread Micrometer, 60°, Length: 125mm
167-266	Setting Standard Screw Thread Micrometer, 60°, Length: 150mm
167-267	Setting Standard Screw Thread Micrometer, 60°, Length: 175mm
167-268	Setting Standard Screw Thread Micrometer, 60°, Length: 200mm
167-269	Setting Standard Screw Thread Micrometer, 60°, Length: 225mm
167-270	Setting Standard Screw Thread Micrometer, 60°, Length: 250mm
167-271	Setting Standard Screw Thread Micrometer, 60°, Length: 275mm



126-125 with optional accessories



Interchangeable anvils/spindle tips in matching pairs (optional accessories)

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Measuring force [N]	L [mm]	a [mm]	Mass [g]
126-125	0–25	0,01 mm	±4 µm	5-10	39,5	25	240
126-126	25–50	0,01 mm	±4 µm	5-10	64,5	32	290
126-127	50–75	0,01 mm	±4 µm	5-10	90	45	390
126-128	75–100	0,01 mm	±5 µm	5-10	115,6	65	450
126-129	100–125	0,01 mm	±5 µm	5-10	140,6	79	530
126-130	125–150	0,01 mm	±5 µm	5-10	165,6	93	620
126-131	150–175	0,01 mm	±6 µm	5-10	190,5	105	730
126-132	175–200	0,01 mm	±6 µm	5-10	214,5	118	860
126-133	200–225	0,01 mm	±6 µm	5-10	240,5	131	1030
126-134	225–250	0,01 mm	±7 µm	5-10	265,5	144	1200
126-135	250–275	0,01 mm	±7 µm	5-10	290,5	156	1370
126-136	275–300	0,01 mm	±7 µm	5-10	314,5	169	1540


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Screw Thread Micrometers with Interchangeable Tips

mm

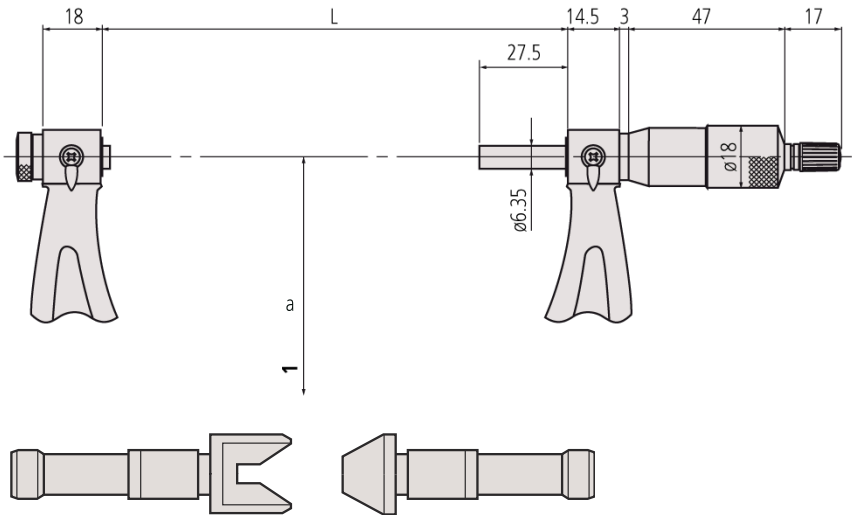

Anvil/spindle-tip matching pair

Optional accessories

No.	Description
167-272	Setting Standard Screw Thread Micrometer, 55°, Length: 25mm
167-273	Setting Standard Screw Thread Micrometer, 55°, Length: 50mm
167-274	Setting Standard Screw Thread Micrometer, 55°, Length: 75mm
167-275	Setting Standard Screw Thread Micrometer, 55°, Length: 100mm
167-276	Setting Standard Screw Thread Micrometer, 55°, Length: 125mm
167-277	Setting Standard Screw Thread Micrometer, 55°, Length: 150mm
167-278	Setting Standard Screw Thread Micrometer, 55°, Length: 175mm
167-279	Setting Standard Screw Thread Micrometer, 55°, Length: 200mm
167-280	Setting Standard Screw Thread Micrometer, 55°, Length: 225mm
126-800	Interchangeable Tip Set (Metric/UNF), 6 pairs
126-810	Interchangeable Tip Set (Whitworth), 10 pairs
126-801	Interchangeable Tips, 0,4-0,5mm/ 64-48TPI
126-802	Interchangeable Tips, 0,6-0,9mm/ 44-28TPI
126-803	Interchangeable Tips, 1-1,75mm/ 24-14TPI
126-804	Interchangeable Tips, 2-3mm/13-9TPI
126-805	Interchangeable Tips, 3,5-5mm/8-5TPI
126-806	Interchangeable Tips, 5,5-7mm/ 4,5-3,5TPI
126-811	Interchangeable Tips, 60-48 TPI
126-812	Interchangeable Tips, 48-40 TPI
126-813	Interchangeable Tips, 40-32 TPI
126-814	Interchangeable Tips, 32-24 TPI
126-815	Interchangeable Tips, 24-18 TPI
126-816	Interchangeable Tips, 18-14 TPI
126-817	Interchangeable Tips, 14-10 TPI
126-818	Interchangeable Tips, 10-7 TPI
126-819	Interchangeable Tips, 7-4,5 TPI
126-820	Interchangeable Tips, 7-5-3,5 TPI

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Interchangeable Thread Measuring Anvil / Spindle Tip Sets

Series 126

Optional accessories anvils/spindle-tips



Individual measuring anvil/spindle-tip pairs

No.	Half Angle Error	Metric pitch	UNF threads/inch	Withworth threads / inch	Tip angle
126-801	±30'	0,4 - 0,5 mm	64 - 48 TPI		60°
126-802	±20'	0,6 - 0,9 mm	44 - 28 TPI		60°
126-803	±15'	1 - 1,75 mm	24 - 14 TPI		60°
126-804	±10'	2 - 3 mm	13 - 9 TPI		60°
126-805	±10'	3,5 - 5 mm	8 - 5 TPI		60°
126-806	±10'	5,5 - 7 mm	4,5 - 3,5 TPI		60°
126-811	±30'			60 - 48 TPI	55°
126-812	±30'			48 - 40 TPI	55°
126-813	±20'			40 - 32 TPI	55°
126-814	±20'			32 - 24 TPI	55°
126-815	±15'			24 - 18 TPI	55°
126-816	±15'			18 - 14 TPI	55°
126-817	±10'			14 - 10 TPI	55°
126-818	±10'			10 - 7 TPI	55°
126-819	±10'			7 - 4,5 TPI	55°
126-820	±10'			4,5 - 3,5 TPI	55°

Measuring anvil/spindle-tip set Metric UNF (consists of No. 126-801 to 126-806)

No.	Content of Set	Metric pitch	UNF threads/inch	Tip angle
126-800	No. 126-801 to 126-806	0,4 - 7 mm	64 - 3,5 TPI	60°

Measuring anvil/spindle-tip set Whitworth (consists of No. 126-811 to 126-820)

No.	Content of Set	Withworth threads / inch	Tip angle
126-810	No. 126-811 to 126-820	60 - 3,5 TPI	55°

Ø Nominal	Thread pitch P	Pitch Ø d2
M 1	0,25	0,838
M 1,2	0,25	1,038
M 1,4	0,30	1,205
M 1,7	0,35	1,473
M 2	0,40	1,740
M 2,3	0,40	2,040
M 2,6	0,45	2,308
M 3	0,50	2,675
M 3,5	0,60	3,110
M 4	0,70	3,545
M 5	0,80	4,480
M 6	1,00	5,350
M 8	1,25	7,188
M 10	1,50	9,026
M 12	1,75	10,863

Ø Nominal	Thread pitch P	Pitch Ø d2
M 14	2,00	12,701
M 16	2,00	14,701
M 20	2,50	18,376
M 22	2,50	20,376
M 24	3,00	22,051
M 27	3,00	25,051
M 30	3,50	27,727
M 33	3,50	30,727
M 36	4,00	33,402
M 39	4,00	36,402
M 42	4,50	39,077
M 45	4,50	42,077
M 48	5,00	44,752
M 52	5,00	48,752
M 56	5,50	52,428
M 60	5,50	56,428

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Screw Thread Micrometers

Series 125

This Screw Thread Micrometer has a fixed anvil, offering the following benefits:


- Fixed anvil type.
- It directly indicates screw pitch diameter, meaning no need for calculation.




125-103

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Thread to be measured (Metric/ Unified)	Tip angle	L [mm]	a [mm]	Mass [g]
125-101	0–25	0,01 mm	±6 µm	0,4-0,5 mm / 64-48 TPI	60°	37,2	25	200
125-102	0–25	0,01 mm	±6 µm	0,6-0,9 mm / 44-28 TPI	60°	37,2	25	200
125-103	0–25	0,01 mm	±6 µm	1-1,75 mm / 24-14 TPI	60°	37,2	25	200
125-104	0–25	0,01 mm	±6 µm	2-3 mm / 13-9 TPI	60°	37,2	25	200
125-105	0–25	0,01 mm	±6 µm	3,5-5 mm / 8-5 TPI	60°	37,2	25	200
125-106	25–50	0,01 mm	±6 µm	0,4-0,5 mm / 64-48 TPI	60°	62,2	32	250
125-107	25–50	0,01 mm	±6 µm	0,6-0,9 mm / 44-28 TPI	60°	62,2	32	250
125-108	25–50	0,01 mm	±6 µm	1-1,75 mm / 24-14 TPI	60°	62,2	32	250
125-109	25–50	0,01 mm	±6 µm	2-3 mm / 13-9 TPI	60°	62,2	32	250
125-110	25–50	0,01 mm	±6 µm	3,5-5 mm / 8-5 TPI	60°	62,2	32	250
125-111	50–75	0,01 mm	±6 µm	0,6-0,9 mm / 44-28 TPI	60°	87	49	260
125-112	50–75	0,01 mm	±6 µm	1-1,75 mm / 24-14 TPI	60°	87	49	260
125-113	50–75	0,01 mm	±6 µm	2-3 mm / 13-9 TPI	60°	87	49	260
125-114	50–75	0,01 mm	±6 µm	3,5-5 mm / 8-5 TPI	60°	87	49	260
125-115	50–75	0,01 mm	±6 µm	5,5-7 mm / 4,5-3,5 TPI	60°	87	49	260
125-116	75–100	0,01 mm	±7 µm	0,6-0,9 mm / 44-28 TPI	60°	112	63	330
125-117	75–100	0,01 mm	±7 µm	1-1,75 mm / 24-14 TPI	60°	112	63	330
125-118	75–100	0,01 mm	±7 µm	2-3 mm / 13-9 TPI	60°	112	63	330
125-119	75–100	0,01 mm	±7 µm	3,5-5 mm / 8-5 TPI	60°	112	63	330
125-120	75–100	0,01 mm	±7 µm	5,5-7 mm / 4,5-3,5 TPI	60°	112	63	330

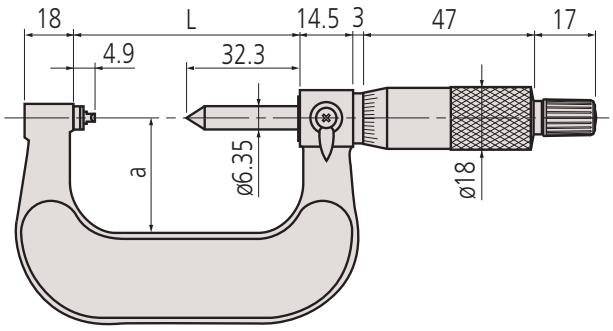

0-50 mm

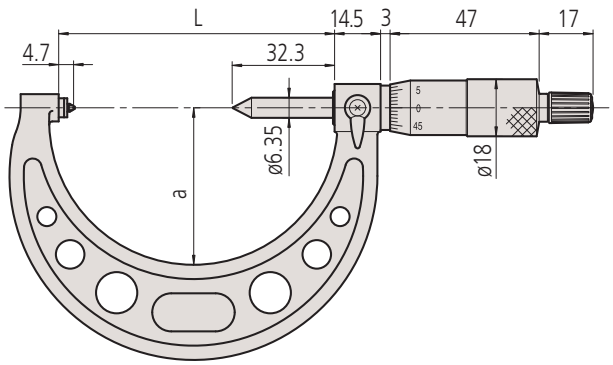

50-100 mm

Specifications

Measuring face	Hardened steel, fixed anvil/spindle
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard 60° (from 25 mm upward), key

Optional accessories

No.	Description
156-105-10	Micrometer Stand, 45° Angle Type, for Micrometer 0-50mm/0-2"
156-101-10	Micrometer Stand, Adjustable Angle Type, for Micrometer 0-100mm/0-4"



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Gear Tooth Micrometers

Functions	Series 324
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Interchangeable anvil/ spindle inserts (optional)
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward) interchangeable tips are optional

Series 324

This Digimatic Gear Tooth Micrometer is designed to measure the over-pin diameter of gears.

TÜVRheinland CERTIFIED Dust- and Water-Protected www.tuv.com ID 0000040191

IP65

- It has interchangeable steel or carbide ball inserts (optional accessory) that allow you to measure modules sized between 0,5-5,25 mm.



324-251-30



324-252-30



324-253-30



324-254-30

Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Measuring force [N]	L [mm]	a [mm]	Mass [g]
324-251-30	0–25	0,001 mm	±4 µm	5-10	64,5	32	400
324-252-30	25–50	0,001 mm	±4 µm	5-10	90	45	490
324-253-30	50–75	0,001 mm	±4 µm	5-10	115,6	65,5	530
324-254-30	75–100	0,001 mm	±5 µm	5-10	140,6	79	600

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Gear Tooth Micrometers

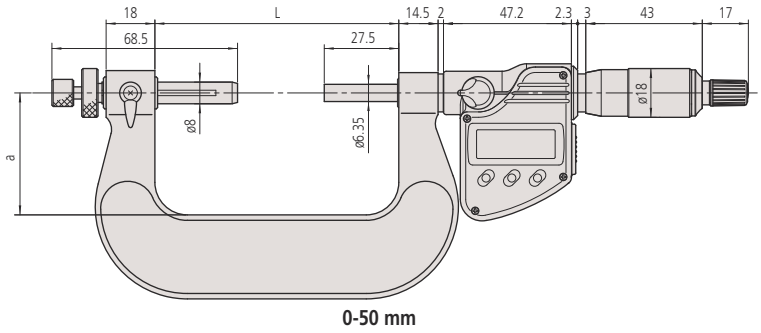

0-50 mm

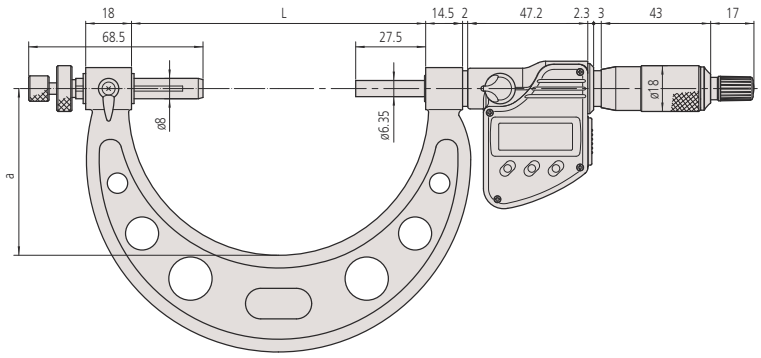

50-100 mm



Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
124-801	Interchangeable Ball Anvil/Spindle Tip, 0,8mm
124-802	Interchangeable Ball Anvil/Spindle Tip, 1,0mm
124-821	Interchangeable Ball Anvil/Spindle Tip, 1,5mm
124-805	Interchangeable Ball Anvil/Spindle Tip, 2,0mm
124-822	Interchangeable Ball Anvil/Spindle Tip, 2,5mm
124-807	Interchangeable Ball Anvil/Spindle Tip, 3,0mm
124-823	Interchangeable Ball Anvil/Spindle Tip, 3,5mm
124-810	Interchangeable Ball Anvil/Spindle Tip, 4,0mm
124-824	Interchangeable Ball Anvil/Spindle Tip, 4,5mm
124-812	Interchangeable Ball Anvil/Spindle Tip, 5,0mm
124-814	Interchangeable Ball Anvil/Spindle Tip, 6,0mm
124-816	Interchangeable Ball Anvil/Spindle Tip, 7,0mm
124-819	Interchangeable Ball Anvil/Spindle Tip, 8,0mm
124-803	Interchangeable Ball Anvil/Spindle Tip, 1,191mm (3/64")
124-804	Interchangeable Ball Anvil/Spindle Tip, 1,588mm (1/16")
124-806	Interchangeable Ball Anvil/Spindle Tip, 2,381mm (3/32")
124-808	Interchangeable Ball Anvil/Spindle Tip, 3,175mm (1/8")
124-809	Interchangeable Ball Anvil/Spindle Tip, 3,969mm (5/32")
124-811	Interchangeable Ball Anvil/Spindle Tip, 4,763mm (3/16")
124-813	Interchangeable Ball Anvil/Spindle Tip, 5,556mm (7/32")
124-815	Interchangeable Ball Anvil/Spindle Tip, 6,35mm (1/4")
124-817	Interchangeable Ball Anvil/Spindle Tip, 7,144mm (9/32")
124-818	Interchangeable Ball Anvil/Spindle Tip, 7,938mm (5/16")
124-820	Interchangeable Ball Anvil/Spindle Tip, 8,731mm (11/32")

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gear Tooth Micrometers

Series 124

Measuring the over-pin diameter of gears.

- It has interchangeable steel or carbide ball inserts (optional accessory) that allow you to measure modules sized between 0,5-5,25 mm.



124-173 with optional accessories

Specifications


Measuring face	Interchangeable anvil/ spindle inserts (optional)
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key, interchangeable anvils/spindle tips not included

Optional accessories


No.	Description
124-801	Interchangeable Ball Anvil/Spindle Tip, 0,8mm
124-802	Interchangeable Ball Anvil/Spindle Tip, 1,0mm
124-821	Interchangeable Ball Anvil/Spindle Tip, 1,5mm
124-805	Interchangeable Ball Anvil/Spindle Tip, 2,0mm
124-822	Interchangeable Ball Anvil/Spindle Tip, 2,5mm
124-807	Interchangeable Ball Anvil/Spindle Tip, 3,0mm
124-823	Interchangeable Ball Anvil/Spindle Tip, 3,5mm
124-810	Interchangeable Ball Anvil/Spindle Tip, 4,0mm
124-824	Interchangeable Ball Anvil/Spindle Tip, 4,5mm
124-812	Interchangeable Ball Anvil/Spindle Tip, 5,0mm
124-814	Interchangeable Ball Anvil/Spindle Tip, 6,0mm
124-816	Interchangeable Ball Anvil/Spindle Tip, 7,0mm
124-819	Interchangeable Ball Anvil/Spindle Tip, 8,0mm
124-803	Interchangeable Ball Anvil/Spindle Tip, 1,191mm (3/64")
124-804	Interchangeable Ball Anvil/Spindle Tip, 1,588mm (1/16")
124-806	Interchangeable Ball Anvil/Spindle Tip, 2,381mm (3/32")
124-808	Interchangeable Ball Anvil/Spindle Tip, 3,175mm (1/8")
124-809	Interchangeable Ball Anvil/Spindle Tip, 3,969mm (5/32")
124-811	Interchangeable Ball Anvil/Spindle Tip, 4,763mm (3/16")
124-813	Interchangeable Ball Anvil/Spindle Tip, 5,556mm (7/32")
124-815	Interchangeable Ball Anvil/Spindle Tip, 6,35mm (1/4")
124-817	Interchangeable Ball Anvil/Spindle Tip, 7,144mm (9/32")
124-818	Interchangeable Ball Anvil/Spindle Tip, 7,938mm (5/16")
124-820	Interchangeable Ball Anvil/Spindle Tip, 8,731mm (11/32")

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Measuring force [N]	L [mm]	a [mm]	Mass [g]
124-173	0–25	0,01 mm	±4 µm	5-10	64,5	32	295
124-174	25–50	0,01 mm	±4 µm	5-10	90	45	400
124-175	50–75	0,01 mm	±4 µm	5-10	115,6	65	460
124-176	75–100	0,01 mm	±5 µm	5-10	140,6	79	540
124-177	100–125	0,01 mm	±5 µm	5-10	165,6	93	640
124-178	125–150	0,01 mm	±5 µm	5-10	190,5	105	760
124-179	150–175	0,01 mm	±6 µm	5-10	214,5	120	900
124-180	175–200	0,01 mm	±6 µm	5-10	240,5	131	1060
124-181	200–225	0,01 mm	±6 µm	5-10	265,5	144	1230
124-182	225–250	0,01 mm	±7 µm	5-10	290,5	156	1430
124-183	250–275	0,01 mm	±7 µm	5-10	314,5	171	1620
124-195	275–300	0,01 mm	±7 µm	5-10	353	187	2070

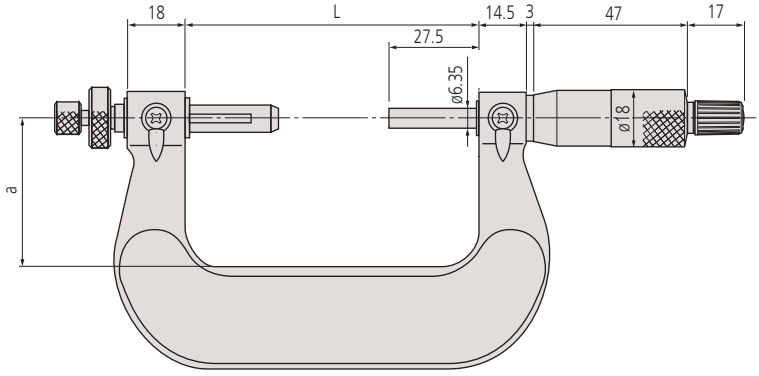

0-50 mm

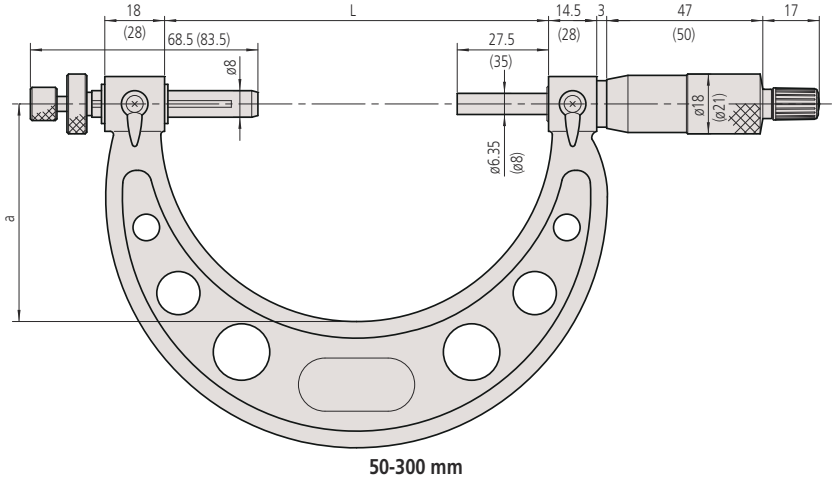

50-300 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Interchangeable Ball Anvil/Spindle Tip Sets

Series 124/ 324

These optional interchangeable anvils allow you to measure the over-pin diameter of gears.



124-801




124-802



124-807



124-822

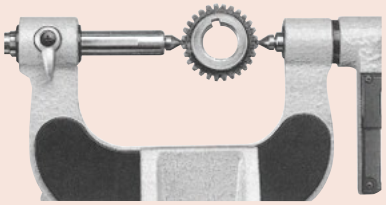

124-801

Metric

No.	Diameter (D)	Remarks	Measurable module [mm]	Diameter over balls
124-801	0,8 mm	Carbide-tipped type	0,5 - 0,55	50 mm
124-802	1 mm	Carbide-tipped type	0,6 - 0,65	45 mm
124-821	1,5 mm	Carbide-tipped type	0,9 - 1	28 - 26 mm
124-805	2 mm	Carbide-tipped type	1,25	22 mm
124-822	2,5 mm	Steel type	1,5	17 mm
124-807	3 mm	Steel type	1,75	15 mm
124-823	3,5 mm	Steel type	2	13 mm
124-810	4 mm	Steel type	2,25	11 mm
124-824	4,5 mm	Steel type	2,5	10 mm
124-812	5 mm	Steel type	2,75	9 mm
124-814	6 mm	Steel type	3,5	7 mm
124-816	7 mm	Steel type	4	6,5 mm
124-819	8 mm	Steel type	4,75	5,5 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Disc Micrometers

Functions	Series 323
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Series 323

This Digimatic Disc Micrometer enables you to measure hard-to-reach features, offering you the following benefits:

- Measuring the root tangent length of spur and helical gears.
- You can measure recessed features that are difficult to reach with a standard micrometer.


Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

IP65





323-250-30

Specifications


Display	LCD, character height 7,5 mm
Measuring face	Hardened steel
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)


Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



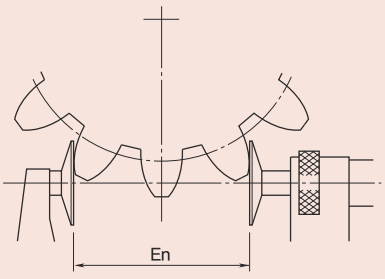


Root tangent length of gear (En)

Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	Measurable module [mm]
323-250-30	0–25	0,001 mm	±4 µm	4 µm	3-8	0,5 - 6
323-251-30	25–50	0,001 mm	±4 µm	4 µm	3-8	0,5 - 6
323-252-30	50–75	0,001 mm	±6 µm	6 µm	3-8	0,5 - 6
323-253-30	75–100	0,001 mm	±6 µm	6 µm	3-8	0,5 - 6

No.	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	t [mm]	Mass [g]
323-250-30	39,7	4,5	9,2	25	20	8	0,7	290
323-251-30	65,6	5,4	11	31	20	8	0,7	355
323-252-30	90,7	5,5	12,2	50	20	8	0,7	555
323-253-30	112,5	5,5	13,5	60	20	8	0,7	610

mm

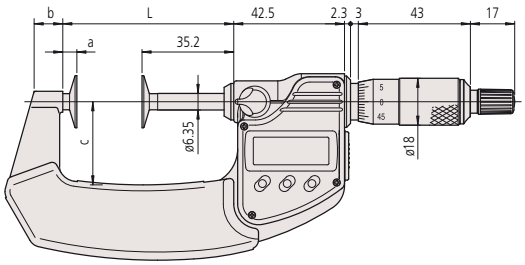

0-75 mm

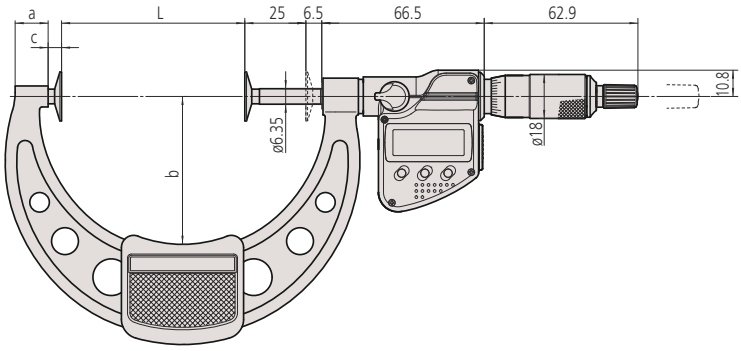

75-100 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Disc Micrometers


Series 123

This Disc Micrometer enables you to measure hard-to-reach features, offering you the following benefits:

- Measuring the root tangent length of spur and helical gears.
- You can measure recessed features that are difficult to reach with a standard micrometer.




123-101




Specifications

Measuring face	Hardened steel or carbide-tipped
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, key, setting standard (from 25 mm upward)

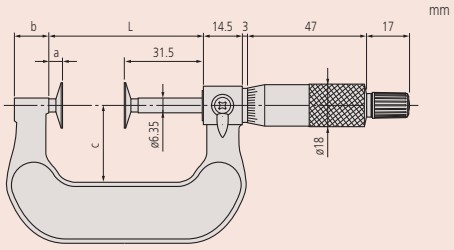

0-50 mm

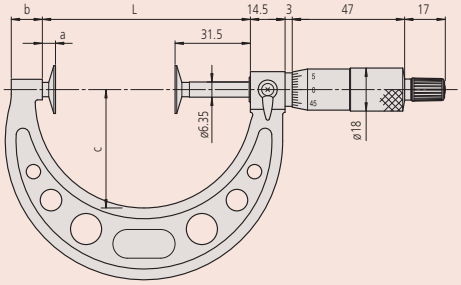

50-300 mm

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	Measurable module [mm]	L [mm]
123-101	0–25	0,01 mm	±4 µm	4 µm	5-10	0,5 - 6	37,5
123-102	25–50	0,01 mm	±4 µm	4 µm	5-10	0,5 - 6	62,5
123-103	50–75	0,01 mm	±6 µm	6 µm	5-10	0,5 - 6	87
123-104	75–100	0,01 mm	±6 µm	6 µm	5-10	0,5 - 6	112
123-105	100–125	0,01 mm	±7 µm	7 µm	5-10	0,7 - 11	137,5
123-106	125–150	0,01 mm	±7 µm	7 µm	5-10	0,7 - 11	162,5
123-107	150–175	0,01 mm	±8 µm	8 µm	5-10	0,7 - 11	187,5
123-108	175–200	0,01 mm	±8 µm	8 µm	5-10	0,7 - 11	212,5
123-109	200–225	0,01 mm	±8 µm	8 µm	5-10	0,7 - 11	237,5
123-110	225–250	0,01 mm	±9 µm	9 µm	5-10	0,7 - 11	262,5
123-111	250–275	0,01 mm	±9 µm	9 µm	5-10	0,7 - 11	287,5
123-112	275–300	0,01 mm	±9 µm	9 µm	5-10	0,7 - 11	312,5

No.	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	t [mm]	Mass [g]
123-101	6	14	25	20	8	0,7	200
123-102	6	14	32	20	8	0,7	250
123-103	5,5	11	49	20	8	0,7	300
123-104	5,5	11	63	20	8	0,7	375
123-105	6	12	79	30	12	1	520
123-106	6	15	94	30	12	1	570
123-107	6	16	106	30	12	1	730
123-108	6	15	118	30	12	1	890
123-109	6	14	130	30	12	1	1000
123-110	6	14	143	30	12	1	1200
123-111	6	15	156	30	12	1	1410
123-112	6	15	169	30	12	1	1680

Metric

With carbide-tipped discs

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Remarks	Measuring force [N]	Measurable module [mm]
123-113	0–25	0,01 mm	±4 µm	4 µm	Disks have carbide tips	5-10	0,5 - 6
123-114	25–50	0,01 mm	±4 µm	4 µm	Disks have carbide tips	5-10	0,5 - 6
123-115	50–75	0,01 mm	±6 µm	6 µm	Disks have carbide tips	5-10	0,5 - 6
123-116	75–100	0,01 mm	±6 µm	6 µm	Disks have carbide tips	5-10	0,5 - 6

No.	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	t [mm]	Mass [g]
123-113	39,7	4,5	9,2	25	20	9,8	0,7	200
123-114	65,6	5,4	11	31	20	9,8	0,7	250
123-115	90,7	5,5	12,2	50	20	9,8	0,7	300
123-116	112,5	5,5	13,5	60	20	9,8	0,7	375

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Disc Micrometers Non-Rotating Spindle Type

Functions	Series 369
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Hardened steel
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V




Series 369

This Digimatic Disc Micrometer allows you to measure a range of different materials.
It offers you the following benefits:

- Non-rotating spindle and disc-shaped measuring surfaces.
- Measuring the root tangent length of spur and helical gears
- Measurable range of gear pitch: 0,5-6 module
- Suitable for measuring felt, rubber, cardboard, fabric etc.






369-250-30


Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	Measurable module [mm]	L [mm]
369-250-30	0–25	0,001 mm	±4 µm	4 µm	3-8	0,5 - 6	58,5
369-251-30	25–50	0,001 mm	±4 µm	4 µm	3-8	0,5 - 6	83,5
369-252-30	50–75	0,001 mm	±6 µm	6 µm	3-8	0,5 - 6	108,5
369-253-30	75–100	0,001 mm	±6 µm	6 µm	3-8	0,5 - 6	112,5

No.	a [mm]	b [mm]	c [mm]	Mass [g]
369-250-30	12,9	7	32	340
369-251-30	12,9	9,8	47	480
369-252-30	12,9	11,2	60	635
369-253-30	5,5	13,5	60	775

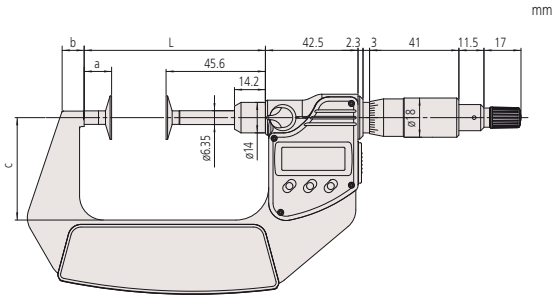

0-75 mm

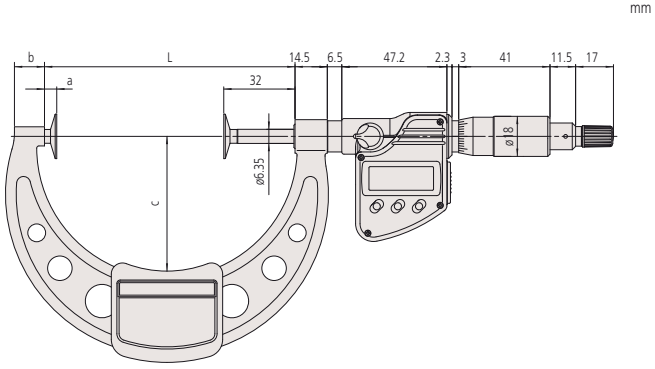

75-100 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Disc Micrometers Quickmike

Series 369 and Series 227

ABSOLUTE®

IP65

369-411-20
369-412-20

The ABSOLUTE Digimatic Disc Micrometer Quickmike allows you to measure with a fast spindle feed of 10 mm per thimble rotation.
It offers you the following benefits:


- Suitable for measuring felt, rubber, cardboard, fabric etc.
- Suitable to measure root tangent length of spur gears and helical gears.
- With a non-rotating spindle and disc-shaped measuring surface.
- Measuring force is adjustable for various kinds of workpieces (series 227)



369-411-20



227-221-20



Series 227 without recess

Functions	Series 369 and Series 227
Data output	●
ON/OFF	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
HOLD	●

Specifications

Display	LCD, character height 10 mm
Measuring face	Hardened steel, micro-lap finish
Measuring spindle	Non-rotating, spindle feed 10 mm
Power supply	1 battery SR-44
Battery life	Approx. 5 years
Delivered	Including box, 1 battery, setting standard (from 25 mm upward)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	Measurable module [mm]	L [mm]
369-411-20	0–30	0,001 mm	±4 µm	4 µm	3-8	0,5 - 6	0
369-412-20	25–55	0,001 mm	±4 µm	4 µm	3-8	0,5 - 6	25


No.	a [mm]	b [mm]	c [mm]	Mass [g]
369-411-20	8,5	36	13,5	360
369-412-20	10,3	47	13,5	490

Metric


Quickmike type with adjustable measuring force

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force settings [N]	Measuring force accuracy (1) [N]	Measurable module [mm]
227-221-20	0–15	0,001 mm	±4 µm	3 µm	0,5 / 1 / 1,5 / 2 / 2,5	±0,1 + (force setting/10)	0,4-3
227-223-20	0–10	0,001 mm	±4 µm	3 µm	2 / 4 / 6 / 8 / 10	±0,4 + (force setting/10)	0,4-3

No.	c [mm]	d [mm]	e [mm]	Mass [g]
227-221-20	5,2	15	13,8	300
227-223-20	5,2	10	18,8	340

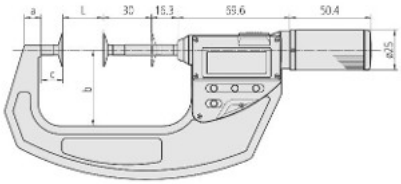

369-411-20, 369-412-20

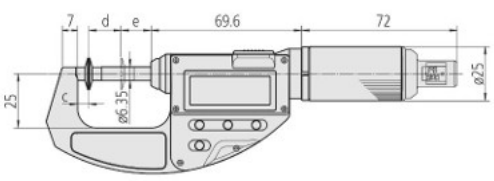

227-221-20, 227-223-20



Ajustable Measuring Force
227-221-20
227-223-20

(1) Only valid for instrument orientation within ±3 degrees of horizontal when measuring.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Disc Micrometers Non-Rotating Spindle Type

Series 169

This Disc Micrometer has a non-rotating spindle and allows you measure a range of different materials.
It offers you the following benefits:

- It features a non-rotating spindle and disc-shaped measuring surfaces.
- Measuring the root tangent length of spur and helical gears
- Measurable range of gear pitch: 0,5-6 module
- It's suitable for measuring materials such as felt, rubber, cardboard and fabric.

Specifications

Measuring face	Hardened steel, micro-lap finish
Measuring spindle	Spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key






169-101-10




169-201-10

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
169-101-10	0–25	0,01mm	±4 µm	3 µm	8,02 N ± 0,8 N	0	13,8	25	5,7	230
169-201-10	0–25	0,01mm	±4 µm	4 µm	3 - 8 N	0	13,8	25	5,7	230
169-202-10	25–50	0,01mm	±4 µm	4 µm	3 - 8 N	25	13,8	32	5,7	280
169-205-10	50–75	0,01mm	±6 µm	6 µm	3 - 8 N	50	12	49	5,5	315
169-207-10	75–100	0,01mm	±6 µm	6 µm	3 - 8 N	75	14	63	5,5	400




169-101-10 no central recess




With annular measuring surfaces

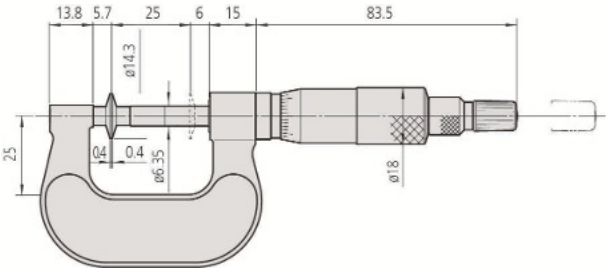

169-101-10

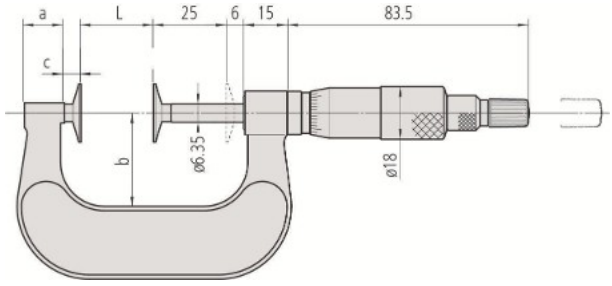

0-50 mm

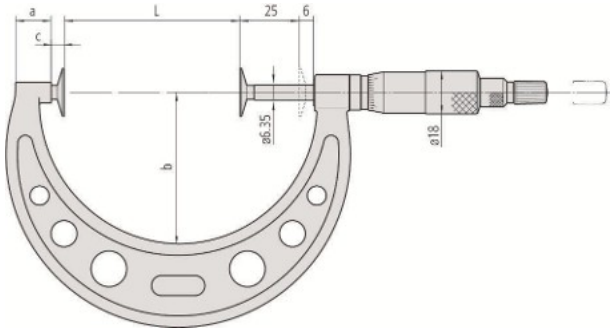

50-100 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Spline Micrometers

Series 331

This Digimatic Spline Micrometer makes it easy for you to measure grooves and shaped parts. It offers you the following benefits:

- Anvil and spindle are of small diameter for measuring splined shafts, slots and keyways.
- Excellent resistance against water and dust (IP65 protection level) enables this micrometer to be used in machining situations that include splashing coolant fluid.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000040191

IP65



331-251-30

Functions	Series 331
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	
HOLD	●


Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)


Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle	Measuring force [N]
331-251-30	0–25	0,001 mm	±2 µm	2 µm	Type A, D=3 mm	5-10
331-261-30	0–25	0,001 mm	±2 µm	2 µm	Type B, D=2 mm	5-10
331-252-30	25–50	0,001 mm	±2 µm	2 µm	Type A, D=3 mm	5-10
331-262-30	25–50	0,001 mm	±2 µm	2 µm	Type B, D=2 mm	5-10
331-253-30	50–75	0,001 mm	±2 µm	2 µm	Type A, D=3 mm	5-10
331-263-30	50–75	0,001 mm	±2 µm	2 µm	Type B, D=2 mm	5-10
331-254-30	75–100	0,001 mm	±3 µm	3 µm	Type A, D=3 mm	5-10
331-264-30	75–100	0,001 mm	±3 µm	3 µm	Type B, D=2 mm	5-10

No.	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
331-251-30	58,2	17,5	7,3	32,5	330
331-261-30	58,2	17,5	7,3	32,5	330
331-252-30	83,2	17,5	10,1	47	470
331-262-30	83,2	17,5	10,1	47	470
331-253-30	108,2	17,5	11,5	60	625
331-263-30	108,2	17,5	11,5	60	625
331-254-30	132,8	20,3	16,7	76	565
331-264-30	132,8	20,3	16,7	76	565

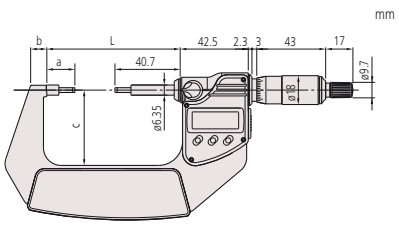

0-75 mm

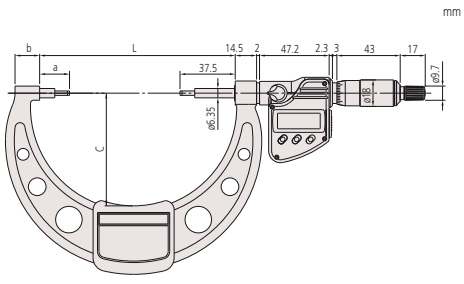

75-100 mm


Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V





Type A



Type B

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Spline Micrometers


Series 111

This Spline Micrometer makes it easy for you to measure grooves and shaped parts.
It offers you the following benefits:


- Stepped measuring surfaces.
- Suitable for measuring grooves, splined shafts, recesses, shaped parts, etc.

Specifications

Measuring face	Carbide-tipped, micro-lap finish, stepped
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key



Type A



Type B




111-115

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle	Measuring force [N]	L [mm]
111-115	0–25	0,01 mm	±3 µm	2 µm	Type A, D=3 mm	5-10	54,5
111-215	0–25	0,01 mm	±3 µm	2 µm	Type B, D=2 mm	5-10	54,5
111-116	25–50	0,01 mm	±3 µm	2 µm	Type A, D=3 mm	5-10	79,5
111-117	50–75	0,01 mm	±3 µm	2 µm	Type A, D=3 mm	5-10	104,5
111-118	75–100	0,01 mm	±4 µm	3 µm	Type A, D=3 mm	5-10	132,3
111-119	100–125	0,01 mm	±4 µm	3 µm	Type A, D=3 mm	5-10	157,7
111-120	125–150	0,01 mm	±4 µm	3 µm	Type A, D=3 mm	5-10	183,1
111-121	150–175	0,01 mm	±5 µm	3 µm	Type A, D=3 mm	5-10	208,3
111-122	175–200	0,01 mm	±5 µm	4 µm	Type A, D=3 mm	5-10	233,7
111-123	200–225	0,01 mm	±5 µm	4 µm	Type A, D=3 mm	5-10	257,5
111-124	225–250	0,01 mm	±6 µm	4 µm	Type A, D=3 mm	5-10	283,5
111-125	250–275	0,01 mm	±6 µm	4 µm	Type A, D=3 mm	5-10	308,5
111-126	275–300	0,01 mm	±6 µm	5 µm	Type A, D=3 mm	5-10	333,5

No.	a [mm]	b [mm]	c [mm]	Mass [g]
111-115	17,5	10	38	205
111-215	17,8	10	38	205
111-116	17,8	12	49	305
111-117	17,8	14	60	370
111-118	20,3	16,7	79	500
111-119	20,7	18,8	94	655
111-120	21,1	19,1	106	710
111-121	21,3	18,2	118	900
111-122	21,7	16,8	130	1040
111-123	20,5	18	143	1245
111-124	21,5	18	156	1395
111-125	21,5	18	169	1555
111-126	21,5	18	181	1975

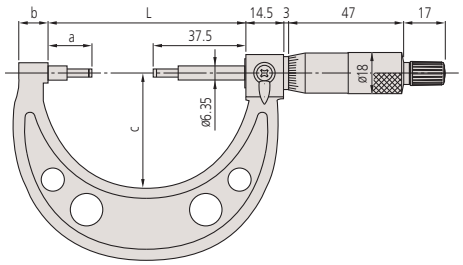

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Tube Micrometers

Series 395

This Digimatic Tube Micrometer allows you to measure curved surfaces such as the wall thickness of tubes, bearings and rings.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

IP65



395-251-30

Metric


Model with spherical anvil

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Anvil / Spindle	Measuring force [N]	D [mm]	b [mm]	c [mm]	Mass [g]
395-251-30	0–25	0,001 mm	±2 µm	Type A, spherical anvil SR=4 mm/flat spindle	5-10	15	9	25	270
395-252-30	25–50	0,001 mm	±2 µm	Type A, spherical anvil SR=4 mm/flat spindle	5-10	15	9,8	32	330
395-253-30	50–75	0,001 mm	±2 µm	Type A, spherical anvil SR=4 mm/flat spindle	5-10	19	12,6	47	470
395-254-30	75–100	0,001 mm	±3 µm	Type A, spherical anvil SR=4 mm/flat spindle	5-10	20	14	60	625


Metric

Model with spherical anvil and spindle

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Anvil / Spindle	Measuring force [N]	D [mm]	b [mm]	c [mm]	Mass [g]
395-271-30	0–25	0,001 mm	±2 µm	Type B, spherical anvil and spindle SR=4 mm	5-10	15	9	25	270
395-272-30	25–50	0,001 mm	±2 µm	Type B, spherical anvil and spindle SR=4 mm	5-10	15	9,8	32	330
395-273-30	50–75	0,001 mm	±2 µm	Type B, spherical anvil and spindle SR=4 mm	5-10	19	12,6	32	470
395-274-30	75–100	0,001 mm	±3 µm	Type B, spherical anvil and spindle SR=4 mm	5-10	20	14	60	625

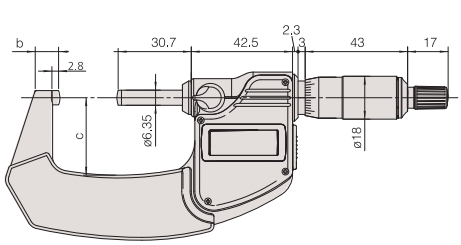

0-50 mm

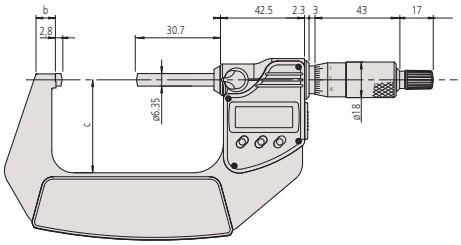

50-100 mm

Functions	Series 395
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications


Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

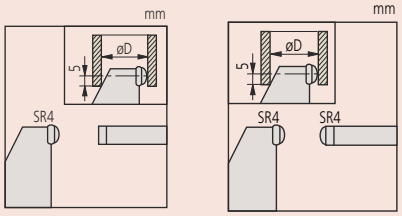

Type A Type B



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Tube Micrometers

Functions	Series 395
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Series 395

This Digimatic Tube Micrometer allows you to measure curved surfaces such as the wall thickness of tubes, bearings and rings. Spherical and cylindrical anvil type.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

IP65

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped, micro-lap finish (spindle) anvil: hardened steel
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V





395-261-30



395-262-30




395-263-30




395-264-30


Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Anvil / Spindle	Measuring force [N]	L [mm]	D [mm]	Mass [g]
395-261-30	0–25	0,001 mm	±3 µm	Type A, pin D=1,8 mm/flat spindle	3-8	4	2	270
395-262-30	0–25	0,001 mm	±3 µm	Type B, spherical pin D=3,5 mm/flat spindle	3-8	4	3,6	270
395-263-30	0–25	0,001 mm	±3 µm	Type C, spherical pin D=4,7 mm/flat spindle	3-8	12	4,8	310
395-264-30	0–25	0,001 mm	±3 µm	Type D, cylindrical pin D=8 mm/flat spindle	3-8	22	8,2	310





Type A







Type B






Type C





Type D



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Tube Micrometers

Series 115

This Tube Micrometer allows you to measure curved surfaces such as the wall thickness of tubes, bearings and rings.



115-215

Specifications

Measuring face	Spindle and anvil: carbide-tipped, micro-lap finish (115-1xx, 115-2xx) spindle: carbide-tipped anvil: hardened steel (115-3xx)
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Anvil / Spindle	Measuring force [N]	L [mm]	D [mm]	Mass [g]
115-302	0–25	0,01 mm	±3 µm	Type A, pin D=1,8 mm/ flat spindle	5-10	4	2	180
115-308	0–25	0,01 mm	±3 µm	Type B, spherical pin D=3,5 mm/ flat spindle	5-10	4	3,6	180
115-303	25–50	0,01 mm	±3 µm	Type A, pin D=1,8 mm/ flat spindle	5-10	4	2	240
115-309	25–50	0,01 mm	±3 µm	Type B, spherical pin D=3,5 mm/ flat spindle	5-10	4	3,6	240
115-315	0–25	0,01 mm	±3 µm	Type C, spherical pin D=4,7 mm/ flat spindle	3-8	12	4,8	180
115-316	0–25	0,01 mm	±3 µm	Type D, cylindrical pin D=8 mm/ flat spindle	3-8	22	8,2	180

Metric — Model with spherical anvil


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Anvil / Spindle	Measuring force [N]	D [mm]	Mass [g]
115-115	0–25	0,01 mm	±3 µm	Type E, sperical anvil SR=4 mm/ flat spindle	5-10	10	180
115-116	25–50	0,01 mm	±3 µm	Type E, sperical anvil SR=4 mm/ flat spindle	5-10	11	240
115-117	50–75	0,01 mm	±3 µm	Type E, sperical anvil SR=4 mm/ flat spindle	5-10	17	315
115-118	75–100	0,01 mm	±4 µm	Type E, sperical anvil SR=4 mm/ flat spindle	5-10	18	375

Metric — Model with spherical anvil and spindle face


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Anvil / Spindle	Measuring force [N]	D [mm]	Mass [g]
115-215	0–25	0,01 mm	±3 µm	Type F, spherical anvil and spindle SR=4 mm	5-10	10	180
115-216	25–50	0,01 mm	±3 µm	Type F, spherical anvil and spindle SR=4 mm	5-10	11	240
115-217	50–75	0,01 mm	±3 µm	Type F, spherical anvil and spindle SR=4 mm	5-10	17	315
115-218	75–100	0,01 mm	±4 µm	Type F, spherical anvil and spindle SR=4 mm	5-10	18	375

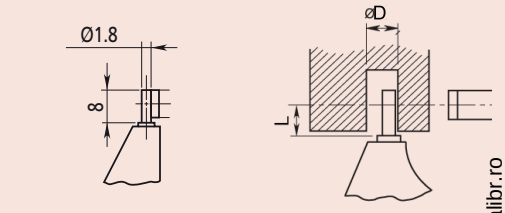


Type A

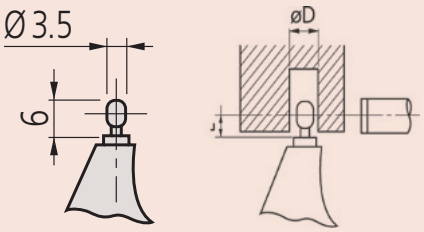


Type B

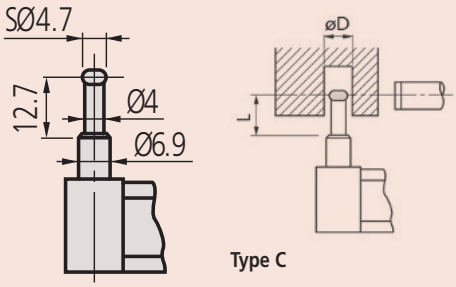

Type C

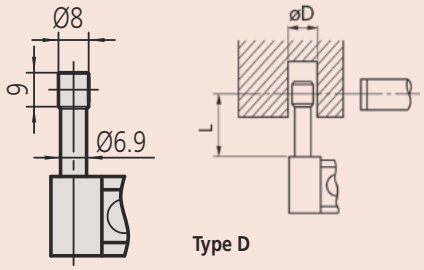

Type D

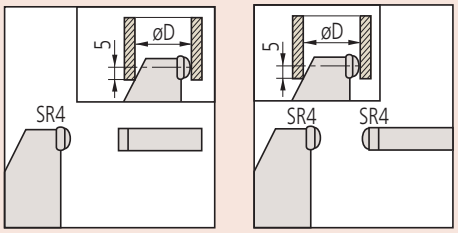

Type E — Type F

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Point Micrometers

Functions	Series 342
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●

Specifications


Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped and conical spindle and anvil, measuring point radius 0,3 mm
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)


Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V







Series 342

This Digimatic Point Micrometer features a pointed anvil and spindle, and offers the following benefits:

- Its pointed anvil and spindle has a choice of included angle, ending in small-radius contact points.
- You can use it to measure grooves, steps and similar.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000040191


IP65




342-251-30

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Tip	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
342-251-30	0–25	0,001 mm	±2 µm	15°	3-8	58,2	12,5	7,3	32	330
342-261-30	0–25	0,001 mm	±2 µm	30°	3-8	58,2	12,5	7,3	32	330
342-252-30	25–50	0,001 mm	±2 µm	15°	3-8	83,2	12,5	10,1	47	470
342-262-30	25–50	0,001 mm	±2 µm	30°	3-8	83,2	12,5	10,1	47	470
342-253-30	50–75	0,001 mm	±2 µm	15°	3-8	108,2	12,5	11,5	60	625
342-263-30	50–75	0,001 mm	±2 µm	30°	3-8	108,2	12,5	11,5	60	625
342-254-30	75–100	0,001 mm	±3 µm	15°	3-8	132,8	15,3	16,7	76	565
342-264-30	75–100	0,001 mm	±3 µm	30°	3-8	132,8	15,3	16,7	76	565

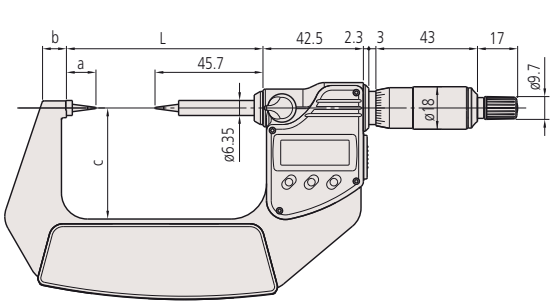

0-75 mm

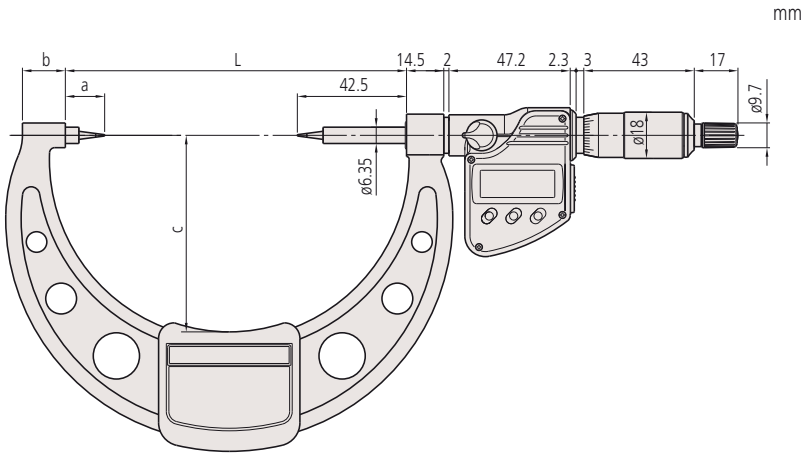

75-100 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Point Micrometers

Series 112

This Point Micrometer features a pointed anvil and spindle, and offers the following benefits:

- Its pointed anvil and spindle has a choice of included angle, ending in small-radius contact points.
- You can use it to measure grooves, steps and similar.




112-201

Metric — Carbide tip

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Tip	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
112-165	0–25	0,01 mm	±3 µm	15°	3-8	55,3	12,8	10	38	205
112-213	0–25	0,01 mm	±3 µm	30°	3-8	55,3	12,8	10	38	205
112-166	25–50	0,01 mm	±3 µm	15°	3-8	80,3	12,8	12	49	305
112-214	25–50	0,01 mm	±3 µm	30°	3-8	80,3	12,8	12	49	305
112-167	50–75	0,01 mm	±3 µm	15°	3-8	105,3	12,8	14	60	370
112-215	50–75	0,01 mm	±3 µm	30°	3-8	105,3	12,8	14	60	370
112-168	75–100	0,01 mm	±4 µm	15°	3-8	132,8	15,3	17	79	500
112-216	75–100	0,01 mm	±4 µm	30°	3-8	132,8	15,3	17	79	500


Metric — Hardened steel tip

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Tip	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
112-153	0–25	0,01 mm	±3 µm	15°	3-8	55,3	12,8	10	38	205
112-201	0–25	0,01 mm	±3 µm	30°	3-8	55,3	12,8	10	38	205
112-154	25–50	0,01 mm	±3 µm	15°	3-8	80,3	12,8	12	49	305
112-202	25–50	0,01 mm	±3 µm	30°	3-8	80,3	12,8	12	49	305
112-155	50–75	0,01 mm	±3 µm	15°	3-8	105,3	12,8	14	60	370
112-203	50–75	0,01 mm	±3 µm	30°	3-8	105,3	12,8	14	60	370
112-156	75–100	0,01 mm	±4 µm	15°	3-8	132,8	15,3	17	79	500
112-204	75–100	0,01 mm	±4 µm	30°	3-8	132,8	15,3	17	79	500

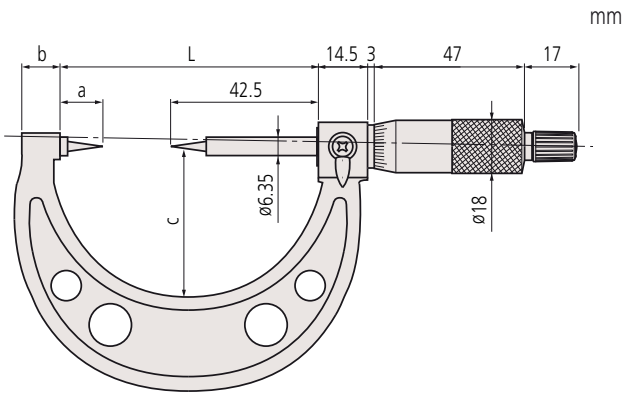



Specifications

Measuring face	Carbide pointed or hardened steel spindle and anvil, measuring point radius 0,3 mm
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key

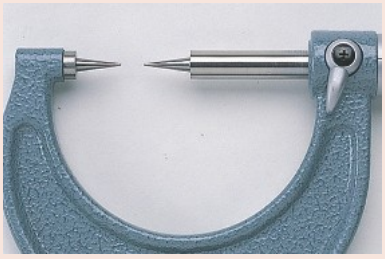


Tip angle : 15°



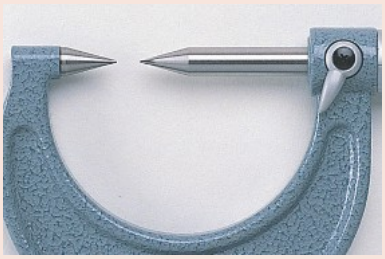

Tip angle : 30°



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Crimp Height Micrometers

Series 342/ Series 112

This Crimp Height Micrometer that features a flat anvil and pointed spindle offers you the following benefits:

- It allows you to measure the crimped height of electrical contacts.
- Excellent resistance against water and dust (IP65 protection level).

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000040191
342-271-30

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000063013
342-451-20

ABSOLUTE®
342-451-20

IP65

Functions	Series 342/ Series 112 342-271-30	342-451-20
Data output	●	●
ON/OFF		●
ORIGIN	●	●
ABS / INC (INC ZERO)	●	●
Auto Power OFF after 20 min. non use	●	
Low voltage alarm	●	●
Function lock	●	
HOLD	●	●

Specifications

Measuring face	Hardened steel
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm (342-271-30, 112-401) without spindle lock ø 6,35 mm, spindle feed (342-451-20) 10 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm (112-401, 342-271-30)
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years (342-271-30), 5 years under normal use (342-451-20)
Delivered	Including box, 1 battery

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type

02AZD880G, 02AZD730G, 02AZD790B
Wireless Sytem for 342-451-20

264-622, 264-623, 02AZF310
or
264-626, 264-627, 02AZF310
Wireless System for 342-271-30





112-401



342-271-30



342-451-20

Metric — Analog model


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Measuring force [N]	Mass [g]
112-401	0–25	0,01 mm	±3 µm	3-8	165

Metric — Digital model


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Measuring force [N]	Mass [g]
342-271-30	0–20	0,001 mm	±3 µm	3-8	270

Metric — Quickmike

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Measuring force [N]	Mass [g]
342-451-20	0–15	0,001 mm	±3 µm	4-6	270

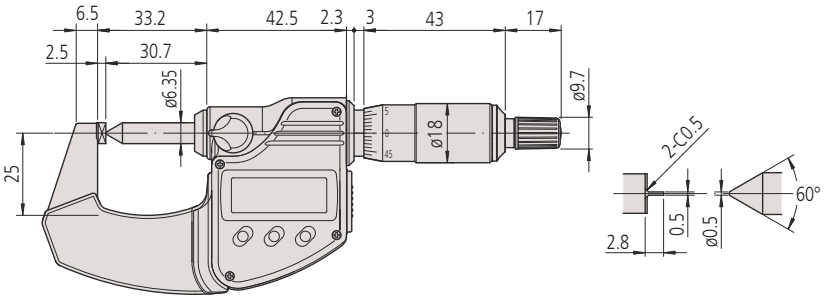

342-271-30

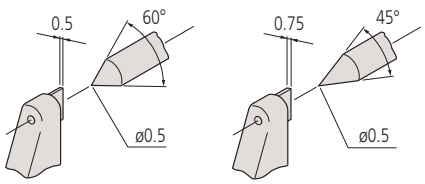

342-271-30
112-401

342-451-20

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Blade Micrometers

Series 422

This Digimatic Blade Micrometer is designed to help you measure hard-to-reach features. It offers the following benefits:


- Blade-shaped anvil and spindle for measuring the groove diameter of shafts, keyways and other hard-to reach features
- Non-rotating spindle




422-230-30

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
422-230-30	0–25	0,001 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm	65,6	12,5	11	31	365
422-260-30	0–25	0,001 mm	±3 µm	3 µm	Type B, hardened steel, t=0,4 mm	65,6	12,5	11	31	365
422-270-30	0–25	0,001 mm	±3 µm	3 µm	Type C, carbide t=0,75 mm	65,6	12,5	11	31	365
422-271-30	0–25	0,001 mm	±3 µm	3 µm	Type D, carbide t=0,4 mm	65,6	12,5	11	31	365
422-231-30	25–50	0,001 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm	90,7	12,6	12,2	50	565
422-261-30	25–50	0,001 mm	±3 µm	3 µm	Type B, hardened steel, t=0,4 mm	90,7	12,6	12,2	50	565
422-232-30	50–75	0,001 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm	105,3	13,5	14,1	57	465
422-233-30	75–100	0,001 mm	±4 µm	4 µm	Type A, hardened steel t=0,75 mm	132,8	16	16,7	76	580

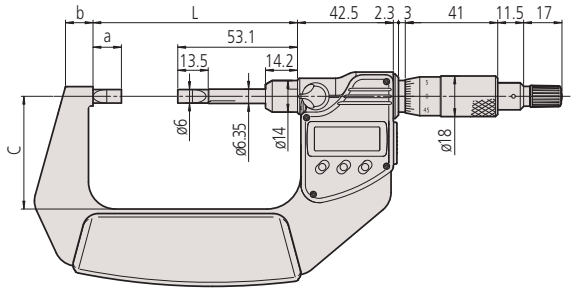

0-50 mm

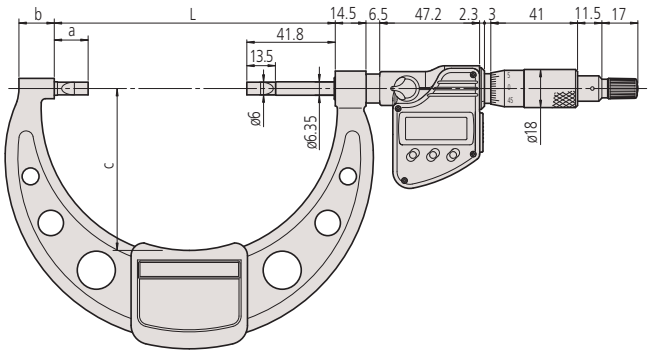

50-100 mm

Functions	Series 422
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Specifications


Display	LCD, character height 7,5 mm
Measuring face	Hardened steel or carbide-tipped
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Measuring force	3-8 N
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, key, 1 battery, setting standard (from 25 mm upward)

Optional accessories


No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V




Type A (hardened steel)



Type B (hardened steel)



Type C (carbide-tipped)



Type D (carbide-tipped)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Blade Micrometers Quickmike

Functions	Series 422
Data output	●
ON/OFF	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
HOLD	●

Specifications


Display	LCD, character height 10 mm
Measuring face	Hardened steel
Measuring spindle	Non-rotating, spindle feed 10 mm
Power supply	1 battery SR-44
Battery life	Approx. 5 years
Delivered	Including box, setting standard (from 25 mm upward), 1 battery

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Type A (hardened steel)

Series 422

TÜVRheinland CERTIFIED — Dust- and Water-Protected — www.tuv.com ID 0000063013

ABSOLUTE®

IP65

This ABSOLUTE Digimatic Blade Micrometer Quickmike is designed to help you measure hard-to-reach features. It offers the following benefits:


- Blade-shaped anvil and spindle for measuring the groove diameter of shafts, keyways and other hard-to reach features
- Non-rotating spindle
- Fast spindle feed of 10 mm/revolution



422-411-20

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
422-411-20	0–30	0,001 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm	5-12	0	8,5	36	13,5	350
422-412-20	25–55	0,001 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm	5-12	25	10,3	47	13,5	490

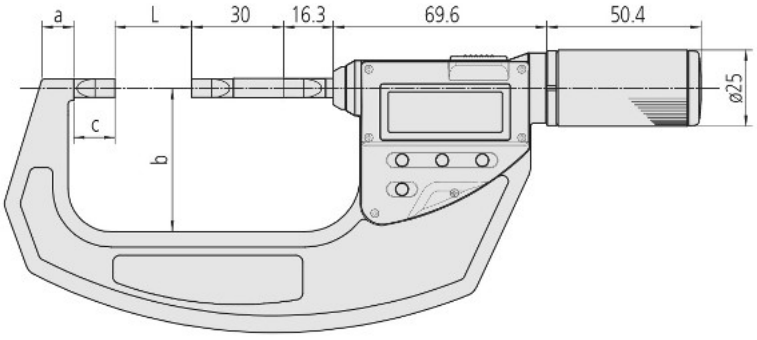

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Blade Micrometers

Series 122

This Blade Micrometer is designed to help you measure hard-to-reach features.
It offers the following benefits:

- Blade-shaped anvil and spindle for measuring the groove diameter of shafts.
- Non-rotating spindle.



122-101-10




122-105-10


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Anvil / Spindle
122-101-10	0–25	0,01 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm
122-111-10	0–25	0,01 mm	±3 µm	3 µm	Type B, hardened steel t=0,4 mm
122-161-10	0–25	0,01 mm	±3 µm	3 µm	Type C, carbide t=0,75 mm
122-141-10	0–25	0,01 mm	±3 µm	3 µm	Type D, carbide t=0,4 mm
122-102-10	25–50	0,01 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm
122-112-10	25–50	0,01 mm	±3 µm	3 µm	Type B, hardened steel t=0,4 mm
122-162-10	25–50	0,01 mm	±3 µm	3 µm	Type C, carbide t=0,75 mm
122-142-10	25–50	0,01 mm	±3 µm	3 µm	Type D, carbide t=0,4 mm
122-103-10	50–75	0,01 mm	±3 µm	3 µm	Type A, hardened steel t=0,75 mm
122-104-10	75–100	0,01 mm	±4 µm	4 µm	Type A, hardened steel t=0,75 mm
122-105-10	100–125	0,01 mm	±4 µm	4 µm	Type A, hardened steel t=0,75 mm
122-106-10	125–150	0,01 mm	±4 µm	4 µm	Type A, hardened steel t=0,75 mm
122-107-10	150–175	0,01 mm	±5 µm	5 µm	Type A, hardened steel t=0,75 mm
122-108-10	175–200	0,01 mm	±5 µm	5 µm	Type A, hardened steel t=0,75 mm
122-109-10	200–225	0,01 mm	±5 µm	5 µm	Type A, hardened steel t=0,75 mm
122-110-10	225–250	0,01 mm	±6 µm	6 µm	Type A, hardened steel t=0,75 mm
122-115-10	250–275	0,01 mm	±6 µm	6 µm	Type A, hardened steel t=0,75 mm
122-116-10	275–300	0,01 mm	±6 µm	6 µm	Type A, hardened steel t=0,75 mm

No.	Measuring force [N]	L [mm]	a [mm]	b [mm]	c [mm]	Mass [g]
122-101-10	3-8	0	7,8	32	15	260
122-111-10	3-8	0	7,8	32	14,7	260
122-161-10	3-8	0	7,8	32	14,7	275
122-141-10	3-8	0	7,8	32	14,7	275
122-102-10	3-8	25	12,2	49	14,5	300
122-112-10	3-8	25	12,2	49	14,5	300
122-162-10	3-8	25	12,2	49	14,5	315
122-142-10	3-8	25	12,2	49	14,5	315
122-103-10	3-8	50	14,6	60	14,5	360
122-104-10	3-8	75	16,7	79	17,5	525
122-105-10	3-8	100	18,8	94	17,9	670
122-106-10	3-8	125	19,1	106	18,3	775
122-107-10	3-8	150	18,2	118	18,5	950
122-108-10	3-8	175	16,8	130	18,9	1140
122-109-10	3-8	200	18	143	17,7	1300
122-110-10	3-8	225	18	156	18,7	1450
122-115-10	3-8	250	18	169	18,7	1600
122-116-10	3-8	275	18	181	18,7	2020

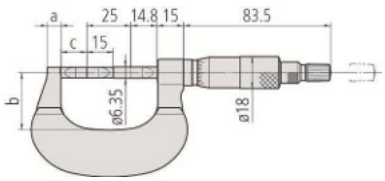

Models up to 25 mm measuring range

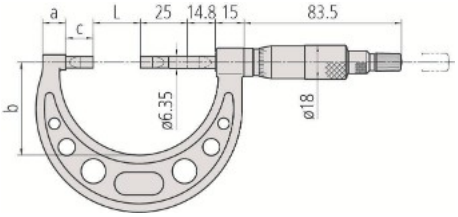


Models over 25 mm measuring range

Specifications


Measuring face	Hardened steel or carbide-tipped
Measuring spindle	ø6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key

mm




Type A (hardened steel)

mm




Type B (hardened steel)

mm



Type C (carbide-tipped)

mm



Type D (carbide-tipped)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic V-Anvil Micrometers

Functions	Series 314
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●

Series 314

This Digimatic V-Anvil Micrometer helps you to measure cutting tools and taps.
It offers the following benefits:

- It measures the outside diameter of cutting tools (such as taps, reamers, end mills) which have three flutes.
- V-anvils with a centreline groove are available for measuring the pitch diameter of taps by the single-wire method.



314-251-30

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Prism angle 60°
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,75 mm mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, setting standard, key, 1 battery

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indica-tor tor
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V




Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Flatness	Anvil	Measuring force [N]	Setting standard	Mass [g]
314-251-30	1–15	0,001 mm	±4 µm	0,3 µm (spindle), 1 µm (anvil)	With groove	3-8	167-327 ø 5 mm	275
314-261-30	1–15	0,001 mm	±4 µm	0,3 µm (spindle), 1 µm (anvil)	Without groove	3-8	167-327 ø 5 mm	275
314-252-30	10–25	0,001 mm	±4 µm	0,3 µm (spindle), 1 µm (anvil)	With groove	5-10	167-328 ø 10 mm	410
314-262-30	10–25	0,001 mm	±4 µm	0,3 µm (spindle), 1 µm (anvil)	Without groove	5-10	167-328 ø 10 mm	410
314-253-30	25–40	0,001 mm	±5 µm	0,3 µm (spindle), 1 µm (anvil)	Without groove	5-10	167-329 ø 25 mm	465

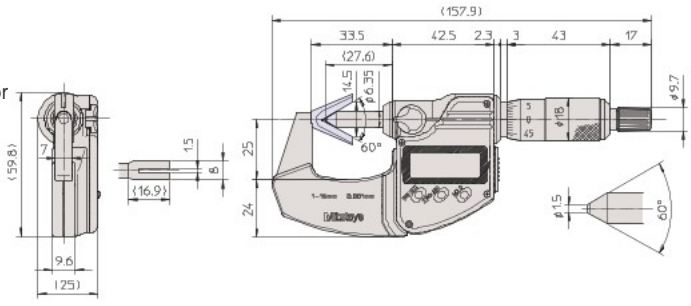

1 - 15 mm

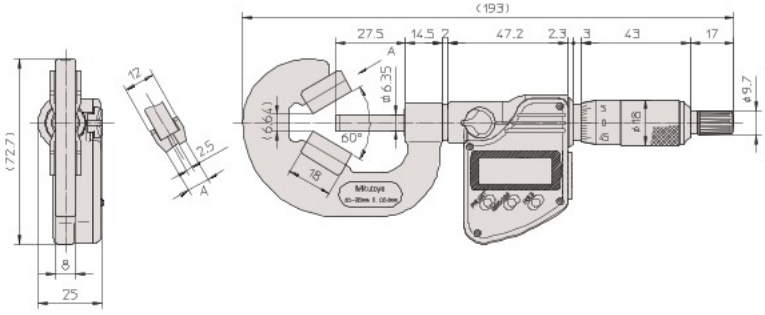

10 - 25 mm

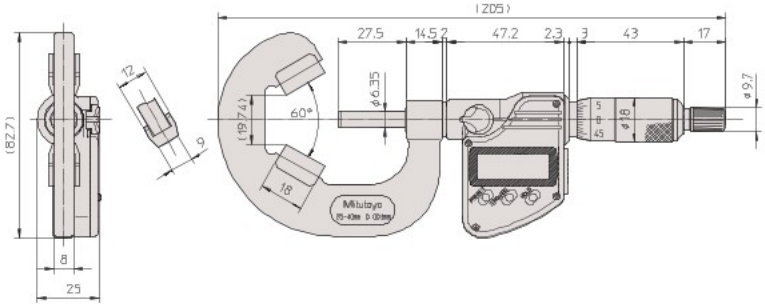

25 - 40 mm

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

V-Anvil Micrometers

Series 114

This V-Anvil Micrometer helps you measure cutting tools and taps.
It offers the following benefits:

- It measures the outside diameter of cutting tools (such as taps, reamers, end mills) which have three or five flutes.
- V-anvils with a centreline groove are available for measuring the pitch diameter of taps by the single-wire method.



114-204



114-121

Metric — For 3-flute cutting tools (60°)


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Flatness	Anvil	Measuring force [N]	Setting standard	a [mm]	Mass [g]
114-101	1–15	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	With groove	5-10	167-327 ø 5 mm	0,5	120
114-161	1–15	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-327 ø 5 mm	0,5	120
114-204	2,3–25	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-327 ø 5 mm	0,5	290
114-102	10–25	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	With groove	5-10	167-328 ø 10 mm	6,2	280
114-162	10–25	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-328 ø 10 mm	6,2	280
114-103	25–40	0,01 mm	±5 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-329 ø 25 mm	19,14	400
114-104	40–55	0,01 mm	±6 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-330 ø 40 mm	32,13	465
114-105	55–70	0,01 mm	±6 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-331 ø 55 mm	45,12	675
114-106	70–85	0,01 mm	±7 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-332 ø 70 mm	58,11	910
114-107	85–100	0,01 mm	±7 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-333 ø 85 mm	71,1	1160
114-108	100–115	0,01 mm	±8 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-334 ø 100 mm	84,1	1480
114-109	115–130	0,01 mm	±8 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-335 ø 115 mm	97,09	2080
114-110	130–145	0,01 mm	±9 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-336 ø 130 mm	110,1	2880

Metric — For 5-flute cutting tools (108°)


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Flatness	Anvil	Measuring force [N]	Setting standard	Mass [g]
114-137	2,3–25	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-327 ø 5 mm	220
114-121	5–25	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	With groove	5-10	167-327 ø 5 mm	255
114-165	5–25	0,01 mm	±4 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-327 ø 5 mm	255
114-122	25–45	0,01 mm	±5 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-329 ø 25 mm	400
114-123	45–65	0,01 mm	±6 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-331 ø 55 mm	540
114-124	65–85	0,01 mm	±7 µm	0,6 µm (spindle), 1,3 µm (anvil)	Without groove	5-10	167-332 ø 70 mm	760

Specifications


Measuring face	Prism angle 60°/108°, carbide tipped spindle hardened anvil (114-204, 114-137 carbide tipped anvil/spindle)
Measuring spindle	With spindle lock, ø6,35 mm, spindle pitch 0,75 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard, key




For 3-flute cutting tools




For 5-flute cutting tools




114-101, 114-161




114-204

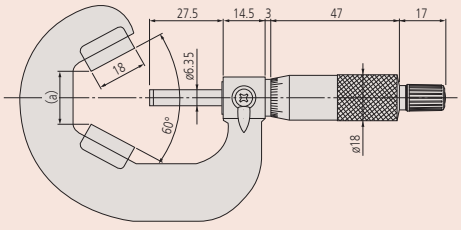


114-102 to 114-110



For 114-101, 114-102, 114-121



Plain anvil model



Grooved anvil model

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Can Seam Micrometers


Series 147

This Can Seam Micrometer allows you to measure different types of can seams.
It offers the following benefits:


- Designed to measure the width, height and depth of can seams.
- Three types are available, for steel, aluminium and spray cans.

Specifications


Measuring face	Hardened steel
Scale	Thimble and sleeve satin chrome finish ø13 mm
Delivered	Including box, key



147-103
For steel cans



147-105
For aluminium cans

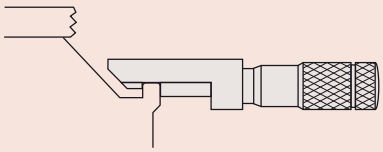

147-202
For spray cans



147-103




147-105




147-202

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Remarks	Mass [g]
147-103	0–13	0,01 mm	±3 µm	For steel cans	65
147-105	0–13	0,01 mm	±3 µm	For aluminium cans	65
147-202	0–13	0,01 mm	±3 µm	For spray cans	65

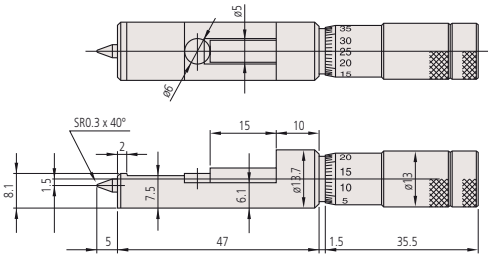

147-103

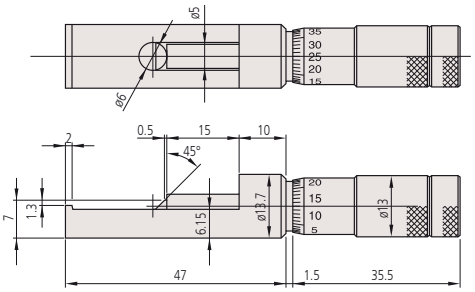

147-105

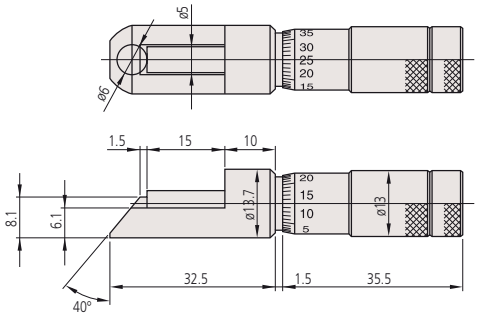

147-202

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Hub Micrometers

Series 147


This Hub Micrometer is designed with a very small throat depth, allowing you to measure hub thickness, shouldered features inside a bore and bearing bushings.



147-301

Specifications


Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	ø6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key

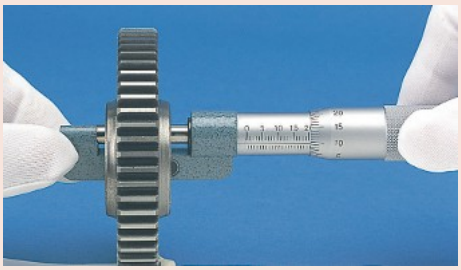


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	L [mm]
147-301	0–25	0,01 mm	±2 µm	3 µm	5-10	0
147-302	25–50	0,01 mm	±2 µm	3 µm	5-10	25
147-303	50–75	0,01 mm	±2 µm	3 µm	5-10	50
147-304	75–100	0,01 mm	±3 µm	3 µm	5-10	75

No.	A [mm]	B [mm]	C [mm]	H [mm]	Mass [g]
147-301	6	8,5	13,5	17,5	135
147-302	6,5	11	14	20,5	150
147-303	6,5	11	13	20,5	170
147-304	6,5	11	13	20,5	185

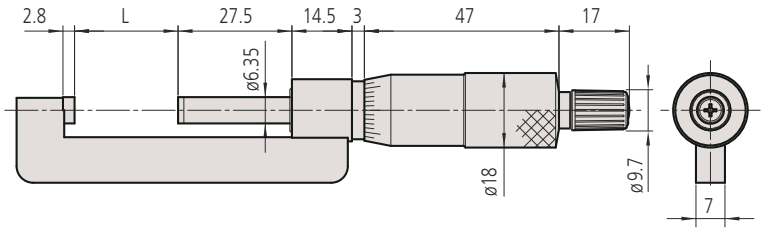

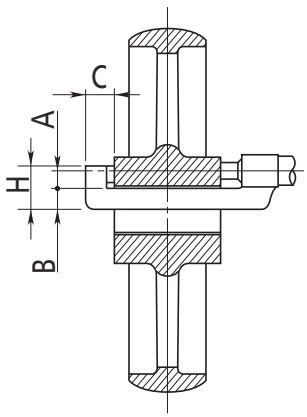

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Micrometers Interchangeable Anvil Type

Functions	Series 317
Data output	●
ORIGIN	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●

Series 317

Dust- and Water-Protected

TÜVRheinland CERTIFIED www.tuv.com ID 0000040191

IP65

This Digimatic Micrometer Interchangeable Anvil Type lets you measure a range of different features.
It offers the following benefits:

- Measures tubing thickness, shoulder edge distance, rivet head height, etc., with interchangeable anvils (flat anvil, rod anvil, V-anvil).



317-251-30

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped spindle, hardened anvil
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years
Delivered	Including box, setting standard (from 25 mm upward), key, 1 battery, anvils

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Variation in length V MPE	Flatness	Measuring force [N]	Content of Set	Mass [g]
317-251-30	0–25	0,001 mm	±4 µm	3 µm	0,6 µm (spindle), 2 µm (anvil)	5-10	Anvils 201217, 201216	335
317-252-30	25–50	0,001 mm	±4 µm	3 µm	0,6 µm (spindle), 2 µm (anvil)	5-10	Anvils 201379, 201216	360

Optional accessories


No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
201218	V-Anvil
950758	Round Base for Series 117, for 0-25mm


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V
201217	Cylindrical Anvil 3mm
201379	Cylindrical Anvil 5mm
201216	Flat Anvil



950758 with micrometer

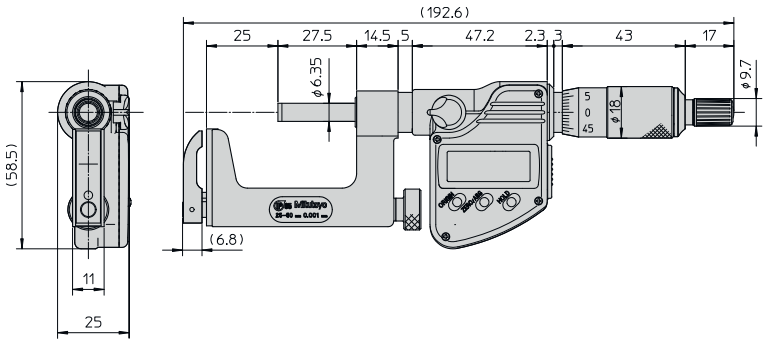

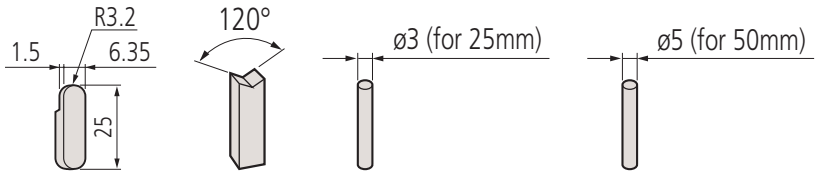

201216
Flat anvil

201218
V-anvil

201217
Cylindrical anvil

201379
Cylindrical anvil

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Micrometers Interchangeable Anvil Type

Series 117

This Micrometer Interchangeable Anvil Type lets you measure a range of different features.
It offers the following benefits:


- Measures tubing thickness, shoulder edge distance, rivet head height, etc., with interchangeable anvils (flat anvil, rod anvil, V-anvil).

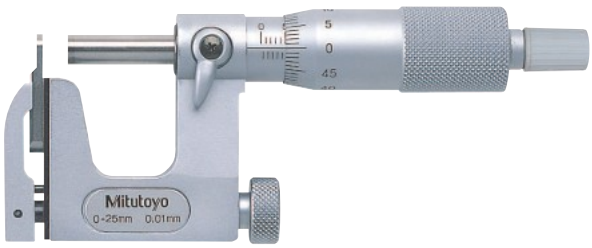


117-101


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Flatness	Measuring force [N]	Content of Set	Mass [g]
117-101	0–25	0,01 mm	±4 µm	3 µm	0,6 µm (spindle), 2 µm (anvil)	5-10	Anvils 201217, 201216	255
117-102	25–50	0,01 mm	±4 µm	3 µm	0,6 µm (spindle), 2 µm (anvil)	5-10	Anvils 201379, 201216	320

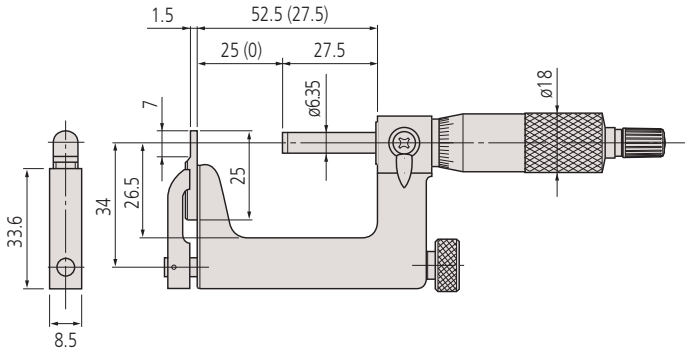





201216
Flat anvil



201218
V-anvil



201217
Cylindrical anvil



201379
Cylindrical anvil

Specifications


Measuring face	Carbide-tipped spindle, hardened anvil
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key, anvils

Optional accessories

No.	Description
950758	Round Base for Series 117, for 0-25mm
201218	V-Anvil

Consumable spares

No.	Description
201217	Cylindrical Anvil 3mm
201379	Cylindrical Anvil 5mm
201216	Flat Anvil

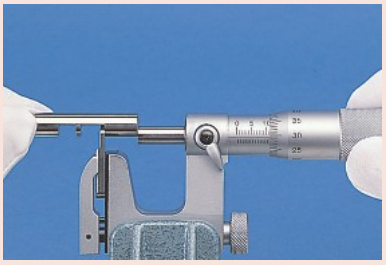



950758 with micrometer

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Limit Micrometers

Series 113

This Limit Micrometer offers the following benefits:
- Spindle and Anvil with chamfered edge.
- You can use it as a GO/±NG gauge by setting the upper and lower limits of dimension.

Specifications

Measuring face	Carbide-tipped with chamfer micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key

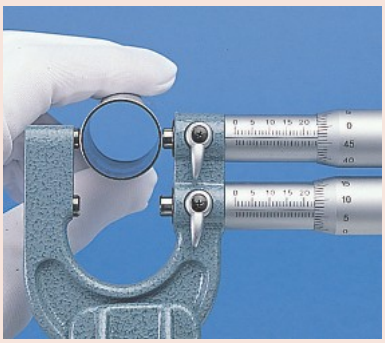




113-102

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	L [mm]	a [mm]	c [mm]	Mass [g]
113-102	0–25	0,01 mm	±3 µm	3 µm	5-10	29,3	15	23	340
113-103	25–50	0,01 mm	±3 µm	3 µm	5-10	54,3	15	37	380

mm

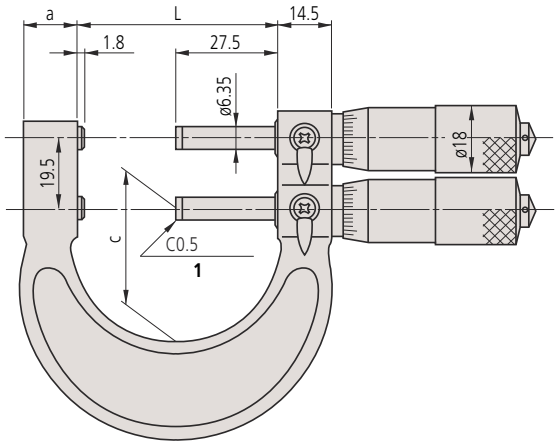

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Indicating Micrometers

Series 510 This is an Indicating Micrometer with a dial comparator that enables you to take fast and highly

This is an Indicating Micrometer with a dial comparator that enables you to take fast and highly accurate measurements. It offers you the following benefits:

- It is easy to use when operated one-handed due to retractable anvil.
- Protection level IP54 and large and easy to read characters on the dial plate
- Large dial comparator for easy reading (+/- 0.06 mm)
- Tolerance markers for GO/NG measurements
- 8 mm spindle diameter gives you easy positioning and highly accurate measurements.



510-121




510-141


Metric

No.	Range [mm]	Graduation	Indicating range	Anvil retracting stroke	Spindle feed error [µm]
510-121	0–25	0,001 mm	±0,06 mm	2 mm	3
510-141	0–25	0,001 mm	±0,06 mm	2 mm	3
510-122	25–50	0,001 mm	±0,06 mm	2 mm	3
510-123	50–75	0,001 mm	±0,06 mm	2 mm	3
510-124	75–100	0,001 mm	±0,06 mm	2 mm	3

No.	Accuracy dial comparator	Repeatability	Flatness	Parallelism	Measuring force [N]	Operating button	L [mm]	D [mm]	Mass [g]
510-121	1 µm	0,4 µm	0,3 µm	0,6 µm	5-10	Right	31,5	25	520
510-141	1 µm	0,4 µm	0,3 µm	0,6 µm	5-10	Left	31,5	25	520
510-122	1 µm	0,4 µm	0,3 µm	0,6 µm	5-10	Left	56,5	38	670
510-123	1 µm	0,4 µm	0,3 µm	1 µm	5-10	Left	81,5	50	820
510-124	1 µm	0,4 µm	0,3 µm	1 µm	5-10	Left	106,5	63	970

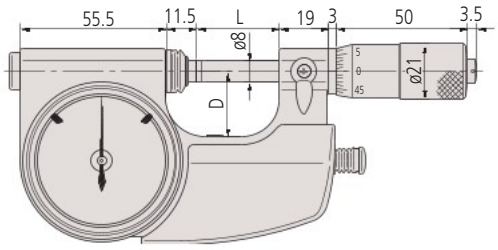

0-25 mm

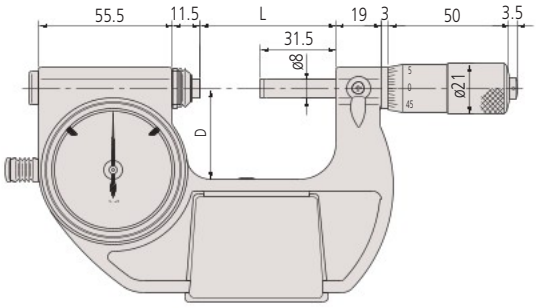

25-100 mm


Specifications

Measuring face	Carbide-tipped, micro-lap finish, ø 8 mm
Scale	Thimble and sleeve satin chrome finish ø21 mm
Delivered	Including box, key


Optional accessories

No.	Description
04AZA124	Workpiece Stopper Indicating Micrometer, 23mm
04AZA125	Workpiece Stopper Indicating Micrometer, 20,5mm
04AZA126	Workpiece Stopper Indicating Micrometer, 15mm


Measuring range mm	Nr.	Diameter range of workpiece supported A Ø mm	B Ø mm	C Ø mm
0– 25	510-121	–	4–16	15– 25
25– 50	510-122	25–37	30–42	41– 50
50– 75	510-123	50–61	54–66	65– 75
75–100	510-124	75–87	80–92	91–100



04AZA124 Workpiecestop A



04AZA125 Workpiecestop B



04AZA126 Workpiecestop C







Adjusting screw for dial comparator ± 5 µm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

on. Product descriptions,

Indicating Snap Gauges

Specifications

Measuring face	Carbide-tipped, micro-lap finish ø 10,8 mm
Delivered	Including box, workpiece rest



Series 523

IP54

This is a Snap Gauge with integrated dial comparator. It offers you the following benefits:

- It is ideal for rapidly inspecting workpieces, especially cylindrical, in batch or mass production situations.
- It can be set with external length standards such as block gauges.
- Easy-to-operate retracting button




523-121

Metric

No.	Range [mm]	Graduation	Indicating range	Anvil retracting stroke	Accuracy dial comparator	Repeatability	Flatness
523-121	0–25	0,001 mm	±0,06 mm	2 mm	1 µm	0,4 µm	0,3 µm
523-122	25–50	0,001 mm	±0,06 mm	2 mm	1 µm	0,4 µm	0,3 µm
523-123	50–75	0,001 mm	±0,06 mm	2 mm	1 µm	0,4 µm	0,3 µm
523-124	75–100	0,001 mm	±0,06 mm	2 mm	1 µm	0,4 µm	0,3 µm

No.	Parallelism	Measuring force [N]	L [mm]	D [mm]	Mass [g]
523-121	0,6 µm	5-10	31	25	740
523-122	0,6 µm	5-10	56	35	840
523-123	1 µm	5-10	81	47,5	950
523-124	1 µm	5-10	106	60	1080

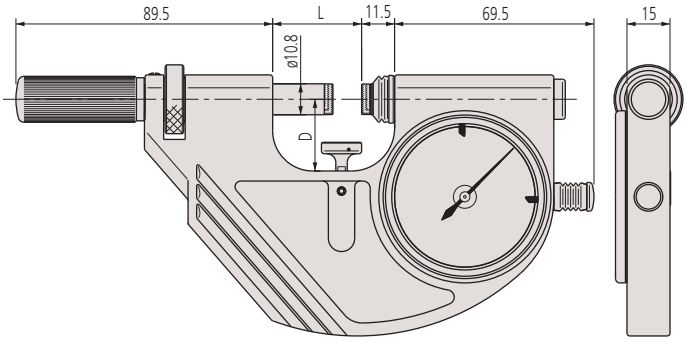

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Snap Gauges

Series 523

This Snap Gauge designed to mount an indicator to suit the measurement application, and offers the following benefits:


- It's ideal for rapidly inspecting workpieces, especially cylindrical, in batch or mass production situations, when you need an indication of where a measurement falls within the tolerance band.
- You can set it with external length standards such as block gauges.
- Easy-to-operate retracting button.



523-141 with optional indicator

Metric

No.	Range [mm]	Anvil retracting stroke	Repeatability	Flatness	Parallelism	Measuring force [N]	L [mm]	D [mm]	Mass [g]
523-141	0–25	2 mm	0,4 µm	0,3 µm	0,6 µm	5-10	31	25	710
523-142	25–50	2 mm	0,4 µm	0,3 µm	0,6 µm	5-10	56	35	810
523-143	50–75	2 mm	0,4 µm	0,3 µm	1 µm	5-10	81	47,5	920
523-144	75–100	2 mm	0,4 µm	0,3 µm	1 µm	5-10	106	60	1050

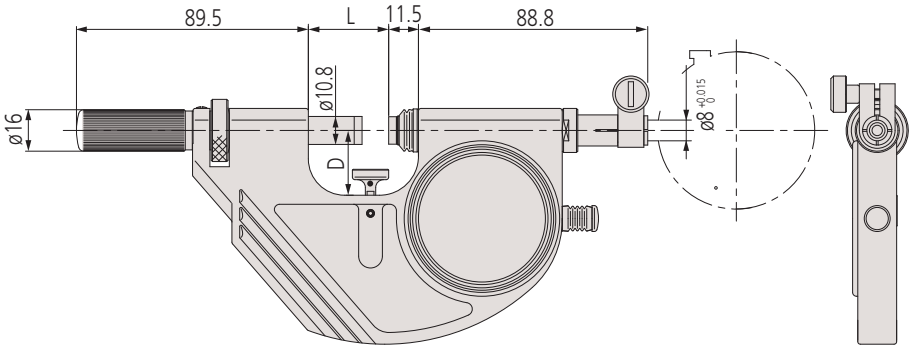



ABS Digimatic Indicator



Linear Gage and counter

Specifications

Measuring face	Carbide-tipped, micro-lap finish ø 10,8 mm
Delivered	Including box, workpiece rest, without indicator

Optional accessories

No.	Description
2109AB-10	Dial Gauge, Flat Back, ISO Type, Jewelled Bearing, Shockproof, 1mm, 0,001mm
2900AB-10	Dial Gauge, Flat Back, ISO Type, One Revolution, Jewelled Bearing, Shockproof, 0,08mm, 0,001mm
543-700B	Digital Indicator ID-C, 12,7mm, 0,0005mm, Flat Back Plate

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Gauge Micrometers

Specifications

Measuring face	Carbide-tipped, micro-lap finish
Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, setting standard (from 25 mm upward), key





2900AB-10
(1 µm graduation)



543-700B
(0,0005 µm digital step)



542-192
(0,1 µm digital step)

Series 107

This Dial Gauge Micrometer allows you to quickly measure mass-produced parts.
It offers the following benefits:


- Designed to mount a dial or a Digital indicator for direct GO/NG judgement of mass-produced parts.
- You can take rapid measurements thanks to its anvil retracting trigger.
- 3 mm anvil retracting stroke.




107-201 with optional dial indicator

Metric

No.	Range [mm]	Graduation	Anvil retracting stroke	Spindle feed error [µm]	Flatness	Parallelism	Measuring force [N]	L [mm]	C [mm]	Mass [g]
107-201	0–25	0,01 mm	3 mm	3	0,6 µm	2 µm	5-10	39,5	30	480
107-202	25–50	0,01 mm	3 mm	3	0,6 µm	2 µm	5-10	64,5	38	520
107-203	50–75	0,01 mm	3 mm	3	0,6 µm	2 µm	5-10	90	45	585
107-204	75–100	0,01 mm	3 mm	3	0,6 µm	3 µm	5-10	115,6	65	630
107-205	100–125	0,01 mm	3 mm	3	0,6 µm	3 µm	5-10	140,6	79	725
107-206	125–150	0,01 mm	3 mm	3	0,6 µm	3 µm	5-10	165,6	93	810
107-207	150–175	0,01 mm	3 mm	3	0,6 µm	3 µm	5-10	190,5	105	1050
107-208	175–200	0,01 mm	3 mm	3	0,6 µm	4 µm	5-10	215,5	120	1170

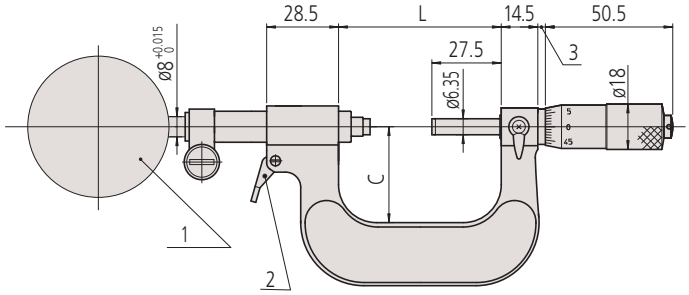

1: dial indicator
2: retracting trigger
(0 - 50 mm)

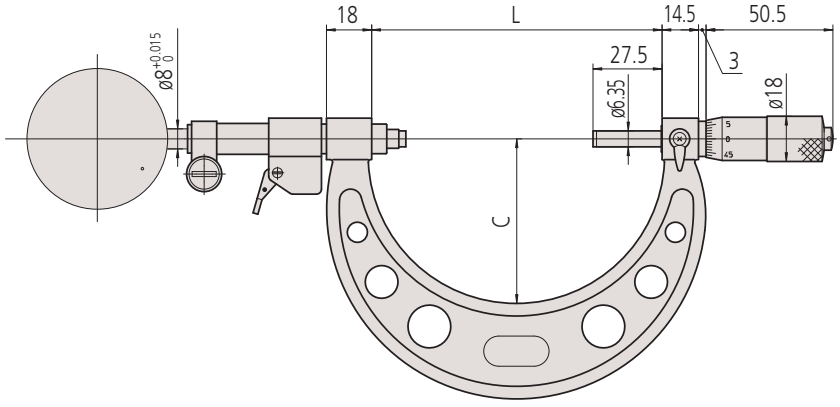

50 - 200 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Dial Snap Gauges

Series 201

These Dial Snap Gauges are designed to let you quickly carry out GO/NG judgement of the diameters of cylinders and shafts in machining processes.
They offer the following benefits:

- Wide, flat carbide anvils.
- 2 mm anvil retracting stroke.
- You can adjust the measuring range with an adjustment nut.



201-101



201-102




201-104



201-107

Metric

No.	Range [mm]	Anvil retracting stroke	Repeatability	Flatness	Parallelism	Remarks	Measuring force [N]	Mass [g]
201-101	0–25	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	570
201-102	25–50	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	660
201-103	50–75	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	700
201-104	75–100	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	770
201-105	100–125	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	870
201-106	125–150	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	950
201-107	150–175	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	1070
201-108	175–200	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	1160
201-109	200–225	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	1260
201-110	225–250	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	1350
201-111	250–275	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	1470
201-112	275–300	2 mm	2 µm	1 µm	5 µm	For indicator with 8 mm stem	12-18	1620

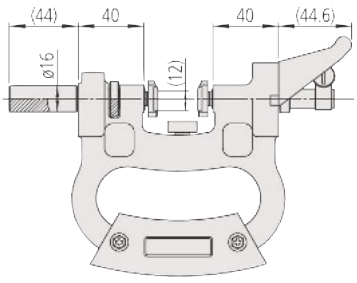

201-101

Specifications

Measuring face	Carbide-tipped, micro-lap finish
Delivered	Including hand guard adjustable workpiece stop

Optional accessories

No.	Description
2046AB	Dial Gauge, Flat Back, ISO Type, 10mm, 0,01mm
2109AB-10	Dial Gauge, Flat Back, ISO Type, Jewelled Bearing, Shockproof, 1mm, 0,001mm
2972AB	Dial Gauge, Flat Back, ISO Type, One Revolution, Shock- & Dustproof, 1mm, 0,01mm
2900AB-10	Dial Gauge, Flat Back, ISO Type, One Revolution, Jewelled Bearing, Shockproof, 0,08mm, 0,001mm
21DZA000	Protector for Indicator (plastic cover)



201-101 with optional accessories: stand 156-101-10 and dial indicator

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Internal Groove Micrometers


Series 146


This Internal Groove Micrometer is designed to measure the width and location of grooves cut into bore walls.
It offers the following features:


- Two-directional ratchet stop


Specifications


Measuring face	Hardened steel
Measuring spindle	Spindle pitch 0,5 mm
Scale	Thimble and sleeve satin chrome finish ø18 mm
Delivered	Including box, key

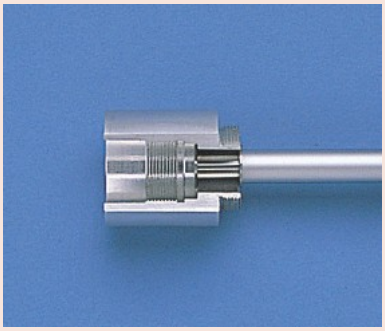



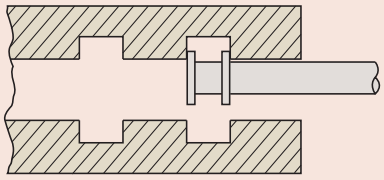







146-221




146-222


Metric

Non-rotating spindle type

No.	Range Outside	Range Inside	Graduation	Max. Permissible Error E MPE	Variation in length V MPE	Measuring force [N]	L [mm]	l [mm]	Mass [g]
146-221	0-25 mm	1,6-26,5 mm	0,01 mm	±10 µm	10 µm	5-10	25	115	135
146-222	0-25 mm	1,6-26,5 mm	0,01 mm	±10 µm	10 µm	5-10	25	115	185
146-223	25-50 mm	26,5-51,5 mm	0,01 mm	±10 µm	10 µm	5-10	50	90	175
146-224	50-75 mm	51,5-76,5 mm	0,01 mm	±10 µm	10 µm	5-10	75	65	165
146-225	75-100 mm	76,5-101,5 mm	0,01 mm	±10 µm	10 µm	5-10	100	40	160

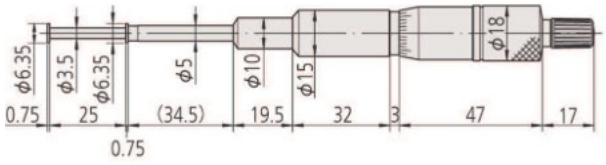

146-221

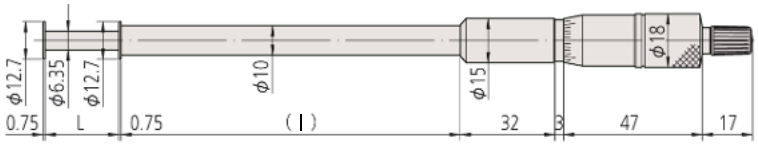

146-222

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Setting Standards ≤ 1000 mm

Series 167

Used for adjusting the reference point of outside micrometers



167-103



167-108

Metric

No.	Length (L)	Diameter (D)	Accuracy	Flatness	Parallelism	l [mm]
167-101	25 mm	6,35 mm	±1,5 µm	0,3 µm	2 µm	18
167-102	50 mm	6,35 mm	±2 µm	0,3 µm	2 µm	40
167-103	75 mm	6,35 mm	±2,5 µm	0,3 µm	2 µm	40
167-104	100 mm	7,9 mm	±3 µm	0,3 µm	2 µm	
167-105	125 mm	7,9 mm	±3,5 µm	0,3 µm	2 µm	
167-106	150 mm	7,9 mm	±4 µm	0,3 µm	2 µm	
167-107	175 mm	7,9 mm	±4,5 µm	0,3 µm	2 µm	
167-108	200 mm	7,9 mm	±5 µm	0,3 µm	2 µm	47
167-109	225 mm	7,9 mm	±5,5 µm	0,3 µm	2 µm	47
167-110	250 mm	7,9 mm	±6 µm	0,3 µm	2 µm	52
167-111	275 mm	7,9 mm	±6,5 µm	0,3 µm	2 µm	57
167-112	300 mm	7,9 mm	±7 µm	0,3 µm	2 µm	64
167-113	325 mm	7,9 mm	±7,5 µm	0,3 µm	2 µm	69
167-114	350 mm	7,9 mm	±8 µm	0,3 µm	2 µm	74
167-115	375 mm	7,9 mm	±8,5 µm	0,3 µm	2 µm	80
167-116	400 mm	7,9 mm	±9 µm	0,3 µm	2 µm	85
167-117	425 mm	7,9 mm	±9,5 µm	0,3 µm	2 µm	90
167-118	450 mm	7,9 mm	±10 µm	0,3 µm	2 µm	95
167-119	475 mm	7,9 mm	±10,5 µm	0,3 µm	2 µm	101
167-120	500 mm	11,9 mm	±11 µm	0,3 µm	2 µm	106
167-121	525 mm	11,9 mm	±11,5 µm	0,3 µm	2 µm	112
167-122	550 mm	11,9 mm	±12 µm	0,3 µm	2 µm	117
167-123	575 mm	11,9 mm	±12,5 µm	0,3 µm	2 µm	122
167-124	600 mm	11,9 mm	±13 µm	0,3 µm	2 µm	128
167-125	625 mm	11,9 mm	±13,5 µm	0,3 µm	2 µm	133
167-126	650 mm	11,9 mm	±14 µm	0,3 µm	2 µm	138
167-127	675 mm	11,9 mm	±14,5 µm	0,3 µm	2 µm	142
167-128	700 mm	11,9 mm	±15 µm	0,3 µm	2 µm	147
167-129	725 mm	11,9 mm	±15,5 µm	0,3 µm	2 µm	153
167-130	750 mm	11,9 mm	±16 µm	0,3 µm	2 µm	158
167-131	775 mm	11,9 mm	±16,5 µm	0,3 µm	2 µm	164
167-132	800 mm	11,9 mm	±17 µm	0,3 µm	2 µm	170
167-133	825 mm	11,9 mm	±17,5 µm	0,3 µm	2 µm	175
167-134	850 mm	11,9 mm	±18 µm	0,3 µm	2 µm	180
167-135	875 mm	11,9 mm	±18,5 µm	0,3 µm	2 µm	185
167-136	900 mm	11,9 mm	±19 µm	0,3 µm	2 µm	191
167-137	925 mm	11,9 mm	±19,5 µm	0,3 µm	2 µm	196
167-138	950 mm	11,9 mm	±20 µm	0,3 µm	2 µm	201
167-139	975 mm	11,9 mm	±20,5 µm	0,3 µm	2 µm	207
167-140	1000 mm	11,9 mm	±21 µm	0,3 µm	2 µm	211

Metric Sets

No.	Length (L)	Flatness	Parallelism	Content of Set
167-902	25-125 mm	0,3 µm	2 µm	167-101 up to 167-105
167-903	25-275 mm	0,3 µm	2 µm	167-101 up to 167-111


Specifications

Measuring face	Micro-lap finish







25 mm - 75 mm



100 mm - 175 mm



200 mm - 475 mm



500 mm - 1000 mm


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micrometer Setting Standards > 1000 mm

Specifications

Measuring face	Micro-lap finish



1000-2000 mm

Series 167

Used for adjusting the reference point of outside micrometers



Metric

No.	Length (L)	Diameter (D)	Accuracy	Flatness	Parallelism	l [mm]
167-365	1025 mm	11,9 mm	±21,5 µm	0,3 µm	2 µm	217
167-366	1050 mm	11,9 mm	±22 µm	0,3 µm	2 µm	222
167-367	1075 mm	11,9 mm	±22,5 µm	0,3 µm	2 µm	227
167-368	1100 mm	11,9 mm	±23 µm	0,3 µm	2 µm	232
167-369	1125 mm	11,9 mm	±23,5 µm	0,3 µm	2 µm	238
167-370	1150 mm	11,9 mm	±24 µm	0,3 µm	2 µm	243
167-371	1175 mm	11,9 mm	±24,5 µm	0,3 µm	2 µm	248
167-372	1200 mm	11,9 mm	±25 µm	0,3 µm	2 µm	254
167-373	1225 mm	11,9 mm	±25,5 µm	0,3 µm	2 µm	259
167-374	1250 mm	11,9 mm	±26 µm	0,3 µm	2 µm	264
167-375	1275 mm	11,9 mm	±26,5 µm	0,3 µm	2 µm	269
167-376	1300 mm	11,9 mm	±27 µm	0,3 µm	2 µm	275
167-377	1325 mm	11,9 mm	±27,5 µm	0,3 µm	2 µm	280
167-378	1350 mm	11,9 mm	±28 µm	0,3 µm	2 µm	285
167-379	1375 mm	11,9 mm	±28,5 µm	0,3 µm	2 µm	291
167-380	1400 mm	11,9 mm	±29 µm	0,3 µm	2 µm	296
167-381	1425 mm	11,9 mm	±29,5 µm	0,3 µm	2 µm	301
167-382	1450 mm	11,9 mm	±30 µm	0,3 µm	2 µm	306
167-383	1475 mm	11,9 mm	±30,5 µm	0,3 µm	2 µm	312
167-384	1500 mm	11,9 mm	±31 µm	0,3 µm	2 µm	317
167-385	1525 mm	11,9 mm	±31,5 µm	0,3 µm	2 µm	322
167-386	1550 mm	11,9 mm	±32 µm	0,3 µm	2 µm	328
167-387	1575 mm	11,9 mm	±32,5 µm	0,3 µm	2 µm	333
167-388	1600 mm	11,9 mm	±33 µm	0,3 µm	2 µm	338
167-389	1625 mm	11,9 mm	±33,5 µm	0,3 µm	2 µm	343
167-390	1650 mm	11,9 mm	±34 µm	0,3 µm	2 µm	349
167-391	1675 mm	11,9 mm	±34,5 µm	0,3 µm	2 µm	354
167-392	1700 mm	11,9 mm	±35 µm	0,3 µm	2 µm	359
167-393	1725 mm	11,9 mm	±35,5 µm	0,3 µm	2 µm	364
167-394	1750 mm	11,9 mm	±36 µm	0,3 µm	2 µm	370
167-395	1775 mm	11,9 mm	±36,5 µm	0,3 µm	2 µm	375
167-396	1800 mm	11,9 mm	±37 µm	0,3 µm	2 µm	380
167-397	1825 mm	11,9 mm	±37,5 µm	0,3 µm	2 µm	386
167-398	1850 mm	11,9 mm	±38 µm	0,3 µm	2 µm	391
167-399	1875 mm	11,9 mm	±38,5 µm	0,3 µm	2 µm	396
167-400	1900 mm	11,9 mm	±39 µm	0,3 µm	2 µm	401
167-401	1925 mm	11,9 mm	±39,5 µm	0,3 µm	2 µm	407
167-402	1950 mm	11,9 mm	±40 µm	0,3 µm	2 µm	412
167-403	1975 mm	11,9 mm	±40,5 µm	0,3 µm	2 µm	417
167-404	2000 mm	11,9 mm	±41 µm	0,3 µm	2 µm	423

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Setting Standards for Screw Thread Micrometers

Setting Standards Metric (unified) 60°

Used for accurately setting screw thread micrometers at the start or end of the measuring range.




Metric — Angle 60°

No.	Length (L)	Accuracy
167-261	25 mm	±4 µm
167-262	50 mm	±5 µm
167-263	75 mm	±6 µm
167-264	100 mm	±7 µm
167-265	125 mm	±8 µm
167-266	150 mm	±9 µm
167-267	175 mm	±10 µm
167-268	200 mm	±11 µm
167-269	225 mm	±12 µm
167-270	250 mm	±13 µm
167-271	275 mm	±14 µm

Setting Standards Metric Whitworth 55°

Used for accurately setting screw thread micrometers at the start or end of the measuring range.

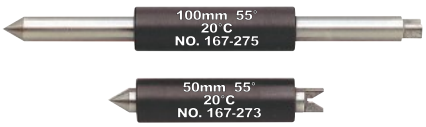

Metric — Angle 55°

No.	Length (L)	Accuracy
167-272	25 mm	±4 µm
167-273	50 mm	±5 µm
167-274	75 mm	±6 µm
167-275	100 mm	±7 µm
167-276	125 mm	±8 µm
167-277	150 mm	±9 µm
167-278	175 mm	±10 µm
167-279	200 mm	±11 µm
167-280	225 mm	±12 µm
167-281	250 mm	±13 µm
167-282	275 mm	±14 µm

Setting Standards for V-Anvil Micrometers

Series 167

Used for accurately setting V-anvil micrometers

Metric

No.	Length (L)	Accuracy	Remarks
167-327	5 mm	±2 µm	Plug
167-328	10 mm	±2 µm	Plug
167-329	25 mm	±2 µm	Plug
167-330	40 mm	±3 µm	Ring
167-331	55 mm	±3 µm	Ring
167-332	70 mm	±3 µm	Ring
167-333	85 mm	±3 µm	Ring
167-334	100 mm	±5 µm	Ring
167-335	115 mm	±5 µm	Ring
167-336	130 mm	±5 µm	Ring



167-329



167-332



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


3-Wire Measuring Process


Series 313


This three-wire measuring process is one of the most precise procedures for determining the pitch diameter of threads. It offers you the following benefits:

- The measuring wires are hardened and precision-lapped.
- They are placed onto the spindle and anvil of an outside micrometer, allowing you to measure the pitch diameter of threads.







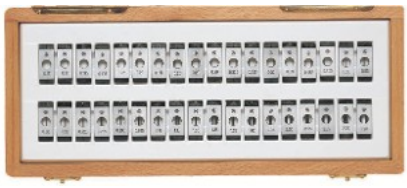

313-101

P =thread pitch
d_D =measuring wire Ø
d_2 =pitch diameter
M =theoretical dimension at measuring pressure d
a =pitch angle
d =correction factor

$$M = d_2 + \frac{d_D}{\sin\frac{a}{2}} - \frac{P}{2\tan\frac{a}{2}} + d_D + d$$

$$d = \frac{d_D}{2} \cdot \frac{P^2}{p^2} \cdot \frac{\cos\frac{a}{2} \cdot \cot\frac{a}{2}}{d_2^2}$$

Nominal	Thread pitch P	Pitch d2	Measuring wire dD	Measurement over wire M	(M-d2)
M 1	0,25	0,838	0,170	1,133	0,295
M 1,2	0,25	1,038	0,170	1,332	0,294
M 1,4	0,30	1,205	0,170	1,456	0,251
M 1,7	0,35	1,473	0,220	1,831	0,358
M 2	0,40	1,740	0,250	2,145	0,405
M 2,3	0,40	2,040	0,250	2,444	0,404
M 2,6	0,45	2,308	0,290	2,789	0,481
M 3	0,50	2,675	0,290	3,113	0,438
M 3,5	0,60	3,110	0,335	3,596	0,486
M 4	0,70	3,545	0,455	4,305	0,760
M 5	0,80	4,480	0,455	5,153	0,673
M 6	1,00	5,350	0,620	6,346	0,996
M 8	1,25	7,188	0,725	8,282	1,094
M 10	1,50	9,026	0,895	10,414	1,388
M 12	1,75	10,863	1,100	12,650	1,787

Nominal	Thread pitch P	Pitch d2	Measuring wire dD	Measurement over wire M	(M-d2)
M 14	2,00	12,701	1,350	15,021	2,320
M 16	2,00	14,701	1,350	17,021	2,320
M 20	2,50	18,376	1,650	21,163	2,787
M 22	2,50	20,376	1,650	23,163	2,787
M 24	3,00	22,051	2,050	25,606	3,555
M 27	3,00	25,051	2,050	28,605	3,554
M 30	3,50	27,727	2,050	30,848	3,121
M 33	3,50	30,727	2,050	33,848	3,121
M 36	4,00	33,402	2,550	37,591	4,189
M 39	4,00	36,402	2,550	40,590	4,188
M 42	4,50	39,077	2,550	42,832	3,755
M 45	4,50	42,077	2,550	45,832	3,755
M 48	5,00	44,752	3,200	50,025	5,273
M 52	5,00	48,752	3,200	54,024	5,272
M 56	5,50	52,428	3,200	57,267	4,839
M 60	5,50	56,428	3,200	61,267	4,839

1) Wire in set

No.	Accuracy	Remarks	Content of Set
313-101	DIN 2269, Grade 1	For micrometer spindle diameter 6,35 mm	18 pairs of wires D= 0,17 - 3,2 mm
313-102	DIN 2269, Grade 1	For micrometer spindle diameter 8 mm	18 pairs of wires D= 0,17 - 3,2 mm

Individual wires (content of 313-101)
One pair, support spindle ø 6.35 mm

No.	Diameter (D)	Accuracy
952131	0,17 mm	DIN 2269, Grade 1
952132	0,195 mm	DIN 2269, Grade 1
952133	0,22 mm	DIN 2269, Grade 1
952134	0,25 mm	DIN 2269, Grade 1
952135	0,29 mm	DIN 2269, Grade 1
952136	0,335 mm	DIN 2269, Grade 1
952137	0,39 mm	DIN 2269, Grade 1
952138	0,455 mm	DIN 2269, Grade 1
952139	0,53 mm	DIN 2269, Grade 1
952140	0,62 mm	DIN 2269, Grade 1
952141	0,725 mm	DIN 2269, Grade 1
952142	0,895 mm	DIN 2269, Grade 1
952143	1,1 mm	DIN 2269, Grade 1
952144	1,35 mm	DIN 2269, Grade 1
952145	1,65 mm	DIN 2269, Grade 1
952146	2,05 mm	DIN 2269, Grade 1
952147	2,55 mm	DIN 2269, Grade 1
952148	3,2 mm	DIN 2269, Grade 1

Individual wires (content of 313-102)
One pair, support spindle ø 8 mm

No.	Diameter (D)	Accuracy
952149	0,17 mm	DIN 2269, Grade 1
952150	0,195 mm	DIN 2269, Grade 1
952151	0,22 mm	DIN 2269, Grade 1
952152	0,25 mm	DIN 2269, Grade 1
952153	0,29 mm	DIN 2269, Grade 1
952154	0,335 mm	DIN 2269, Grade 1
952155	0,39 mm	DIN 2269, Grade 1
952156	0,455 mm	DIN 2269, Grade 1
952157	0,53 mm	DIN 2269, Grade 1
952158	0,62 mm	DIN 2269, Grade 1
952159	0,725 mm	DIN 2269, Grade 1
952160	0,895 mm	DIN 2269, Grade 1
952161	1,1 mm	DIN 2269, Grade 1
952162	1,35 mm	DIN 2269, Grade 1
952163	1,65 mm	DIN 2269, Grade 1
952164	2,05 mm	DIN 2269, Grade 1
952165	2,55 mm	DIN 2269, Grade 1
952166	3,2 mm	DIN 2269, Grade 1

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Stands

Series 156

This is a micrometer stand that offers you the following benefits:

- Keeps both hands free for operating the micrometer and positioning the workpiece.
- Designed for batch or mass production measurements in manufacturing and quality assurance.



156-105-10




156-101-10




156-102


No.	Applicable measuring range	Remarks	Mass [g]
156-105-10	0 - 50 mm	Fixed angle type 45°	700
156-101-10	0 - 100 mm	Adjustable angle type	1210
156-102	100 - 300 mm	Vertical type	9000
156-103	300 - 1000 mm	Vertical type	8500

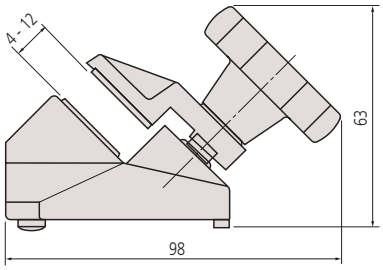


156-105-10

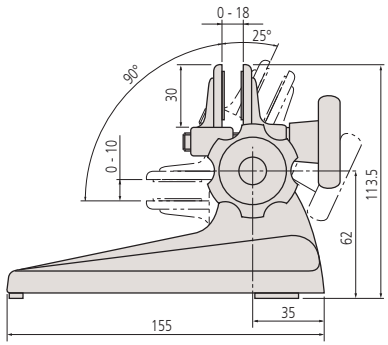

156-101-10

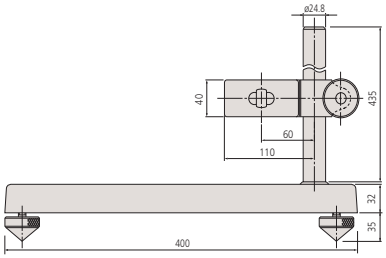

156-102

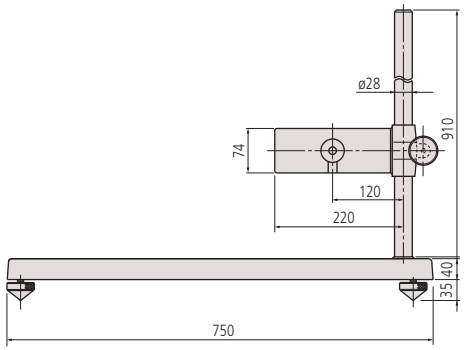

156-103








M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Colour Coded Ratchets and Speeders

Micrometer accessories

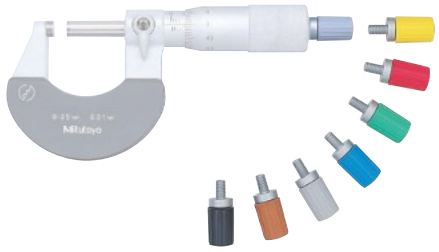

Colour-coded ratchets



Colour-coded speeders for Ratchet Thimble Micrometer series 102-7XX, QuantuMike and Series 293 with ratched thimble



Colour-coded ratchets for analogue micrometer 0-300 mm

No.	Colour
985056	Black
985061	Red
985081	Blue
985071	Yellow
985076	Green
985066	Brown
04GZA239	Grey

Colour-coded ratchets for analogue micrometer 300-1000 mm

No.	Colour
04GZA243	Grey

Colour-coded speeders for digital micrometer 0-300 mm

No.	Colour
04GZA241	Grey

Colour-coded speeders for series 102-7XX, QuantuMike and series 293 with ratched thimble

No.	Colour
04AAB208	Grey
04GAA900	Red
04GAA901	Yellow
04GAA902	Green
04GAA903	Blue
04GAA899	Black

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ball Attachments

Micrometer accessories

- Ball attachment to fit micrometer anvils (ø 6,35 mm only)



K544888



Sample application

Metric

No.	Diameter (D)
K544888	5 mm

Optical Parallels

Series 157

These Optical Parallels allow you to inspect micrometers and other measuring tools. Using optical interference, they can inspect the measuring faces for parallelism and flatness.




157-904



Metric

No.	Diameter (D)	Flatness	Parallelism	Remarks	Content of Set
157-903	30 mm	0,1 µm	0,2 µm	For micrometer range 0 - 25 mm	157-101 (12 mm), 157-102 (12,12 mm), 157-103 (12,25 mm), 157-104 (12,37 mm)
157-904	30 mm	0,1 µm	0,2 µm	For micrometer range 25 - 50 mm	157-105 (25 mm), 157-106 (25,12 mm), 157-107 (25,25 mm), 157-108 (25,37 mm)

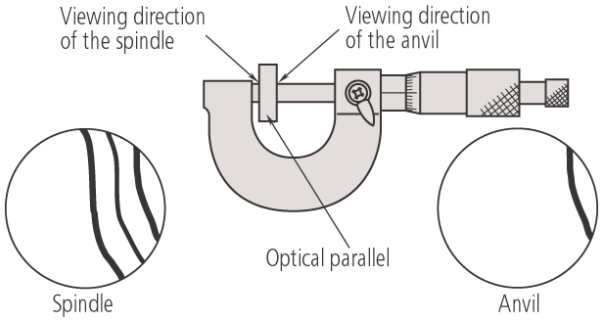



Testing a micrometer for flatness and parallelism of anvil and spindle faces : flatness is indicated by straightness and regular spacing of interference fringes, and parallelism by how many fringes are visible.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optical Flats

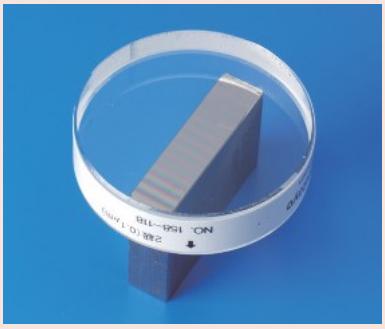

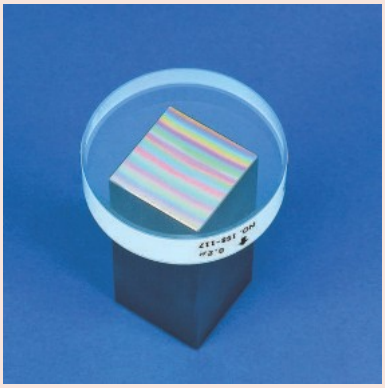

Series 158


These optical flats are an essential tool to test the flatness of reflective surfaces such as gauge blocks through optical interference technology.



158-118

Metric

No.	Length (L)	Diameter (D)	Flatness
158-117	12 mm	45 mm	0,2 µm
158-118	12 mm	45 mm	0,1 µm
158-119	15 mm	60 mm	0,2 µm
158-120	15 mm	60 mm	0,1 µm

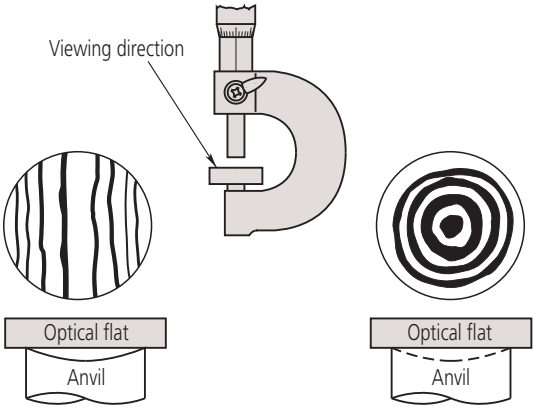

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digital Micrometer Heads with Non-Rotating Spindle

Series 164


This is a digital micrometer head with non-rotating spindle. It offers you the following benefits:
- Rotatable display, carbide tipped and non-rotating spindle
- It is perfect for integration into machinery and measuring instruments.



164-163

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Remarks	Mass [g]
164-163	0 - 50	0,001 mm	±3 µm	Flat	0,5	18	Flat	Non-rotating spindle	490

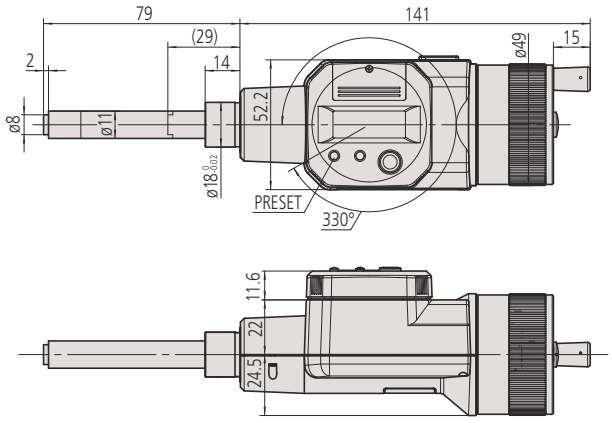

164-163
(): with spindle full retracted

Functions	Series 164
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
2 x PRESET	●
Counting direction switchable	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped
Power supply	2 batteries SR-44
Battery life	Approx. 1,8 years

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



164-163 Application

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digital Micrometer Heads with 10 mm Stem

Series 350

This Micrometer Head has a 25 mm range and a 10 mm stem, and offers the following benefits:

- You can integrate it into machinery and measuring instruments.
- Measurement values are clearly displayed in 0,001mm increments.
- Stem diameter: 10 mm.

Functions	Series 350
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped
Measuring spindle	With spindle lock, ø 6,35 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V




350-251-30

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
350-251-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	10	Plain		230
350-252-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	230
350-253-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5	10	Plain		230
350-254-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5	10	w/ clamp nut	11,5	230



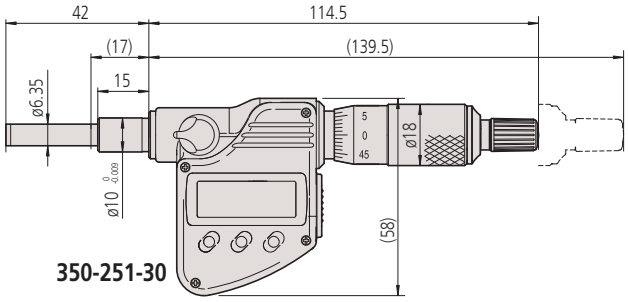

(): with spindle full retracted

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digital Micrometer Heads with 12 mm Stem

Series 350

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000040191

IP65

This Micrometer Head has a 25 mm range and a 12 mm stem, and offers the following benefits:

- You can integrate it into machinery and measuring instruments.
- Its excellent water and dust resistance (IP65 protection level) lets you use it in machining situations that include splashing coolant fluid (except types with threaded stem).




350-281-30




350-282-30

Metric


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Remarks	Mass [g]
350-271-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	Plain		IP65	230
350-272-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	w/ clamp nut	11,5	Threaded stem	230
350-273-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5	12	Plain		IP65	230
350-274-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5	12	w/ clamp nut	11,5	Threaded stem	230
350-281-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	Plain		IP65	230
350-282-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	w/ clamp nut	11,5	IP65	230
350-283-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5	12	Plain		IP65	230
350-284-30	0 - 25	0,001 mm	±2 µm	Spherical (SR4)	0,5	12	w/ clamp nut	11,5	IP65	230
350-261-30	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	Plain		IP65, w/ non-rotating measuring face w/o ratched stop	235

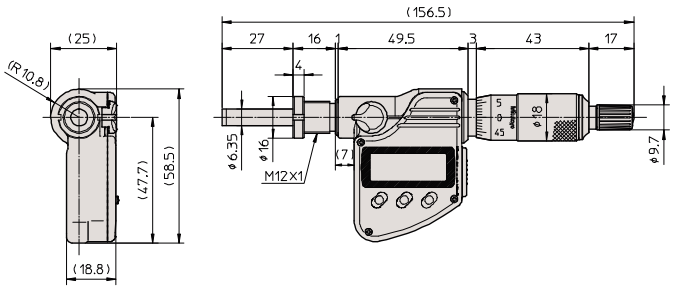

350-272-30

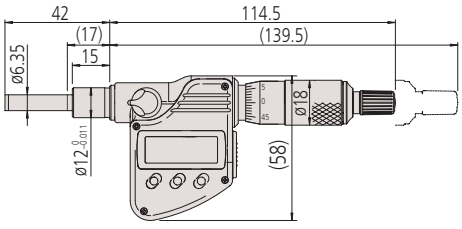

350-281-30

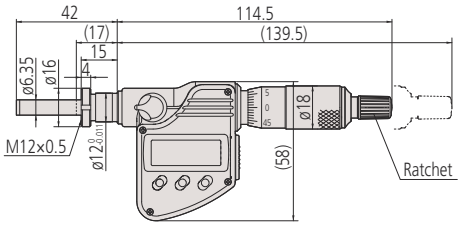

350-282-30

(): with spindle full retracted

Functions	Series 350
Data output	●
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Function lock	●
HOLD	●
2 x PRESET	●

Specifications

Display	LCD, character height 7,5 mm
Measuring face	Carbide-tipped
Measuring spindle	With spindle lock, ø 6,35 mm
Scale	Thimble and sleeve satin chrome finish
Power supply	1 battery SR-44
Battery life	Approx. 2,4 years


Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V
305307	Bush, Series 350, Ø 12/18 mm, 14 mm length
306625	Bush, Series 350, Ø 12/18 mm, 16 mm length

306625 Standard for 350-271-30, 350-273-30
305307 Standard for 350-261-30



350-261-30



305307

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Heads with Counter

Specifications

Measuring spindle	With spindle lock, ø 6,35 mm, spindle pitch 0,5 mm
Measuring face	Carbide-tipped
Scale	• Thimble and sleeve satin chrome finish • White anodized aluminium

Series 250 - Digit counter type


This Digit counter type is a micrometer head with a mechanical counter.

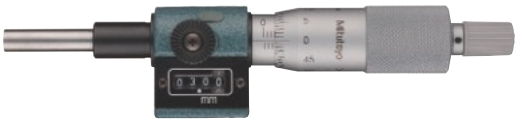

250-301

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Mass [g]
250-301	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain	165

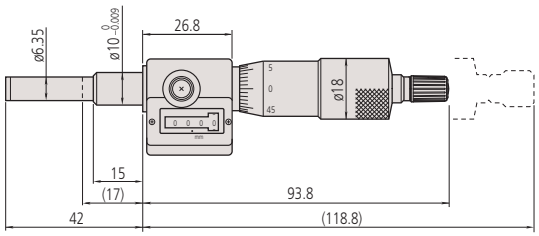

250-301

Micro Jack

Specifications

Measuring face	Hardened steel (>60 HRC)



Series 7


This Micro Jack allows you to make easy adjustments under a heavy load.
It offers the following benefits:

- Adjustments can easily be made under a heavy load.
- You can use it to accurately level machines, surface plates, and other precision instruments.



Metric

No.	Graduation	Range [mm]	Remarks	Mass [g]
7850	0,01 mm	60 - 75	Max. load : 400kg	400

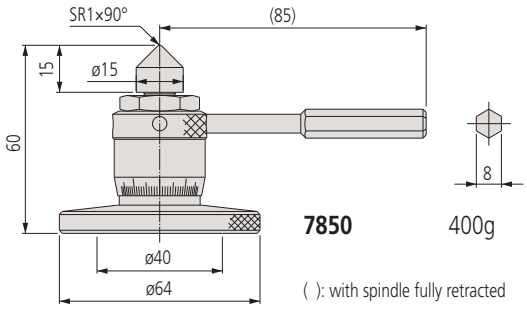

7850 400g

( ): with spindle fully retracted

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Fine Spindle Feed 0,1 mm / rev Micrometer Heads 5 mm and 6,5 mm Range

Series 148 - Very fine spindle feed of 0,1/rev

These micrometer heads have a very fine spindle feed of 0.1 mm/rev.
They offer the following benefits:

- Small size micrometer heads with extremely fine pitch of 0.1 mm.
- Ideal for fine adjustment applications in scientific apparatus.



148-244



148-245



148-142-10



148-143-10



148-242-10



148-243-10




148-342-10




148-343-10

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
148-244	0 - 5	0,004 mm	±5 µm	Spherical (SR1,5)	0,1	3,5	Plain		4
148-245	0 - 5	0,004 mm	±5 µm	Spherical (SR1,5)	0,1	3,5	w/ clamp nut	3	5
148-142-10	0 - 6,5	0,002 mm	±2 µm	Spherical (SR4)	0,1	9,5	Plain		31
148-143-10	0 - 6,5	0,002 mm	±2 µm	Spherical (SR4)	0,1	9,5	w/ clamp nut	6	34
148-342-10	0 - 6,5	0,002 mm	±2 µm	Spherical (SR4)	0,1	9,5	Plain		29
148-343-10	0 - 6,5	0,002 mm	±2 µm	Spherical (SR4)	0,1	9,5	w/ clamp nut	6	31
148-242-10	0 - 6,5	0,002 mm	±5 µm	Spherical (SR3)	0,1	6	Plain		10
148-243-10	0 - 6,5	0,002 mm	±5 µm	Spherical (SR3)	0,1	6	w/ clamp nut	4	10




Pitch 0,1 mm



Pitch 0,5 mm




148-342-10




148-343-10
(): with spindle full retracted

Specifications


Measuring face	Hardened steel (>60 HRC)

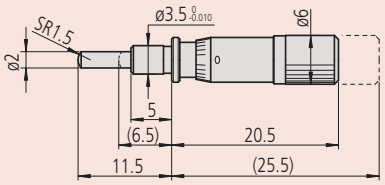


148-244

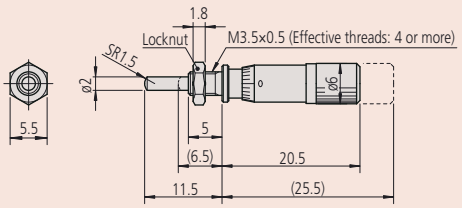


148-245

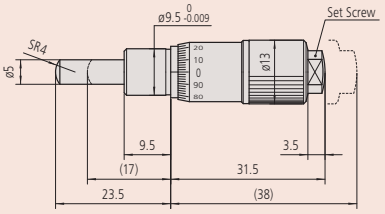


148-142-10

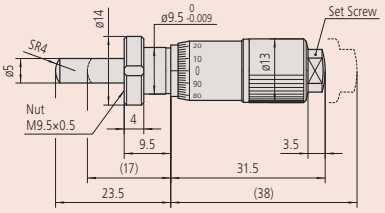

148-143-10

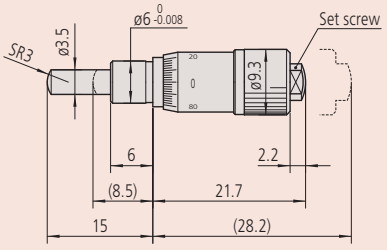

148-242-10

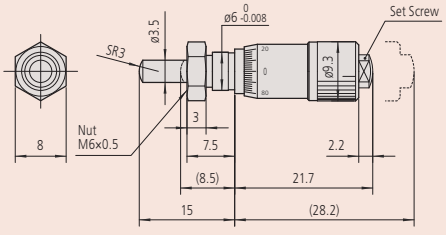

148-243-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ultra Small Micrometer Heads 5 mm and 6,5 mm Range

Specifications

Measuring face	Hardened steel (>60 HRC)



Series 148 - Ultra small

This ultra-small micrometer head allows you to easily incorporate it into machines and offers you the following benefits:

- Plain stem and a flat spindle end
- Hardened steel measuring surface



148-215



148-216




148-201-10




148-203-10

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
148-215	0 - 5	0,02 mm	±5 µm	Spherical (SR1,5)	0,5	3,5	Plain			4
148-216	0 - 5	0,02 mm	±5 µm	Spherical (SR1,5)	0,5	3,5	w/ clamp nut	3		4
148-201-10	0 - 6,5	0,01 mm	±5 µm	Flat	0,5	6	Plain			10
148-203-10	0 - 6,5	0,01 mm	±5 µm	Flat	0,5	6	w/ clamp nut	4		10
148-205-10	0 - 6,5	0,01 mm	±5 µm	Spherical (SR3)	0,5	6	Plain			10
148-207-10	0 - 6,5	0,01 mm	±5 µm	Spherical (SR3)	0,5	6	w/ clamp nut	4		10
148-209-10	0 - 6,5	0,01 mm	±5 µm	Flat	0,5	6	Plain		Reverse reading	10
148-211-10	0 - 6,5	0,01 mm	±5 µm	Flat	0,5	6	w/ clamp nut	4	Reverse reading	10




148-209-10
148-211-10
Reverse reading

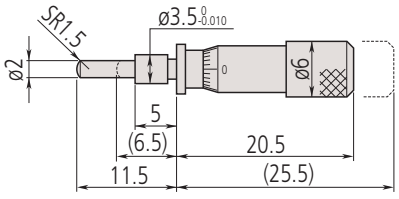


148-215

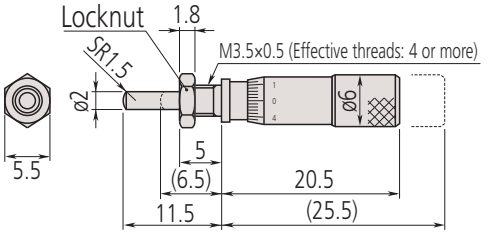

148-216

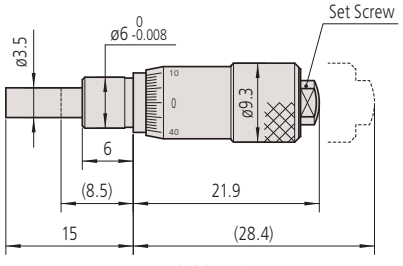

148-201-10
(): with spindle full retracted

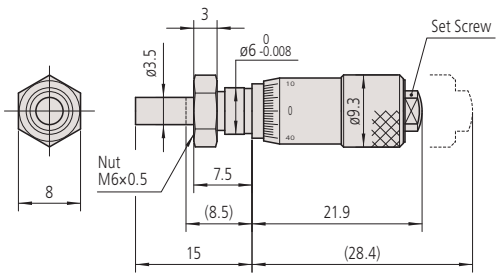

148-203-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Fine Spindle Feed 0,25 mm / rev Micrometer Heads 6,5 mm and 13 mm Range

Series 148 - Fine spindle feed of 0,25/rev

These micrometer heads are a standard, small-sized type with a 6,5 mm and 13 mm measuring range.
They offer the following benefits:

- Fine spindle feed of 0,25 mm/rev for fine adjustment.



148-132-10



148-133-10



148-322-10




148-323-10

Specifications


Measuring face	Hardened steel (>60 HRC)

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
148-132-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,25	9,5	Plain		30
148-133-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,25	9,5	w/ clamp nut	6	35
148-322-10	0 - 6,5	0,01 mm	±2 µm	Spherical (SR4)	0,25	9,5	Plain		30
148-323-10	0 - 6,5	0,01 mm	±2 µm	Spherical (SR4)	0,25	9,5	w/ clamp nut	6	35

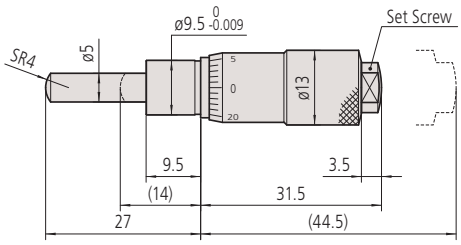


148-132-10

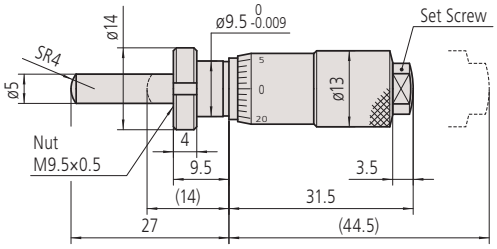

148-133-10

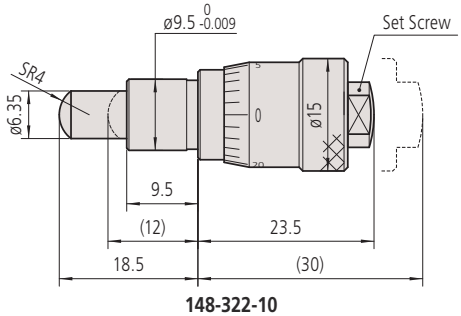

148-322-10

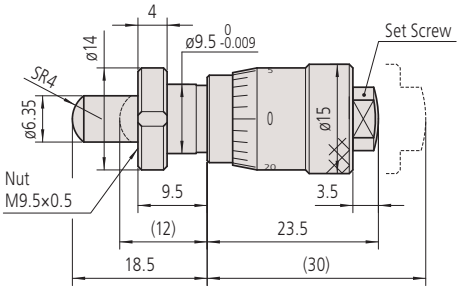

148-323-10
(): with spindle full retracted


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Head 6,5 mm and 13 mm Short Thimble Type

Specifications


Measuring face	Hardened steel (>60 HRC)




148-301-10




148-302-10




148-303-10



148-304-10



148-307-10



148-308-10



148-301-10



148-302-10



148-303-10



148-309-10




148-310-10




148-311-10

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Thimble Ø	Mass [g]
148-301-10	0 - 6,5	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		15 mm	26
148-302-10	0 - 6,5	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	15 mm	26
148-303-10	0 - 6,5	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		20 mm	39
148-304-10	0 - 6,5	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	20 mm	39
148-313-10	0 - 6,5	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain		15 mm	26
148-314-10	0 - 6,5	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6	15 mm	26
148-307-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		15 mm	35
148-308-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	15 mm	35
148-309-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		20 mm	55
148-310-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	20 mm	55
148-311-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		29 mm	103
148-312-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	29 mm	103




148-309-10



148-310-10



148-311-10
(): with spindle full retracted



148-312-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Heads 6,5 mm Range with Spindle Lock

Series 148 - Locking screw Type

These micrometer heads feature a knurled locking screw so you can lock the spindle in any position with the knurled locking screw.



148-220-10




148-221-10



148-222-10



148-223-10



148-316-10



148-317-10




148-318-10




148-319-10

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
148-220-10	0 - 6,5	0,01 mm	±5 µm	Flat	0,5	6	Plain		16
148-221-10	0 - 6,5	0,01 mm	±5 µm	Flat	0,5	6	w/ clamp nut	4	17
148-222-10	0 - 6,5	0,01 mm	±5 µm	Spherical (SR3)	0,5	6	Plain		16
148-223-10	0 - 6,5	0,01 mm	±5 µm	Spherical (SR3)	0,5	6	w/ clamp nut	4	17
148-316-10	0 - 6,5	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		40
148-317-10	0 - 6,5	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	43
148-318-10	0 - 6,5	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain		40
148-319-10	0 - 6,5	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6	43

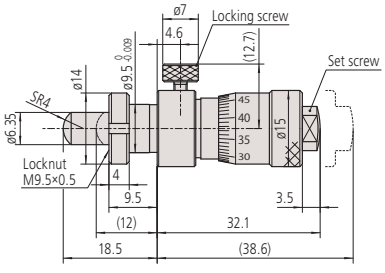


148-319-10

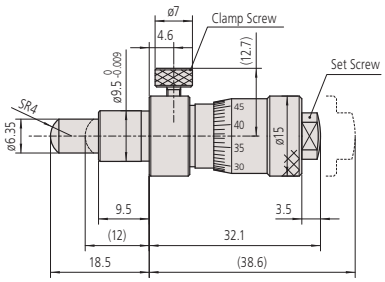


148-318-10
(): with spindle full retracted

Specifications


Measuring face	Hardened steel (>60 HRC)

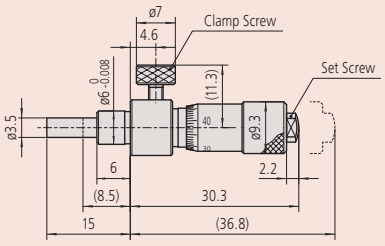


148-220-10

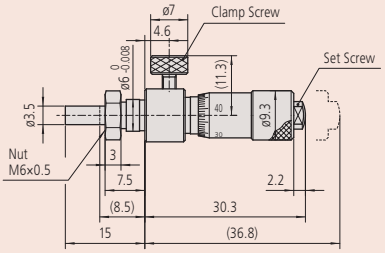


148-221-10

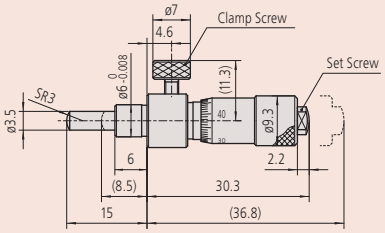


148-222-10

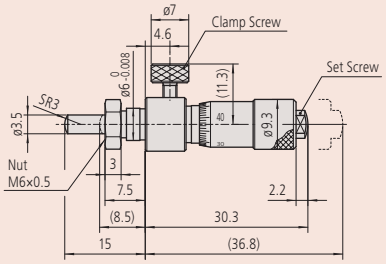

148-223-10

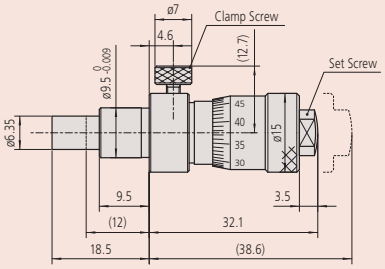

148-316-10

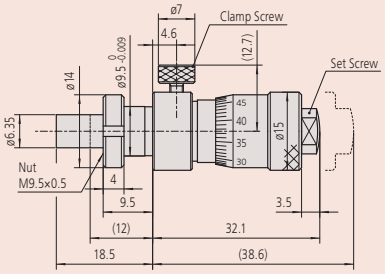

148-317-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Heads 13 mm Range with Spindle Lock

Specifications

Measuring face	Hardened steel (>60 HRC)

Series 148 - Locking screw Type


These micrometer heads feature a locking screw so you can lock the spindle in any position with the knurled locking screw.



148-150-10



148-151-10



148-152-10




148-153-10


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]
148-150-10	0 - 13	0,01 mm	±2 µm	Flat	0,5
148-151-10	0 - 13	0,01 mm	±2 µm	Flat	0,5
148-152-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5
148-153-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5


No.	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
148-150-10	9,5	Plain		40
148-151-10	9,5	w/ clamp nut	6	43
148-152-10	9,5	Plain		40
148-153-10	9,5	w/ clamp nut	6	43

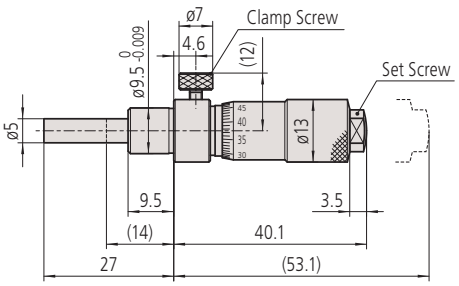


148-150-10

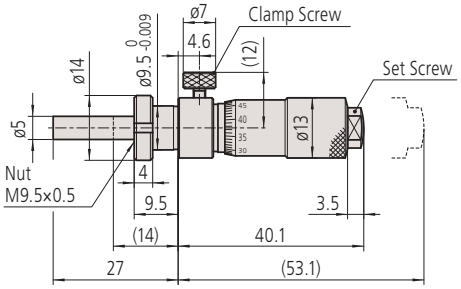

148-151-10

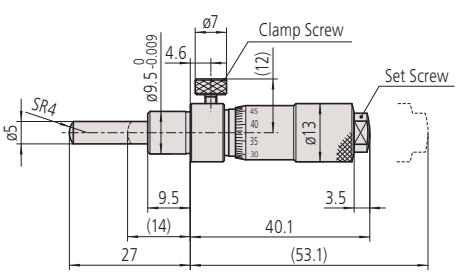

148-152-10

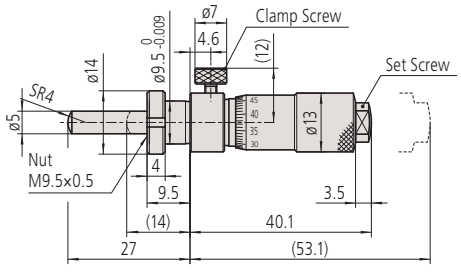

148-153-10
(): with spindle full retracted

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Heads 13 mm Range with Zero Thimble

Series 148 - Standard type, small size with zero-adjustable thimble.

These are a standard type of small size micrometer heads with a zero-adjustable thimble.
They offer the following benefits:

- You can make a zero-setting at any position by loosening the setscrew in the thimble.



148-508



148-853



148-863



148-864



148-506



148-504

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
148-503	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		35
148-508	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	40
148-853	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain		40
148-858	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6	40

Metric Reverse reading

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
148-863	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		Reverse reading	35
148-868	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	Reverse reading	40

Metric Reverse reading / with spindle lock


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
148-864	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	Reverse reading	40
148-866	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		Reverse reading	35

Metric With spindle lock


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Mass [g]
148-506	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		35
148-504	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	40
148-854	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6	40
148-856	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain		35

Specifications


Measuring face	Hardened steel (>60 HRC)




148-503




148-508




148-853




148-858




148-863



148-864



148-506



148-504

(): with spindle full retracted


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Heads 13 mm Range Small Standard Type

Specifications


Measuring face	Hardened steel (>60 HRC)

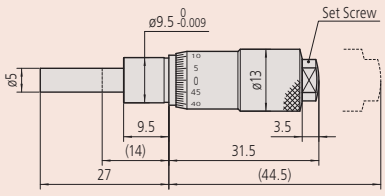


148-104-10

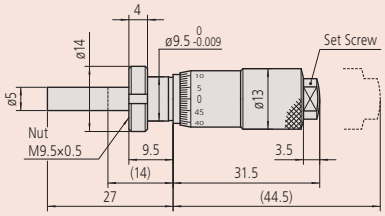


148-103-10

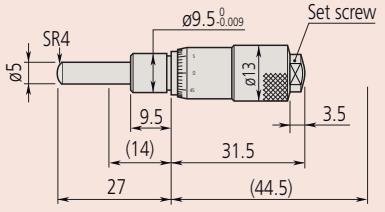


148-801-10

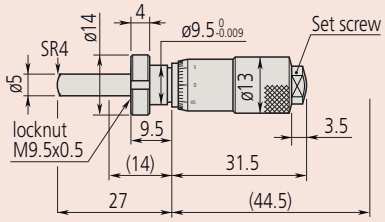


148-802-10

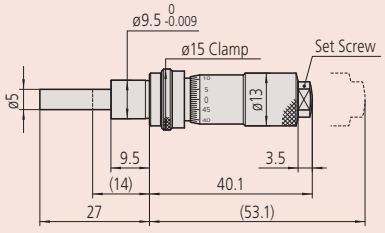

148-121-10

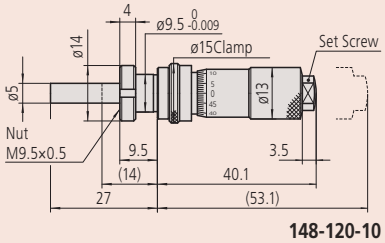

148-120-10



148-821-10 / 148-822-10
148-823-10 / 148-824-10
Reverse reading

Series 148 - Small standard type

This is a standard, small-sized micrometer head which offers you the following benefits:

- Plain stem and a flat or spherical spindle end
- Hardened steel measuring surface



148-104-10



148-103-10



148-801-10



148-802-10



148-121-10



148-120-10

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
148-104-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain			30
148-103-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6		35
148-801-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain			30
148-802-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6		35
148-821-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		Reverse reading	30
148-822-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	Reverse reading	35

Metric With spindle lock

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
148-121-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain			40
148-120-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6		45
148-803-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain			40
148-804-10	0 - 13	0,01 mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6		45
148-823-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	Plain		Reverse reading	40
148-824-10	0 - 13	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	Reverse reading	45

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Heads 15 mm Range

Series 149 - Small standard type with carbide-tipped spindle

This small micrometer head with tungsten carbide measuring surface offers you the following benefits:

- Stem with clamp nut and a flat or spherical spindle end
- Stem with carbide-tipped spindle



149-132-10



149-131-10



149-183-10



149-184-10

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
149-132-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	Plain			55
149-131-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	11,5		60
149-801-10	0 - 15	0,01mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain			55
149-802-10	0 - 15	0,01mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	11,5		60
149-821-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	Plain		Reverse reading	55
149-822-10	0 - 15	0,01 mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	11,5	Reverse reading	60

Metric With spindle lock


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
149-183-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	Plain			55
149-184-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6		60
149-803-10	0 - 15	0,01mm	±2 µm	Spherical (SR4)	0,5	9,5	Plain			55
149-804-10	0 - 15	0,01mm	±2 µm	Spherical (SR4)	0,5	9,5	w/ clamp nut	6		60
149-823-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	Plain		Reverse reading	55
149-824-10	0 - 15	0,01mm	±2 µm	Flat	0,5	9,5	w/ clamp nut	6	Reverse reading	60

Specifications


Measuring face	Carbide-tipped

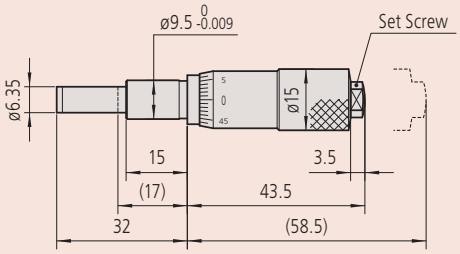


149-132-10

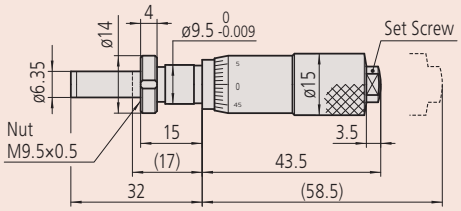


149-131-10

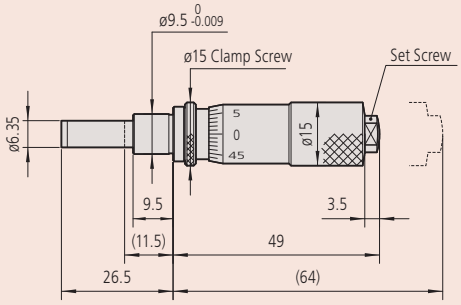


149-183-10

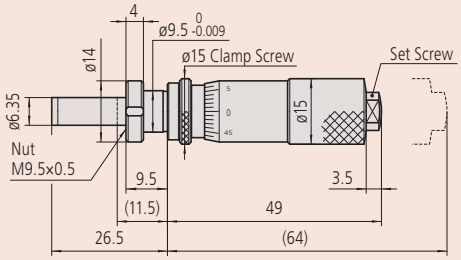


149-184-10



Reverse reading



Spherical spindle end



With spindle lock


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Heads 25 mm Range

Specifications

Measuring face	Carbide-tipped



Reverse reading



Graduation 0.001mm

Series 150 - Medium-sized standard type

This is a standard, medium-size micrometer head that offers you the following benefits:

- Plain stem and a flat or spherical spindle end
- With carbide-tipped spindle



150-191



150-192



150-801



150-802



150-195-10



150-196-10



150-209



150-210



150-803



150-824



150-211-10



150-212-10

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
150-192	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain			95
150-191	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5		100
150-801	0 - 25	0,01 mm	±2 µm	Spherical (SR4)	0,5	10	Plain			95
150-802	0 - 25	0,01 mm	±2 µm	Spherical (SR4)	0,5	10	w/ clamp nut	11,5		100
150-821	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain		Reverse reading	95
150-822	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	Reverse reading	100
150-190	0 - 25	0,001 mm	±2 µm	Flat	0,5	10	Plain		Graduation 0,001 mm	95
150-189	0 - 25	0,001 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	Graduation 0,001 mm	100
150-196-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain		w/o ratchet stop	90
150-195-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	w/o ratchet stop	90

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Micrometer Heads 25 mm Range


Metric

With spindle lock


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
150-209	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain			110
150-210	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5		115
150-803	0 - 25	0,01 mm	±2 µm	Spherical (SR4)	0,5	10	Plain			125
150-804	0 - 25	0,01 mm	±2 µm	Spherical (SR4)	0,5	10	w/ clamp nut	11,5		125
150-823	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain		Reverse reading	125
150-824	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	Reverse reading	125
150-183	0 - 25	0,001 mm	±2 µm	Flat	0,5	10	Plain		Graduation 0,001 mm	110
150-184	0 - 25	0,001 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	Graduation 0,001 mm	115
150-211-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	Plain		w/o ratchet stop	115
150-212-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	10	w/ clamp nut	11,5	w/o ratchet stop	115




150-192




150-191

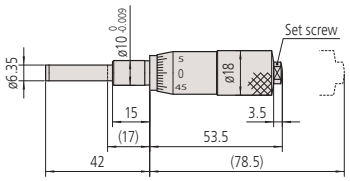


150-196-10

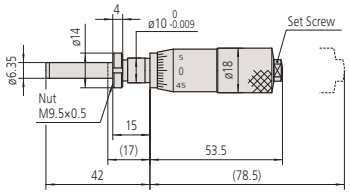


150-195-10




150-209



150-210

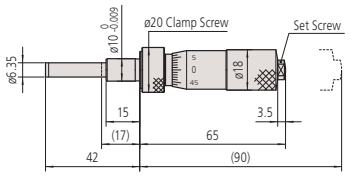

150-211-10

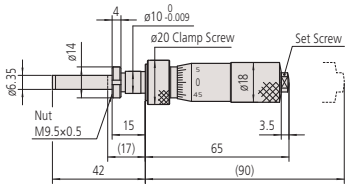

150-212-10

(): with spindle full retracte


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Heads 25 mm and 50 mm Range with 8 mm Spindle Diameter

Specifications


Measuring face	Carbide-tipped




151-224

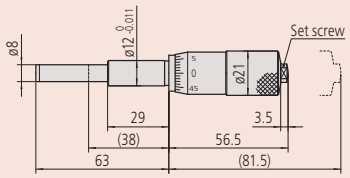


151-227-10

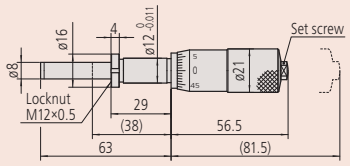


151-228-10




151-256



151-255



151-214



151-213

(): with spindle full retracted

Series 151 - Medium-sized standard type with 8 diameter spindle.

These micrometer heads are a medium-sized, standard type.
They offer the following benefits:

- 8 mm diameter spindle
- Extremely sturdy micrometer head with or without a ratchet.



151-224



151-223



151-256



151-255



151-214



151-213

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
151-224	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	Plain			150
151-223	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	w/ clamp nut	25,5		155
151-222	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	Plain		Graduation 0,001 mm	150
151-221	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	w/ clamp nut	25,5	Graduation 0,001 mm	155
151-227-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	Plain		w/o ratchet stop	150
151-228-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	w/ clamp nut	25,5	w/o ratchet stop	155
151-256	0 - 50	0,01 mm	±4 µm	Flat	0,5	12	Plain			240
151-255	0 - 50	0,01 mm	±4 µm	Flat	0,5	12	w/ clamp nut	25,5		250
151-260-10	0 - 50	0,01 mm	±4 µm	Flat	0,5	12	Plain		w/o ratchet stop	240
151-259-10	0 - 50	0,01 mm	±4 µm	Flat	0,5	12	w/ clamp nut	25,5	w/o ratchet stop	250

Metric With spindle lock

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
151-214	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	Plain			160
151-213	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	w/ clamp nut	15,5		165
151-212	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	Plain		Graduation 0,001 mm	160
151-211	0 - 25	0,001 mm	±2 µm	Flat	0,5	12	w/ clamp nut	15,5	Graduation 0,001 mm	165
151-225-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	Plain		w/o ratchet stop	165
151-226-10	0 - 25	0,01 mm	±2 µm	Flat	0,5	12	w/ clamp nut	15,5	w/o ratchet stop	165

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Heads with Large Thimble

Series 152 - Large thimble type for fine adjustment

These micrometer heads come with a large thimble, allowing you to make fine adjustments. They offer the following benefits:

- The large scale drum allows fine graduation and very easy rotation.



152-283



152-332



152-380

Specifications

Measuring face	Carbide-tipped


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Thimble Ø	Mass [g]
152-283	0 - 10	0,002 mm	±2 µm	Flat	0,5	12	w/ clamp nut	22,5	49 mm	190
152-332	0 - 25	0,002 mm	±2 µm	Flat	0,5	12	Plain		49 mm	310


Metric

Black and red scaling in both directions


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Special features	Thimble Ø	Mass [g]
152-380	0 - 50	0,002 mm	±4 µm	Flat	0,5	12	Plain	Bidirectional graduation	49 mm	460

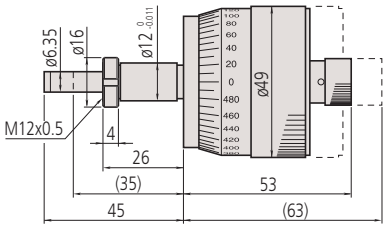

152-283

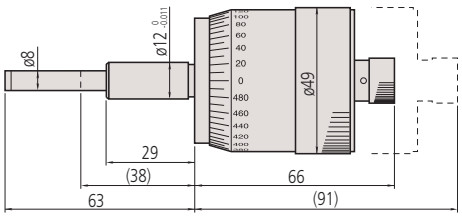

152-332

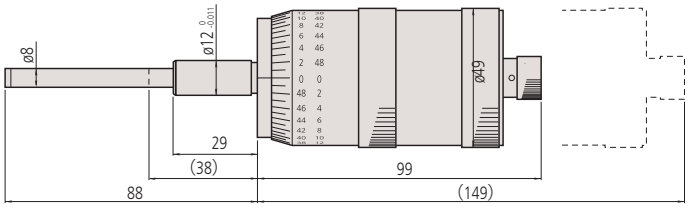

152-380

(): with spindle full retracted


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Micrometer Heads for XY-Stage

Specifications

Measuring face	Hardened steel (>60 HRC) 152-390, 152-389

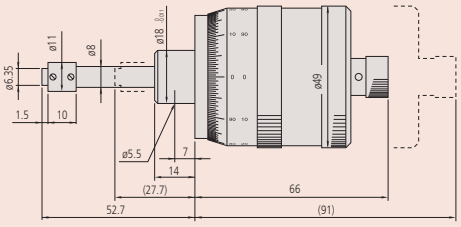

152-390



152-389

Series 152 - XY Stage type

These XY Stage type micrometer heads let you read measurement values easily.
They offer the following benefits:

- Micrometer heads especially designed for accurate cross-travel stage translation in X and Y axes.
- Spindle end: Flat form and hardened, or spherical with carbide tip (more than HRA90), lapped surface.



152-389



152-390


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Special features	Mass [g]
152-389	0 - 25	0,005 mm	±2 µm	Flat with non-rotating device	1	18	Plain	For Y-axis Bidirectional grad.	270
152-390	0 - 25	0,005 mm	±2 µm	Flat with non-rotating device	1	18	Plain	For X-axis Bidirectional grad.	270


Quick Spindle Feed Micrometer Heads

Specifications

Measuring face	Carbide-tipped

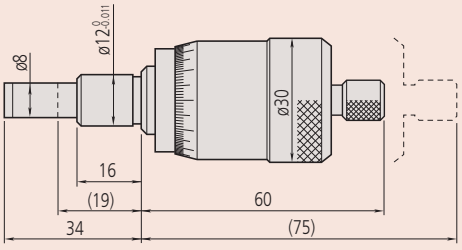

152-101

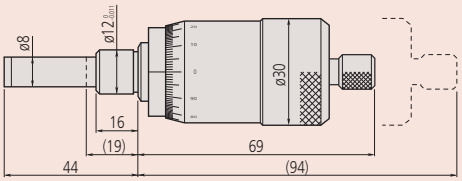

152-102

(): with spindle full retracted

Series 152 - Quick spindle feed of 1/rev

This is a quick spindle micrometer head.
It offers you the following benefits:

- Micrometer head with 1 mm / rotation



152-101



152-102

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Mass [g]
152-101	0 - 15	0,01 mm	±2 µm	Flat	1	12	Plain	205
152-102	0 - 25	0,01 mm	±2 µm	Flat	1	12	Plain	230

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Heads with Non-Rotating Spindle

Series 110 - Differential screw translator (Extra-fine feed) type

This is a differential screw translator (extra-fine feed) type of micrometer head.
It offers you the following benefits:

- Micrometer head with ultra-fine rate of travel.
- With its non-rotating spindle it is particularly suited to fine adjustments.
- The differential travel mechanism with double spindle enables ultra-sensitive travel



110-101



110-102



110-105-10



110-106-10



110-107-10




110-108-10



110-502-10

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Stem Ø [mm]	Stem	Fixture thickness for clamp nut [mm]	Special features	Mass [g]
110-101	0 - 2,5	0,001 mm	±5 µm / ±1,5 µm	Flat	12	w/ clamp nut	9,5		150
110-102	0 - 2,5	0,0001 mm	±5 µm / ±1,5 µm	Flat	12	w/ clamp nut	9,5	Fine Graduation	150
110-105-10	0 - 1	0,001 mm	±3 µm / ±1,5 µm	Flat	12	w/ clamp nut	9,5		150
110-106-10	0 - 1	0,0001 mm	±3 µm / ±1,5 µm	Flat	12	w/ clamp nut	9,5	Fine Graduation	150
110-107-10	0 - 1	0,001 mm	±3 µm / ±1,5 µm	Spherical (SR10)	12	w/ clamp nut	9,5		150
110-108-10	0 - 1	0,0001 mm	±3 µm / ±1,5 µm	Spherical (SR10)	12	w/ clamp nut	9,5	Fine Graduation	150
110-502-10	0 - 13	A: 0,01 mm / B: 0,0005 mm	±3 µm / ±1,5 µm	Spherical (SR3)	9,5	w/ clamp nut	11,5	Range A: 0-13 mm, Range B: 0-0,2 mm	100




110-107-10
110-108-10

Specifications


Measuring face	Carbide-tipped




Version with non-rotating spindle

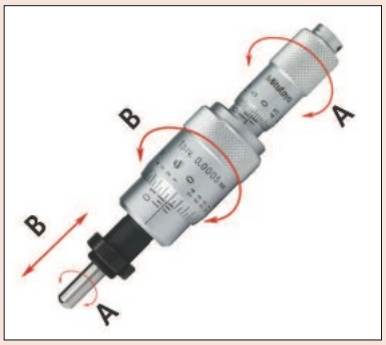


Version with rotating spindle
110-502-10

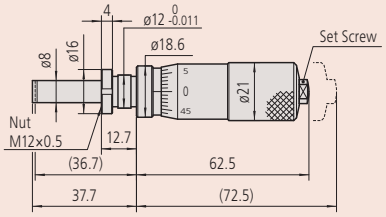

110-105-10
110-106-10

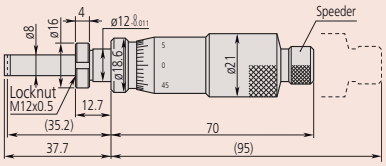

110-101
110-102

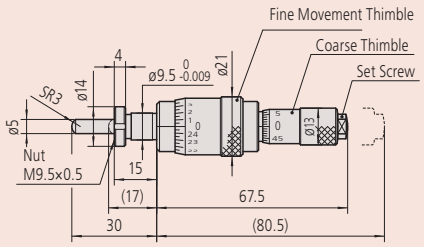

110-502-10
(): with spindle full retracted

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micrometer Heads with Non-Rotating Spindle

Specifications

Measuring face	Carbide-tipped



Version with non-rotating spindle

Series 153 - Standard type

- Micrometer Head featuring a non-rotating spindle for delicate workpieces
- Design suits applications where the twisting effect of the standard spindle is undesirable because of the risk of damage



153-101



153-203



153-201




153-202

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Special features	Mass [g]
153-101	0 - 15	0,01 mm	±3 µm	Flat	0,5	9,5	Plain		70
153-203	0 - 25	0,01 mm	±3 µm	Flat	0,5	12	Plain		125
153-204	0 - 25	0,001 mm	±3 µm	Flat	0,5	12	Plain	Graduation with vernier	125

Metric With ratchet stop


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Special features	Mass [g]
153-201	0 - 25	0,01 mm	±3 µm	Flat	0,5	12	Plain		125
153-202	0 - 25	0,001 mm	±3 µm	Flat	0,5	12	Plain	Graduation with vernier	125




153-204 / 153-202
Graduation 0,001 mm

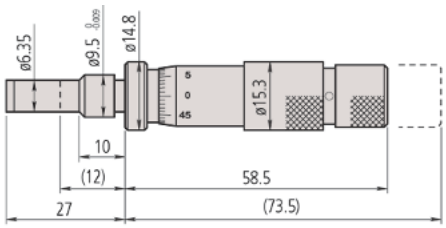

153-101

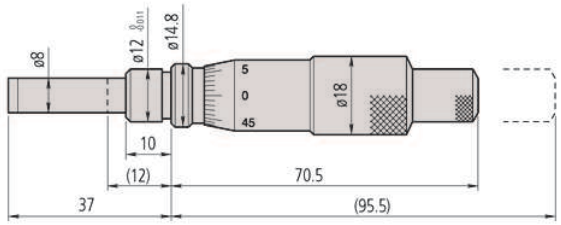

153-203 + 153-204

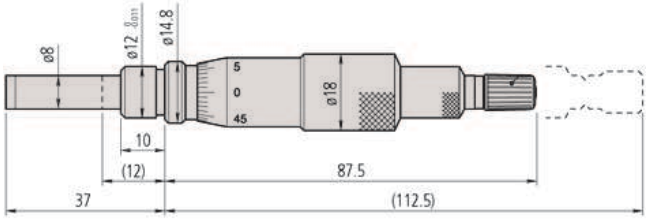

153-201 + 153-202

(): with spindle full retracted

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Micrometer Heads with Non-Rotating Spindle

Series 197 - Non-rotating spindle and large thimble

- Micrometer Head with non-rotating spindle and 1 mm spindle pitch.
- Measurement values can be read directly from the 100-step graduation thimble without the complication of having to consider 1/2 mm values, which simplifies reading and therefore reduces the chance of error.
- The scale is set to zero by rotating the barrel.




197-101

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Special features	Mass [g]
197-101	0 - 50	0,005 mm	±5 µm	Flat	1	18	Plain	Bidirectional graduation	300

Specifications

Measuring face	Carbide-tipped

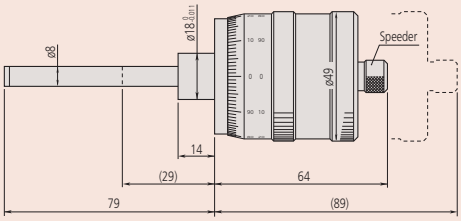

197-101

Series 153 - Fine graduation and high accuracy

- Extra-large-diameter micrometer head with non-rotating spindle.




153-301

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Spindle end	Spindle pitch [mm]	Stem Ø [mm]	Stem	Special features	Mass [g]
153-301	0 - 25	0,0005 mm	±1 µm / ±0,5 µm	Flat	0,5	18	Plain	Bidirectional graduation	750

Specifications

Measuring face	Carbide-tipped

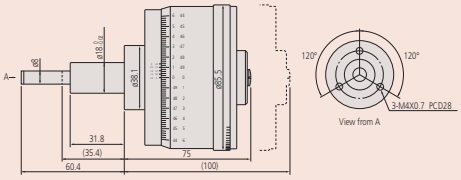

153-301

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Inside Measuring Instruments



Inside Micrometers
Page 128



Bore Gauges
Page 146



Inside Measuring Instruments Accessories
Page 158

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digimatic Holtests Individual Metric

Series 468

These are three-point internal micrometers that offer you the following benefits:

- Individual micrometer.
- Titanium-coated measuring pins give you excellent durability and impact resistance.
- They also have excellent resistance against water and dust (IP65 protection level), allowing you to use this product in machining situations that include splashing coolant fluid.
- Large LCD display with character height of 7,5 mm enables you to read measurements easily.
- Without setting rings or extensions.

Dust- and Waterproof IP65

TÜVRheinland CERTIFIED

www.tuv.com ID 0000021605

PROPRIETARY INSPECTION CERTIFICATE

IP65





Titanium coated measuring surfaces for durability

Functions	Series 468
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●
Data output	●

Specifications

Power supply	1 battery SR-44
Battery life	Approx. 1,2 years
Measuring pins	Titanium coated tungsten carbide (6-12 mm) titanium coated hardened steel (12-300 mm) taper: tungsten carbide
Display	LCD, character height 7,5 mm
Delivered	Including box, key, 1 battery, certificate of inspection

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range
156-101-10	Micrometer Stand, Adjustable Angle Type, for Micrometer 0-100mm/0-4"
04AZB157	Holder for Micrometer Stand, for Series 468

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Mass [g]
468-161	6–8	0,001 mm	±2 µm	370
468-162	8–10	0,001 mm	±2 µm	370
468-163	10–12	0,001 mm	±2 µm	370
468-164	12–16	0,001 mm	±3 µm	400
468-165	16–20	0,001 mm	±3 µm	400
468-166	20–25	0,001 mm	±3 µm	470
468-167	25–30	0,001 mm	±3 µm	480
468-168	30–40	0,001 mm	±3 µm	480
468-169	40–50	0,001 mm	±3 µm	500
468-170	50–63	0,001 mm	±3 µm	620
468-171	62–75	0,001 mm	±4 µm	630
468-172	75–88	0,001 mm	±4 µm	960
468-173	87–100	0,001 mm	±4 µm	970
468-174	100–125	0,001 mm	±5 µm	940
468-175	125–150	0,001 mm	±5 µm	1030
468-176	150–175	0,001 mm	±5 µm	1120
468-177	175–200	0,001 mm	±5 µm	1210
468-178	200–225	0,001 mm	±6 µm	1300
468-179	225–250	0,001 mm	±6 µm	1390
468-180	250–275	0,001 mm	±6 µm	1480
468-181	275–300	0,001 mm	±6 µm	1570

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Holtests Individual Metric




Holtest with optional accessories
Stand 156-101-10
Printer DP1-VA 264-505D
Holder 04AZB157
Cable 05CZA662




04AZB157




Extension rod for deep holes

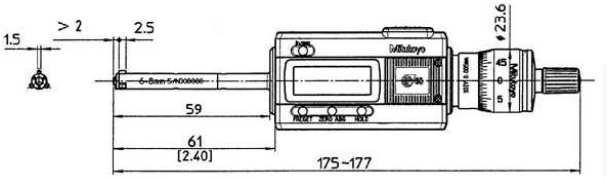


468-161, 468-162, 468-163

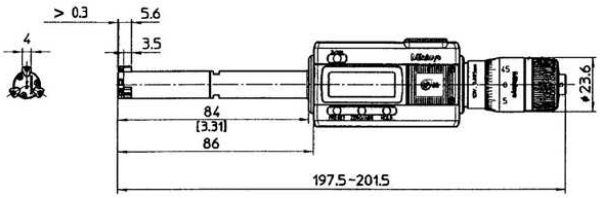


468-164, 468-165

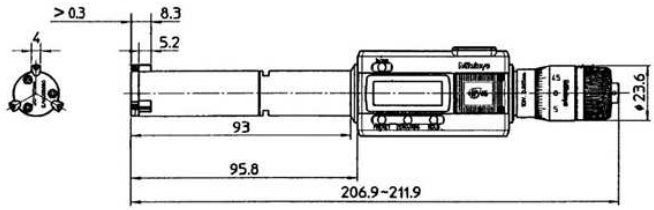


468-166, 468-167

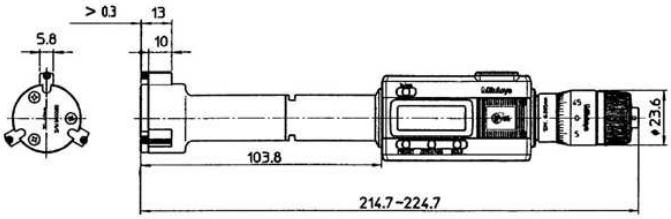

468-168, 468-169

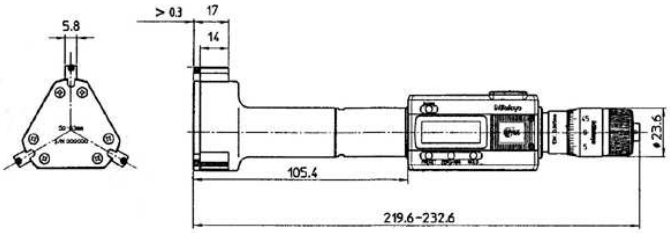

468-170, 468-171, 468-172, 468-173

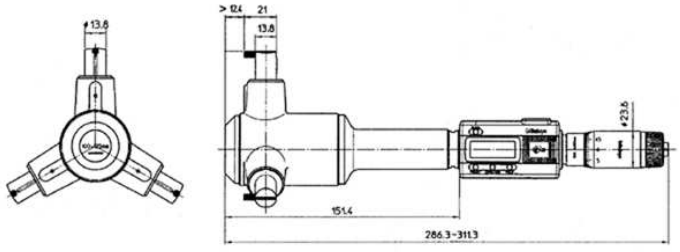

468-174, 468-175, 468-176, 468-177, 468-178, 468-179, 468-180, 468-181

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Holtest Interchangeable Head Sets

Series 468

These are three-point internal micrometers that offer you the following benefits:

- Interchangeable head set.
- Titanium-coated measuring pins give you excellent durability and impact resistance.
- They also have excellent resistance against water and dust (IP65 protection level), allowing you to use this product in machining situations that include splashing coolant fluid.
- Large LCD display with character height of 7,5 mm enables you to read measurements easily.
- With setting rings and extensions.

Dust- and Waterproof IP65


TÜVRheinland CERTIFIED www.tuv.com ID 0000021605

PROPRIETARY INSPECTION CERTIFICATE

IP65



468-973

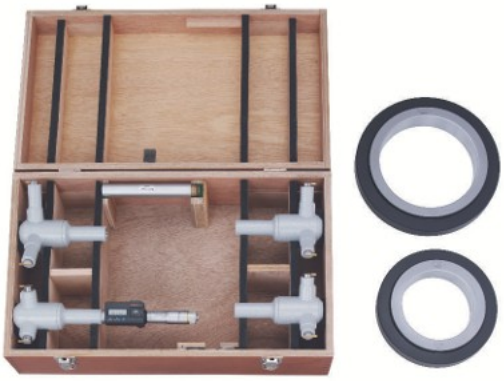

468-975

Metric

No.	Range [mm]	Digital step	Individual ranges [mm]	Setting rings included	Mass [g]
468-971	6–12	0,001 mm	6–8, 8–10, 10–12	ø8 mm (177-125) ø10 mm (177-126)	420
468-972	12–20	0,001 mm	12–16, 16–20	ø16 mm (177-177)	560
468-973	20–50	0,001 mm	20–25, 25–30, 30–40, 40–50	ø25 mm (177-139) ø40 mm (177-290)	1170
468-974	50–100	0,001 mm	50–63, 62–75, 75–88, 87–100	ø62 mm (177-314) ø87 mm (177-318)	2420
468-975	100–200	0,001 mm	100–125, 125–150, 150–175, 175–200	ø125 mm (177-298) ø175 mm (177-302)	3540



Extension



04AZB157

Functions	Series 468
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●
Data output	●

Specifications

Power supply	1 battery SR-44
Battery life	Approx. 1,2 years
Measuring pins	Titanium coated tungsten carbide (6-12 mm) titanium coated hardened steel (12-200 mm) taper: tungsten carbide
Display	LCD, character height 7,5 mm
Delivered	Including box, key, 1 battery, setting ring, extension, certificate of inspection (instruments only - certificate of inspection for setting rings not included).

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range
156-101-10	Micrometer Stand, Adjustable Angle Type, for Micrometer 0-100mm/0-4"
04AZB157	Holder for Micrometer Stand, for Series 468

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Holtest Complete Unit Sets

Functions	Series 468
ABS / INC (INC ZERO)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
HOLD	●
2 x PRESET	●
Data output	●

Specifications

Power supply	1 battery SR-44
Battery life	Approx. 1,2 years
Measuring pins	Titanium coated tungsten carbide (6-12 mm) titanium coated hardened steel (12-100 mm) taper: tungsten carbide
Display	LCD, character height 7,5 mm
Delivered	Including box, key, 1 battery, setting ring, certificate of inspection (instruments only - certificate of inspection for setting rings not included).

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790B	Connection Cable B for U-WAVE, with Data Button for IP Micrometer Type
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range
156-101-10	Micrometer Stand, Adjustable Angle Type, for Micrometer 0-100mm/0-4"
04AZB157	Holder for Micrometer Stand, for Series 468

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 468

Dust- and Waterproof IP65

TÜVRheinland CERTIFIED www.tuv.com ID 0000021605

PROPRIETARY INSPECTION CERTIFICATE

IP65

These are three-point internal micrometers that offer you the following benefits:

- Complete unit set.
- Titanium-coated measuring pins give you excellent durability and impact resistance.
- They also have excellent resistance against water and dust (IP65 protection level), allowing you to use this product in machining situations that include splashing coolant fluid.
- Large LCD display with character height of 7,5 mm enables you to read measurements easily.
- With setting rings but without extensions.



468-981



468-983

Metric

Measuring surfaces titanium coated. Carbide taper and contact points.

No.	Range [mm]	Digital step	Individual ranges	Models included	Setting rings included	Mass [g]
468-981	6–12	0,001 mm	6-8, 8-10, 10-12 mm	468-161 / 468-162 / 468-163	ø8 mm (177-125) ø10 mm (177-126)	1160
468-982	12–25	0,001 mm	12-16, 16-20, 20-25 mm	468-164 / 468-165 / 468-166	ø16 mm (177-177) ø20 mm (177-286)	1290
468-983	25–50	0,001 mm	25-30, 30-40, 40-50 mm	468-167 / 468-168 / 468-169	ø30 mm (177-288) ø40 mm (177-290)	1480
468-984	50–75	0,001 mm	50-63, 62-75 mm	468-170 / 468-171	ø62 mm (177-314)	1270
468-985	75–100	0,001 mm	75-88, 87-100 mm	468-172 / 468-173	ø87 mm (177-318)	1990



Extension



04AZB157

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Analog Holtest Individual Metric

Series 368

These are three-point and two-point internal micrometers that offer you the following benefits:

- Titanium-coated measuring pins give you excellent durability and impact resistance (3-point type).
- Three-point micrometer allows stable measurement through automatic centring.
- It is delivered without setting rings or extensions.



368-001 368-168 368-170 368-174

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	a [mm]	b [mm]	c [mm]	L1 [mm]	L2 [mm]	Mass [g]
368-001	2–2,5	0,001 mm	±2 µm			2	12	103.5-104	88
368-002	2,5–3	0,001 mm	±2 µm			2	12	103.5-104	88
368-003	3–4	0,001 mm	±2 µm			2	22	113-114	91
368-004	4–5	0,001 mm	±2 µm			2	22	113-114	91
368-005	5–6	0,001 mm	±2 µm			2	22	113-114	91
368-161	6–8	0,001 mm	±2 µm	2		2,5	59	102-104	60
368-162	8–10	0,001 mm	±2 µm	2		2,5	59	102-104	60
368-163	10–12	0,001 mm	±2 µm	2		2,5	59	102-104	60
368-164	12–16	0,005 mm	±3 µm	0,3	5,6	3,5	82	126-130	150
368-165	16–20	0,005 mm	±3 µm	0,3	5,6	3,5	82	126-130	160
368-166	20–25	0,005 mm	±3 µm	0,3	8,3	5,2	94	126-130	260
368-167	25–30	0,005 mm	±3 µm	0,3	8,3	5,2	94	137-142	280
368-168	30–40	0,005 mm	±3 µm	0,3	13	10	102	145-155	290
368-169	40–50	0,005 mm	±3 µm	0,3	13	10	102	145-155	330
368-170	50–63	0,005 mm	±3 µm	0,3	17	14	105	150-163	440
368-171	62–75	0,005 mm	±4 µm	0,3	17	14	105	150-163	450
368-172	75–88	0,005 mm	±4 µm	0,3	17	14	105	150-165	570
368-173	87–100	0,005 mm	±4 µm	0,3	17	14	105	150-165	580
368-174	100–125	0,005 mm	±5 µm	12,4	21	13,8	161	227-252	1030
368-175	125–150	0,005 mm	±5 µm	12,4	21	13,8	161	227-252	1120
368-176	150–175	0,005 mm	±5 µm	12,4	21	13,8	161	227-252	1210
368-177	175–200	0,005 mm	±5 µm	12,4	21	13,8	161	227-252	1320
368-178	200–225	0,005 mm	±6 µm	12,4	21	13,8	161	227-252	1430
368-179	225–250	0,005 mm	±6 µm	12,4	21	13,8	161	227-252	1550
368-180	250–275	0,005 mm	±6 µm	12,4	21	13,8	161	227-252	1700
368-181	275–300	0,005 mm	±6 µm	12,4	21	13,8	161	227-252	1870


Specifications


Scale	Thimble and sleeve satin chrome finish, Up to 12 mm : ø17 mm Over 12 mm : ø23 mm
Measuring Surface/Pins	2 - 6 mm: carbide 6 - 12 mm: titanium coated tungsten carbide 12 - 300 mm: titanium coated hardened steel taper: tungsten carbide
Measuring spindle	Spindle pitch 0,5 mm
Measuring method	2-6 mm : 2-point 6-300 mm : 3-point
Delivered	Including box, key, certificate of inspection

Optional accessories

No.	Description
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range



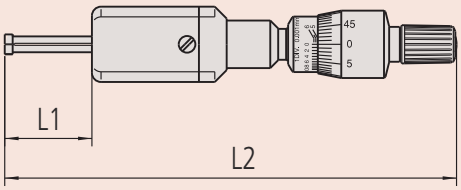

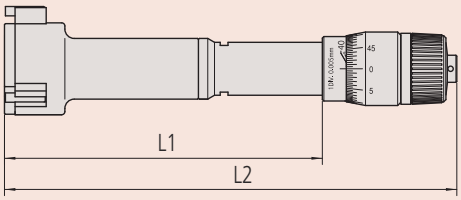

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Analog Holtests Set

Series 368

This is a set of three-point and two-point internal micrometers that offers you the following benefits:

- Complete unit set.
- Carbide measuring surface (2-6 mm range).
- Titanium-coated measuring pins (>6 mm range) give you excellent durability and impact resistance.
- Delivered with setting rings and extension rod (>6 mm range).

Specifications

Scale	Thimble and sleeve satin chrome finish, Up to 12 mm : ø17 mm Over 12 mm : ø23 mm
Measuring Surface/Pins	2 - 6 mm: carbide 6 - 12 mm: titanium coated tungsten carbide 12 - 300 mm: titanium coated hardened steel taper: tungsten carbide
Measuring method	2-6 mm 2-point 6-200 mm 3-point
Delivered	Including box, key, setting ring, extension, certificate of inspection (instruments only - certificate of inspection for setting rings not included).



368-906




368-907



368-911




368-912



368-913



368-914

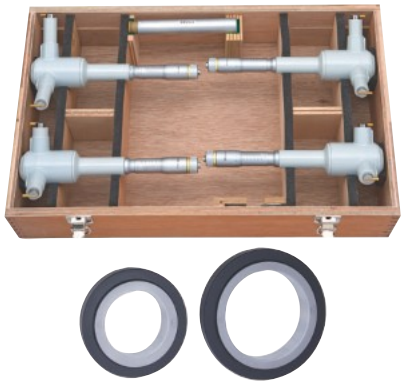

368-915

Metric

No.	Range [mm]	Graduation	Individual ranges	Models included	Setting rings included	Extension rod	Mass [g]
368-906	2–3	0,001 mm	2-2,5, 2,5-3 mm	368-001 / 368-002	ø2,5 mm (177-208)		310
368-907	3–6	0,001 mm	3-4, 4-5, 5-6 mm	368-003 / 368-004 / 368-005	ø4 mm (177-204) ø5 mm (177-205)		505
368-911	6–12	0,001 mm	6-8, 8-10, 10-12 mm	368-161 / 368-162 / 368-163	ø8 mm (177-125) ø10 mm (177-126)	952322	180
368-912	12–20	0,005 mm	12-16, 16-20 mm	368-164 / 368-165	ø16 mm (177-177)	952621	280
368-913	20–50	0,005 mm	20-25, 25-30, 30-40, 40-50 mm	368-166 / 368-167 / 368-168 / 368-169	ø25 mm (177-139) ø40 mm (177-290)	952622	960
368-914	50–100	0,005 mm	50-63, 62-75, 75-88, 87-100 mm	368-170 / 368-171 / 368-172 / 368-173	ø62 mm (177-314) ø87 mm (177-318)	952623	2030
368-915	100–200	0,005 mm	100-125, 125-150, 150-175, 175-200 mm	368-174 / 368-175 / 368-176 / 368-177	ø125 mm (177-298) ø175 mm (177-302)	952623	4680

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Economy Holtests Individual Metric

Series 368

This is an economy version of a three-point internal micrometer, that offers you the following benefits:


- Hardened tool steel anvils and tapers allow a more economically priced and affordable tool.
- Individual types without setting rings or extensions.




368-765 368-769 368-770 368-774

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	a [mm]	b [mm]	L1 [mm]	L2 [mm]	Mass [g]
368-764	12–16	0,005 mm	±3 µm	2,6	3,5	126 - 130	82	150
368-765	16–20	0,005 mm	±3 µm	2,6	3,5	126 - 130	82	150
368-766	20–25	0,005 mm	±3 µm	3,4	5,2	137 - 142	94	260
368-767	25–30	0,005 mm	±3 µm	3,4	5,2	137 - 142	94	280
368-768	30–40	0,005 mm	±3 µm	3,4	10	145 - 155	102	290
368-769	40–50	0,005 mm	±3 µm	3,4	10	145 - 155	102	330
368-770	50–63	0,005 mm	±3 µm	3,4	14	150 - 163	105	440
368-771	62–75	0,005 mm	±4 µm	3,4	14	150 - 163	105	450
368-772	75–88	0,005 mm	±4 µm	3,4	14	150 - 163	105	560
368-773	87–100	0,005 mm	±4 µm	3,4	14	150 - 163	105	570
368-774	100–125	0,005 mm	±5 µm	19,6	13,8	227 - 252	161	1020
368-775	125–150	0,005 mm	±5 µm	19,6	13,8	227 - 252	161	1110
368-776	150–175	0,005 mm	±5 µm	19,6	13,8	227 - 252	161	1200
368-777	175–200	0,005 mm	±5 µm	19,6	13,8	227 - 252	161	1300
368-778	200–225	0,005 mm	±6 µm	19,6	13,8	227 - 252	161	1420
368-779	225–250	0,005 mm	±6 µm	19,6	13,8	227 - 252	161	1540
368-780	250–275	0,005 mm	±6 µm	19,6	13,8	227 - 252	161	1690
368-781	275–300	0,005 mm	±6 µm	19,6	13,8	227 - 252	161	1860

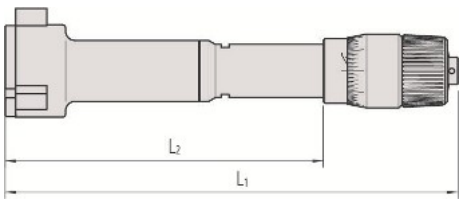



Specifications

Scale	Thimble and sleeve satin chrome finish, Up to 12 mm : Ø17 mm Over 12 mm : Ø23 mm
Measuring spindle	Spindle pitch 0,5 mm
Measuring face	Hardened steel taper: hardened steel
Measuring method	3-point
Delivered	Including box, key, certificate of inspection

Optional accessories

No.	Description
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Economy Holtest Sets

Series 368

This is an economy version of a three-point internal micrometer, that offers you the following benefits:

- Hardened tool steel anvils and tapers allow a more economically priced and affordable tool.
- Sets with setting rings and extensions.

Specifications

Scale	Thimble and sleeve satin chrome finish, Up to 12 mm : Ø17 mm Over 12 mm : Ø23 mm
Measuring method	3-point
Delivered	Including box, key, setting ring, extension, certificate of inspection (instruments only - certificate of inspection for setting rings not included).

Optional accessories

No.	Description
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range



Extension




368-991



368-992



368-993

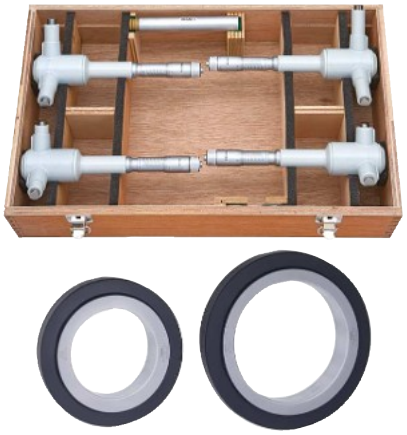

368-994

Metric

No.	Range [mm]	Graduation	Individual ranges	Models included	Setting rings included	Extension rod	Mass [g]
368-991	12–20	0,005 mm	12-16, 16-20 mm	368-764 / 368-765	ø16 mm (177-177)	952621	310
368-992	20–50	0,005 mm	20-25, 25-30, 30-40, 40-50 mm	368-766 / 368-767 368-768 / 368-769	ø25 mm (177-139) ø40 mm (177-290)	952622	1160
368-993	50–100	0,005 mm	50-63, 62-75, 75-88, 87-100 mm	368-770 / 368-771 / 368-772 / 368-773	ø62 mm (177-314) ø87 mm (177-318)	952623	2020
368-994	100–200	0,005 mm	100-125, 125-150, 150-175, 175-200 mm	368-774 / 368-775 / 368-776 / 368-777	ø125 mm (177-298) ø175 mm (177-302)	952623	4630

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Boremetic Individual Metric

Series 568

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE

This is a individual unit Three-Point Digimatic Snap Open Bore Gauge.
It offers you the following benefits:

- It enables you to take measurements easily and quickly.
- Titanium-coated measuring pins gives you excellent durability and impact resistance.
- 330° rotatable display unit also gives you easy reading at any angle.
- GO/NG tolerance judgement function.



568-361-10



568-364-10




568-366-10




568-369-10

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	a [mm]	b [mm]	c [mm]	L1 [mm]	L2 [mm]	Mass [g]
568-361-10	6–8	0,001 mm	±5 µm	2		2,5	284	83	480
568-362-10	8–10	0,001 mm	±5 µm	2		2,5	284	83	485
568-363-10	10–12	0,001 mm	±5 µm	2		2,5	284	83	485
568-364-10	12–16	0,001 mm	±5 µm	0,3	5,6	3,5	255	53	475
568-365-10	16–20	0,001 mm	±5 µm	0,3	5,6	3,5	255	53	480
568-366-10	20–25	0,001 mm	±6 µm	0,3	8,3	5,2	261	59	540
568-367-10	25–30	0,001 mm	±6 µm	0,3	8,3	5,2	261	59	555
568-368-10	30–40	0,001 mm	±6 µm	0,3	13	10	269	67	565
568-369-10	40–50	0,001 mm	±6 µm	0,3	13	10	269	67	610
568-370-10	50–63	0,001 mm	±6 µm	0,3	17	14	277	75	730
568-371-10	62–75	0,001 mm	±6 µm	0,3	17	14	277	75	740
568-372-10	75–88	0,001 mm	±6 µm	0,3	17	14	277	75	790
568-373-10	87–100	0,001 mm	±6 µm	0,3	17	14	277	75	800
568-374-10	100–113	0,001 mm	±6 µm	0,3	17	14	277	75	900
568-375-10	112–125	0,001 mm	±6 µm	0,3	17	14	277	75	910

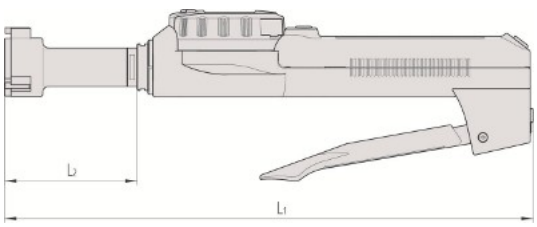



Functions	Series 568
ABS / INC (INC ZERO)	●
ON/OFF	●
Function lock	●
DATA (output with cable) / HOLD (display value)	●
2 x PRESET	●
GO/±NG judgement	●
Data output	●

Specifications

Power supply	1 battery SR-44
Battery life	Approx. 5000 hours
Measuring pins	Titanium coated tungsten carbide (6 - 12 mm) Titanium coated hardened steel (12 - 125 mm)
Display	LCD, character height: 11 mm
Delivered	Including box, key, 1 battery, certificate of inspection

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Titanium coated measuring surfaces for durability

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Borematic Interchangeable Head Sets

Functions	Series 568
ABS / INC (INC ZERO)	●
ON/OFF	●
Function lock	●
DATA (output with cable) / HOLD (display value)	●
2 x PRESET	●
GO/±NG judgement	●
Data output	●

Series 568

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE

This is a Three-Point Digimatic Snap Open Bore Gauge Set with one display unit and interchangeable heads.
It offers you the following benefits:

- It enables you to take measurements easily and quickly.
- Titanium-coated measuring pins gives you excellent durability and impact resistance.
- 330° rotatable display unit also gives you easy reading at any angle.
- GO/NG tolerance judgement function.

Specifications

Power supply	1 battery SR-44
Battery life	Approx. 5000 hours
Measuring pins	Titanium coated tungsten carbide (6 - 12 mm) Titanium coated hardened steel (12 - 125 mm)
Display	LCD, character height: 11 mm
Delivered	Including box, key, 1 battery, setting ring, certificate of inspection (instruments only - certificate of inspection for setting rings not included).



568-924-10



568-925-10



568-926-10



568-927-10

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Titanium coated measuring surfaces for durability

Metric

No.	Range [mm]	Digital step	Individual ranges	Setting rings included	Mass [g]
568-924-10	6–12	0,001 mm	6-8 mm 8-10 mm 10-12 mm	Ø8 mm (177-125) Ø10 mm (177-126)	530
568-925-10	12–25	0,001 mm	12-16 mm 16-20 mm 20-25 mm	Ø16 mm (177-177) Ø20 mm (177-286)	690
568-926-10	25–50	0,001 mm	25-30 mm 30-40 mm 40-50 mm	Ø30 mm (177-288) Ø40 mm (177-290)	930
568-927-10	50–100	0,001 mm	50-63 mm 62-75 mm 75-88 mm 87-100 mm	Ø62 mm (177-314) Ø87 mm (177-318)	1850

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Boremetic Complete Unit Sets

ABSOLUTE Boremetic Complete Unit Sets

This is a Three-Point Digimatic Snap Open Bore Gauge Set with a display unit for each measuring head.
It offers you the following benefits:

- It enables you to take measurements easily and quickly.
- Titanium-coated measuring pins gives you excellent durability and impact resistance.
- 330° rotatable display unit also gives you easy reading at any angle.
- GO/NG tolerance judgement function.



568-955-10



568-958-10

Metric

No.	Range [mm]	Digital step	Individual ranges	Setting rings included	Mass [g]
568-955-10	6–12	0,001 mm	6-8 mm 8-10 mm 10-12 mm	Ø8 mm (177-125) Ø10 mm (177-126)	1450
568-956-10	12–25	0,001 mm	12-16 mm 16-20 mm 20-25 mm	Ø16 mm (177-177) Ø20 mm (177-286)	1520
568-957-10	25–50	0,001 mm	25-30 mm 30-40 mm 40-50 mm	Ø30 mm (177-288) Ø40 mm (177-290)	1750
568-958-10	50–75	0,001 mm	50-63 mm 62-75 mm	Ø62 mm (177-314)	1490
568-959-10	75–100	0,001 mm	75-88 mm 87-100 mm	Ø87 mm (177-318)	1610

Functions	ABSOLUTE Boremetic Complete Unit Sets
ABS / INC (INC ZERO)	●
ON/OFF	●
Function lock	●
DATA (output with cable) / HOLD (display value)	●
2 x PRESET	●
GO/±NG judgement	●
Data output	●

Specifications

Power supply	1 battery SR-44
Battery life	approx. 5000 hours
Measuring pins	Titanium coated tungsten carbide (6 - 12 mm) Titanium coated hardened steel (12 - 125 mm)
Display	LCD, character height: 11 mm
Delivered	Including box, key, battery, setting ring, certificate of inspection (instruments only - certificate of inspection for setting rings not included).

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
952322	Holtest, Boremetic Extension 100mm, for 6-12mm Measuring Range
952621	Holtest, Boremetic Extension 150mm, for 12-20mm Measuring Range
952622	Holtest, Boremetic Extension 150mm, for 20-50mm Measuring Range
952623	Holtest, Boremetic Extension 150mm, for 50-300mm Measuring Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Titanium coated measuring surfaces for durability

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Caliper Jaw Inside Micrometers

Series 345

The Digimatic Caliper Jaw Inside Micrometer offers you the following benefits:
- Carbide measuring faces
- A setting standard (optional) is needed to accurately set the micrometer to the reference point.

Functions	Series 345
DATA/HOLD	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Function lock	●
2 x PRESET	●
Data output	●

Specifications

Measuring force	1-6 N
Power supply	1 battery SR-44
Scale	Thimble and sleeve satin chrome finish, ø18 mm
Battery life	2,4 years
Measuring spindle	With spindle lock, spindle pitch 0,5 mm
Measuring face	Carbide tipped
Delivered	Including box, key, 1 battery.

Optional accessories

No.	Description
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V







345-250-30

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Mass [g]
345-250-30	5–30	0,001 mm	±5 µm	305
345-251-30	25–50	0,001 mm	±6 µm	310

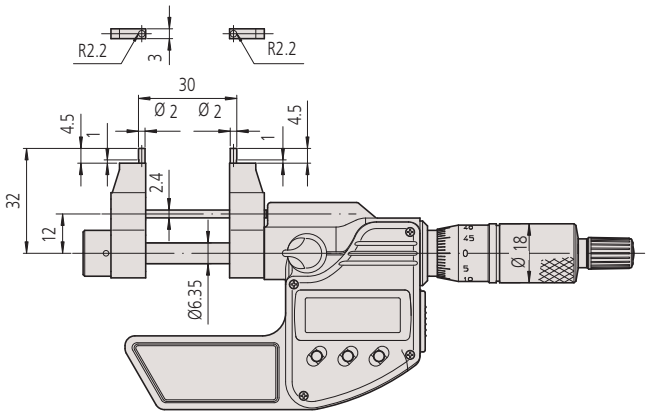

345-250-30

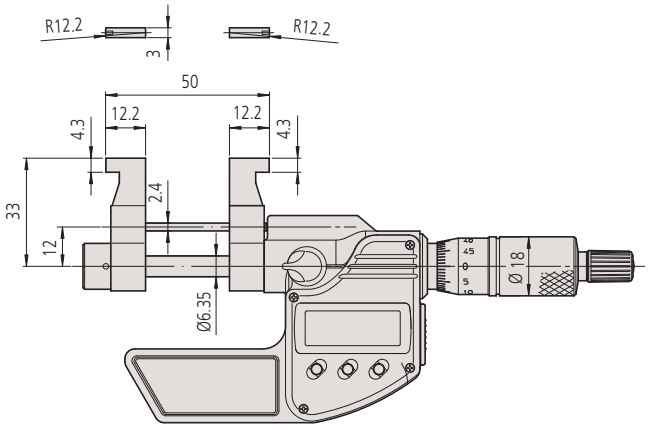

345-251-30

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Caliper Jaw Inside Micrometers


Series 145

The Caliper Jaw Inside Micrometer offers you the following benefits:

- Carbide measuring faces
- A setting standard (optional) is needed to accurately set the micrometer to the reference point.

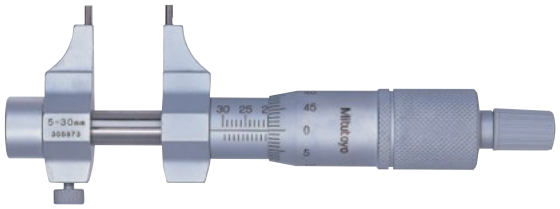

145-185

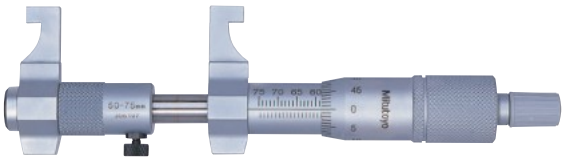


145-187

Specifications

Measuring force	1-6 N
Scale	Thimble and sleeve satin chrome finish, ø18 mm
Measuring spindle	With spindle lock, spindle pitch 0,5 mm
Measuring face	Carbide tipped
Delivered	Including box, key

Optional accessories


No.	Description
300400	Holder for Series 145
300401	Cap for Series 145

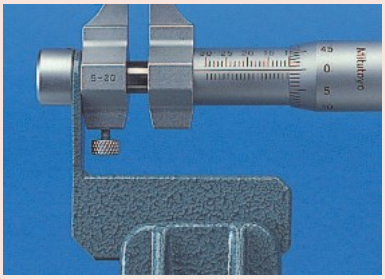


Holder and cap for: 145-185, 145-186

Metric


No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Mass [g]
145-185	5–30	0,01 mm	±5 µm	130
145-186	25–50	0,01 mm	±6 µm	140
145-187	50–75	0,01 mm	±7 µm	160
145-188	75–100	0,01 mm	±8 µm	180
145-189	100–125	0,01 mm	±9 µm	210
145-190	125–150	0,01 mm	±9 µm	230
145-191	150–175	0,01 mm	±10 µm	250
145-192	175–200	0,01 mm	±10 µm	270
145-217	200–225	0,01 mm	±11 µm	310
145-218	225–250	0,01 mm	±11 µm	330
145-219	250–275	0,01 mm	±12 µm	350
145-220	275–300	0,01 mm	±12 µm	370



145-185

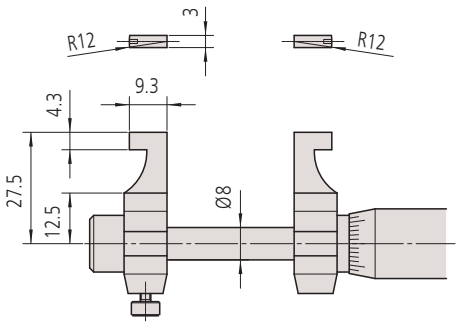

145-186

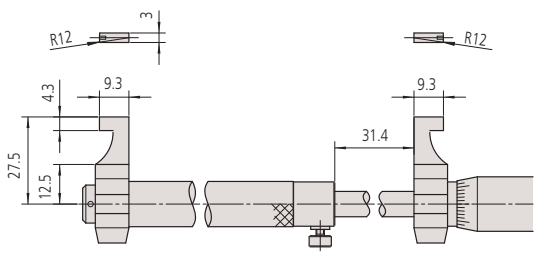

50-300 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Tubular Inside Micrometers Individual


Series 133


This is a standard single rod type inside micrometer (individual unit), with the following features:

- Standard single rod.
- Carbide measuring faces.


Specifications

Scale	Thimble and sleeve satin chrome finish, Ø18 mm
Measuring spindle	With spindle lock (except 50-75 mm), spindle pitch 0,5 mm
Measuring face	Carbide tipped, crown lapped
Delivered	Including box, insulation (from 100 mm), key

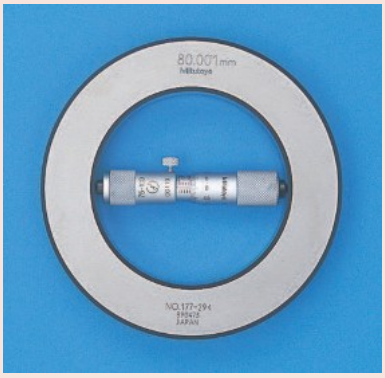


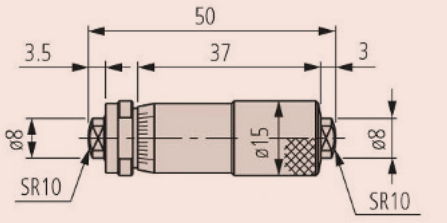


133-143

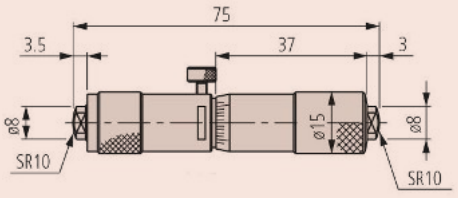

133-144

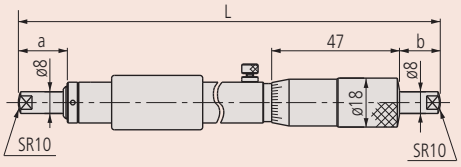

100-1000 mm

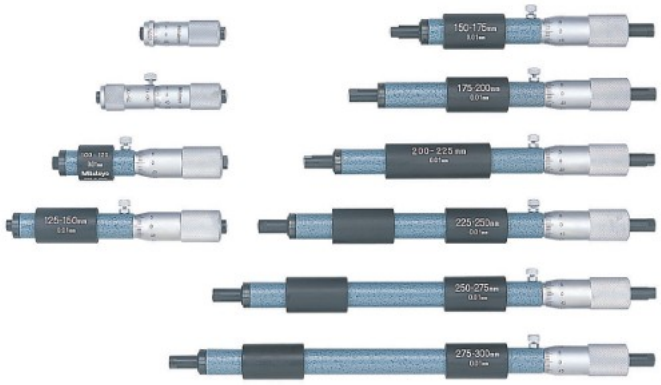

133-143 - 133-152

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	a [mm]	b [mm]	L [mm]	Mass [g]
133-143	50–75	0,01mm	±3 µm				50
133-144	75–100	0,01mm	±4 µm				75
133-145	100–125	0,01mm	±5 µm	5	3	100	130
133-146	125–150	0,01mm	±5 µm	5	3	125	160
133-147	150–175	0,01mm	±5 µm	18	15	150	170
133-148	175–200	0,01mm	±5 µm	18	15	175	180
133-149	200–225	0,01mm	±5 µm	18	15	200	200
133-150	225–250	0,01mm	±6 µm	18	15	225	210
133-151	250–275	0,01mm	±6 µm	18	15	250	235
133-152	275–300	0,01mm	±6 µm	18	15	275	245
133-153	300–325	0,01mm	±7 µm	18	15	300	265
133-154	325–350	0,01mm	±7 µm	18	15	325	285
133-155	350–375	0,01mm	±7 µm	18	15	350	300
133-156	375–400	0,01mm	±8 µm	18	15	375	315
133-157	400–425	0,01mm	±8 µm	18	15	400	330
133-158	425–450	0,01mm	±8 µm	18	15	425	340
133-159	450–475	0,01mm	±9 µm	18	15	450	360
133-160	475–500	0,01mm	±9 µm	18	15	475	370
133-161	500–525	0,01mm	±9 µm	18	15	500	390
133-162	525–550	0,01mm	±10 µm	18	15	525	400
133-163	550–575	0,01mm	±10 µm	18	15	550	410
133-164	575–600	0,01mm	±10 µm	18	15	575	415
133-165	600–625	0,01mm	±11 µm	18	15	600	430
133-166	625–650	0,01mm	±11 µm	18	15	625	450
133-167	650–675	0,01mm	±11 µm	18	15	650	470
133-168	675–700	0,01mm	±12 µm	18	15	675	480
133-169	700–725	0,01mm	±12 µm	18	15	700	500
133-170	725–750	0,01mm	±12 µm	18	15	725	510
133-171	750–775	0,01mm	±13 µm	18	15	750	520
133-172	775–800	0,01mm	±13 µm	18	15	775	540
133-173	800–825	0,01mm	±13 µm	18	15	800	555
133-174	825–850	0,01mm	±14 µm	18	15	825	570
133-175	850–875	0,01mm	±14 µm	18	15	850	590
133-176	875–900	0,01mm	±14 µm	18	15	875	600
133-177	900–925	0,01mm	±15 µm	18	15	900	620
133-178	925–950	0,01mm	±15 µm	18	15	925	630
133-179	950–975	0,01mm	±15 µm	18	15	950	650
133-180	975–1000	0,01mm	±16 µm	18	15	975	670

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Tubular Inside Micrometer Sets

Series 133


This is a standard single rod type inside micrometer (boxed set), with the following features:

- Standard single rod.
- Carbide measuring faces.




Specifications

Scale	Thimble and sleeve satin chrome finish, Ø18 mm
Measuring spindle	With spindle lock (except 50-75 mm), spindle pitch 0,5 mm
Measuring face	Carbide tipped, crown lapped
Delivered	Including box, insulation (from 100 mm), key

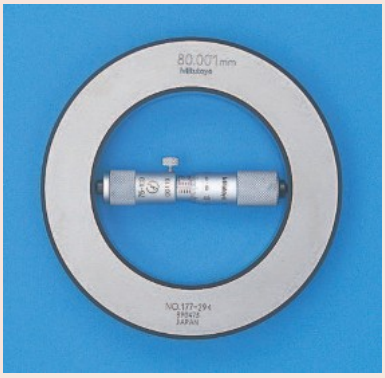

133-901

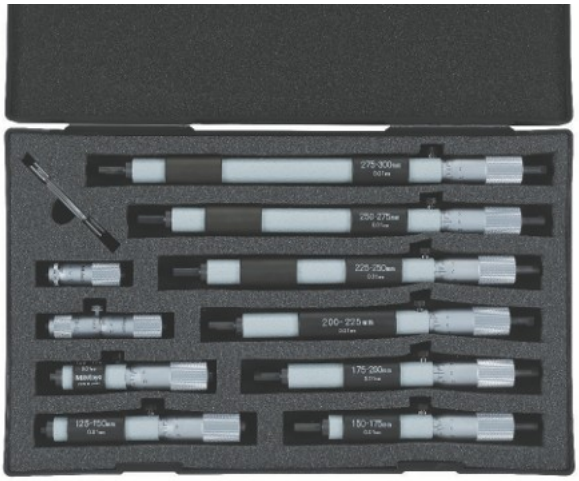

133-902

Metric

Micrometer set

No.	Range [mm]	Graduation	Models included	Mass [g]
133-901	50–150	0,01mm	133-143, 133-144, 133-145, 133-146	415
133-902	50–300	0,01mm	133-143, 133-144, 133-145133-146 133-147, 133-148, 133-149, 133-150, 133-151, 133-152	1655

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Tubular Inside Micrometers with Extensions

Series 137

This is an extension rod type inside micrometer that offers you the following benefits:

- Interchangeable extensions with cylindrical gage rods are spring-mounted in protective sleeves so you can extend the measuring range.
- Carbide measuring faces are available.

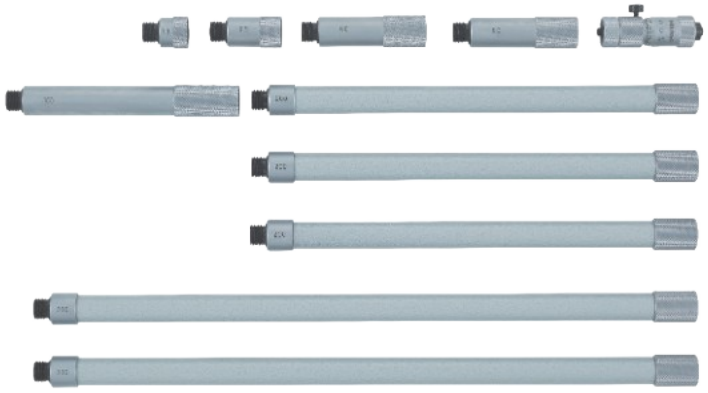

137-205

Specifications


Scale	Thimble and sleeve satin chrome finish, ø15 mm
Measuring spindle	Spindle pitch 0,5 mm
Extension	ø12,5 mm
Delivered	Including box, key, extensions, micrometer head

Optional accessories

No.	Description
137-011	Main Unit for Tubular Inside Micrometer, Hardened Face, 50-63mm
137-013	Main Unit for Tubular Inside Micrometer, Carbide Tipped, 50-63mm

Consumable spares

No.	Description
980505	Extension Rod for Series 137, 13mm, Hardened Face
980507	Extension Rod for Series 137, 25mm, Hardened Face
980509	Extension Rod for Series 137, 50mm, Hardened Face
980511	Extension Rod for Series 137, 100mm, Hardened Face
980515	Extension Rod for Series 137, 200mm, Hardened Face
980517	Extension Rod for Series 137, 300mm, Hardened Face
980519	Extension Rod for Series 137, 337, 13mm, Carbide Tipped
980521	Extension Rod for Series 137, 337, 25mm, Carbide Tipped
980523	Extension Rod for Series 137, 337, 50mm, Carbide Tipped
980525	Extension Rod for Series 137, 337, 100mm, Carbide Tipped
980529	Extension Rod for Series 137, 337, 200mm, Carbide Tipped
980531	Extension Rod for Series 137, 337, 300mm, Carbide Tipped

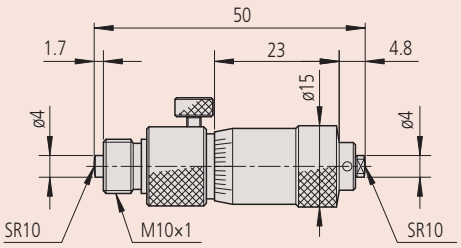

Micrometer Head for series 137

Metric — With carbide measuring surface

No.	Range [mm]	Measuring span	Graduation	Spindle feed error [µm]	Limit of error	Extension rods	Mass [g]
137-206	50–150	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	3 (13, 25, 50 mm)	145
137-207	50–300	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	5 (13, 25, 50 (2 pcs.), 100 mm)	305
137-208	50–500	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	6 (13, 25, 50 (2 pcs.), 100, 200 mm)	460
137-209	50–1000	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	8 (13, 25, 50 (2 pcs.), 100, 200 (2 pcs.), 300 mm)	845
137-210	50–1500	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	10 (13, 25, 50 (2 pcs.) 100, 200 (3 pcs.), 300 mm (2 pcs.))	1225

Metric — With hardened measuring surface

No.	Range [mm]	Measuring span	Graduation	Spindle feed error [µm]	Limit of error	Extension rods	Mass [g]
137-201	50–150	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	3 (13, 25, 50 mm)	145
137-202	50–300	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	5 (13, 25, 50 (2 pcs.), 100 mm)	305
137-203	50–500	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	6 (13, 25, 50 (2 pcs.), 100, 200 mm)	460
137-204	50–1000	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	8 (13, 25, 50 (2 pcs.), 100, 200 (2 pcs.), 300 mm)	845
137-205	50–1500	13 mm	0,01 mm	3	±(3+number of rods+max. measurement length/50) µm	10 (13, 25, 50 (2 pcs.), 100, 200 (3 pcs.), 300 mm (2 pcs.))	1225

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Tubular Inside Micrometers with Extensions

Series 140

This is a long range inside micrometer that offers you the following benefits:


- It has a long measuring range of up to 5000 mm
- Extension tube type design.
- Measuring surfaces in carbide are available, micro-lap finish

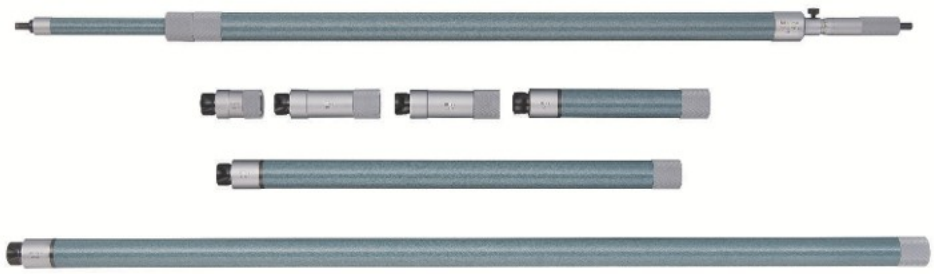

140-158

Metric

No.	Range [mm]	Measuring span	Graduation	Spindle feed error [µm]	Limit of error	Extension rods	Mass [g]
140-157	1000–2000	50 mm	0,01 mm	6	±(7+number of rods+max. measurement length/50) µm	5 (50, 100 (2 pcs.) 200, 500 mm)	3700
140-158	1000–3000	50 mm	0,01 mm	6	±(7+number of rods+max. measurement length/50) µm	6 (50, 100 (2 pcs.), 200, 500, 1000 mm)	5200
140-159	1000–4000	50 mm	0,01 mm	6	±(7+number of rods+max. measurement length/50) µm	7 (50, 100 (2 pcs.), 200, 500, 1000 mm (2 pcs.))	6700
140-160	1000–5000	50 mm	0,01 mm	6	±(7+number of rods+max. measurement length/50) µm	8 (50, 100 (2 pcs.) 200, 500, 1000 mm (3 pcs.))	8260



Micrometer Head for series 140

Specifications

Scale	Thimble and sleeve satin chrome finish, ø21 mm
Measuring spindle	Spindle pitch 0,5 mm
Measuring face	Carbide
Extension	ø32 mm
Delivered	Including box, key

Consumable spares

No.	Description
04GZA394	Extension Rod 50mm, for Series 140
04GZA396	Extension Rod 100mm, for Series 140
04GZA398	Extension Rod 200mm, for Series 140
04GZA400	Extension Rod 500mm, for Series 140
04GZA402	Extension Rod 1000mm, for Series 140

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Inside Micrometers with Interchangeable Rod

Series 141

This an interchangeable rod type inside micrometer that offers you the following benefits:

- Interchangeable measuring rods and spacers achieve the full specified measuring range.
- Each interchangeable rod is marked with its measuring range.
- An extension handle to help you measure deep bores is included in sets up to 300 mm range.

Specifications


Scale	Thimble and sleeve satin chrome finish
Measuring spindle	With spindle lock, spindle pitch 0,5 mm
Measuring face	Hardened or carbide tipped
Delivered	Including box, key




When using one of the extension rods supplied



141-101 with extension handle

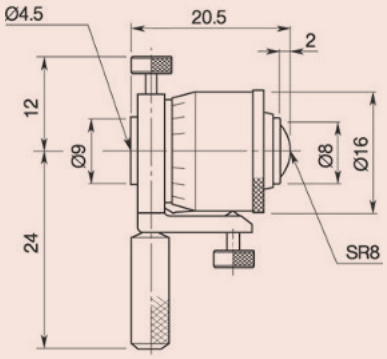

141-001, 141-003

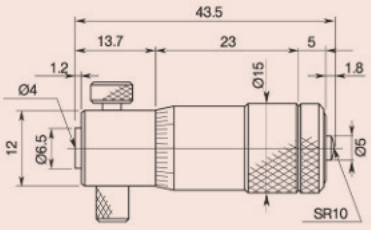

141-025, 141-027




141-205

Metric — With carbide measuring surface

No.	Range [mm]	Measuring span	Graduation	Spindle feed error [µm]	Extension collar	Interchangeable rod	Accessories: inside micrometer (standard in the set) No.	Mass [g]
141-103	25–50	7 mm	0,01 mm	3	1 (6 mm)	2 (38, 50 mm)	141-003	60
141-211	50–200	13 mm	0,01 mm	3	1 (12 mm)	3 (100, 150, 200 mm)	141-027	125
141-212	50–300	13 mm	0,01 mm	3	1 (12 mm)	5 (100, 150, 200, 250, 300 mm)	141-027	275

Metric — With hardened steel measuring surface

No.	Range [mm]	Measuring span	Graduation	Spindle feed error [µm]	Extension collar	Interchangeable rod	Accessories: inside micrometer (standard in the set) No.	Mass [g]
141-101	25–50	7 mm	0,01 mm	3	1 (6 mm)	2 (38, 50 mm)	141-001	60
141-205	50–200	13 mm	0,01 mm	3	1 (12 mm)	3 (100, 150, 200 mm)	141-025	125
141-206	50–300	13 mm	0,01 mm	3	1 (12 mm)	5 (100, 150, 200, 250, 300 mm)	141-025	275
141-117	200–500	25 mm	0,01 mm	3	2 (25/50 mm)	3 (300, 400, 500 mm)	141-009	520
141-118	200–1000	25 mm	0,01 mm	3	2 (25/50 mm)	8 (300, 400, 500, 600, 700, 800, 900, 1000 mm)	141-009	1940

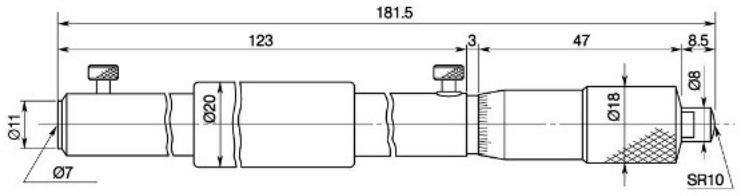

141-009

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Bore Gauges for Extra Small Holes

Series 526 Bore Gauge

This is a two point split contact point ideally suited to smaller bore measurements.
It offers you the following benefits:

- A precision bore gauge so you can make quick and accurate measurements of small hole diameters (0,95-18 mm).
- You can replace the analogue indicator fitted to this instrument with a optional digital indicator (543-310B-10) if you need.
- The contact point is DLC coated (0,95-7,3 mm) or hard chrome coated (7-18 mm).



526-127-20

Metric

No.	Range [mm]	No. Dial Indicator	Graduation	Accuracy [µm]	Repeatability	Measuring depth	Number of anvils	Mass [g]
526-172-20	0,95–1,55	2109AB-10	0,001mm	4	2 µm	11,5 mm	5	240
526-173-20	0,95–1,55	2046AB	0,01mm	4	2 µm	11,5 mm	5	240
526-162-20	1,5–3,95	2109AB-10	0,001mm	4	2 µm	17,5-22,5 mm (1)	9	240
526-163-20	1,5–3,95	2046AB	0,01mm	4	2 µm	17,5-22,5 mm (1)	9	240
526-152-20	3,7–7,3	2109AB-10	0,001mm	4	2 µm	32 mm	7	240
526-153-20	3,7–7,3	2046AB	0,01mm	4	2 µm	32 mm	7	240
526-124-20	7–10	2109AB-10	0,001mm	4	2 µm	40-56 mm (2)	6	300
526-126-20	7–10	2046AB	0,01mm	4	2 µm	40-56 mm (2)	6	300
526-125-20	10–18	2109AB-10	0,001mm	6	2 µm	62 mm	8	366
526-127-20	10–18	2046AB	0,01mm	6	2 µm	62 mm	8	366

(1) Holes Ø ≤ 2.25 mm : measuring depth 17.5 mm / holes Ø > 2.25 mm : measuring depth 22.5 mm
(2) Holes Ø ≤ 8 mm : measuring depth 40 mm / holes Ø > 8 mm : measuring depth 56 mm

Specifications

Delivered	In box including plastic cover for Dial Indicator

Optional accessories

No.	Description
215-120-10	Stand for Bore Gauge Series 526, D=60mm Table, 38mm Table Stroke
543-310B-10	Digital Indicator, Bore Gauge ID-C, 12,7mm, 0,001mm, Flat Back Plate
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4


Setting rings are optional accessories. See Series 177 for details.




215-120-10




543-310B-10

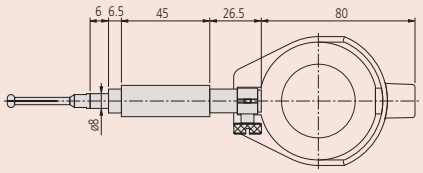

0,95 - 4 mm

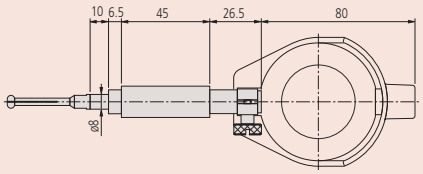

3,7 - 7,3 mm

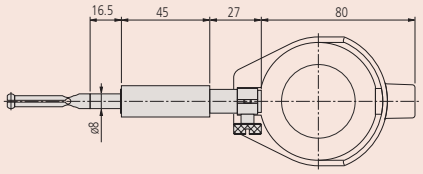

7 - 18 mm


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges for Extra Small Holes



526-153-20



Positioning of Bore Gauges
The contact points have a large curvature, simplifying positioning for bore diameter measurement (in the direction a-a')

Contact Point for Series 526

Split-ball probes 0,95-1,15 mm up to 6,7-7,3 mm range are protected by a diamond-like DLC coating.

Split-ball probes 7-18 mm are hard chrome plated

DLC Black Diamond:

- Extremely high wear protection, due to low frictional resistance
- Safety due to high hardness and resistance
- Safety due to sustained accuracy and precision




10AAP247A




10AAP248B

Replacement contact points

No.	Range [mm]	Marking on the measuring head (engraved)	A [mm]	B [mm]	C [mm]
10AAP247A	0,95–1,15	1	11,5		
10AAP247B	1,07–1,25	1,1	11,5		
10AAP247C	1,17–1,35	1,2	11,5		
10AAP247D	1,27–1,45	1,3	11,5		
10AAP247E	1,37–1,55	1,4	11,5		
10AAP248A	1,5–1,9	1,75	17,5		
10AAP248B	1,8–2,2	2	17,5		
10AAP248C	2,05–2,45	2,25	17,5		
10AAP248D	2,25–2,75	2,5	22,5		
10AAP248E	2,5–3	2,75	22,5		
10AAP248F	2,75–3,25	3	22,5		
10AAP248G	3–3,5	3,25	22,5		
10AAP248H	3,25–3,75	3,5	22,5		
10AAP248J	3,5–4	3,75	22,5		
10AAP249A	3,7–4,3	4	32		
10AAP249B	4,2–4,8	4,5	32		
10AAP249C	4,7–5,3	5	32		
10AAP249D	5,2–5,8	5,5	32		
10AAP249E	5,7–6,3	6	32		
10AAP249F	6,2–6,8	6,5	32		
10AAP249G	6,7–7,3	7	32		
102469	7–7,5	1	1,8	40	29,2
102470	7,5–8	2	1,8	40	29,2
102471	8–8,5	3	1,8	40	29,2
102472	8,5–9	4	1,8	40	29,2
102473	9–9,5	5	1,8	40	29,2
102474	9,5–10	6	1,8	40	29,2
102454	10–11	1	2,1	46	38
102455	11–12	2	2,7	46	38
102456	12–13	3	2,7	46	38
102457	13–14	4	2,7	46	38
102458	14–15	5	2,7	46	38
102459	15–16	6	2,7	46	38
102460	16–17	7	2,7	46	38
102461	17–18	8	2,7	46	38

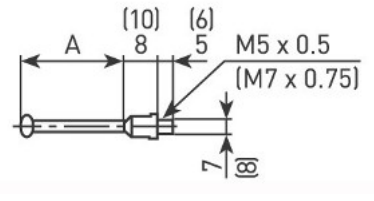

526-162-20, 526-163-20, 526-172-20, 526-173-20
( ) 526-152-20, 526-153-20

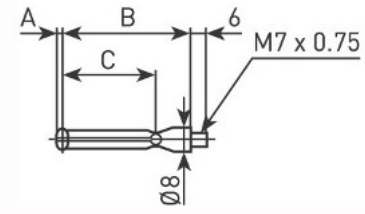

526-124-20, 526-125-20, 526-126-20, 526-127-20

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Bore Gauges for Small Holes

Series 511

These are bore gauges that automatically self-centre via a centring bridge.
They offer you the following benefits:

- A long plunger stroke gives you amazing accuracy.
- Interchangeable washers 0,5 mm thick are supplied as standard accessories, so you can enable setting in small steps.
- Contact points are carbide (>18 mm range), giving you high durability and wear resistance.
- A large grip reduces heat transfer from the operator by 50%.



511-204-20




6 - 10mm




10 - 18.5mm

Metric

No.	Range [mm]	No. Dial Indicator	Stroke of contact point	Graduation	Measuring depth	Number of anvils	Mass [g]
511-210-20	6–10	2109AB-10	0,5 mm	0,001 mm	50 mm	9	255
511-203-20	10–18,5	2109AB-10	0,6 mm	0,001 mm	100 mm	9	268
511-211-20	6–10	2046AB	0,5 mm	0,01 mm	50 mm	9	255
511-204-20	10–18,5	2046AB	0,6 mm	0,01 mm	100 mm	9	264

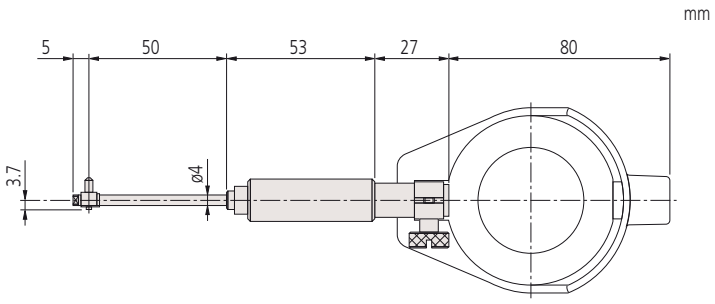

6-10 mm



10-18,5 mm

Specifications

Accuracy	5 µm
Repeatability	2 µm
Delivered	Including box, dial indicator, plastic cover for indicator

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
543-310B-10	Digital Indicator, Bore Gauge ID-C, 12,7mm, 0,001mm, Flat Back Plate



543-310B-10

For details on indicators suitable for use with this instrument, refer to the Dial Gauges section.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges

Series 511

This is a short range application Bore Gauge Set that automatically self-centres via a centring bridge and offers you the following benefits:

- It reduces the influence of heat from the operator's hand by 50% by making the grip hollow structured, thereby retaining high accuracy measurement.
- Interchangeable washers (0,5 mm thick) are supplied as standard accessories, so you can enable setting in small steps.
- Contact points are carbide (>18 mm range), giving you high durability and wear resistance.




511-712-20

Specifications


Accuracy	2 µm
Repeatability	0,5 µm
Delivered	Including box, dial indicator, plastic cover for indicator

Optional accessories

No.	Description
953549	Extension Rod Serie 511, 125mm, 9mm Rod Diameter
953550	Extension Rod Serie 511, 250mm, 9mm Rod Diameter
953551	Extension Rod Serie 511, 500mm, 9mm Rod Diameter
953552	Extension Rod Serie 511, 125mm, 12mm Rod Diameter
953553	Extension Rod Serie 511, 250mm, 12mm Rod Diameter
953554	Extension Rod Serie 511, 500mm, 12mm Rod Diameter
953555	Extension Rod Serie 511, 750mm, 12mm Rod Diameter
953556	Extension Rod Serie 511, 1000mm, 12mm Rod Diameter
953557	Extension Rod Serie 511, 125mm, 15mm Rod Diameter
952361	Extension Rod Serie 511, 250mm, 15mm Rod Diameter
953558	Extension Rod Serie 511, 500mm, 15mm Rod Diameter
953559	Extension Rod Serie 511, 750mm, 15mm Rod Diameter
953560	Extension Rod Serie 511, 1000mm, 15mm Rod Diameter
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
543-310B-10	Digital Indicator, Bore Gauge ID-C, 12,7mm, 0,001mm, Flat Back Plate

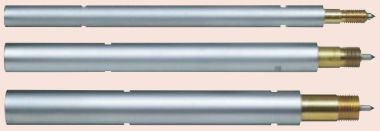

Extensions for deep-hole measurement (optional accessory)




Sub-anvil

For details on indicators suitable for use with this instrument, refer to the Dial Gauges section.

Metric

No.	Range [mm]	No. Dial Indicator	Stroke of contact point	Graduation	Measuring depth	Number of anvils	Sub anvils	A [mm]	B [mm]	Mass [g]
511-721-20	18–35	2109AB-10	1,2 mm	0,001 mm	100 mm	9				330
511-722-20	35–60	2109AB-10	1,2 mm	0,001 mm	150 mm	6				400
511-723-20	50–150	2109AB-10	1,6 mm	0,001 mm	150 mm	11	50 mm	38	16,5	420
511-724-20	100–160	2109AB-10	1,6 mm	0,001 mm	150 mm	13		50	66,5	480
511-725-20	160–250	2109AB-10	1,6 mm	0,001 mm	250 mm	6			50	850
511-726-20	250–400	2109AB-10	1,6 mm	0,001 mm	250 mm	5	75 mm		140	945
511-711-20	18–35	2046AB	1,2 mm	0,01 mm	100 mm	9				330
511-712-20	35–60	2046AB	1,2 mm	0,01 mm	150 mm	6				400
511-713-20	50–150	2046AB	1,6 mm	0,01 mm	150 mm	11	50 mm	38	16,5	420
511-714-20	100–160	2046AB	1,6 mm	0,01 mm	150 mm	13		50	66,5	480
511-715-20	160–250	2046AB	1,6 mm	0,01 mm	250 mm	6			50	850
511-716-20	250–400	2046AB	1,6 mm	0,01 mm	250 mm	5	75 mm		140	945

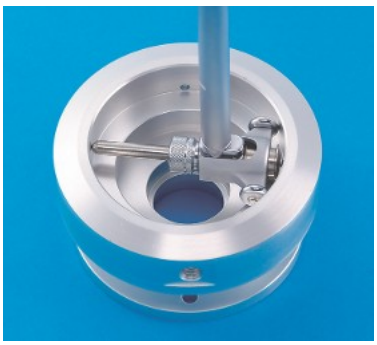

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges

Series 511

Example of measuring heads with different measuring ranges.



18 - 35 mm



35 - 60 mm



50 - 150 mm




100 - 160 mm





160 - 250 mm



250 - 400 mm

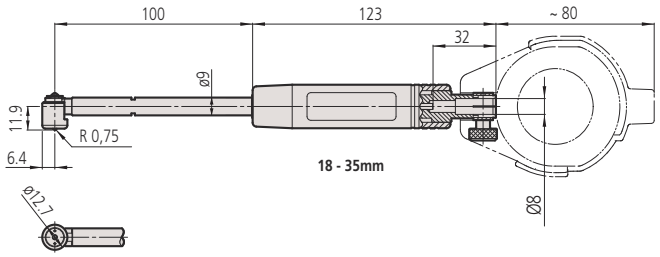

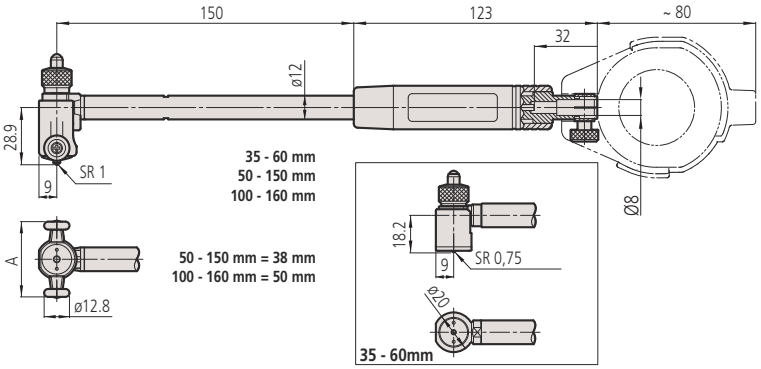

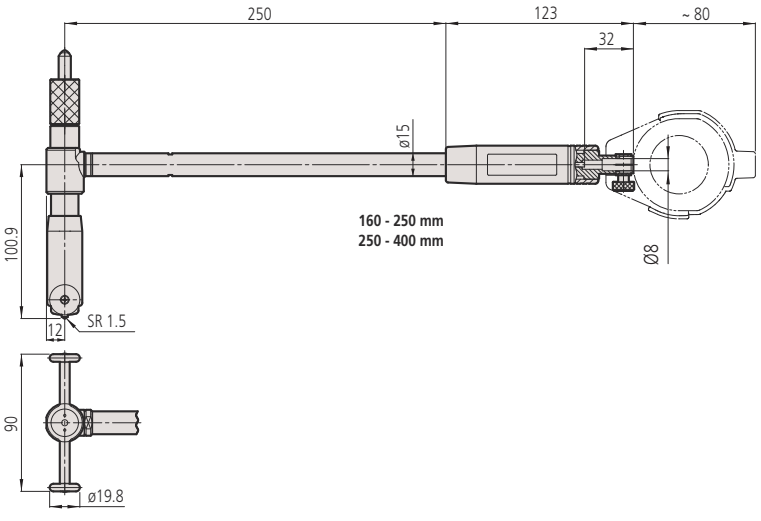

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges

Series 511

This is a wide range application set of Bore Gauges that automatically self-centres via a centring bridge and offers you the following benefits:

- Carbide for the contact point ensuring high durability and wear resistance
- It reduces the influence of heat from the operator's hand by 50% by making the grip hollow structured, thereby retaining high accuracy measurement.

Specifications

Accuracy	2 µm
Repeatability	0,5 µm
Delivered	Including box, dial indicator, plastic cover for indicator

Standard accessories

No.	Description
205457	Washer Series 511, 0,5mm, Range 35-160mm
205458	Washer Series 511, 1 mm, Range 35-160mm
205459	Washer Series 511, 2 mm, Range 35-160mm
205460	Washer Series 511, 3 mm, Range 35-160mm
205623	Washer Series 511, 0,5mm, Range 18-35mm
205624	Washer Series 511, 1mm, Range 18-35mm

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4



511-921-20



Indicator 2046AB included in the set 511-921-20



511-922-20



Indicator 2109AB-10 included in the set 511-922-20



511-925-20



Indicator 543-310B-10 included in the set 511-925-20

Metric

No.	Range [mm]	No. Dial Indicator	Stroke of contact point	Graduation	Measuring depth	Number of anvils	Sub anvils	Mass [g]
511-921-20	18–150	2046AB	18 - 60 mm: 1,2 mm 50 - 150 mm: 1,6 mm	0,01 mm	100/150 mm	26	1	810
511-922-20	18–150	2109AB-10	18 - 60 mm: 1,2 mm 50 - 150 mm: 1,6 mm	0,001 mm	100/150 mm	26	1	810
511-925-20	18–150	543-310B-10	18 - 60 mm: 1,2 mm 50 - 150 mm: 1,6 mm	0,001 mm	100/150 mm	26	1	830

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges with Micrometer Head

Series 511

This is a micrometer head that enables measurements without interchangeable anvils.
It offers you the following benefits:

- A long plunger stroke gives you amazing accuracy.
- Contact points are carbide (>18 mm range), giving you high durability and wear resistance.
- A large grip reduces heat transfer from the operator by 50%.
- Wide measuring range with sub-anvils.



511-826-20



Metric

No.	Range [mm]	No. Dial Indicator	Stroke of contact point	Graduation	Measuring depth	Micrometer Head stroke	Sub anvils	Mass [g]
511-823-20	60–100	2109AB-10	1,6 mm	0,001 mm	150 mm	10 mm	10 mm, 20 mm	430
511-824-20	100–160	2109AB-10	1,6 mm	0,001 mm	150 mm	13 mm	10 mm, 20 mm, 20 mm	480
511-825-20	150–250	2109AB-10	1,6 mm	0,001 mm	250 mm	13 mm	10 mm, 20 mm, 20 mm, 50 mm	850
511-826-20	250–400	2109AB-10	1,6 mm	0,001 mm	250 mm	25 mm	25 mm, 50 mm, 50 mm	950
511-827-20	400–600	2109AB-10	1,6 mm	0,001 mm	250 mm	50 mm	50 mm, 100 mm	1270
511-828-20	600–800	2109AB-10	1,6 mm	0,001 mm	250 mm	50 mm	50 mm, 100 mm	1670
511-813-20	60–100	2046AB	1,6 mm	0,01 mm	150 mm	10 mm	10 mm, 20 mm	430
511-814-20	100–160	2046AB	1,6 mm	0,01 mm	150 mm	13 mm	10 mm, 20 mm, 20 mm	480
511-815-20	150–250	2046AB	1,6 mm	0,01 mm	250 mm	13 mm	10 mm, 20 mm, 20 mm, 50 mm	850
511-816-20	250–400	2046AB	1,6 mm	0,01 mm	250 mm	25 mm	25 mm, 50 mm, 50 mm	950
511-817-20	400–600	2046AB	1,6 mm	0,01 mm	250 mm	50 mm	50 mm, 100 mm	1270
511-818-20	600–800	2046AB	1,6 mm	0,01 mm	250 mm	50 mm	50 mm, 100 mm	1680



Specifications


Accuracy	2 µm
Repeatability	0,5 µm
Delivered	Including box, dial indicator, plastic cover for indicator

Optional accessories

No.	Description
953552	Extension Rod Serie 511, 125mm, 12mm Rod Diameter
953553	Extension Rod Serie 511, 250mm, 12mm Rod Diameter
953554	Extension Rod Serie 511, 500mm, 12mm Rod Diameter
953555	Extension Rod Serie 511, 750mm, 12mm Rod Diameter
953556	Extension Rod Serie 511, 1000mm, 12mm Rod Diameter
953557	Extension Rod Serie 511, 125mm, 15mm Rod Diameter
952361	Extension Rod Serie 511, 250mm, 15mm Rod Diameter
953558	Extension Rod Serie 511, 500mm, 15mm Rod Diameter
953559	Extension Rod Serie 511, 750mm, 15mm Rod Diameter
953560	Extension Rod Serie 511, 1000mm, 15mm Rod Diameter
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
543-310B-10	Digital Indicator, Bore Gauge ID-C, 12,7mm, 0,001mm, Flat Back Plate



543-310B-10

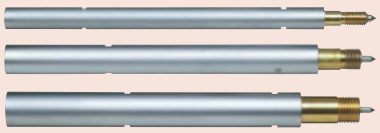

Extensions for deep-hole measurement (optional accessory)

For details on indicators suitable for use with this instrument, refer to the Dial Gauges section.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges with Micrometer Head

Series 511

Dimensions




60 - 100 mm




100 - 160 mm





150 - 250 mm



250 - 400 mm

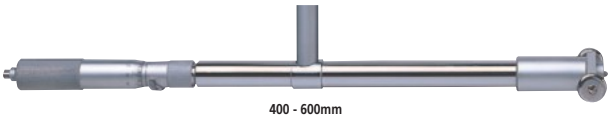



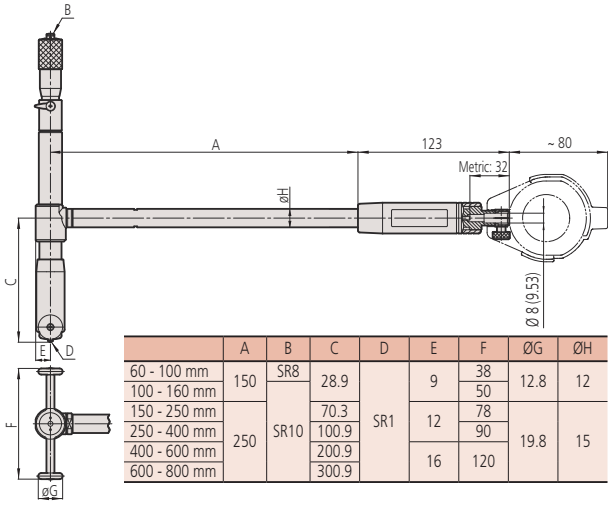

	A	B	C	D	E	F	ØG	ØH
60 - 100 mm	150	SR8	28.9	SR1	9	38	12.8	12
100 - 160 mm		SR10				50		
150 - 250 mm	250		70.3		12	78	19.8	15
250 - 400 mm			100.9			90		
400 - 600 mm			200.9		16	120		
600 - 800 mm			300.9					

Extension Rods

Accessories for Bore Gauges



953549



953552



953557

These extension rods help you with deep-hole measurement, and offer you the following benefits:

- Using a single, longer extension rod rather than several short ones reduces error. When several extension rods are joined together there is the possibility of small errors arising from the extra joints involved. Therefore it is good practice not to connect more than 2 rods to a bore gauge at any one time.
- If you are using an extension rod longer than 500mm, use the bore gauge in the vertical orientation.

No.	Applicable Range	Extension rod diameter	Length [mm]
953549	18-35 mm	9 mm	125
953550	18-35 mm	9 mm	250
953552	35-160 mm	12 mm	125
953553	35-160 mm	12 mm	250
953554	35-160 mm	12 mm	500
953555	35-160 mm	12 mm	750
953556	35-160 mm	12 mm	1,000
953557	150-800 mm	15 mm	125
952361	150-800 mm	15 mm	250
953558	150-800 mm	15 mm	500
953559	150-800 mm	15 mm	750
953560	150-800 mm	15 mm	1,000

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Bore Gauges Short Length Type

Series 511

This is a compact and lightweight bore gauge due to the short length below the grip.
It offers you the following benefits:

- A long plunger stroke gives you amazing accuracy.
- Contact points are carbide giving you high durability and wear resistance.
- A large grip reduces heat transfer from the operator by 50%.



511-766-20

Specifications

Accuracy	2 µm
Repeatability	0,5 µm
Delivered	Including box, dial indicator, plastic cover for indicator

Optional accessories


No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
543-310B-10	Digital Indicator, Bore Gauge ID-C, 12,7mm, 0,001mm, Flat Back Plate




543-310B-10

Metric

No.	Range [mm]	No. Dial Indicator	Stroke of contact point	Graduation	Measuring depth	Number of anvils	Sub anvils	Mass [g]
511-771-20	18–35	2109AB-10	1,2 mm	0,001 mm	50 mm	9		320
511-772-20	35–60	2109AB-10	1,2 mm	0,001 mm	50 mm	6		380
511-773-20	50–150	2109AB-10	1,6 mm	0,001 mm	50 mm	11	50 mm	400
511-774-20	100–160	2109AB-10	1,6 mm	0,001 mm	50 mm	13		460
511-766-20	18–35	2046AB	1,2 mm	0,01 mm	50 mm	9		320
511-767-20	35–60	2046AB	1,2 mm	0,01 mm	50 mm	6		380
511-768-20	50–150	2046AB	1,6 mm	0,01 mm	50 mm	11	50 mm	400
511-769-20	100–160	2046AB	1,6 mm	0,01 mm	50 mm	13		460

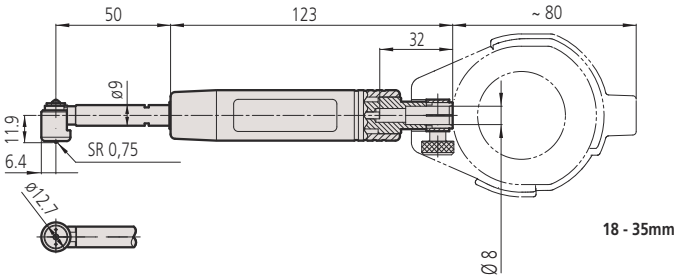

18 - 35mm

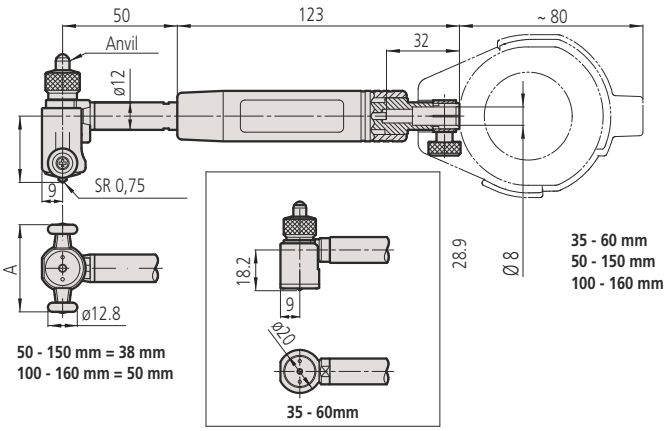

50 - 150 mm = 38 mm
100 - 160 mm = 50 mm

35 - 60mm

35 - 60 mm
50 - 150 mm
100 - 160 mm



For details of indicators suitable for use with this instrument, refer to the Dial Gauges section.


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bore Gauges for Blind Holes

Series 511

This is a bore gauge for measuring blind holes that offers you the following benefits:
- You can measure the inside diameter close to the bottom of blind holes.
- Contact points are carbide giving you high durability and wear resistance.

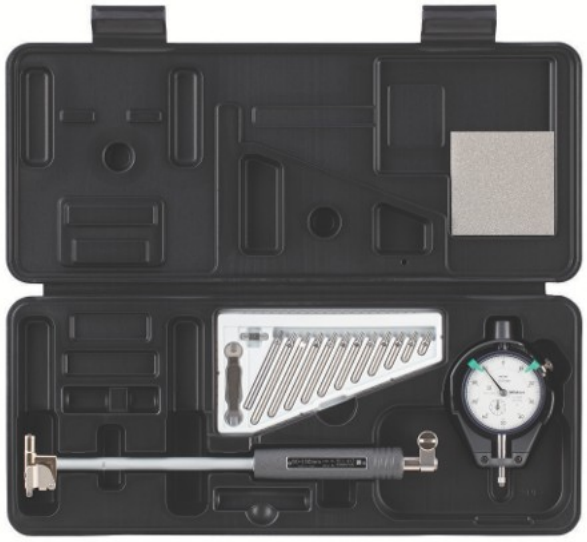


511-427-20
with optional limit hands (green)


Specifications

Accuracy	4 µm
Repeatability	1 µm
Delivered	Including box, dial indicator, plastic cover for indicator

Optional accessories

No.	Description
953549	Extension Rod Serie 511, 125mm, 9mm Rod Diameter
953550	Extension Rod Serie 511, 250mm, 9mm Rod Diameter
953551	Extension Rod Serie 511, 500mm, 9mm Rod Diameter
543-310B-10	Digital Indicator, Bore Gauge ID-C, 12,7mm, 0,001mm, Flat Back Plate
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4

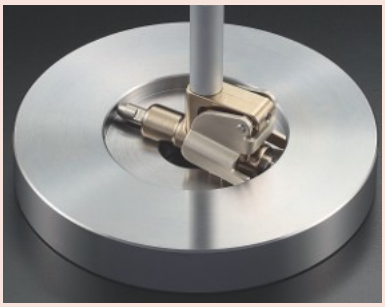




For blind holes with minimum depth 2,5 mm



15 - 35 mm



35 - 60 mm

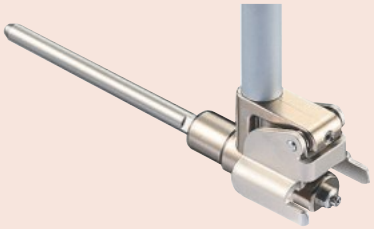


50 - 150 mm

For details on indicators suitable for use with this instrument, refer to the Dial Gauges section.

Metric

No.	Range [mm]	No. Dial Indicator	Stroke of contact point	Graduation	Measuring depth	Number of anvils	a [mm]	b [mm]	Mass [g]
511-425-20	15–35	2046AB	1,2 mm	0,01 mm	150 mm	11	9,9	10,6	350
511-426-20	35–60	2046AB	1,2 mm	0,01 mm	150 mm	6	14,3	18	370
511-427-20	50–150	2046AB	1,2 mm	0,01 mm	150 mm	11	22,7	22	380
511-435-20	15–35	2109AB	1,2 mm	0,001 mm	150 mm	11	9,9	10,6	350
511-436-20	35–60	2109AB	1,2 mm	0,001 mm	150 mm	6	14,3	18	370
511-437-20	50–150	2109AB	1,2 mm	0,001 mm	150 mm	11	22,7	22	380

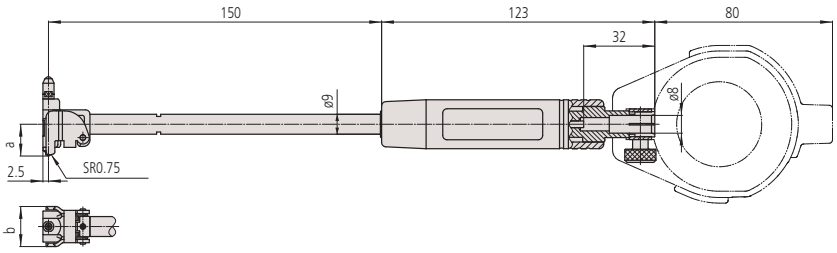

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Bore Gauges

Series 511 This is a Digimatic bore gauge that lets you take digital inside measurements

ABSOLUTE


IP53

This is a Digimatic bore gauge that lets you take digital inside measurements with amazing accuracy even at the maximum 2 m depth.
with amazing accuracy even at the maximum 2 m depth.
The ABSOLUTE Digimatic Bore Gauge offers you the following benefits:

- Precision bore gauge lets you easily measure the diameter of deep bores without loss of accuracy.
- You can store and recall up to 3 sets of master values and upper/lower tolerance values at the push of a button.
- GO/±NG judgement can be set.
- Up to max. four extension rods (250 or 500 mm) can be used.




511-501

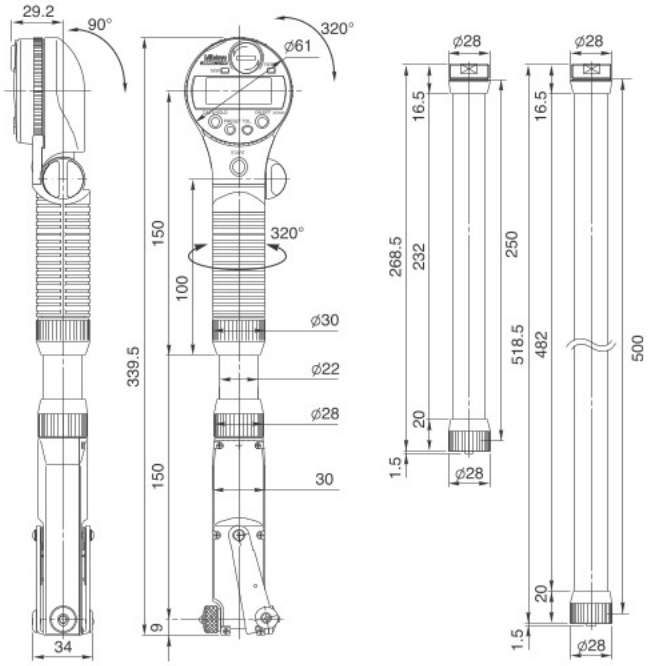


Metric


No.	Range [mm]	Stroke of contact point	Digital step	Number of anvils	Mass [g]
511-501	45–100	1,2 mm	0,001 mm	12	500
511-502	100–160	1,2 mm	0,001 mm	13	570



The display can be rotated 320° and turned 90°. The handle can also be rotated 320° 320°.



Up to 3 sets of reference values can be preset, including top/bottom tolerance limits. bottom tolerance limits.



Even during measurement with a 2 m extension the accuracy is secured, as measured-value transmission is electronic.

Functions	Series 511
ON/OFF	●
DATA (output cable / hold display value)	●
PRESET 3x	●
MIN Value Hold	●
GO/±NG judgement	●

Specifications

Accuracy	0,003 mm (excluding quantizing er-ror) ror)
Repeatability	0,002 mmMeasuring force
Measuring force	≤5 N
Power supply	2 batteries SR-44
Battery life	2000 hours
Sampling Frequency	50 times/sec*
Display	LCD character height 7,5 mm

Optional accessories


No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cab USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Trans-mitter mitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmit-ter ter
02AZD790F	Connection Cable F for U-WAVE, Straight, wi Straight, without Data Button
21DZA089	Extension Rod, Series 511, 250mm
21DZA081	Extension Rod, Series 511, 500mm

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



The ABSOLUTE Digimatic Bore Gauge detects the minimum v minimum value (true diameter) and holds it automatically.



Four extension rods (500 mm each) connected together provide a 2 m extension.*if the detecting speed is >50 µ

*if the detecting speed is >50 µm/s the peak value may not be di not be displayed correctly

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

on. Product descriptions,

Bore Gauge Checker

Specifications

Delivered	Delivery as complete set in soft box

Standard accessories

No.	Description
940088	Receiver for Bore Gauge Checker, 18-35mm/35-60mm
940089	Receiver for Bore Gauge Checker, 50-100mm/100-160mm
940090	Receiver for Bore Gauge Checker, 100-250mm/250-400mm
630030	Flat Jaws for Bore Gauge Checker, 2 pcs.




Series 515


- For setting 2-point bore gauges series 511.
- The Bore Gauge Checker allows easy setting of dial bore gauges with ranges of 18 mm through 400 mm using gauge blocks.




515-590
+ gauge block (optional)



940088



940089



940090


Metric

No.	Applicable Range	Mass [kg]
515-590	18-400 mm	4,51

Gauge Sets

Specifications

Delivered	Including plastic wallet

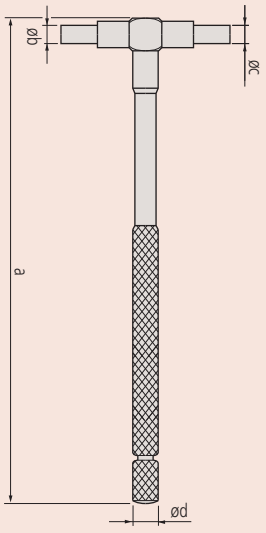

Series 155 - Telescopic Gauge Set

- Self-centering and satin chrome finish.
- Constant spring force on to the measuring surface. Locked in position by knurled lockscrew.



155-905

Metric

No.	Range	Gauges included	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
155-905	8-12,7 mm	155-127	110	4	3	5	15
	12,7-19 mm	155-128	110	5	3,5	5,5	25
	19-32 mm	155-129	110	5	3,5	5,5	35
	32-54 mm	155-130	150	7,5	6	8	75
	54-90 mm	155-131	150	7,5	6	8	80
	90-150 mm	155-132	150	7,5	6	8	100

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Setting Rings

Series 177 - Metric Type

- Used for quick and accurate setting of 2-Point Inside Measuring Instruments and 2-Point/3-Point Inside Micrometers
- Nominal diameter is marked in 0,001 mm increments



177-424




177-432



177-139



177-300

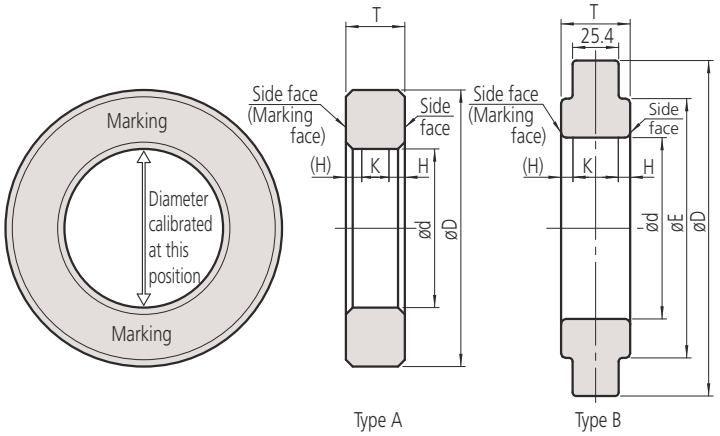

Specifications

Delivered	Without certificate of inspection

Metric

Ceramic

No.	Nominal size ød metric [mm]	Type	D [mm]	H [mm]	T [mm]	Tolerance nominal size / marked diameter [µm]	Uncertainty of marked diameter [µm]	Roundness / Cylindricity [µm]	Warranted calibration surface K [mm]
177-418	4	A	25	1.7	7	±10	1,5	1	3.6
177-420	6	A	25	1.7	7	±10	1,5	1	3.6
177-423	8	A	32	2.0	10	±10	1,5	1	6.0
177-424	10	A	32	2.0	10	±10	1,5	1	6.0
177-425	12	A	32	2.0	10	±10	1,5	1	6.0
177-427	16	A	45	2.0	10	±10	1,5	1	6.0
177-429	20	A	45	2.0	10	±10	1,5	1	6.0
177-430	25	A	53	3.2	15	±10	1,5	1	8.6
177-431	30	A	71	3.2	15	±10	1,5	1	8.6
177-432	35	A	71	3.2	15	±10	1,5	1	8.6
177-433	40	A	71	3.2	15	±10	1,5	1	8.6
177-434	45	A	85	3.7	15	±10	1,5	1	7.6

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Setting Rings

Metric

Steel

No.	Nominal size ød metric [mm]	Type	D [mm]	E [mm]	H [mm]	T [mm]	Tolerance nominal size / marked diameter [µm]	Uncertainty of marked diameter [µm]	Roundness / Cylindricity [µm]	Warranted calibration surface K [mm]
177-220	1	A	20		1.6	4	±10	1,5	1	0.8
177-222	1,1	A	20		1.6	4	±10	1,5	1	0.8
177-225	1,2	A	20		1.6	4	±10	1,5	1	0.8
177-227	1,3	A	20		1.6	4	±10	1,5	1	0.8
177-230	1,4	A	20		1.6	4	±10	1,5	1	0.8
177-236	1,75	A	25		1.6	5	±10	1,5	1	1.8
177-239	2	A	25		1.6	5	±10	1,5	1	1.8
177-242	2,25	A	25		1.6	5	±10	1,5	1	1.8
177-208	2,5	A	25		1.7	7	±10	1,5	1	3.6
177-246	2,75	A	25		1.7	7	±10	1,5	1	3.6
177-248	3	A	25		1.7	7	±10	1,5	1	3.6
177-250	3,25	A	25		1.7	7	±10	1,5	1	3.6
177-252	3,5	A	25		1.7	7	±10	1,5	1	3.6
177-255	3,75	A	25		1.7	7	±10	1,5	1	3.6
177-204	4	A	25		1.7	7	±10	1,5	1	3.6
177-257	4,5	A	25		1.7	7	±10	1,5	1	3.6
177-205	5	A	25		1.7	7	±10	1,5	1	3.6
177-263	5,5	A	25		1.7	7	±10	1,5	1	3.6
177-267	6	A	25		1.7	7	±10	1,5	1	3.6
177-271	6,5	A	25		1.7	7	±10	1,5	1	3.6
177-275	7	A	25		1.7	7	±10	1,5	1	3.6
177-125	8	A	32		2.0	10	±10	1,5	1	6.0
177-279	9	A	32		2.0	10	±10	1,5	1	6.0
177-126	10	A	32		2.0	10	±10	1,5	1	6.0
177-284	12	A	32		2.0	10	±10	1,5	1	6.0
177-132	14	A	38		2.0	10	±10	1,5	1	6.0
177-177	16	A	45		2.0	10	±10	1,5	1	6.0
177-133	17	A	45		2.0	10	±10	1,5	1	6.0
177-285	18	A	45		2.0	10	±10	1,5	1	6.0
177-286	20	A	45		2.0	10	±10	1,5	1	6.0
177-139	25	A	53		3.2	15	±10	1,5	1	8.6
177-288	30	A	71		3.2	15	±10	1,5	1	8.6
177-140	35	A	71		3.2	15	±10	1,5	1	8.6
177-290	40	A	71		3.2	15	±10	1,5	1	8.6
177-178	45	A	85		3.7	15	±10	1,5	1	7.6
177-146	50	A	85		3.7	20	±20	1,5	1	12.6
177-292	60	A	112		3.7	20	±20	1,5	1	12.6
177-314	62	A	112		3.7	20	±20	1,5	1,5	12.6
177-147	70	A	112		3.7	20	±20	1,5	1,5	12.6
177-316	75	A	125		4.2	25	±20	1,5	1,5	16.6
177-294	80	A	125		4.2	25	±20	1,5	1,5	16.6
177-318	87	A	140		4.2	25	±20	1,5	1,5	16.6
177-148	90	A	140		4.2	25	±20	1,5	1,5	16.6
177-296	100	A	160		4.2	25	±20	1,5	2	16.6
177-298	125	B	210	168	5.3	38,1	±20	2,5	2	27.5
177-300	150	B	235	187	5.3	38,1	±20	2,5	2	27.5
177-302	175	B	260	215	5.3	38,1	±20	2,5	2,5	27.5
177-304	200	B	311	244	5.3	38,1	±20	2,5	2,5	27.5
177-306	225	B	337	264	5.3	38,1	±20	2,5	2,5	27.5
177-308	250	B	362	290	5.3	38,1	±20	2,5	3	27.5
177-310	275	B	413	321	5.3	38,1	±20	2,5	3	27.5
177-312	300	B	438	340	5.3	38,1	±20	2,5	3	27.5

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Absolute Digimatic Calipers
Page 161




Analog Caliper
Page 173



Special Purpose Calipers
Page 180



Caliper Accessories
Page 197



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Coolant Proof Calipers IP67

Series 500

This IP67 ABSOLUTE digimatic caliper allows reliable measurements in a wide range of situations and offers you the following benefits:

- Excellent resistance against water and dust (IP67 protection level) enabling use in machining situations that include splashing coolant fluid
- It is dustproof, complies with EN60529 and withstands temporary complete immersion in water without suffering any damage.
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE

IP67

Functions	Series 500
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range
050085-10	Depth Base Attachment for Caliper, 125mm width for 300mm Range

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V




Beam 150 and 200 mm or 300 mm



With Wireless System U-WAVE fit



050083-10

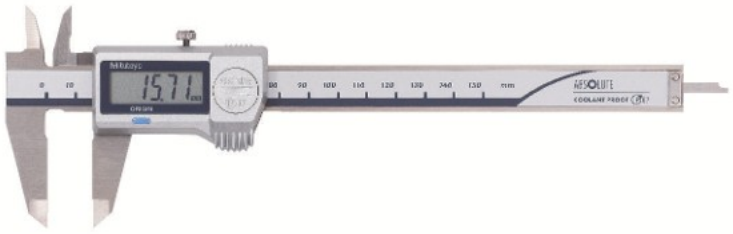


500-706-20

Metric

No.	Range [mm]	Depth bar	Thumb roller	Data output	Max. Permissible Error E MPE	Max. Permissible Error S MPE
500-706-20	0–150	flat			±0,02 mm	±0,04 mm
500-709-20	0–150	Ø 1,9 mm			±0,02 mm	±0,04 mm
500-716-20	0–150	flat		●	±0,02 mm	±0,04 mm
500-702-20	0–150	flat	●		±0,02 mm	±0,04 mm
500-712-20	0–150	flat	●	●	±0,02 mm	±0,04 mm
500-719-20	0–150	Ø 1,9 mm	●	●	±0,02 mm	±0,04 mm
500-707-20	0–200	flat			±0,02 mm	±0,04 mm
500-717-20	0–200	flat		●	±0,02 mm	±0,04 mm
500-703-20	0–200	flat	●		±0,02 mm	±0,04 mm
500-713-20	0–200	flat	●	●	±0,02 mm	±0,04 mm
500-708-20	0–300	flat			±0,03 mm	±0,05 mm
500-718-20	0–300	flat		●	±0,03 mm	±0,05 mm
500-704-20	0–300	flat	●		±0,03 mm	±0,05 mm
500-714-20	0–300	flat	●	●	±0,03 mm	±0,05 mm

No.	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-706-20	233	16,5	21	14,6	40	16	168
500-709-20	233	16,5	21	14,6	40	16	168
500-716-20	233	16,5	21	14,6	40	16	168
500-702-20	233	16,5	21	14,6	40	16	168
500-712-20	233	16,5	21	14,6	40	16	168
500-719-20	233	16,5	21	14,6	40	16	168
500-707-20	290	20	24,5	18,1	50	16	198
500-717-20	290	20	24,5	18,1	50	16	198
500-703-20	290	20	24,5	18,1	50	16	198
500-713-20	290	20	24,5	18,1	50	16	198
500-708-20	404	22	27,5	19,8	64	20	345
500-718-20	404	22	27,5	19,8	64	20	345
500-704-20	404	22	27,5	19,8	64	20	350
500-714-20	404	22	27,5	19,8	64	20	350

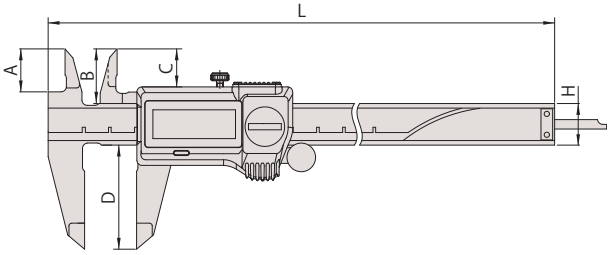

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Coolant Proof Calipers IP67 with Carbide Tipped Jaws

Series 500

These robust calipers have carbide-tipped jaws and allow reliable measurements in a wide range of situations.
The ABSOLUTE Digimatic Carbide Caliper IP67 offers you the following benefits:


- Excellent resistance against water and dust (IP67 protection level) enabling use in machining situations that include splashing coolant fluid.
- Dustproof, complies with EN60529 withstands temporary complete immersion in water without suffering any damage
- Extraordinarily long battery life.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE

IP67

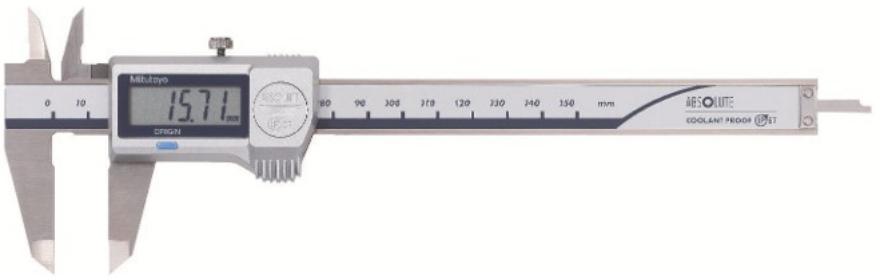

500-727-20

Metric — Carbide-tipped jaws for outside/inside measurement


No.	Range [mm]	Depth bar	Thumb roller	Data output	Max. Permissible Error E MPE	Max. Permissible Error S MPE
500-727-20	0–150	flat		●	±0,02 mm	±0,04 mm
500-723-20	0–150	flat	●	●	±0,02 mm	±0,04 mm
500-728-20	0–200	flat		●	±0,02 mm	±0,04 mm
500-724-20	0–200	flat	●	●	±0,02 mm	±0,04 mm

No.	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-727-20	233	16,5	21	14,6	40	16	164
500-723-20	233	16,5	21	14,6	40	16	168
500-728-20	290	20	24,5	18,1	50	16	194
500-724-20	290	20	24,5	18,1	50	16	198

Metric — Carbide-tipped jaws for outside measurement

No.	Range [mm]	Depth bar	Thumb roller	Data output	Max. Permissible Error E MPE	Max. Permissible Error S MPE
500-721-20	0–150	flat	●	●	±0,02 mm	±0,04 mm
500-722-20	0–200	flat	●	●	±0,02 mm	±0,04 mm

No.	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-721-20	233	16,5	21	14,6	40	16	168
500-722-20	290	20	24,5	18,1	50	16	198

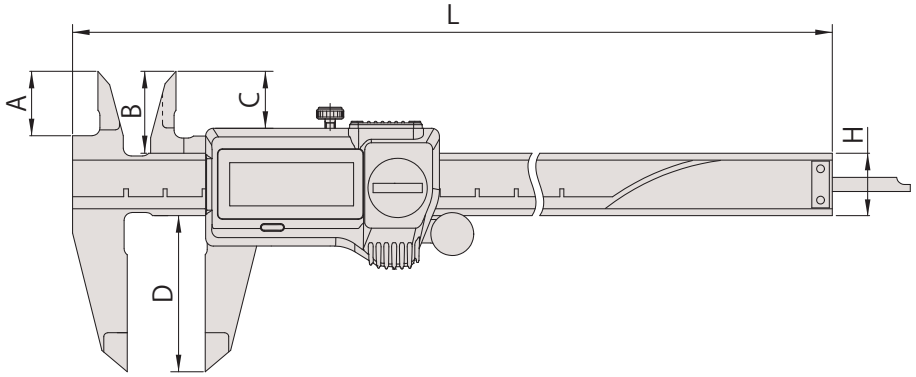

Functions	Series 500
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



050083-10





Carbide-tipped jaws

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE AOS Digimatic Calipers

Functions	Series 500
ORIGIN (ABS-Zero)	●
ON/OFF	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF300	Connection Unit for Standard Caliper, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
959143	Data Hold Unit, for Digital Caliper
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range
050085-10	Depth Base Attachment for Caliper, 125mm width for 300mm Range

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V



Round depth bar type



Caliper with Wireless System U-WAVE fit



050083-10

Series 500

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE

This digimatic caliper allows you to take reliable measurements and offers you the following benefits:

- AOS (Advanced Onsite Sensor) induction type encoder used in top-of-the-line ABS coolant-proof calipers
- Thanks to the adoption of the electromagnetic induction type ABS encoder, this caliper can be used without concern for contamination on the scale face during measurement. Detection signal is not affected by dirt (water, oil, etc.) on surface of a scale.
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed.




500-181-30

Metric

No.	Range [mm]	Depth bar	Thumb roller	Data output	Max. Permissible Error E MPE	Max. Permissible Error S MPE
500-180-30	0–100	Ø 1,9 mm			±0,02 mm	±0,04 mm
500-201-30	0–100	Ø 1,9 mm		●	±0,02 mm	±0,04 mm
500-150-30	0–100	Ø 1,9 mm	●	●	±0,02 mm	±0,04 mm
500-181-30	0–150	flat			±0,02 mm	±0,04 mm
500-184-30	0–150	Ø 1,9 mm			±0,02 mm	±0,04 mm
500-161-30	0–150	flat		●	±0,02 mm	±0,04 mm
500-203-30	0–150	Ø 1,9 mm		●	±0,02 mm	±0,04 mm
500-151-30	0–150	flat	●	●	±0,02 mm	±0,04 mm
500-158-30	0–150	Ø 1,9 mm	●	●	±0,02 mm	±0,04 mm
500-182-30	0–200	flat			±0,02 mm	±0,04 mm
500-162-30	0–200	flat		●	±0,02 mm	±0,04 mm
500-152-30	0–200	flat	●	●	±0,02 mm	±0,04 mm
500-205-30	0–300	flat		●	±0,03 mm	±0,05 mm
500-153-30	0–300	flat	●	●	±0,03 mm	±0,05 mm

No.	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-180-30	182	16,5	21	14,5	40	16	143
500-201-30	182	16,5	21	14,5	40	16	143
500-150-30	182	16,5	21	14,5	40	16	143
500-181-30	233	16,5	21	14,5	40	16	168
500-184-30	233	16,5	21	14,5	40	16	168
500-161-30	233	16,5	21	14,5	40	16	168
500-203-30	233	16,5	21	14,5	40	16	168
500-151-30	233	16,5	21	14,5	40	16	168
500-158-30	233	16,5	21	14,5	40	16	168
500-182-30	290	20	24,5	18	50	16	194
500-162-30	290	20	24,5	18	50	16	194
500-152-30	290	20	24,5	18	50	16	198
500-205-30	404	22	27,5	19,8	64	20	345
500-153-30	404	22	27,5	19,8	64	20	350

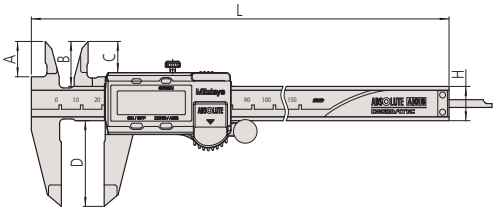

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE AOS Digimatic Calipers with Carbide Tipped Jaws

Series 500

These Digimatic calipers have carbide-tipped jaws and allow you to take reliable measurements and offer you the following benefits:

- Thanks to the adoption of the electromagnetic induction type ABS encoder, this caliper can be used without concern for contamination on the scale face during measurement. Detection signal is not affected by dirt (water, oil, etc.) on surface of a scale.
- The slider provides smooth, stable and comfortable operation.
- Character height: 9 mm (alleviation of fatigue with the high-contrast LCD)
- The ABS (ABSOLUTE) scale requires no origin setting after power-on and also has no limit to response speed.
- Extraordinary battery life.



500-233-30

Metric

Carbide-tipped jaws for outside/inside measurement

No.	Range [mm]	Depth bar	Thumb roller	Data output	Max. Permissible Error E MPE	Max. Permissible Error S MPE
500-234-30	0–150	Flat		●	±0,02 mm	±0,04 mm
500-155-30	0–150	Flat	●	●	±0,02 mm	±0,04 mm
500-236-30	0–200	Flat		●	±0,02 mm	±0,04 mm
500-157-30	0–200	Flat	●	●	±0,02 mm	±0,04 mm


No.	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-234-30	233	16,5	21	14,5	40	16	168
500-155-30	233	16,5	21	14,5	40	16	168
500-236-30	290	20	24,5	18	50	16	194
500-157-30	290	20	24,5	18	50	16	194

Metric

Carbide-tipped jaws for outside measurement

No.	Range [mm]	Depth bar	Thumb roller	Data output	Max. Permissible Error E MPE	Max. Permissible Error S MPE
500-233-30	0–150	Flat		●	±0,02 mm	±0,04 mm
500-154-30	0–150	Flat	●	●	±0,02 mm	±0,04 mm
500-235-30	0–200	Flat		●	±0,02 mm	±0,04 mm
500-156-30	0–200	Flat	●	●	±0,02 mm	±0,04 mm

No.	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-233-30	233	16,5	21	14,5	40	16	168
500-154-30	233	16,5	21	14,5	40	16	168
500-235-30	290	20	24,5	18	50	16	194
500-156-30	290	20	24,5	18	50	16	194

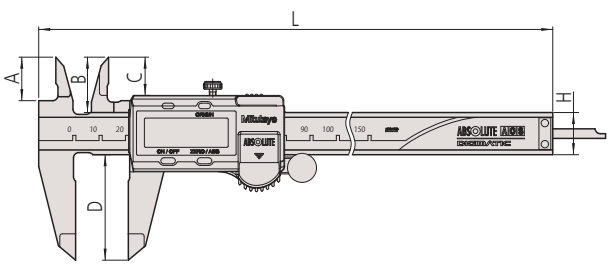

Functions	Series 500
ORIGIN (ABS-Zero)	●
ON/OFF	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF300	Connection Unit for Standard Caliper, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
959143	Data Hold Unit, for Digital Caliper
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V





Carbide-tipped jaws



050083-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Calipers for Long Range

Functions	Series 500
ORIGIN (ABS-Zero)	●
ON/OFF	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 10 mm
Battery life	Approx. 3,5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
959143	Data Hold Unit, for Digital Caliper
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V

Series 500

ABSOLUTE®

This digimatic caliper allows you to take reliable measurements and offers you the following benefits:


- It has a robust design (6 x 25 mm beam) for large measuring ranges.
- ABSOLUTE System delivers reliable measurements.
- The slider provides smooth, stable and comfortable operation.
- Character height: 10 mm.

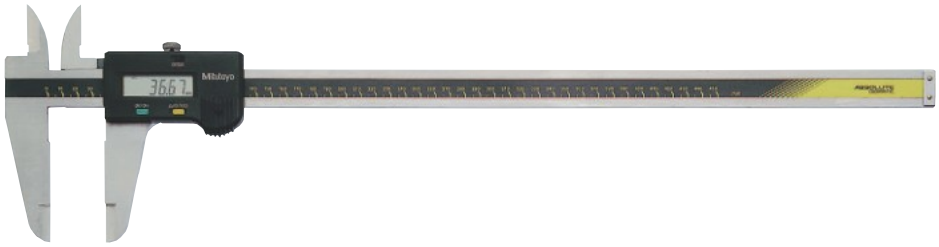

500-500-10

Metric

No.	Range [mm]	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	Mass [g]
500-500-10	0–450	±0,05 mm	±0,07 mm	630	38	47	35,9	90	25	1170
500-501-10	0–600	±0,05 mm	±0,07 mm	780	38	47	35,9	90	25	1350
500-502-10	0–1000	±0,07 mm	±0,09 mm	1240	50	60	49,8	130	32	3300

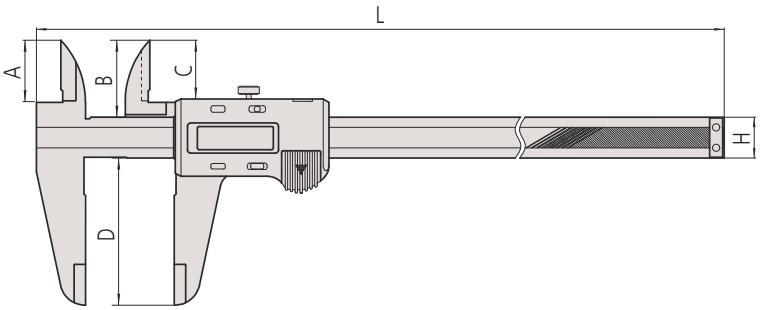

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Calipers with Nib Style Jaws

Series 550

This is a Digimatic caliper with nib-style jaws that lets you measure inside dimensions.
It offers you the following benefits:

- Rounded measuring surfaces enable you to measure inside dimensions.
- ABSOLUTE System delivers reliable measurements.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®
IP67

550-301-20
550-331-20



550-301-20

Metric — IP67 model


No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
550-301-20	0–200	10,1 mm	±0,03 mm	±0,03 mm
550-331-20	0–300	10,1 mm	±0,04 mm	±0,04 mm


No.	L [mm]	d [mm]	g [mm]	s [mm]	w [mm]	h [mm]	t [mm]	R [mm]	Mass [g]
550-301-20	290	60	5	8	76	16	3	5	180
550-331-20	404	75	5	12	95	20	3,8	5	365

Metric — Non IP67 model

No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
550-203-10	0–450	20,1 mm	±0,05 mm	±0,05 mm
550-205-10	0–600	20,1 mm	±0,05 mm	±0,05 mm
550-207-10	0–1000	20,1 mm	±0,07 mm	±0,07 mm

No.	L [mm]	d [mm]	g [mm]	s [mm]	w [mm]	h [mm]	t [mm]	R [mm]	Mass [g]
550-203-10	630	100	10	18	125	25	6	10	1110
550-205-10	780	100	10	18	125	25	6	10	1290
550-207-10	1240	140	10	24	172	32	8	10	3350

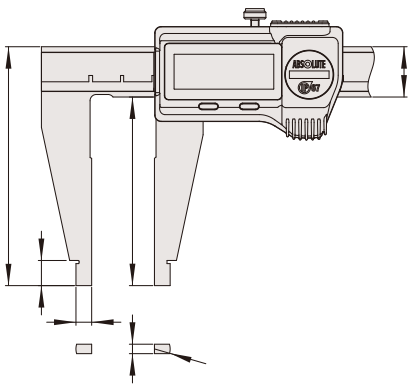



Round surfaces of jaws for measuring inside dimensions

Functions	Series 550: 550-203-10 up to 550-207-10	550-301-20	550-331-20
ORIGIN (ABS-Zero)	●	●	●
PRESET			●
ON/OFF	●		
Auto Power OFF after 20 min. non use		●	●
Low voltage alarm	●	●	●
Data output	●	●	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height: 9 mm (200 mm), 11 mm (300 mm), 10 mm (>300 mm)
OFFSET	10 mm (IP67 type only)
Battery life	Approx. 5 years, 3,5 years (>300 mm)
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
959143	Data Hold Unit, for Digital Caliper

Optional accessories for IP67

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Wireless System U-WAVE fit (IP67 model only)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Calipers with Nib Style and Standard Jaws

Series 551

This is a Digimatic caliper with nib-style and standard jaws.
It offers you the following benefits:

- Knife-shaped measuring surfaces allow you to take outside measurements.
- Rounded measuring surfaces enable you to measure inside dimensions.
- ABSOLUTE System delivers reliable measurements.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000045042

ABSOLUTE®

IP67

551-301-20
551-331-20

Functions	Series 551: 551-204-10 up to 551-207-10	551-301-20	551-331-20
ORIGIN (ABS-Zero)	●	●	●
PRESET			●
ON/OFF	●		
Auto Power OFF after 20 min. non use		●	●
Low voltage alarm	●	●	●
Data output	●	●	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height: 9 mm (200 mm), 11 mm (300 mm), 10 mm (>300 mm)
OFFSET	10 mm (IP67 type only)
Battery life	Approx. 5 years, 3,5 year (>300 mm)
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
959143	Data Hold Unit, for Digital Caliper

Optional accessories for IP67

No.	Description
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



551-301-20

Metric — IP67 model


No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
551-301-20	0–200	10,1 mm	±0,03 mm	±0,03 mm
551-331-20	0–300	10,1 mm	±0,04 mm	±0,04 mm


No.	L [mm]	b [mm]	c [mm]	d [mm]	g [mm]	s [mm]	h [mm]	t [mm]	R [mm]	Mass [g]
551-301-20	290	30	23,6	60	5	8	16	3	5	190
551-331-20	404	40	32,2	90	5	10	20	3,8	5	400

Metric — Non IP67 model

No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
551-204-10	0–500	20,1 mm	±0,06 mm	±0,06 mm
551-206-10	0–750	20,1 mm	±0,06 mm	±0,06 mm
551-207-10	0–1000	20,1 mm	±0,07 mm	±0,07 mm

No.	L [mm]	b [mm]	c [mm]	d [mm]	g [mm]	s [mm]	h [mm]	t [mm]	R [mm]	Mass [g]
551-204-10	680	56	44,9	150	10	18	25	6	10	1060
551-206-10	963	56	44,9	150	10	18	25	6	10	1410
551-207-10	1230	56	43,8	150	10	20	32	8	10	3430





Round surface of jaws for measuring inside dimensions

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Carbon Fibre Calipers IP66

Series 552

This is a lightweight standard model of Digimatic caliper with steel jaws.
It offers you the following benefits:

- Its ultra-lightweight design (with carbon fibre reinforced material) reduces total weight by up to 50%.
- It has excellent resistance against water and dust (IP66 protection level) enabling you to use it in machining situations that include splashing coolant fluid.
- Direct readout of inside measurements from the LCD (you can easily set the offset value by using the offset button).
- Preset function lets you set a desired starting point.

Safety Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000022582

ABSOLUTE®
IP66



552-304-10

Functions	Series 552
DATA (output with cable) / HOLD (display value)	●
ORIGIN (ABS-Zero)	●
PRESET	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●


Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 10 mm
OFFSET	20 mm
Battery life	Approx. 5000 hours
Delivered	In a case, including 1 battery

Metric

No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
552-302-10	0–450	20,1 mm	±0,04 mm	±0,04 mm
552-303-10	0–600	20,1 mm	±0,04 mm	±0,04 mm
552-304-10	0–1000	20,1 mm	±0,05 mm	±0,05 mm
552-305-10	0–1500	20,1 mm	±0,09 mm	±0,09 mm
552-306-10	0–2000	20,1 mm	±0,12 mm	±0,12 mm

No.	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	Mass [g]
552-302-10	640	100	18	41,2	91,8	25	10	715
552-303-10	790	100	18	41,2	91,8	25	10	790
552-304-10	1230	150	24	62,8	113,8	32	10	1760
552-305-10	1740	150	24	62,8	113,8	32	10	2160
552-306-10	2250	150	24	62,8	113,8	32	10	2560

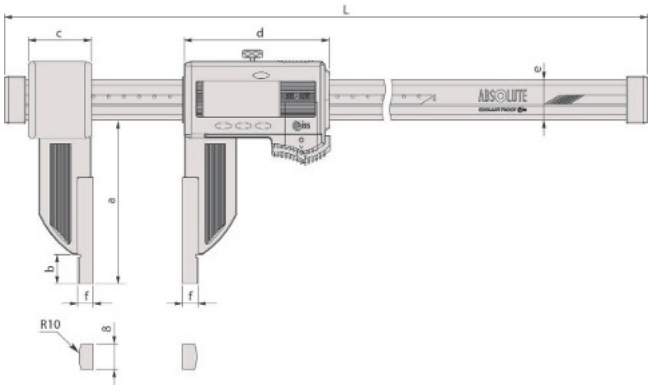

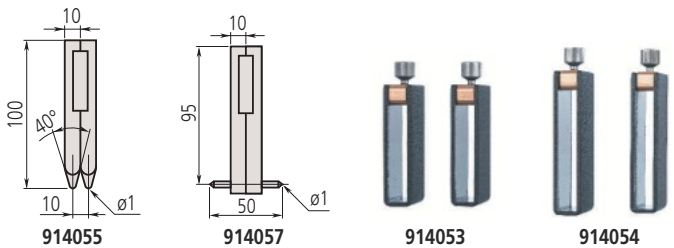


914055 914057 914053 914054

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type
914055	Center to Center Jaws Series 552, 2 pcs., (≥10,1mm) Metric
914057	Inside Groove Jaws Series 552, 2 pcs., Metric
914053	Holders (Clamps) Series 552, 2 pcs., 450 and 600mm Range
914054	Holders (Clamps) Series 552, 2 pcs., >600mm Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



hole center to center



inside goove diameter

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Carbon Fibre Calipers IP66 with Ceramic Jaws

Functions	Series 552
DATA (output with cable) / HOLD (display value)	●
ORIGIN (ABS-Zero)	●
PRESET	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 10 mm
OFFSET	20 mm
Battery life	Approx. 5000 hours
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type
914055	Center to Center Jaws Series 552, 2 pcs., (≥10,1mm) Metric
914057	Inside Groove Jaws Series 552, 2 pcs., Metric
914053	Holders (Clamps) Series 552, 2 pcs., 450 and 600mm Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



914055



914057


914053

Series 552

This is a lightweight standard model of Digimatic caliper with ceramic jaws.
It offers you the following benefits:

- Its ultra-lightweight design (with carbon fibre reinforced material) reduces total weight by up to 50%.
- It has excellent resistance against water and dust (IP66 protection level) enabling you to use it in machining situations that include splashing coolant fluid.
- Direct readout of inside measurements from the LCD (you can easily set the offset value by using the offset button).
- Preset function lets you set a desired starting point.

Safety Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000022582


ABSOLUTE® IP66


552-156-10

Metric

No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
552-155-10	0–450	20,1 mm	±0,04 mm	±0,04 mm
552-156-10	0–600	20,1 mm	±0,04 mm	±0,04 mm

No.	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	Mass [g]
552-155-10	640	100	18	41,2	91,8	25	10	715
552-156-10	790	100	18	41,2	91,8	25	10	790

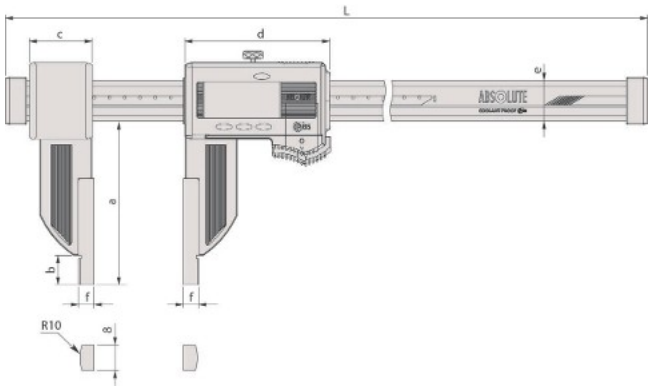

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Carbon Fibre Calipers IP66 with Extra Long Jaws

Series 552

This is a lightweight standard model of Digimatic caliper with extra-long jaws.
It offers you the following benefits:

- Its ultra-lightweight design (with carbon fibre reinforced material) reduces total weight by up to 50%.
- It has excellent resistance against water and dust (IP66 protection level) enabling you to use it in machining situations that include splashing coolant fluid.
- Direct readout of inside measurements from the LCD (you can easily set the offset value by using the offset button).
- Preset function lets you set a desired starting point.

Safety Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000022582

ABSOLUTE®
IP66



552-151-10

Functions	Series 552
ORIGIN (ABS-Zero)	●
PRESET	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 10 mm
OFFSET	20 mm
Battery life	Approx. 5000 hours
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V

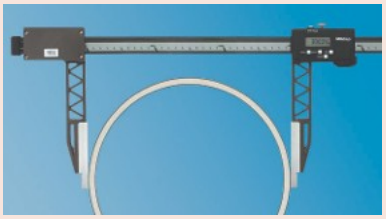

Metric

No.	Range [mm]	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
552-150-10	0–450	20,1 mm	±0,06 mm	±0,06 mm
552-151-10	0–600	20,1 mm	±0,06 mm	±0,06 mm
552-152-10	0–1000	20,1 mm	±0,07 mm	±0,07 mm
552-153-10	0–1500	20,1 mm	±0,11 mm	±0,11 mm
552-154-10	0–2000	20,1 mm	±0,14 mm	±0,14 mm

No.	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	Mass [g]
552-150-10	680	173	65,5	89	91,8	25	10	8	1215
552-151-10	830	173	65,5	89	91,8	25	10	8	1290
552-152-10	1280	170,5	73	110	113,8	32	10	12	2090
552-153-10	1790	170,5	73	110	113,8	32	10	12	2490
552-154-10	2300	170,5	73	110	113,8	32	10	12	2890

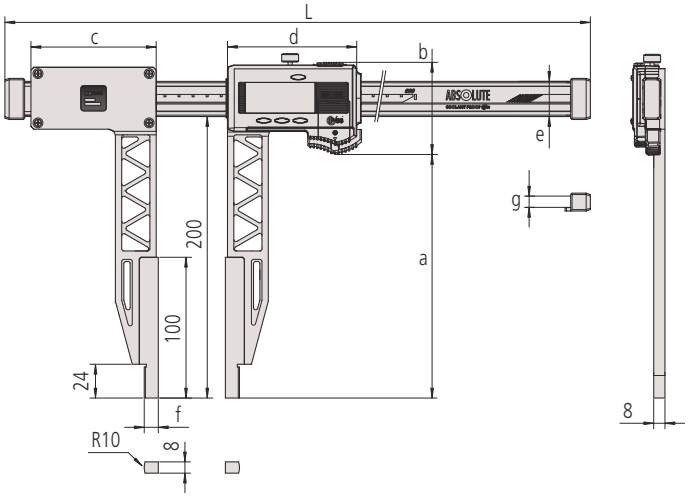

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Carbon Fibre Calipers IP66 for Interchangeable Jaws/ Scriber

Functions	Series 552
ORIGIN (ABS-Zero)	●
PRESET	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 10 mm
OFFSET	20 mm
Battery life	Approx. 5000 hours
Delivered	In a case, including 1 battery, scriber clamps (2 pcs.)

Standard accessories


No.	Description
05GZA033	Scriber Clamp, for 9x9mm Scriber


Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V





05GZA033

Series 552

Safety Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000022582

ABSOLUTE® IP66

This is a lightweight standard model of Digimatic caliper **with optional interchangeable jaws**.
It offers you the following benefits:

- Its ultra-lightweight design (with carbon fibre reinforced material) reduces total weight by up to 50%.
- It has excellent resistance against water and dust (IP66 protection level) enabling you to use it in machining situations that include splashing coolant fluid.
- Direct readout of inside measurements from the LCD (you can easily set the offset value by using the offset button).
- Preset function lets you set a desired starting point.



552-182-10

Metric

No.	Range [mm]	Max. Permissible Error E MPE	Mass [g]	L [mm]	c [mm]	d [mm]	e [mm]
552-181-10	0–450	±0,04 mm	650	640	41,2	91,8	25
552-182-10	0–600	±0,04 mm	725	790	41,2	91,8	25
552-183-10	0–1000	±0,05 mm	1480	1230	62,8	113,8	32
552-184-10	0–1500	±0,09 mm	1880	1740	62,8	113,8	32
552-185-10	0–2000	±0,12 mm	2280	2250	62,8	113,8	32

Standard contact point	Measuring range		**0-450 mm** / 0-18"	**0-600 mm** / 0-24"	**0-1000 mm** / 0-40"	**0-1500 mm** / 0-60"	**0-2000 mm** / 0-80"
	E_{MPE}		**± 0,06** / ± 0.0025"	**± 0,06** / ± 0.0025"	**± 0,07** / ± 0.0030"	**± 0,11** / ± 0.0045"	**± 0,14** / ± 0.0055"
Inside Point type	Measuring range (mm)	IN	**50,1-500 mm**	**50,1-650 mm**	**50,1-1050 mm**	**50,1-1550 mm**	**50,1-2050 mm**
		OUT	**0-450 mm**	**0-600 mm**	**0-1000 mm**	**0-1500 mm**	**0-2000 mm**
	Measuring range (inch)	IN	2,004-20"	2,004-26"	2,004-42"	2,004-62"	2,004-82"
		OUT	0-18"	0-24"	0-40"	0-60"	0-80"
	E_{MPE}		**± 0,09 mm** / ± 0.0035"	**± 0,09 mm** / ± 0.0035"	**± 0,10 mm** / ± 0.0040"	**± 0,14 mm** / ± 0.0055"	**± 0,17 mm** / ± 0.0070"
Centerline type	Measuring range (mm)		**30,1-480 mm**	**30,1-630 mm**	**30,1-1030 mm**	**30,1-1530 mm**	**30,1-2030 mm**
	Measuring range (inch)		1,204-19.2"	1,204-25.2"	1,204-41.2"	1,204-61,2"	1,204-81,2"
	S_{MPE}		**± 0,08 mm** / ± 0.0030"	**± 0,08 mm** / ± 0.0030"	**± 0,10 mm** / ± 0,004"	**± 0,13 mm** / ± 0.0055"	**± 0,16 mm** / ± 0.0065"
Scriber type	Measuring range (mm)		**30,1-480 mm**	**30,1-630 mm**	**30,1-1030 mm**	**30,1-1530 mm**	**30,1-2030 mm**
	Measuring range (inch)		1,204-19.2"	1,204-25.2"	1,204-41.2"	1,204-61.2"	1,204-81.2" /
	S_{MPE}		**± 0,11** / ± 0.0045"	**± 0,11** / ± 0.0045"	**± 0,11** / ± 0.0045"	**± 0,15** / ± 0.0060"	**± 0,18** / ± 0.0070"
Surface Plate type + Scriber	Measuring range		**0-450 mm** / 0-17,7"	**0-600 mm** / 0-23.7"	**0-1000 mm** / 0-39.4"	**0-1500 mm** / 0-59.4"	**0-2500 mm** / 0-79.6"
	E_{MPE}		**± 0,10** / ± 0.0040"	**± 0,10** / ± 0.0040"	**± 0,11** / ± 0.0045"	**± 0,15** / ± 0.0060"	**± 0,18** / ± 0.0070"
Surface Plate type + Inside Point type	Measuring range (mm)	Outside	**0-450 mm**	**0-600 mm**	**0-1000 mm**	**0-1500 mm**	**0-2000 mm**
	Measuring range (inch)	Outside	0-18"	0-24"	0-40"	0-60"	0-80"
	E_{MPE}		**± 0,12 mm** / ± 0.005"	**± 0,12 mm** / ± 0.0050"	**± 0,13 mm** / ± 0.0055"	**± 0,17 mm** / ± 0.0070"	**± 0,20 mm** / ± 0.0080"
Surface Plate type + Center Line type	Measuring range (mm)		**15,1-465 mm**	**15,1-615 mm**	**15,1-1015 mm**	**15,1-1515 mm**	**15,1-2015 mm**
	Measuring range (inch)		0,6-18.6"	0,6-24.6"	0,6-40.6"	0,6-60.6"	0,6-80.6"
	S_{MPE}		**± 0,11 mm/** ± 0.0045"	**± 0,11 mm/** ± 0.0045"	**± 0,12 mm/** ± 0.0050"	**± 0,16 mm/** ± 0.0065"	**± 0,19 mm/** ± 0.0075"

Accuracy with different Interchangeable Jaws

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Carbon Fibre Calipers IP66 for Interchangeable Jaws/ Scriber

Series 552

Interchangeable jaws (optional)



07CZA056



07CZA057



07CZA044



07CZA058




07CZA055




07GZA000.

Metric


No.	Type	Mass [g]
07CZA056	Standard (pair)	90,6
07CZA057	Centreline (pair)	119,6
07CZA044	Surface plate (1 piece)	191,3
07CZA058	Inside point (pair)	98,8
07CZA055	Scriber (pair)	63,2
07GZA000.	Scriber for height gauges (1 piece)	120




Standard type




Centreline type




Surface plate type




Inside point type




Scriber type




Scriber for height gages

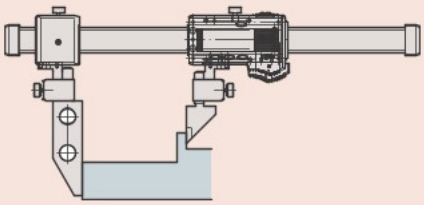


Surface plate type + Standard type

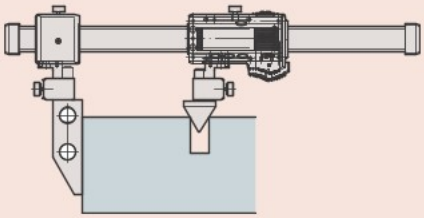


Surface plate type + Centrerline type

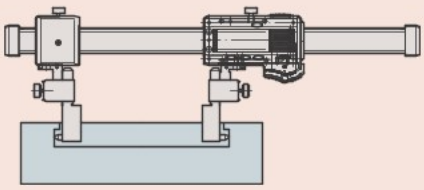

Inside point type

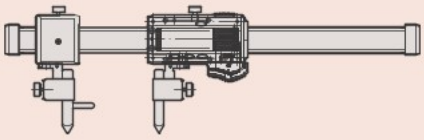

Scriber type

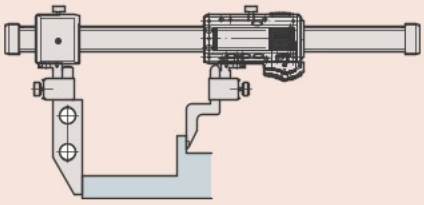

Surface plate type + Scriber for height gages

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


on. Product descriptions,

Vernier Calipers

Series 530

This is a standard type of vernier caliper that offers you the following benefits:

- Main scale and vernier scale satin chrome finish gives you high readability.
- Raised sliding surfaces.

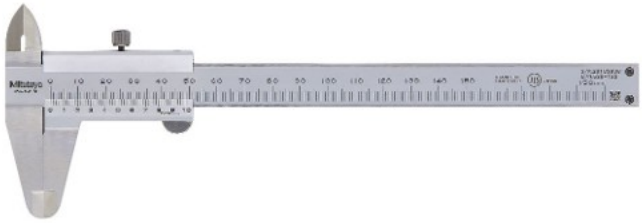


530-122

Specifications

Delivered	In a box

Optional accessories

No.	Description
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range
050085-10	Depth Base Attachment for Caliper, 125mm width for 300mm Range



Easy reading due to vernier scales inclined by 14 degrees

Metr.ISO-Gew			
Nenn ext. ext. ϕ mm	Stg. Passo Pas Paso mm	Kern fond int. nucleo ϕ mm	Bohr trap meche broca ϕ mm
3	0.5	2.46	2.5
4	0.7	3.24	3.3
5	0.8	4.13	4.2
6	1	4.92	5
8	1.25	6.65	6.8
10	1.5	8.38	8.5
12	1.75	10.11	10.2
16	2	13.84	14
20	2.5	17.29	17.5
Whitworth			
ϕ in.	G/in.	ϕ mm	ϕ mm
1/4	20	4.72	5.0
5/16	18	6.13	6.4
3/8	16	7.49	7.7
1/2	12	9.99	10.25
5/8	11	12.92	13.25
3/4	10	15.8	16.25
7/8	9	18.61	19
1	8	21.34	21.75
101995			

530-316 only

Metric


Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
530-122	0–150	0,02 mm	flat	±0,03 mm	±0,05 mm	229	40	21	17	16	143
530-123	0–200	0,02 mm	flat	±0,03 mm	±0,05 mm	288	50	24,5	20,5	16	180
530-124	0–300	0,02 mm	flat	±0,04 mm	±0,06 mm	404	64	27,5	22	20	355
530-100	0–100	0,05 mm	Ø 1,9 mm	±0,05 mm	±0,07 mm	182	40	21,5	17	16	128
530-102	0–150	0,05 mm	Ø 1,9 mm	±0,05 mm	±0,07 mm	229	40	21	17	16	144
530-101	0–150	0,05 mm	flat	±0,05 mm	±0,07 mm	229	40	21	17	16	143
530-108	0–200	0,05 mm	flat	±0,05 mm	±0,07 mm	288	50	24,5	20,5	16	180
530-109	0–300	0,05 mm	flat	±0,08 mm	±0,1 mm	404	64	27,5	22	20	355
530-501	0–600	0,05 mm	without	±0,1 mm	±0,12 mm	780	90	47	38	25	1300
530-502	0–1000	0,05 mm	without	±0,15 mm	±0,17 mm	1240	130	60	50	32	3300

Metric/Inch

Metric/Inch

No.	Range ["]	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
530-312	0–6	0–150	0,02 mm/ 0,001"	flat	±0,03 mm	±0,05 mm	229	40	21	17	16	143
530-118	0–8	0–200	0,02 mm/ 0,001"	flat	±0,03 mm	±0,05 mm	288	50	24,5	20,5	16	180
530-119	0–12	0–300	0,02 mm/ 0,001"	flat	±0,04 mm	±0,06 mm	404	64	27,5	22	20	355
530-104	0–6	0–150	0,05 mm/ 1/128"	flat	±0,05 mm	±0,07 mm	229	40	21	17	16	143
530-316	0–6	0–150	0,05 mm/ 1/128"	flat	±0,05 mm	±0,07 mm	229	40	21	17	16	145
530-114	0–8	0–200	0,05 mm/ 1/128"	flat	±0,05 mm	±0,07 mm	288	50	24,5	20,5	16	180
530-115	0–12	0–300	0,05 mm/ 1/128"	flat	±0,08 mm	±0,1 mm	404	64	27,5	22	20	355

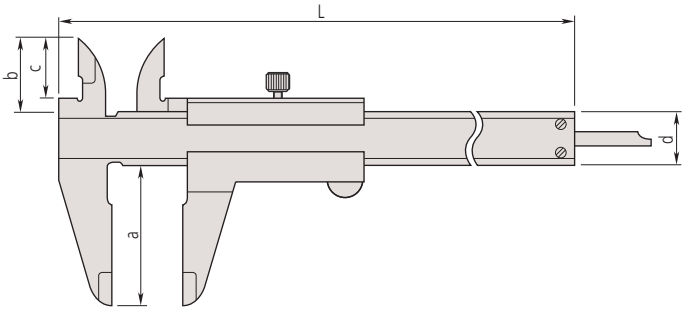

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Vernier Calipers with Carbide Tipped Jaws

Series 530

These Vernier Calipers have carbide-tipped jaws and offers you the following benefits:
- Main scale and vernier scale satin chrome finish gives you high readability.
- Raised sliding surfaces.



530-320

Metric


Carbide-tipped jaws for outside/inside measurement

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
530-335	0–150	0,05 mm	flat	±0,05 mm	±0,07 mm	229	40	21	17	16	145

Metric

Carbide-tipped jaws for outside measurement

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
530-320	0–150	0,05 mm	flat	±0,05 mm	±0,07 mm	229	40	21	17	16	145
530-321	0–200	0,05 mm	flat	±0,05 mm	±0,07 mm	288	50	24,5	20,5	16	181
530-322	0–300	0,05 mm	flat	±0,08 mm	±0,1 mm	404	64	27,5	22	20	355

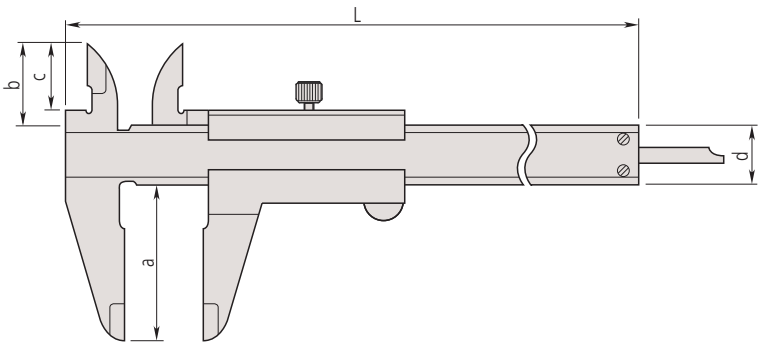


Specifications


Delivered	In a box

Optional accessories

No.	Description
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range
050085-10	Depth Base Attachment for Caliper, 125mm width for 300mm Range

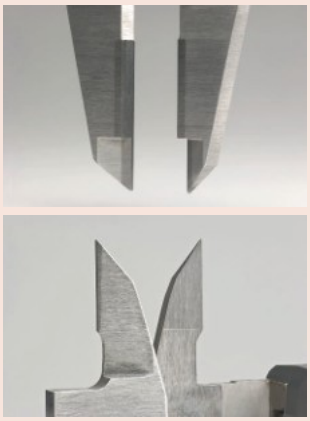

Carbide-tipped measuring surfaces



Easy reading due to vernier scales inclined by 14 degrees

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vernier Calipers with Thumb Clamp

Series 531

These Vernier Calipers with thumb clamp only moves when you depress the spring-loaded thumb grip.




531-122

Specifications

Delivered	In a box

Optional accessories

No.	Description
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range
050085-10	Depth Base Attachment for Caliper, 125mm width for 300mm Range

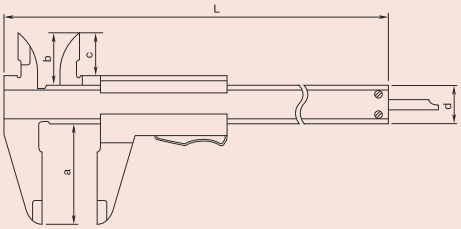

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
531-101	0–150	0,05 mm	flat	±0,05 mm	±0,07 mm	229	40	21,5	17	16	142
531-102	0–200	0,05 mm	flat	±0,05 mm	±0,07 mm	288	50	25	20,5	16	175
531-103	0–300	0,05 mm	flat	±0,08 mm	±0,1 mm	403	64	27,5	22	20	360


Metric/Inch

No.	Range ["]	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
531-122	0–6	0–150	0,05 mm/ 1/128"	flat	±0,05 mm	±0,07 mm	229	40	21,5	17	16	142
531-108	0–8	0–200	0,05 mm/ 1/128"	flat	±0,05 mm	±0,07 mm	288	50	25	20,5	16	175
531-109	0–12	0–300	0,05 mm/ 1/128"	flat	±0,08 mm	±0,1 mm	403	64	27,5	22	20	360

Vernier Calipers with Fine Adjustment

Series 532

These Vernier Calipers have fine-adjustment to help you with slider positioning.

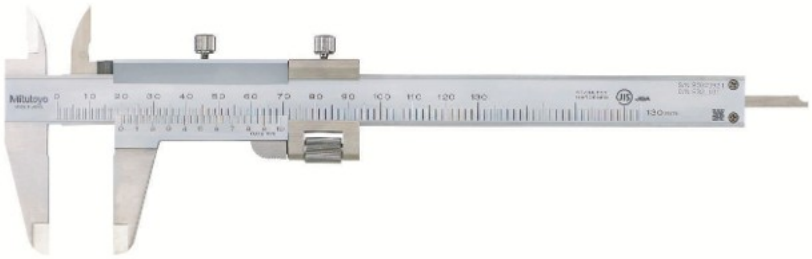


532-101

Specifications

Delivered	In a box

Optional accessories

No.	Description
050083-10	Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm width for 100, 150, 200mm Range
050085-10	Depth Base Attachment for Caliper, 125mm width for 300mm Range

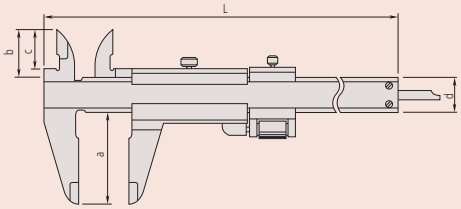

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
532-101	0–130	0,02 mm	flat	±0,03 mm	±0,05 mm	229	40	21,5	17	16	165
532-102	0–180	0,02 mm	flat	±0,03 mm	±0,05 mm	288	50	25	20,5	16	202
532-103	0–280	0,02 mm	flat	±0,04 mm	±0,06 mm	403	64	27,5	22	20	395

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Dial Calipers

Series 505

These dial calipers allows you to take reliable measurements and offers you the following following benefits:

- Ultra-smooth sliding and high shock protection.
- Easy to read dial with large character height.



505-730



505-732

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
505-730	0–150	0,02 mm 2 mm/rev	flat	±0,03 mm	±0,05 mm	231	40	21	16,5	16	175
505-732	0–150	0,01 mm 1 mm/rev	flat	±0,02 mm	±0,04 mm	231	40	21	16,5	16	176
505-731	0–200	0,02 mm 2 mm/rev	flat	±0,03 mm	±0,05 mm	288	50	24,5	20	16	185
505-733	0–200	0,01 mm 1 mm/rev	flat	±0,03 mm	±0,05 mm	288	50	24,5	20	16	186
505-745	0–300	0,02 mm 2 mm/rev	flat	±0,04 mm	±0,06 mm	404	64	27,5	22	20	370

Metric


Carbide-tipped jaws for outside/inside measurement

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
505-735	0–150	0,02 mm 2mm/rev	flat	±0,03 mm	±0,05 mm	231	40	21	16,5	16	175

Metric

Carbide-tipped jaws for outside measurement

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
505-734	0–150	0,02 mm 2 mm/rev	flat	±0,03 mm	±0,05 mm	231	40	21	16,5	16	175

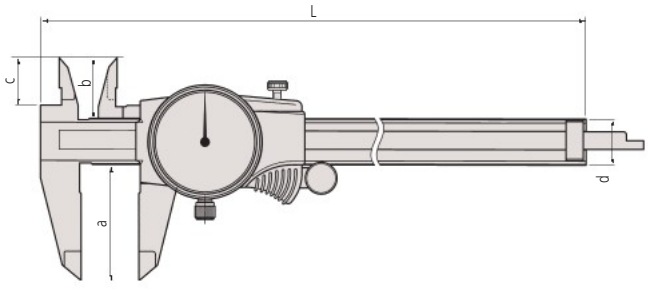


Specifications

Delivered	In a case

Optional accessories

No.	Description
050083-10	Depth Base Attachment for Caliper, 75mm width 75mm width for 100, 150, 200mm Range
050084-10	Depth Base Attachment for Caliper, 100mm widt 100mm width for 100, 150, 200mm Range Range
050085-10	Depth Base Attachment for Caliper, 125mm widt 125mm width for 300mm Range



Carbide tipped jaws outside505-734 / 505-735
505-734 / 505-735



Carbide tipped jaws inside and outside505-735
505-735

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

on. Product descriptions,

Vernier Calipers with Nib Style and Standard Jaws

Specifications

Delivered	In a box




Round surface of jaws for measuring inside dimensions

Series 533

These vernier calipers with nib style and standard jaws let you take easy, metric measurements They offer you the following benefits:

- You can read inside and outside measurements directly from the upper and lower vernier scales.
- Main scale and vernier scale satin chrome finish gives you high readability.

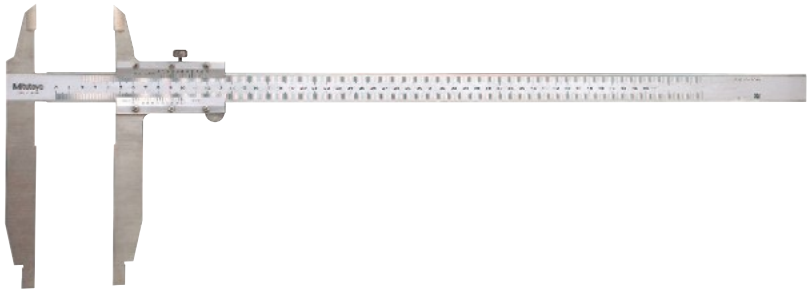

533-404
Without fine adjustment

Metric — With fine adjustment


No.	Range [mm]	Graduation	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]
533-504	0–500	0,02 mm	20,1 mm	±0,05 mm	±0,05 mm	680
533-505	0–750	0,02 mm	20,1 mm	±0,06 mm	±0,06 mm	963
533-506	0–1000	0,02 mm	20,1 mm	±0,07 mm	±0,07 mm	1230

No.	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
533-504	150	15	56	25	1250
533-505	150	15	56	25	1550
533-506	150	20	56	32	3450

Metric — Without fine adjustment

No.	Range [mm]	Graduation	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]
533-404	0–500	0,05 mm	20,1 mm	±0,1 mm	±0,1 mm	680
533-405	0–750	0,05 mm	20,1 mm	±0,12 mm	±0,12 mm	963
533-406	0–1000	0,05 mm	20,1 mm	±0,15 mm	±0,15 mm	1230

No.	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
533-404	150	15	56	25	1200
533-405	150	15	56	25	1500
533-406	150	20	56	32	3300

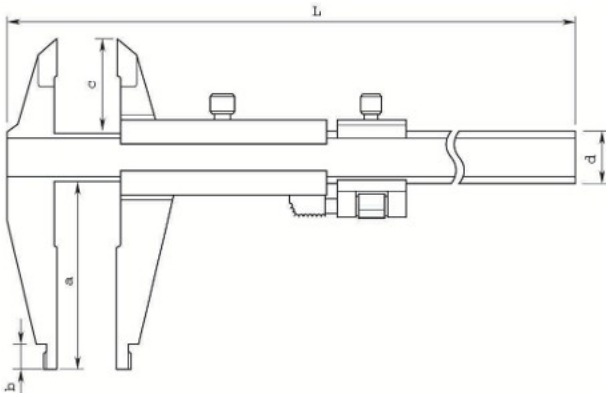

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Vernier Calipers with Nib Style Jaws

Series 160

These vernier calipers with nib style jaws come with or without fine adjustment.
They offer you the following benefits:

- For the metric only models the top offset vernier scale allows you to directly read the inside dimensions without having to add the nib widths.
- Main scale and vernier scale satin chrome finish gives you high readability.



160-127




160-101

Specifications

Delivered	In a box





Rounded outside measuring surfaces for measuring inside dimensions

Metric — With fine adjustment


No.	Range [mm]	Graduation	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]
160-127	0–300	0,02 mm	10,1 mm	±0,04 mm	±0,04 mm	445
160-128	0–450	0,02 mm	20,1 mm	±0,05 mm	±0,05 mm	630
160-101	0–600	0,02 mm	20,1 mm	±0,05 mm	±0,05 mm	780
160-104	0–1000	0,02 mm	20,1 mm	±0,07 mm	±0,07 mm	1240

No.	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	R [mm]	Mass [g]
160-127	95	75	12	20	10	38	5	450
160-128	125	100	18	25	14,8	6	10	1200
160-101	125	100	18	25	14,8	6	10	1400
160-104	172	140	24	32	17	8	10	3500

Metric — Without fine adjustment

No.	Range [mm]	Graduation	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]
160-130	0–450	0,05 mm	20,1 mm	±0,1 mm	±0,1 mm	630
160-131	0–600	0,05 mm	20,1 mm	±0,1 mm	±0,1 mm	780
160-132	0–1000	0,05 mm	20,1 mm	±0,15 mm	±0,15 mm	1240

No.	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	R [mm]	Mass [g]
160-130	125	100	18	25	14,8	6	10	1100
160-131	125	100	18	25	14,8	6	10	1300
160-132	172	140	24	32	17	8	10	3300

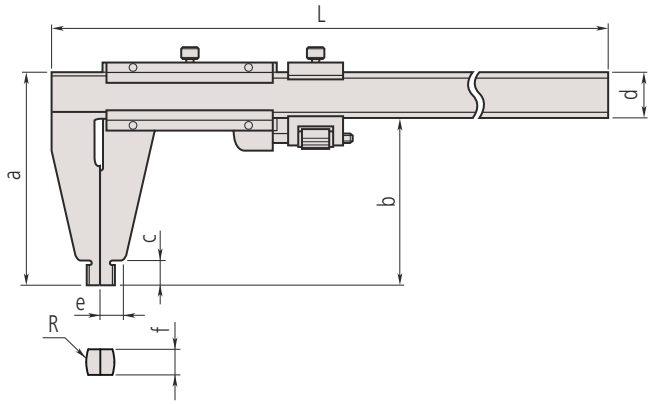


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Vernier Calipers with Long Jaws

Specifications

Delivered	In a box

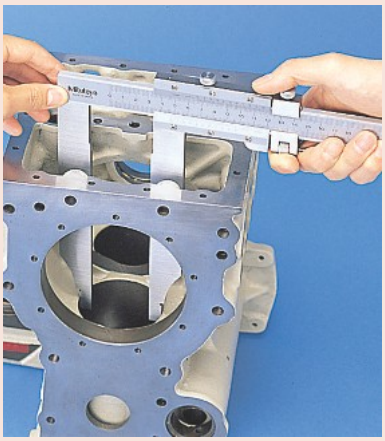





Rounded outside measuring surfaces for measuring inside dimensions

Series 534

These vernier calipers with long jaws come with or without fine adjustment and let you measure hard-to-reach features.
They offer you the following benefits:

- Long jaws enable you to measure hard-to-reach workpiece features.
- The top offset vernier scale allows you to directly read the inside dimensions without having to add the jaw blade width.



534-110
Without fine adjustment

Metric — With fine adjustment


No.	Range [mm]	Graduation	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
534-113	0–300	0,02 mm	10,1 mm	±0,04 mm	±0,04 mm
534-114	0–500	0,02 mm	20,1 mm	±0,06 mm	±0,06 mm
534-115	0–750	0,02 mm	20,1 mm	±0,08 mm	±0,08 mm
534-116	0–1000	0,02 mm	20,1 mm	±0,1 mm	±0,1 mm

No.	L [mm]	D [mm]	E [mm]	F [mm]	H [mm]	R [mm]	M [mm]	S [mm]	Mass [g]	t [mm]
534-113	445	90	76,6	38	20	5	7	12	460	3,8
534-114	682	200	89	51	25	10	12	18,5	1500	6
534-115	995	200	150	62,5	32	10	12	18,5	2900	6
534-116	1230	200	150	62,5	32	10	12	18,5	3500	8

Metric — Without fine adjustment

No.	Range [mm]	Graduation	Inside measuring from	Max. Permissible Error E MPE	Max. Permissible Error S MPE
534-109	0–300	0,05 mm	10,1 mm	±0,07 mm	±0,07 mm
534-110	0–500	0,05 mm	20,1 mm	±0,13 mm	±0,13 mm

No.	L [mm]	D [mm]	E [mm]	H [mm]	R [mm]	M [mm]	S [mm]	Mass [g]	t [mm]
534-109	445	90	76,5	20	5	7	12	400	3,8
534-110	682	200	89	25	10	12	18,5	1400	6

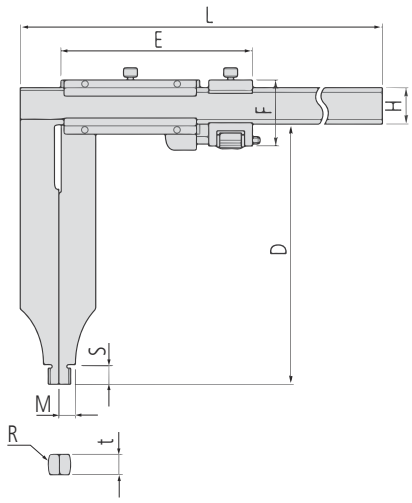

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Calipers with Constant Measuring Force

Series 573

ABSOLUTE®

The ABSOLUTE Digimatic calipers have a load cell and help you measure elastic workpieces.
They offer you the following benefits:


- Due to their low and constant measuring force these calipers are ideal for measuring elastic workpieces such as plastic and rubber parts that standard calipers cannot measure accurately.
- Large character height (alleviation of fatigue with the high-contrast LCD)
- The ABS (ABSOLUTE) scale requires no origin setting after power-on and also has no limit to response speed.
- Extraordinary battery life.



573-191-30

Metric

No.	Range [mm]	Depth bar	Max. Permissible Error E MPE	Mass [g]
573-191-30	0–180	Without	±0,05 mm	253

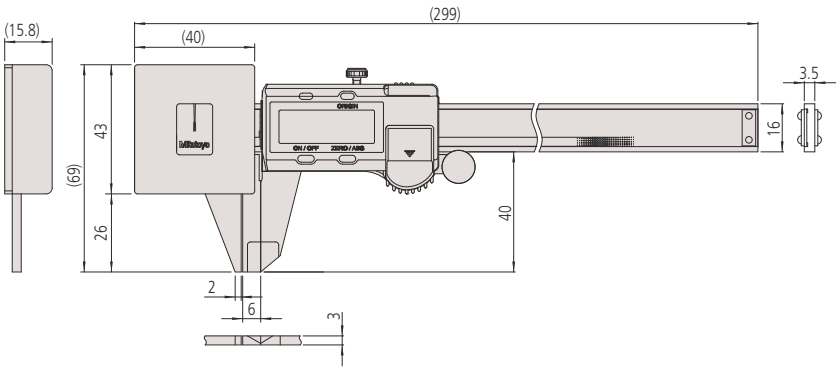

Functions	Series 573
ORIGIN (ABS-Zero)	●
ON/OFF	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
Data output	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Measuring force	0.5-1 N
Jaw retraction	0,3 mm
Display	LCD, character height 9 mm
Battery life	Approx. 18000 hours
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF300	Connection Unit for Standard Caliper, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
959143	Data Hold Unit, for Digital Caliper

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

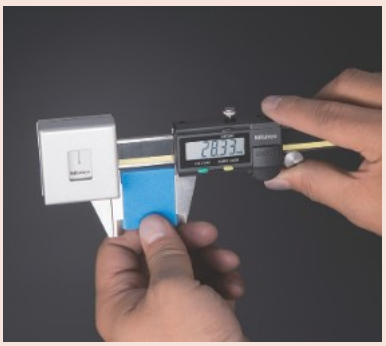



A consistently low measuring force can be guaranteed by only taking measurements when the pointer is between the two fiducial lines.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Calipers for Tolerance Measurement

Functions	Series 573
ORIGIN (ABS-Zero)	●
ON/OFF	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
Data output	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Measuring force	7-14 N
Jaw retraction	2 mm
Display	LCD, character height 9 mm
Battery life	Approx. 18000 hours
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
959143	Data Hold Unit, for Digital Caliper

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

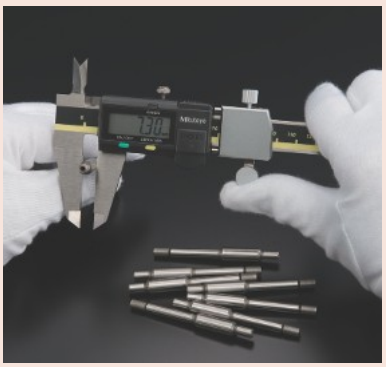


Series 573

ABSOLUTE®

The ABSOLUTE Digimatic snap caliper for tolerance measurement features a spring-loaded mechanism to allow quick and efficient GO/±NO-GO inspection for mass produced parts.


- Large character height (alleviation of fatigue with the high-contrast LCD)
- The ABS (ABSOLUTE) scale requires no origin setting after power-on and also has no limit to response speed.
- Extraordinary battery life.

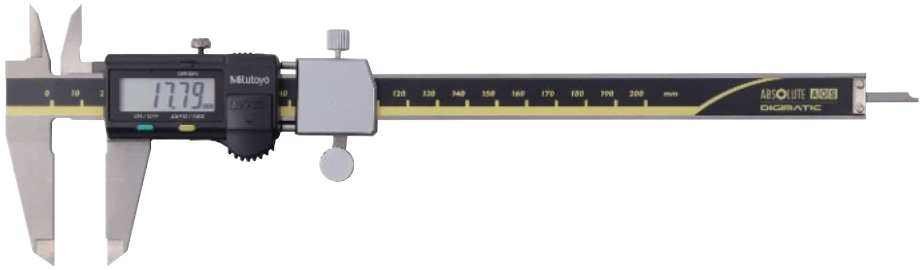

573-182-30

Metric

No.	Range [mm]	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
573-181-30	0–100	Flat	±0,02 mm	±0,04 mm	233	40	21	16,5	16	213
573-182-30	0–150	Flat	±0,02 mm	±0,04 mm	290	50	24,5	20	16	233

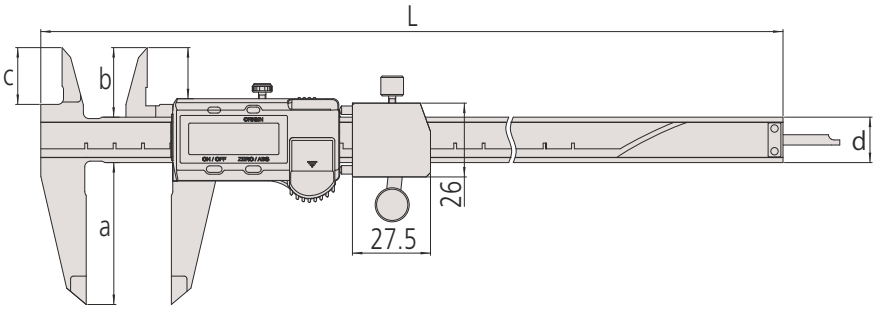

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Scribing Calipers with Carbide Tipped Jaws

Series 573


These Calipers are designed for scribing tasks.

Dust- and Water-Protected

TÜVRheinland CERTIFIED www.tuv.com ID 0000045042

ABSOLUTE®


IP67

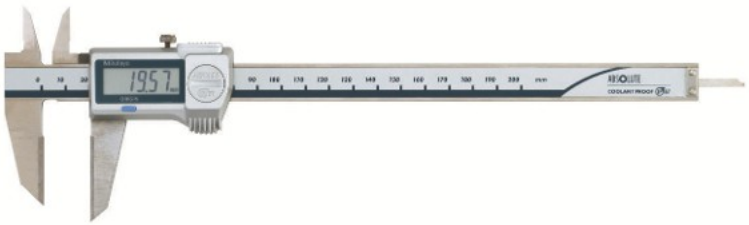

573-677-20

Metric

No.	Range [mm]	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Mass [g]
573-676-20	0–150	Flat	±0,02 mm	±0,04 mm	229	46	21,5	17	16	33	166
573-677-20	0–200	Flat	±0,02 mm	±0,04 mm	288	50	25	20,5	16	43	196
573-679-20	0–300	Flat	±0,03 mm	±0,05 mm	404	64	27,5	22	20	54	360

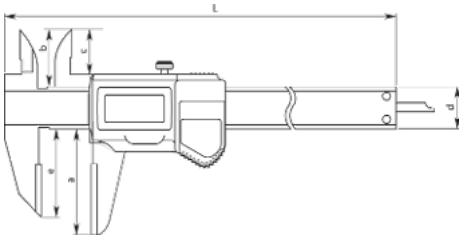

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 536

These Calipers are designed for scribing tasks.

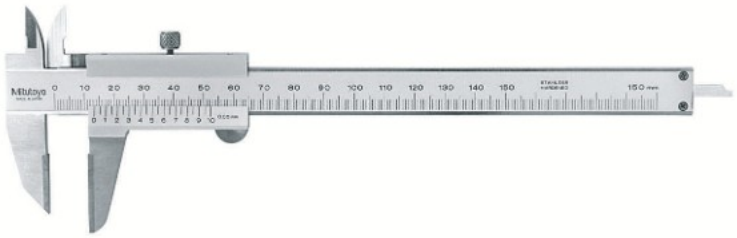

536-221


Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]
536-221	0–150	0,05 mm	Flat	±0,05 mm	±0,07 mm	229	40	21,5	17	16	33
536-222	0–200	0,05 mm	Flat	±0,05 mm	±0,07 mm	288	50	25	20,5	16	43
536-223	0–300	0,05 mm	Flat	±0,08 mm	±0,1 mm	403	64	27,5	22	20	54

No.	Mass [g]
536-221	150
536-222	180
536-223	400

Specifications

Delivered	In a case

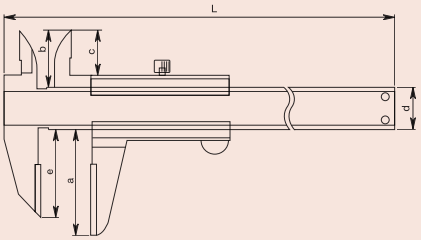

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Offset Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm (150 mm, 200 mm) 11 mm (300 mm)
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Series 573

These offset calipers enable you to measure stepped workpieces. They offer you the following benefits:

- You can adjust the beam-mounted jaw to facilitate measurement of stepped sections and hard-to-reach workpiece features.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®
IP67




573-602-20

Metric — Without thumb roller

No.	Range [mm]	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
573-611-20	0–150	Flat	±0,02 mm	±0,04 mm	95	10	40	30	168
573-612-20	0–200	Flat	±0,02 mm	±0,04 mm	95	10	50	38,5	198
573-614-20	0–300	Flat	±0,03 mm	±0,05 mm	135	15	64	51	380

Metric — With thumb roller

No.	Range [mm]	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
573-601-20	0–150	Flat	±0,02 mm	±0,04 mm	95	10	40	30	168
573-602-20	0–200	Flat	±0,02 mm	±0,04 mm	95	10	50	38,5	198
573-604-20	0–300	Flat	±0,03 mm	±0,05 mm	135	15	64	51	970

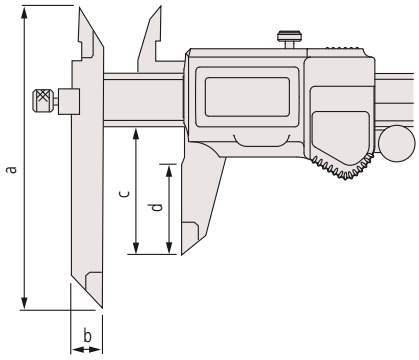

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Offset Calipers

Series 536

These Offset Calipers enables you to measure stepped workpieces and offers you the following benefits:

- The beam-mounted jaw is adjustable to facilitate the measurement of stepped sections and hard-to-reach workpiece features.



536-101


Specifications

Delivered	In a case

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]
536-101	0–150	0,05 mm	Flat	±0,05 mm	±0,07 mm	229	95	40	10	16	7,5
536-102	0–200	0,05 mm	Flat	±0,05 mm	±0,07 mm	286	95	50	10	16	8,5
536-103	0–300	0,05 mm	Flat	±0,08 mm	±0,1 mm	403	135	64	15	20	12

No.	Mass [g]
536-101	150
536-102	200
536-103	400

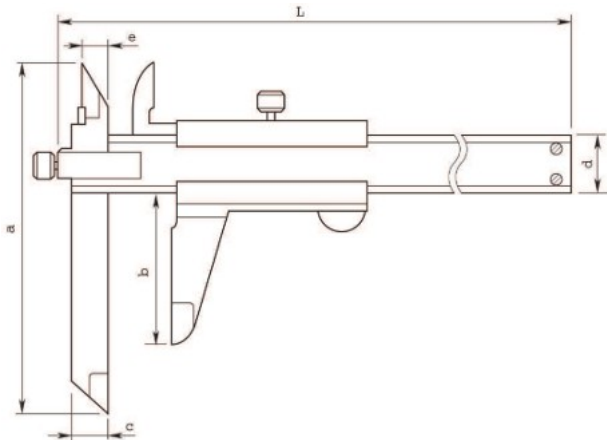

536-101

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Offset Centerline Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm (150 mm, 200 mm) 11 mm (300 mm)
OFFSET	10 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Series 573

Dust- and Water-Protected

TÜVRheinland CERTIFIED www.tuv.com ID 0000045042

ABSOLUTE IP67

These offset centreline calipers enable you to measure centre to centre distance.
They offer you the following benefits:

- Specially designed for hole centre-to-centre measurements in the same plane, or between offset planes.
- You can also measure from an edge to a hole centre.



573-606-20


Metric — Without thumb roller

No.	Range [mm]	Depth bar	Max. Permissible Error S MPE	a [mm]	t [mm]	Mass [g]
573-615-20	10,1–160	Without	±0,03 mm	75	3,5	157
573-616-20	10,1–210	Without	±0,03 mm	75	3,5	177
573-618-20	10,1–310	Without	±0,04 mm	100	3,8	335

Metric — With thumb roller

No.	Range [mm]	Depth bar	Max. Permissible Error S MPE	a [mm]	t [mm]	Mass [g]
573-605-20	10,1–160	Without	±0,03 mm	75	3,5	157
573-606-20	10,1–210	Without	±0,03 mm	75	3,5	177
573-608-20	10,1–310	Without	±0,04 mm	100	3,8	340

mm

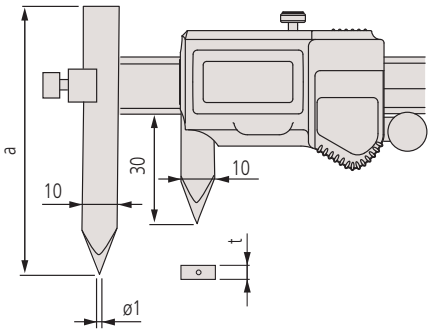

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Offset Centerline Calipers

Series 536

This Offset Centerline Caliper enables you to measure center-to-center distance and offers you the following benefits:


- Center-to-center measurements for holes on the same plane or between offset planes.
- Edge to center measurements.



536-106

Specifications

Delivered | In a case

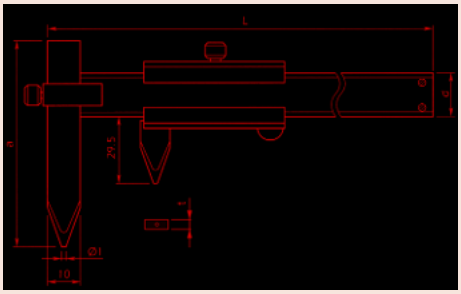

Metric


No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error S MPE	L [mm]	a [mm]	d [mm]	t [mm]	Mass [g]
536-105	10,1–150	0,05 mm	Without	±0,05 mm	229	75	16	3	140
536-106	10,1–200	0,05 mm	Without	±0,05 mm	282	75	16	3	160
536-107	10,1–300	0,05 mm	Without	±0,08 mm	383	100	20	3,8	320

Swivel Calipers

Series 536

These Vernier Calipers have a swivelling jaw. They offer you the following benefits:


- You can rotate the moving jaw to measure sectioned shafts.

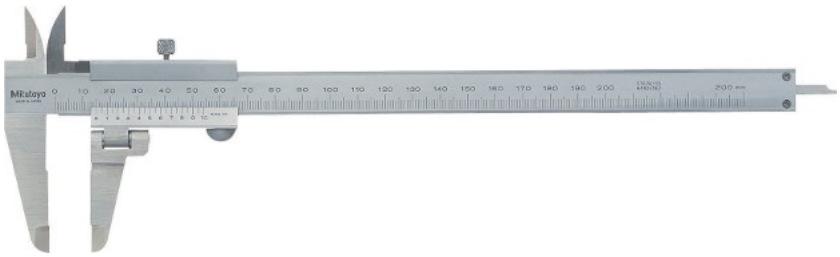


536-212

Specifications


Delivered | In a case

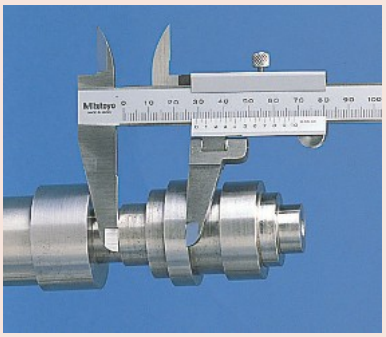

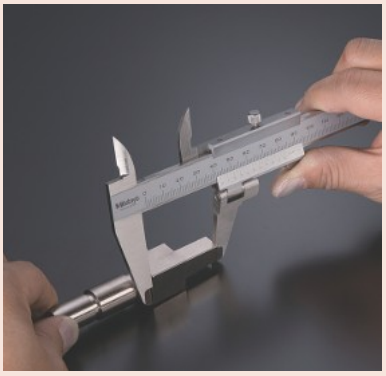

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Remarks	Mass [g]
536-212	0–200	0,05 mm	Flat	±0,05 mm	±0,07 mm	Swivel range ±90°	190

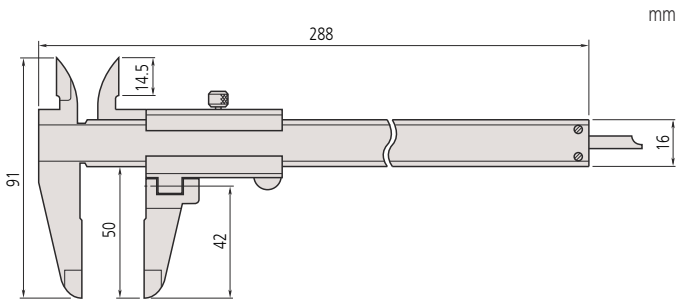

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Back-Jaw Centreline Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
PRESET	●
ABS / INC (INC ZERO)	●
Low voltage alarm	●
Data output	●

Specifications


Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 11 mm
OFFSET	10 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V




Edge-to-center type





Centre-to-centre type



Series 573

The ABSOLUTE Digimatic back-jaw centreline calipers offer you the following benefits:

- Specially designed to allow you to measure hole centre-to-centre or edge-to-centre distances.
- You can read measurements more easily from above, thanks to the jaws being on the back of the slide.
- Direct reading of pitch measurements is also available due to the offset value setting function.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000045042

ABSOLUTE IP67



573-716-20
Centre-to-centre type




573-718-20
Edge-to-centre type

Metric — Centre-to-centre type


No.	Range [mm]	Depth bar	Max. Permissible Error S MPE	Mass [g]
573-716-20	10,1–200	Without	±0,1 mm	465
573-717-20	10,1–300	Without	±0,15 mm	550

Metric — Edge-to-centre type

No.	Range [mm]	Depth bar	Max. Permissible Error S MPE	Mass [g]
573-718-20	10,1–200	Without	±0,1 mm	470
573-719-20	10,1–300	Without	±0,15 mm	555



573-718-20
573-719-20

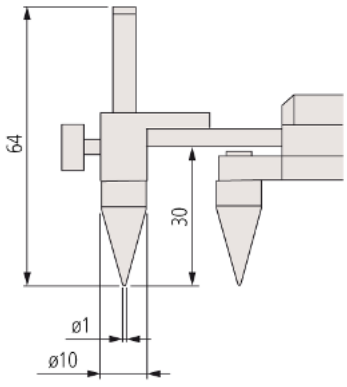

573-716-20
573-717-20

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Point Calipers

Series 573

These point calipers have extra fine ground measuring jaws. They offer you the following benefits:

- Narrow-tip jaws fit into very small grooves and tracks, making it much easier for you to obtain many previously difficult outside measurements.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE IP67




573-621-20
Fine measuring jaws

Metric — Fine measuring jaws


No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
573-621-20	0–150	Flat	●	±0,02 mm	±0,04 mm	163
573-622-20	0–150	Flat		±0,02 mm	±0,04 mm	163

Metric — Pointed measuring jaws

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
573-625-20	0–150	Flat	●	±0,02 mm	±0,04 mm	163
573-626-20	0–150	Flat		±0,02 mm	±0,04 mm	163



Fine measuring jaws



Pointed measuring jaws

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V



Specifications

Delivered	In a case


mm



Series 536

These Vernier Point Calipers have extra fine ground measuring jaws. It offers you the following benefits:

- Narrow-tip jaws fit into very small grooves and tracks, making it much easier for you to obtain many previously difficult outside measurements.

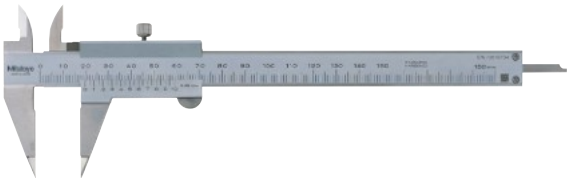

536-121
Fine measuring jaws

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
536-121	0–150	0,05 mm	Flat	±0,05 mm	±0,07 mm	150

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Blade Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Specifications

Delivered	In a case

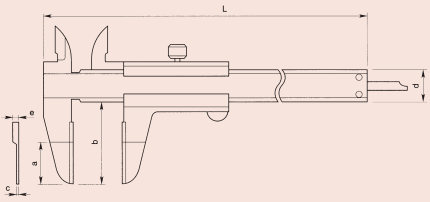

Series 573

A Mitutoyo waterproof digital caliper suitable for use in the presence of coolant or cutting oil.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000045042

ABSOLUTE®

IP67

- The outside measuring faces are carbide-tipped.




573-634-20

Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
573-634-20	0–150	Flat	●	±0,02 mm	±0,04 mm	168
573-635-20	0–150	Flat		±0,02 mm	±0,04 mm	168




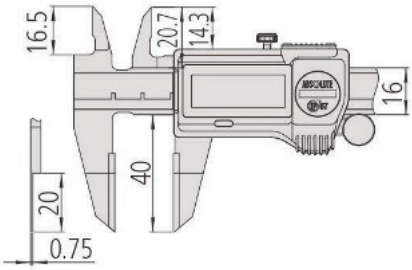

Series 536

These Blade Calipers have thin measuring jaws. They offer you the following benefits:

- The outside measuring faces are carbide-tipped.

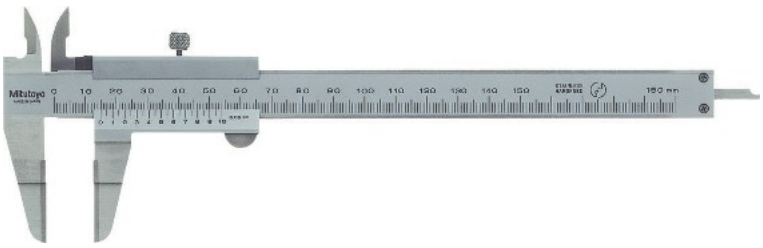

536-134

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]
536-134	0–150	0,05 mm	Flat	±0,05 mm	±0,07 mm	229	20	40	0,75	16	3
536-135	0–200	0,05 mm	Flat	±0,05 mm	±0,07 mm	286	25	50	0,75	16	3
536-136	0–300	0,05 mm	Flat	±0,08 mm	±0,1 mm	403	30	64	1	16	3,8

No.	Mass [g]
536-134	140
536-135	180
536-136	420

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Neck Calipers

Series 573

These neck calipers enable measurements in hard to reach places. They offer you the following benefits:

- You can measure wall thickness inside bores and recesses.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®
IP67



573-651-20




573-652-20
Point jaw type

Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Mass [g]
573-651-20	0–150	Without	●	±0,03 mm	157
573-653-20	0–150	Without		±0,03 mm	157

Metric Point jaw type

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Mass [g]
573-652-20	0–150	Without	●	±0,03 mm	157
573-654-20	0–150	Without		±0,03 mm	157

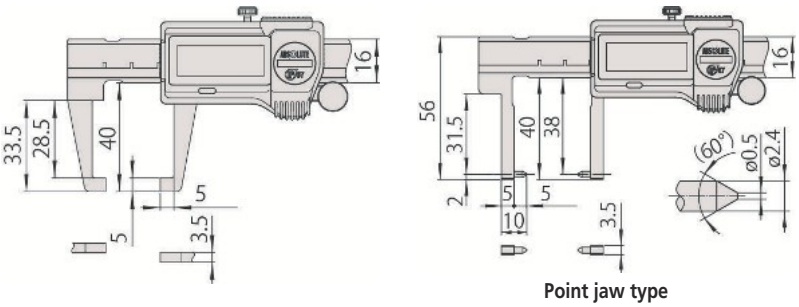

Point jaw type

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery


Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



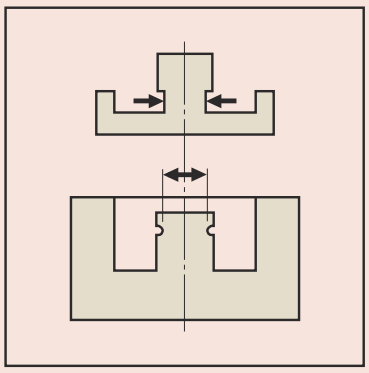


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Neck Calipers

Specifications


Delivered	In a case




Series 536

These Neck Calipers enable measurements in hard to reach places.
They offer you the following benefits:

- You can measure wall thickness inside bores and recesses.

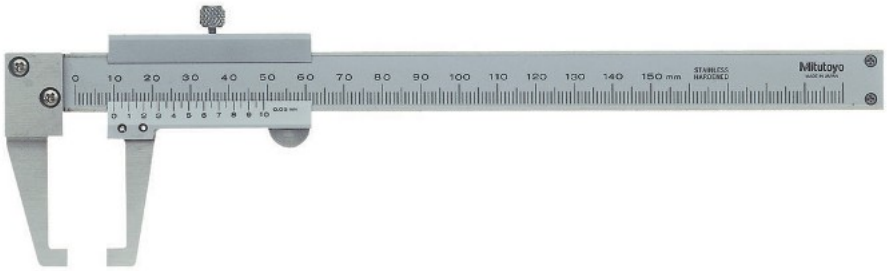

536-151

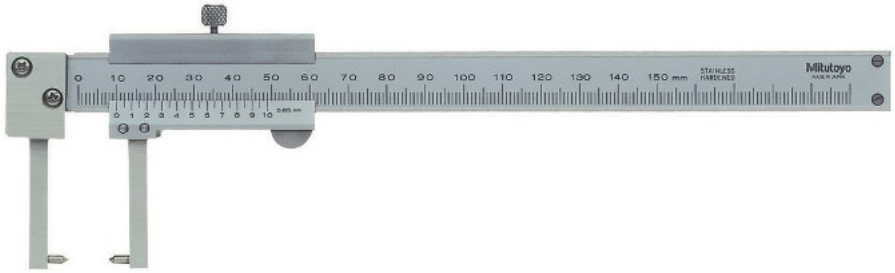

536-152
Point jaw type


Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Mass [g]
536-151	0–150	0,05 mm	Without	±0,05 mm	140


Metric Point jaw type

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Mass [g]
536-152	0–150	0,05 mm	Without	±0,05 mm	229	38	5	5	16	2	140

mm



536-151

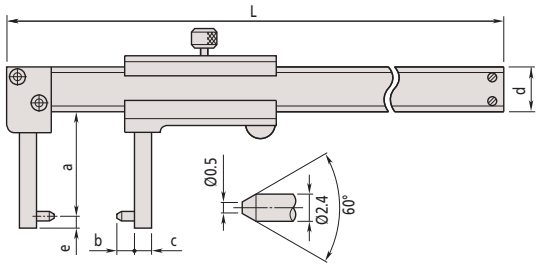

536-152
Point jaw type

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Knife-Edge Calipers

Series 573

These Digital Knife Edge Caliper offer you the following benefits:
- Specially designed to let you take inside measurements in hard-to-reach places.
- With long narrow jaws.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042


ABSOLUTE®
IP67



573-642-20

Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error S MPE	Mass [g]
573-642-20	10–200	Without	●	±0,05 mm	227
573-643-20	10–200	Without		±0,05 mm	227

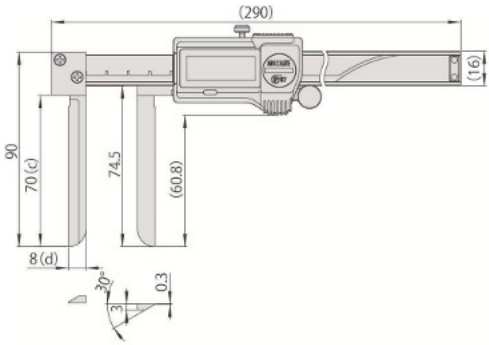



Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 536

This Analog Knife Edge Caliper offer you the following benefits:
- Specially designed to let you take inside measurements in hard-to-reach places.
- With long narrow jaws.

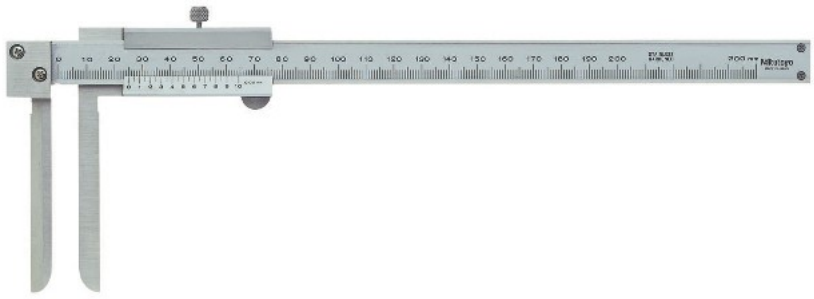

536-142


Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error S MPE	Mass [g]
536-142	10–200	0,05 mm	Without	±0,12 mm	210

Specifications

Delivered	In a case

mm

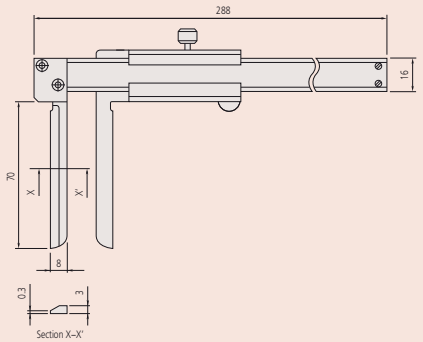

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Inside Calipers

Series 573

These inside calipers enable measurements inside a groove
They offer you the following benefits:
- Specially designed for measurements in hard-to-reach places.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE® IP67

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery


Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V







573-645-20




573-646-20
Point jaw type


Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error S MPE	OFFSET	Mass [g]
573-645-20	10,1–160	Without	●	±0,05 mm	10 mm	147
573-647-20	10,1–160	Without		±0,05 mm	10 mm	147

Metric Point jaw type

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error S MPE	OFFSET	Mass [g]
573-646-20	20,1–170	Without	●	±0,03 mm	20 mm	157
573-648-20	20,1–170	Without		±0,03 mm	20 mm	157

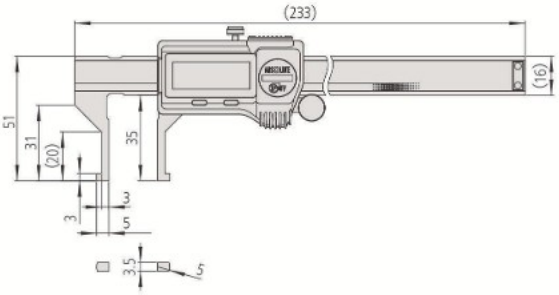

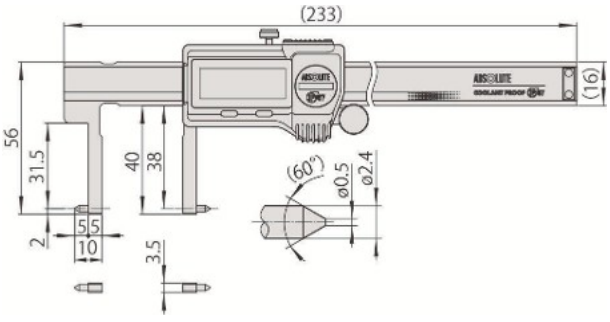

Point jaw type

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo


Inside Calipers

Series 536

- Specially designed for inside measurements in hard-to-reach places.

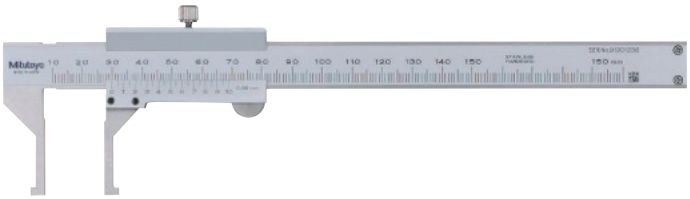


536-145

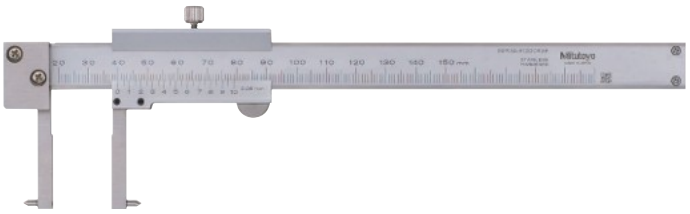


536-146
Point jaw type

Specifications

Delivered | In a case






Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error S MPE	Mass [g]
536-145	10,1–150	0,05 mm	Without	±0,05 mm	130


Metric Point jaw type

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error S MPE	L [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	H [mm]
536-146	20,1–150	0,05 mm	Without	±0,05 mm	229	38	31	5	5	2	16
536-147	30,1–300	0,05 mm	Without	±0,08 mm	403	98	89	5	10	2	20
536-148	70,1–450	0,05 mm	Without	±0,1 mm	610	145	136	10	25	5	25
536-149	70,1–600	0,05 mm	Without	±0,12 mm	750	145	136	10	25	5	25

No.	Mass [g]
536-146	140
536-147	370
536-148	1250
536-149	1430

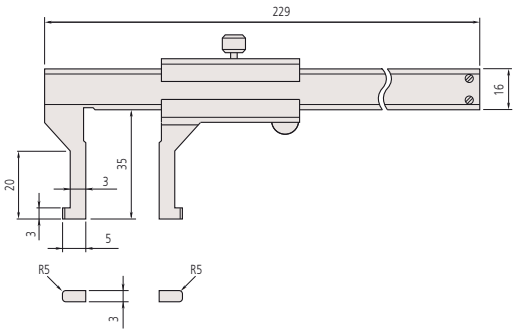

536-145

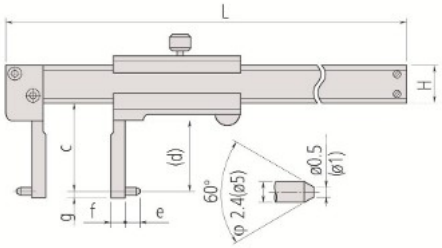

Point jaw type

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Tube Thickness Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Specifications

Delivered	In a case



Series 573

These tube thickness calipers are designed especially for round-shaped workpieces.
They offer you the following benefits:

- The beam-mounted jaw is a round bar that lets you easily measure tube wall thickness.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE® IP67




573-661-20



Metric


No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Mass [g]
573-661-20	0–150	Without	●	±0,05 mm	167
573-662-20	0–150	Without		±0,05 mm	167

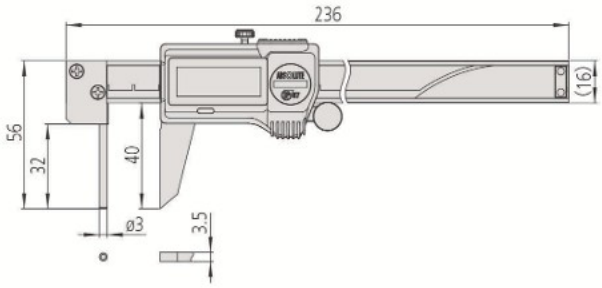

Series 536

These Tube Thickness Calipers are designed especially for round-shaped workpieces.
They offer you the following benefits:


- The beam-mounted jaw is a round bar that lets you easily measure tube wall thickness.

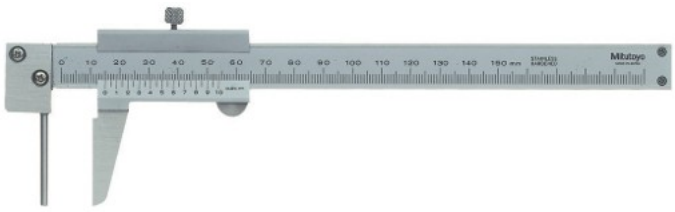

536-161

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Mass [g]
536-161	0–150	0,05	Without	±0,05 mm	150

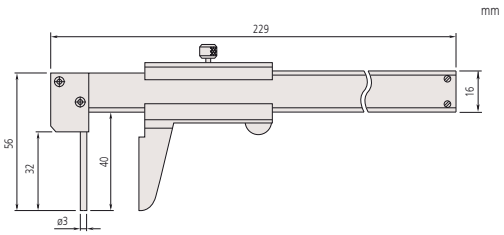

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Vernier Hook Type Calipers

Series 536

These Vernier Hook Type Calipers enable you to measure the width of grooves and lands inside bores and recesses.



536-171




536-172

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE
536-171	0–200	0,02 mm	Without	±0,03 mm
536-172	0–200	0,02 mm	Without	±0,03 mm


No.	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	Mass [g]
536-171	±0,03 mm	320	28			12	4	5	3,5	170
536-172	±0,03 mm	320	28	28,5	20	12	4	1	3,5	200

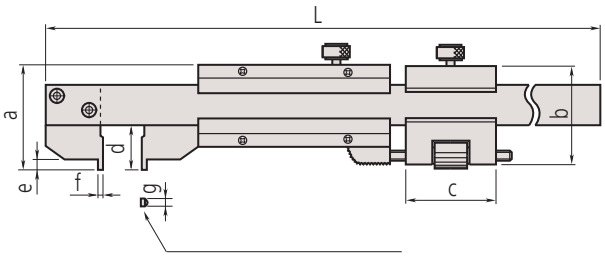


Measuring face
536-171: Radius 5 mm
536-172: flat

Specifications

Delivered	In a case

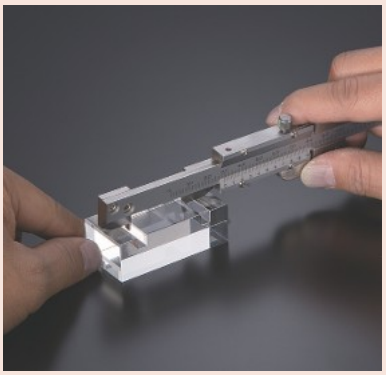





M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Accessories for Calipers


Depth base attachment

This is an optional depth base attachment for calipers.
It offers you the following benefits:

- For digital, vernier and dial calipers which have a depth measuring bar.
- Finely ground base surface.
- Secure locking clamp.

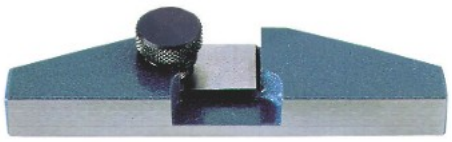


050084-10



050083-10

Metric

No.	Applicable measuring range of caliper	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Mass [g]
050083-10	100, 150 and 200 mm	25	75	24,5	9	16	130
050084-10	100, 150 and 200 mm	25	100	24,5	9	16	160
050085-10	300 mm	30	125	28,5	11,5	20	270

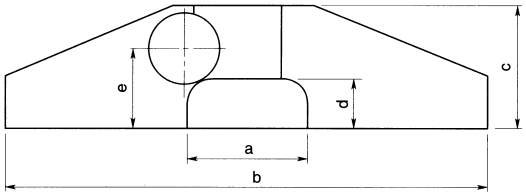







M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Depth Micrometers
Page 199



Depth Calipers and Depth Gauges
Page 202



Depth Caliper Accessories
Page 211



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Depth Micrometers without Interchangeable Rods

Series 128

This Depth Micrometer offers you the following benefits:

- ∅4 mm measuring rod.
- Ratchet stop provides you with constant measuring force.
- Measuring rod lock.
- Carbide-tipped measuring rod model is available.

Specifications

Measuring face	Hardened, precision ground, micro-lap finish
Measuring span	25 mm
Base	Hardened tool steel
Scale	Thimble and sleeve satin chrome finish, ∅ 18 mm
Measuring force	5-10 N
Spindle pitch	0,5 mm
Delivered	Including box and key





128-101



128-102

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Flatness base	Flatness rod	Parallelism base/rod	Base (W x T)	Mass [g]
128-101	0–25	0,01 mm	±3 µm	1,3 µm	0,3 µm	5 µm	63,5 x 16 mm	200
128-102	0–25	0,01 mm	±3 µm	2 µm	0,3 µm	5 µm	101,6 x 16 mm	250

Metric Carbide-tipped measuring rod

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Flatness base	Flatness rod	Parallelism base/rod	Base (W x T)	Mass [g]
128-103	0–25	0,01 mm	±3 µm	1,3 µm	0,3 µm	5 µm	63,5 x 16 mm	200
128-104	0–25	0,01 mm	±3 µm	2 µm	0,3 µm	5 µm	101,6 x 16 mm	250

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Depth Micrometers with Interchangeable Rods

Series 129

This interchangeable rod type micrometer can be used for wide range measurements.
It offers you the following benefits:


- ∅4 mm interchangeable rods, with lapped measuring surfaces, enable you to make wide-range measurement.
- The ratchet stop provides constant measuring force.
- Measuring rod lock.

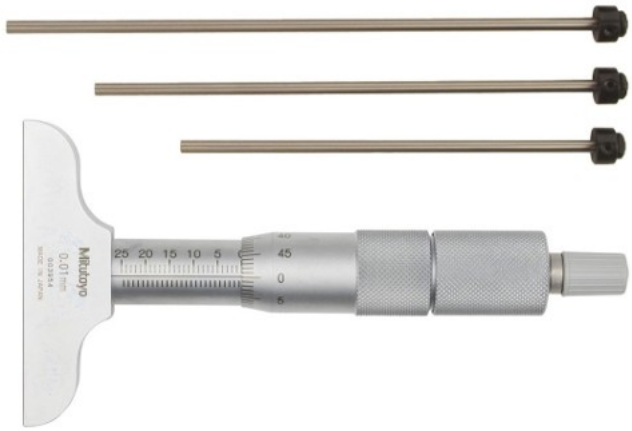


129-110

Specifications

Measuring span	25 mm
Spindle pitch	0,5 mm
Measuring face	Hardened, precision ground, micro-lap finish
Base	Hardened tool steel
Scale	Thimble and sleeve satin chrome finish ∅18 mm
Measuring force	5-10 N
Delivered	Including box and key

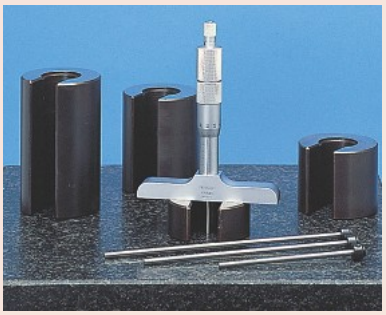




Interchangeable rods

Metric — Base 101,6 x 16 mm

No.	Range [mm]	Graduation	Spindle feed error [µm]	Zero point errors of rods	Flatness base	Flatness rod	Parallelism base/rod	Number of rods	Mass [g]
129-155	0–25	0,01 mm	3	±3 µm	2 µm	0,3 µm	5 µm	1	290
129-113	0–50	0,01 mm	3	±3 µm	2 µm	0,3 µm	5 µm	2	310
129-114	0–75	0,01 mm	3	±3 µm	2 µm	0,3 µm	6 µm	3	330
129-115	0–100	0,01 mm	3	±4 µm	2 µm	0,3 µm	6 µm	4	355
129-116	0–150	0,01 mm	3	±4 µm	2 µm	0,3 µm	7 µm	6	410
129-153	0–300	0,01 mm	3	±6 µm	2 µm	0,3 µm	10 µm	12	640

Metric — Base 63,5 x 16 mm

No.	Range [mm]	Graduation	Spindle feed error [µm]	Zero point errors of rods	Flatness base	Flatness rod	Parallelism base/rod	Number of rods	Mass [g]
129-154	0–25	0,01 mm	3	±3 µm	1,3 µm	0,3 µm	5 µm	1	240
129-109	0–50	0,01 mm	3	±3 µm	1,3 µm	0,3 µm	5 µm	2	260
129-110	0–75	0,01 mm	3	±3 µm	1,3 µm	0,3 µm	6 µm	3	280
129-111	0–100	0,01 mm	3	±4 µm	1,3 µm	0,3 µm	6 µm	4	310
129-112	0–150	0,01 mm	3	±4 µm	1,3 µm	0,3 µm	7 µm	6	370
129-152	0–300	0,01 mm	3	±6 µm	1,3 µm	0,3 µm	10 µm	12	600

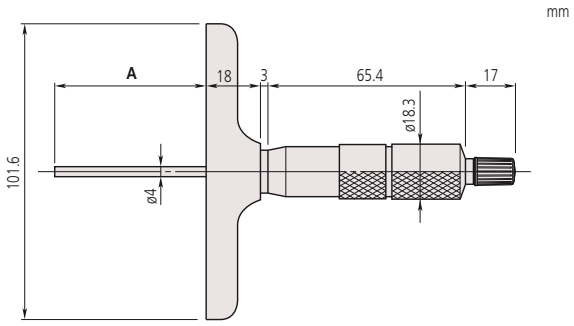

A = Range

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Depth Micrometers with Interchangeable Rod

Functions	Series 329
DATA (output with cable) / HOLD (display value)	●
Lock function	●
Auto Power OFF after 20 min. non use	●
2 x PRESET	●
Low voltage alarm	●
Data output	●
ABS / INC (INC ZERO)	●

Specifications

Power supply	1 battery SR-44
Measuring span	25 mm
Spindle pitch	0,5 mm
Measuring face	Hardened, precision ground, micro-lap finish
Base	Hardened tool steel
Scale	Thimble and sleeve satin chrome finish, ∅18 mm
Measuring force	5-10 N
Battery life	Approx. 2,4 years
Delivered	Including box, key and 1 battery

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
05CZA662	Digimatic Cable with Data Button IP Type, 1 m, Micrometer Type
05CZA663	Digimatic Cable with Data Button IP Type, 2 m, Micrometer Type
06AFM380B	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Micrometer Type
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 329

This interchangeable rod type micrometer can be used for wide range measurements.
It offers you the following benefits:


- ∅4 mm interchangeable rods, with lapped measuring surfaces, enable you to make wide-range measurement.
- The ratchet stop provides constant measuring force.
- Measuring rod lock.



329-250-30

Metric

No.	Range [mm]	Digital step	Spindle feed error [µm]	Zero point errors of rods	Flatness base	Flatness rod	Parallelism base/rod	Base (W x T)	Number of rods	Mass [g]
329-250-30	0–150	0,001 mm	3	±4 µm	2 µm	0,3 µm	7 µm	101,6 x 16 mm	6	540
329-251-30	0–300	0,001 mm	3	±6 µm	2 µm	0,3 µm	10 µm	101,6 x 16 mm	12	790

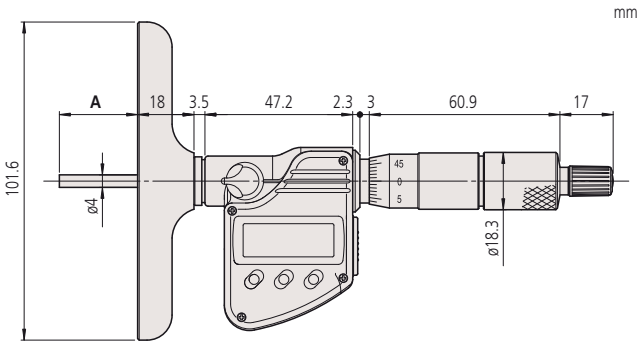

A = Range

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Indicator Depth Gauges

Series 547

ABSOLUTE®

This ABSOLUTE Digimatic Indicator Depth Gauge offers you the following benefits:

- It is equipped with the ABSOLUTE Digimatic Indicator ID-C.
- Bidirectional communication e.g. to perform parameter setting from a PC (Digimatic S 1 interface) is possible.
- It has a hardened, precision ground and micro-lapped reference face on its base.




Metric — With indicator No. 543-700BD

No.	Range [mm]	Digital step	Base (W x T)	Accuracy	Base flatness	Mass [g]
547-251A	0–200	0,001 mm	63,5 x 16 mm	± 5 µm	2 µm	285
547-252A	0–200	0,001 mm	101,6 x 16 mm	± 5 µm	2 µm	335

Metric — With indicator No. 543-710BD

No.	Range [mm]	Digital step	Base (W x T)	Accuracy	Base flatness	Mass [g]
547-211A	0–200	0,01 mm	63,5 x 16 mm	± 20 µm	5 µm	280
547-212A	0–200	0,01 mm	101,6 x 16 mm	± 20 µm	5 µm	330

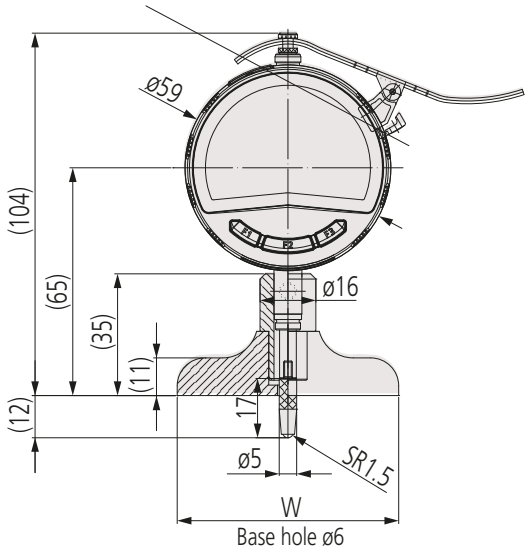

Functions	Series 547
DATA/HOLD	●
PRESET	●
ON/OFF	●
Lock function	●
GO/±NG judgement	●
MAX/MIN/RANGE	●
ZERO/ABS	●
ABS / INC (INC ZERO)	●
Data output	●
Analog bar resolution selection	●
Auto Power OFF setting	●
Calculation function (with formula)	●
Customizing keys	●
Counting direction switchable	●
Calibration warning function	●

Specifications

Power supply	1 battery CR-2032
Stroke	12,7 mm
Scale	Capacitance type ABSOLUTE linear encoder
Contact point	Carbide ball
Alarm	Low voltage, counting value composition error, overflow error, tolerance limit setting error
Measuring force	≤ 1,5 N
Battery life	Approx. 7000 hours
Delivered	Including box, CR-2032 battery, battery lid opener and extensions 10, 20, 30 (2 pcs.), 100 mm

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/Digimatic 2/Digimatic S1 Interface, 2 m
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface
02AZG011	Connection Cable SF for U-WAVE, for U-WAVE-T and Instruments with Digimatic S1 Interface

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
21JAA224	Contact Element Ball Point, M2,5x0,45, 17mm Length, Carbide, Metric

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicator Depth Gauges

Series 7

This rectangular base dial indicator depth gauge offers you the following benefits:


- It has a hardened, precision ground and micro-lapped reference face on its base.


Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4



7231A

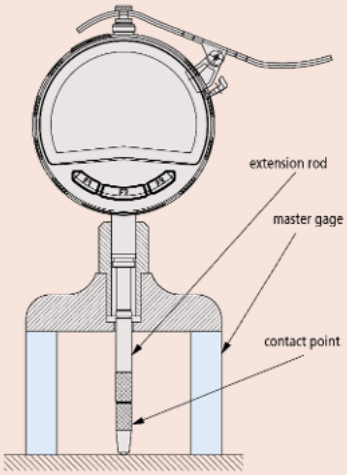

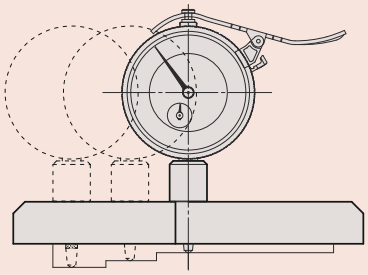

7220A and 7221A allow the mounting position of a dial indicator to be varied.



7231A



7210A



7211A



7214A



7220A



7221A

Metric

With back plunger indicator No. 1162A

No.	Range [mm]	Graduation	Accuracy	Measuring force [N]	Base (W x T)	Stroke [mm]	Base flatness [µm]	Probe tip	Extension rods	Mass [g]
7231A	0–200	0,01 mm	±15 µm	≤ 1,4	63,5 x 16 mm	5	5	Ball, R = 1.5 mm (No. 21JAA224)	10, 20, 30, 30, 100 mm	200

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Dial Indicator Depth Gauges

Metric


With indicator No. 2902AB

No.	Range [mm]	Graduation	Accuracy	Measuring force [N]	Base (W x T)	Stroke [mm]	Base flatness [µm]	Probe tip	Extension rods	Mass [g]
7210A	0–10	0,01 mm	±15 µm	≤ 1,4	40 x 16 mm	10	5	Needle, R = 0.2 mm (No.137413)		205
7211A	0–200	0,01 mm	±15 µm	≤ 1,4	63,5 x 16 mm	10	5	Ball, R = 1.5 mm (No. 21JAA224)	10, 20, 30, 30, 100 mm	260
7212A	0–200	0,01 mm	±15 µm	≤ 1,4	101,6 x 16 mm	10	5	Ball, R = 1.5 mm (No. 21JAA224)	10, 20, 30, 30, 100 mm	310
7220A	0–200	0,01 mm	±15 µm	≤ 1,4	100 x 18 mm	10	5	Ball, R = 1.5 mm (No. 21JAA224)	10, 20, 30, 30, 100 mm	380
7221A	0–200	0,01 mm	±15 µm	≤ 1,4	150 x 18 mm	10	5	Ball, R = 1.5 mm (No. 21JAA224)	10, 20, 30, 30, 100 mm	500


Metric

With indicator No. 2952AB


No.	Range [mm]	Graduation	Accuracy	Measuring force [N]	Base (W x T)	Stroke [mm]	Base flatness [µm]	Probe tip	Extension rods	Mass [g]
7213A	0–210	0,01 mm	±30 µm	≤ 2,5	63,5 x 16 mm	30	5	Ball, R = 1.5 mm (No. 21JAA225)	30, 60, 90 mm	260
7214A	0–210	0,01 mm	±30 µm	≤ 2,5	101,6 x 16 mm	30	5	Ball, R = 1.5 mm (No. 21JAA225)	30, 60, 90 mm	310




7231A




21JAA226 (7231A)
21JAA243 (7237A, 7238A)
(interchangeable point)
is provided as standard.




7210A




7211A A=63.5 mm
7212A A=101.6 mm



7213A A=63.5 mm
7214A A=101.6 mm



7220A



7221A

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicator Depth Gauges

Series 7

This round base type dial indicator depth gauge offers you the following benefits:

- It has a hardened, precision ground and micro-lapped reference face on its base.



7222A



7223A



7224A


Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4


Metric

Round base with indicator No. 2902AB

No.	Range [mm]	Graduation	Accuracy	Measuring force [N]	Base (W x T)	Stroke [mm]	Base flatness [µm]	Probe tip	Mass [g]
7222A	0–10	0,01 mm	±15 µm	≤ 1,4	∅ 16 mm	10	5	Needle, R = 0.2 mm (No.137413)	165
7223A	0–10	0,01 mm	±15 µm	≤ 1,4	∅ 25 mm	10	5	Ball, R = 1.5 mm (No. 21JAA224)	180
7224A	0–10	0,01 mm	±15 µm	≤ 1,4	∅ 40 mm	10	5	Ball, R = 1.5 mm (No. 21JAA224)	195

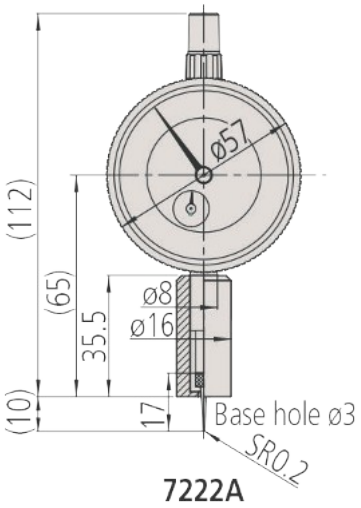

7222A

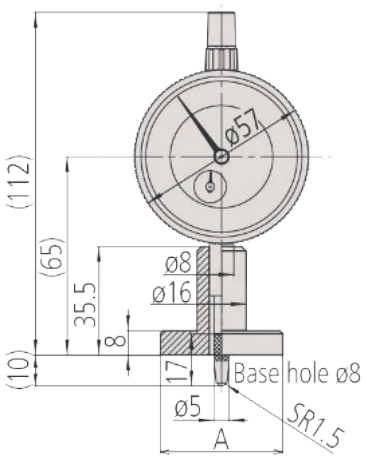

7223A A=ø25 mm
7224A A=ø40 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Depth Gauges

Series 571


ABSOLUTE®

This is a standard model Digital Depth Gauge.
It offers you the following benefits:

- ABSOLUTE System gives you reliable measurements.
- Its base and measuring faces are hardened and micro-lapped for robustness.
- Large character height makes measurements easy to read.




571-201-30

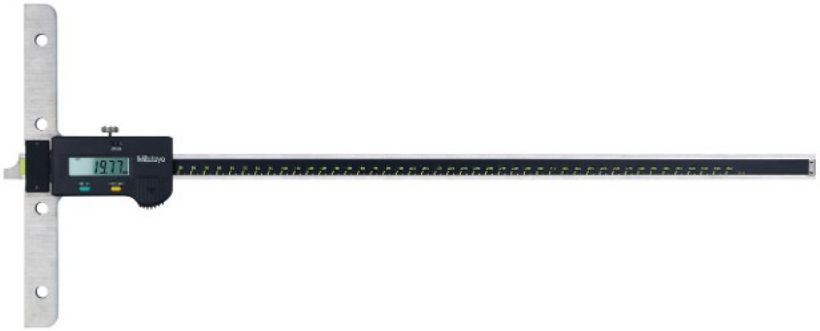


571-204-10

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	L [mm]	Base (W x T)	Mass [g]
571-201-30	0–150	0,01 mm	±0,02 mm	239	100 x 6 mm	207
571-202-30	0–200	0,01 mm	±0,02 mm	289	100 x 6 mm	227
571-203-30	0–300	0,01 mm	±0,03 mm	403	100 x 6,3 mm	310
571-204-10	0–450	0,01 mm	±0,05 mm	635	250 x 10 mm	1270
571-205-10	0–600	0,01 mm	±0,05 mm	785	250 x 10 mm	1400
571-206-10	0–750	0,01 mm	±0,06 mm	935	250 x 10 mm	1530
571-207-10	0–1000	0,01 mm	±0,07 mm	1200	250 x 10 mm	1760

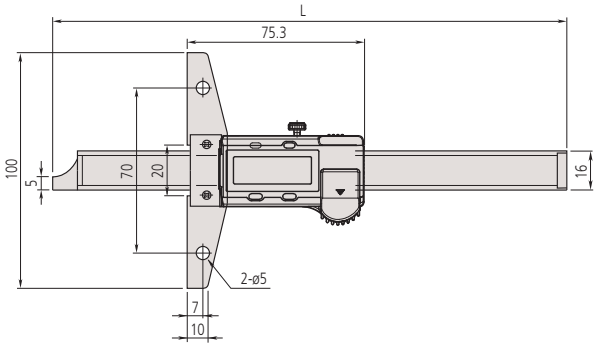

Up to 300 mm range



> 300 mm range

Functions	Series 571
ORIGIN (ABS-Zero)	●
ON/OFF	●
Low voltage alarm	●
Data output	●
ABS / INC (INC ZERO)	●

Specifications

Power supply	1 battery SR-44
Max. response speed	Unlimited
Battery life	Approx. 18000 hours (150, 200 mm) approx. 20000 hours (>200 mm)
Display	LCD, character height 9 mm (150/200/300 mm), 10 mm (>300 mm)
Delivered	In a box including 1 battery

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
959143	Data Hold Unit, for Digital Caliper
Range <300 mm	
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF300	Connection Unit for Standard Caliper, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
900370	Extension Base, Depth Gauge, 180mm width for up to 300mm Range
900371	Extension Base, Depth Gauge, 260mm width for up to 300mm Range
900372	Extension Base, Depth Gauge, 320mm width for up to 300mm Range
Range >300 mm	
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Depth Gauges

Functions	Series 571
Auto Power OFF after 20 min. non use	●
ORIGIN (ABS-Zero)	●
Low voltage alarm	●
Data output	●

Specifications


Power supply	1 battery SR-44
Max. response speed	Unlimited
Battery life	Approx. 5 years
Display	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
Delivered	In a box including 1 battery

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
900370	Extension Base, Depth Gauge, 180mm width for up to 300mm Range
900371	Extension Base, Depth Gauge, 260mm width for up to 300mm Range
900372	Extension Base, Depth Gauge, 320mm width for up to 300mm Range

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

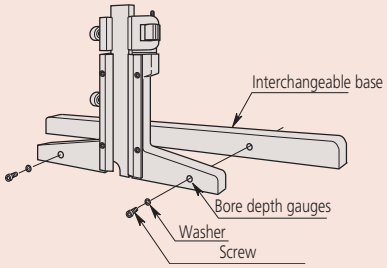

Mounting the interchangeable base

Series 571

Dust- and Water-Protected

TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE IP67

This Digital Depth Gauge is IP67 coolant proof and offers you the following benefits:


- ABSOLUTE System gives you reliable measurements.
- Its base and measuring faces are hardened and micro-lapped for robustness.
- It has excellent resistance against water and dust (IP67 protection level) enabling you to use it in machining situations that include splashing coolant fluid.
- Extremely resistant to both coolants and lubricants.



571-252-20

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	L [mm]	Base (W x T)	Mass [g]
571-251-20	0–150	0,01 mm	±0,02 mm	239	100 x 6 mm	199
571-252-20	0–200	0,01 mm	±0,02 mm	289	100 x 6 mm	219
571-253-20	0–300	0,01 mm	±0,03 mm	403	100 x 6,3 mm	315

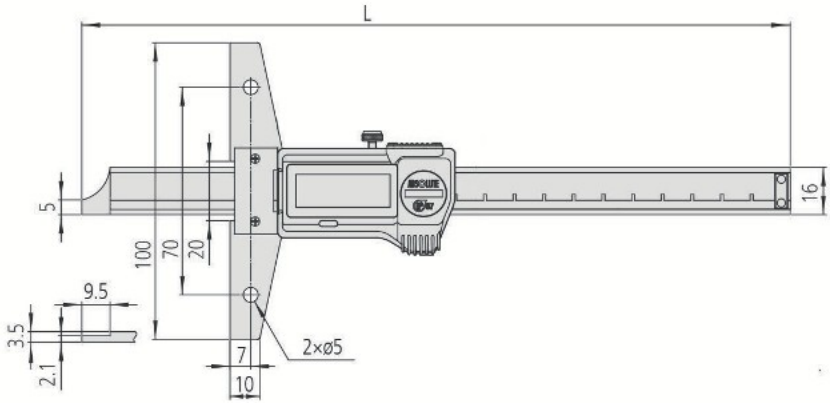

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Depth Gauges IP67 Hook/Pin Type

Series 571

This Digital Depth Gauge is IP67 and offers you the following benefits:
- It has excellent resistance against water and dust (IP67 protection level) enabling you to use it in situations that include coolant fluid.
- Direct reading by pressing the OFFSET function, which compensates for the 10 mm width of the hook (hook type).

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®
IP67



571-255-20



571-302-20

Functions	Series 571
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Power supply	1 battery SR-44
Max. response speed	Unlimited
Battery life	Approx. 5 years
Display	LCD, Character Height 9 mm
Delivered	In a case including 1 battery

Optional accessories

No.	Description
06AGR543	USB-ITPAK Vers. 3.0, USB Dongle + Manual (Software available Online)
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth
900370	Extension Base, Depth Gauge, 180mm width for up to 300mm Range
900371	Extension Base, Depth Gauge, 260mm width for up to 300mm Range
900372	Extension Base, Depth Gauge, 320mm width for up to 300mm Range

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V

Metric — Hook Type


No.	Depth range	Hook range	Digital step	Max. Permissible Error E MPE	Base (W x T)	L [mm]	Mass [g]
571-254-20	10,1-160 mm	0-150 mm	0,01 mm	±0,03 mm	100 x 6 mm	249	216
571-255-20	10,1-210 mm	0-200 mm	0,01 mm	±0,03 mm	100 x 6 mm	299	236

Metric — Pin Type


No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Base (W x T)	L [mm]	Mass [g]
571-301-20	0–150	0,01 mm	±0,02 mm	100 x 6 mm	249	207
571-302-20	0–200	0,01 mm	±0,02 mm	100 x 6 mm	299	227

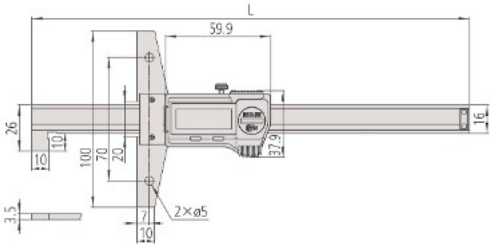

Hook Type

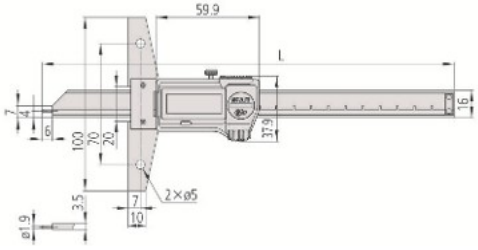

Pin Type

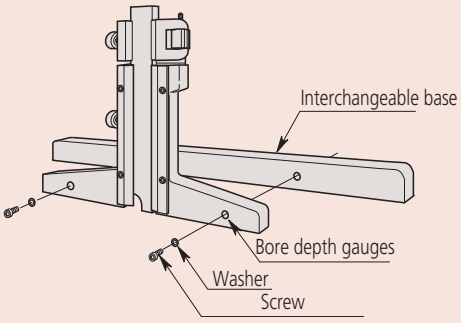

Mounting the interchangeable base

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Vernier Depth Gauges

Series 527


This vernier depth gauge offers you the following benefits:
- Its base and measuring faces are hardened and micro-lapped for robustness.
- Fine adjustment models available.

Optional accessories

No.	Description
900370	Extension Base, Depth Gauge, 180mm width for up to 300mm Range
900371	Extension Base, Depth Gauge, 260mm width for up to 300mm Range
900372	Extension Base, Depth Gauge, 320mm width for up to 300mm Range

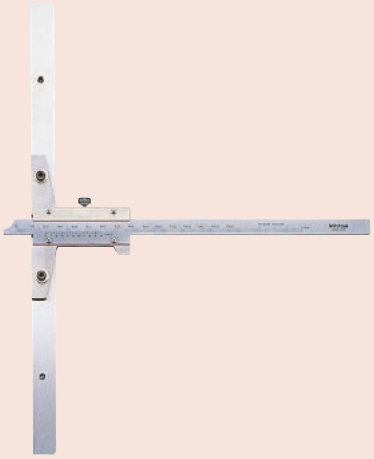

527-201 with 900372

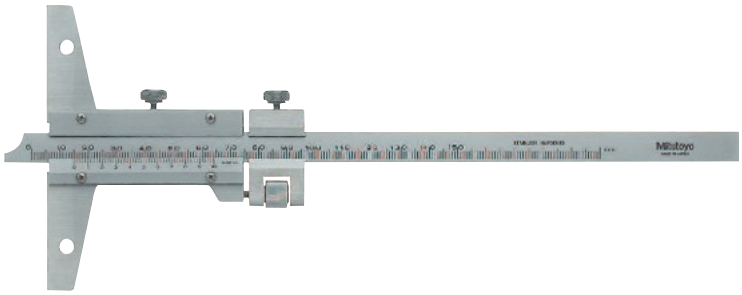

527-101


Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Base (W x T)	L [mm]	Mass [g]
527-201	0–150	0,05 mm	±0,05 mm	100 x 6,5 mm	260	240
527-121	0–150	0,02 mm	±0,03 mm	100 x 6,5 mm	260	215
527-202	0–200	0,05 mm	±0,05 mm	100 x 6,5 mm	310	260
527-122	0–200	0,02 mm	±0,03 mm	100 x 6,5 mm	310	230
527-203	0–300	0,05 mm	±0,08 mm	100 x 6,5 mm	410	300
527-123	0–300	0,02 mm	±0,04 mm	100 x 6,5 mm	410	265
527-204	0–600	0,05 mm	±0,1 mm	250 x 10 mm	800	1510
527-205	0–1000	0,05 mm	±0,15 mm	250 x 10 mm	1200	1880


Metric

With fine adjustment

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Base (W x T)	L [mm]	Mass [g]
527-101	0–150	0,02 mm	±0,03 mm	100 x 6,5 mm	260	280
527-102	0–200	0,02 mm	±0,03 mm	100 x 6,5 mm	310	300
527-103	0–300	0,02 mm	±0,04 mm	100 x 6,5 mm	410	350
527-104	0–600	0,02 mm	±0,05 mm	250 x 10 mm	800	1510
527-105	0–1000	0,02 mm	±0,07 mm	250 x 10 mm	1200	1880

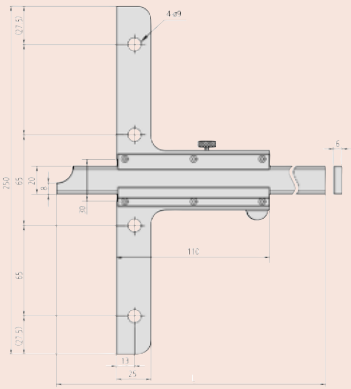

Range: 0-600 mm, 0-1000 mm

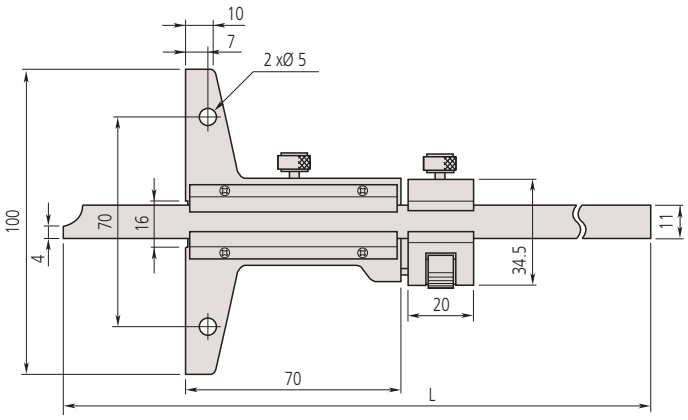

Range: 0-150 mm, 0-200 mm, 0-300 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vernier Depth Gauges Hook Type

Series 527

This hook type vernier depth gauge offers you the following benefits:

- The end of the beam is hook-shaped so you can take depth and thickness measurements of a projected portion or lip in a hole, as well as standard depth measurements.
- Its base and measuring faces are hardened and micro-lapped for robustness.
- Fine adjustment models are available.

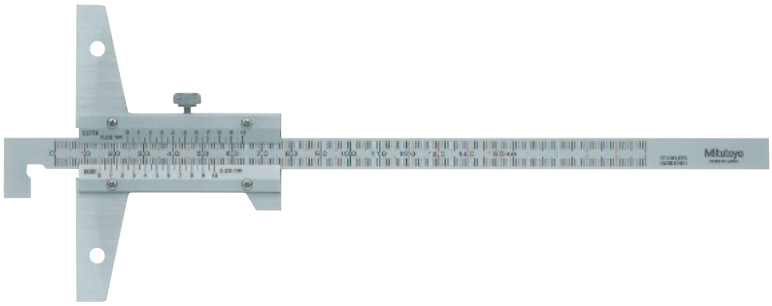


527-401


Metric

No.	Depth range	Hook range	Graduation	Max. Permissible Error E MPE	Base (W x T)	L [mm]	Mass [g]
527-401	10,1-150 mm	0-150 mm	0,05 mm	±0,05 mm	100 x 6,5 mm	260	240
527-402	10,1-200 mm	0-200 mm	0,05 mm	±0,05 mm	100 x 6,5 mm	310	240
527-403	10,1-300 mm	0-300 mm	0,05 mm	±0,08 mm	100 x 6,5 mm	410	270

Metric With fine adjustment

No.	Depth range	Hook range	Graduation	Max. Permissible Error E MPE	Base (W x T)	L [mm]	Mass [g]
527-411	10,1-150 mm	0-150 mm	0,02 mm	±0,03 mm	100 x 6,5 mm	260	280
527-412	10,1-200 mm	0-200 mm	0,02 mm	±0,03 mm	100 x 6,5 mm	310	300
527-413	10,1-300 mm	0-300 mm	0,02 mm	±0,04 mm	100 x 6,5 mm	410	350

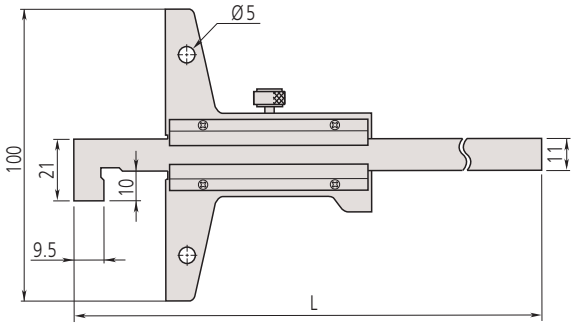


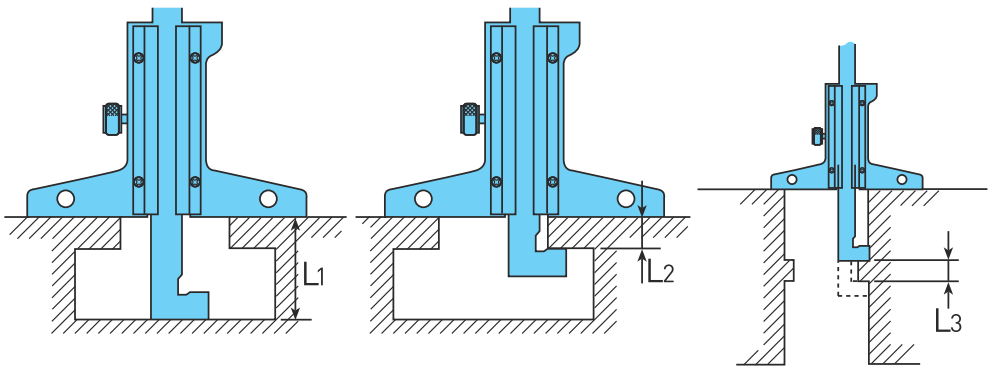

L1 = depth-vernier reading / L2 = hook-vernier reading / L3 = (depth-vernier reading) - (hook-vernier reading)

Optional accessories

No.	Description
900370	Extension Base, Depth Gauge, 180mm width for up to 300mm Range
900371	Extension Base, Depth Gauge, 260mm width for up to 300mm Range
900372	Extension Base, Depth Gauge, 320mm width for up to 300mm Range

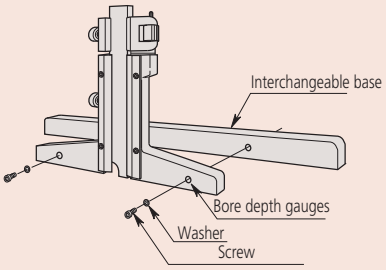

Mounting the interchangeable base

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Tyre Tread Depth Gauges

Functions	Series 571
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Power supply	1 battery SR-44
Max. response speed	Unlimited
Battery life	Approx. 5 years
Display	LCD, character height 9 mm
Delivered	Including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

* optional extension base is unavailable

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 571

This is designed to measure tyre tread depth and offers you the following benefits:

- The ABSOLUTE feature of this gauge keeps track of the origin point (once set) for the entire life of the battery.

Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000045042

ABSOLUTE®
IP67




571-100-20



Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Base (W x T)	Mass [g]
571-100-20	0–25	0,01 mm	±0,02 mm	60 x 6,2 mm	160

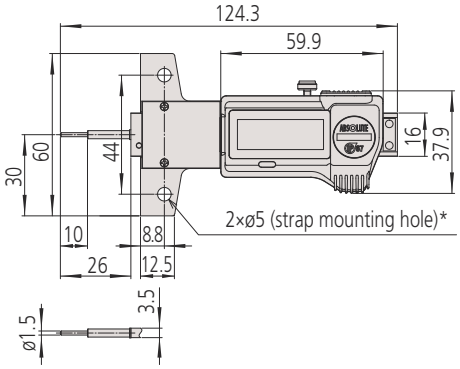

Optional Accessories for Depth Calipers

Extension bases


These optional extension bases can be fitted to depth gauge models up to 0-300 mm range. They cannot be attached to 0-450 mm, 0-600 mm, 0-750 mm and 0-1000 mm range models.




900372

Metric

No.	L [mm]	A [mm]	B [mm]	Number of holes	Mass [g]
900370	180	70	55	2	200
900371	260	35	60	5	270
900372	320	70	55	4	345

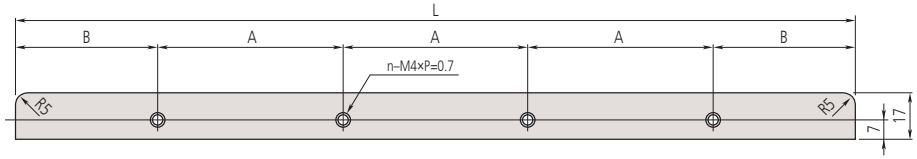

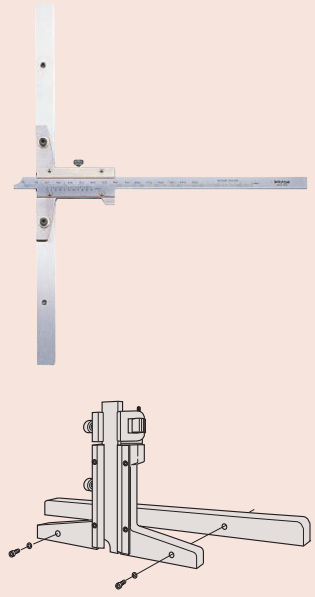

Attaching the extension base

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Height Gauges
Page 213



Height Gauge Accessories
Page 219



Height Gauges with Data Processing Unit
Page 220



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vernier Height Gauges

Series 514

This vernier height gauge offers you the following benefits:

- You can take accurate and fast readings thanks to the satin chrome finished main and vernier scales.
- A carbide-tipped scriber is provided.

Specifications

Scale adjustment	15 mm: 300, 450, 600 mm range, 25 mm: 1000 mm range
Delivered	Including scriber & scriber clamp

Standard accessories

No.	Description
05GZA033	Scriber Clamp, for 9x9mm Scriber
06AGR304	Scriber Clamp with Plastic Screw, for 12,7x6,35mm Scriber
900173	Carbide Tipped Scriber, 6,35x12,7mm, 47mm Length
07GZA000	Carbide Tipped Scriber, 9x9mm, 80mm Length
905200	Carbide Tipped Scriber, 9x9mm, 150mm Length

06AGR304: for 506-207
05GZA033: for 514-102, 514-104, 514-106, 514-108
900173: for 506-207
07GZA000: for 514-102, 514-104, 514-106
905200: for 514-108

Optional accessories

No.	Description
953638	Holding Bar for Swivel Clamp, 9x9mm, 50mm Length
900209	Holding Bar for Swivel Clamp, 9x9mm, 100mm Length
953639	Holding Bar for Swivel Clamp, 6,25x12,7mm, 2" Length
900321	Swivel Clamp, for D=4/8mm, Dovetail
07GZA003	Magnifier for Vernier Height Gauge, 300, 450, 600mm
07GZA015	Magnifier for Vernier Height Gauge, 1000mm

953638: except 506-207
900209: except 506-207
953639 is required for the combination of 900321 with 506-207




953638




900321





Large graduation

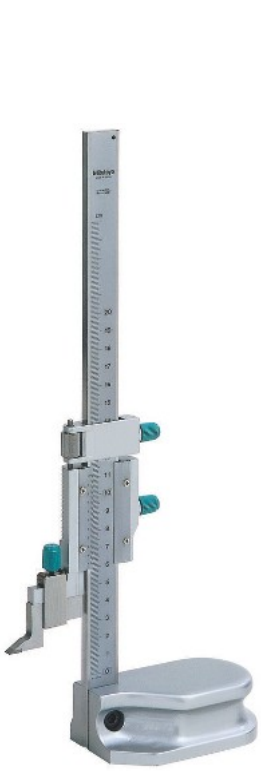


506-207




514-102

Metric

No.	Range [mm]	Graduation	Max. Permissible Error E MPE	Fine adjust-ment	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	L [mm]	Mass [kg]
506-207	0 - 200	0,02 mm	±0,03 mm	4 mm							1,4
514-102	0 - 300	0,02 mm	±0,04 mm	4 mm	32	20	70	28	45	525	3,1
514-104	0 - 450	0,02 mm	±0,05 mm	4 mm	32	20	70	28	45	675	3,4
514-106	0 - 600	0,02 mm	±0,05 mm	7 mm	32	24	85	35	54	870	7,4
514-108	0 - 1000	0,02 mm	±0,07 mm	6 mm	42	30	110	45	65	1340	20

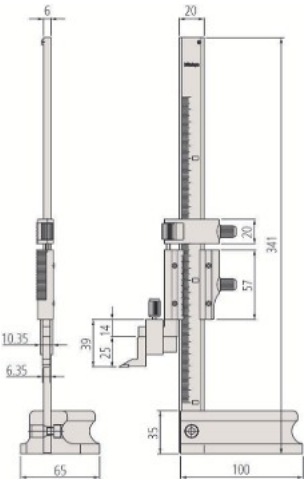

0 - 200 mm

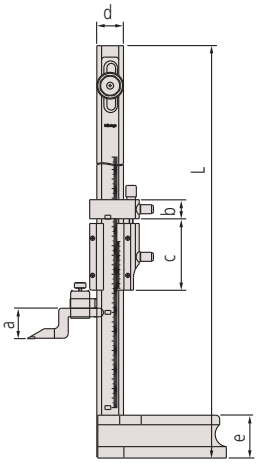

0 - 300 to 0 - 1000 mm

M & B Calibr, s.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Dial Height Gauges

Series 192

This Dial Height Gauge offers you the following benefits:

- It allows you easy and error-free reading with both up and down digital counters as well as a dial.
- It comes with a hand wheel so you can easily make rough adjustments.
- A carbide-tipped scriber is provided.



192-130




192-132




192-133

Metric

No.	Range [mm]	Digital step	Graduation	Max. Permissible Error E MPE	Mass [kg]
192-130	0 - 300	0,01 mm	0,01 mm	±0,03 mm	4,2
192-131	0 - 450	0,01 mm	0,01 mm	±0,05 mm	9,2
192-132	0 - 600	0,01 mm	0,01 mm	±0,05 mm	9,8
192-133	0 - 1000	0,01 mm	0,01 mm	±0,07 mm	17

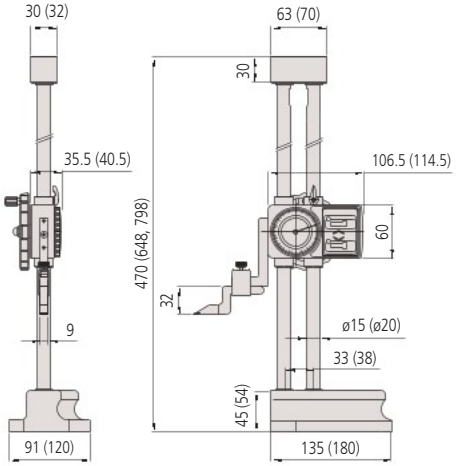

0 - 300 mm (0 - 450 mm, 0 - 600 mm)

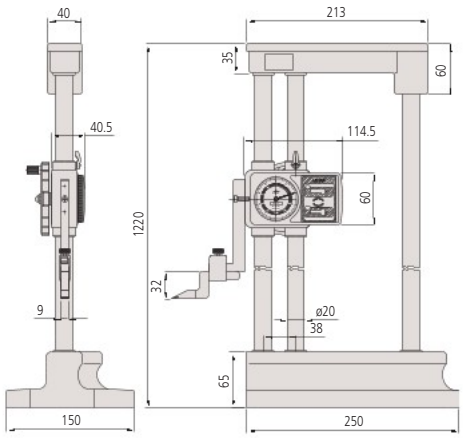

0 - 1000 mm

Specifications

Delivered	Including scriber, scriber clamp and cover

Standard accessories

No.	Description
07GZA000	Carbide Tipped Scriber, 9x9mm, 80mm Length Length
05GZA033	Scriber Clamp, for 9x9mm Scriber
450291	Vinyl Cover Series 192, 300mm
450292	Vinyl Cover Series 192, 450mm, 600mm
450290	Vinyl Cover Series 192, 1000mm

Optional accessories


No.	Description
953638	Holding Bar for Swivel Clamp, 9x9mm, 50mm Le 50mm Length
900321	Swivel Clamp, for D=4/8mm, Dovetail




953638



900321

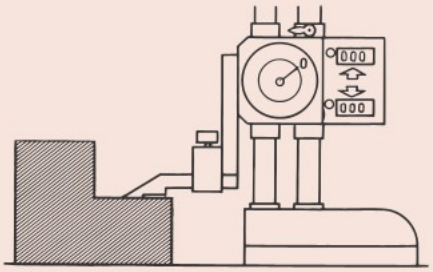

Reset

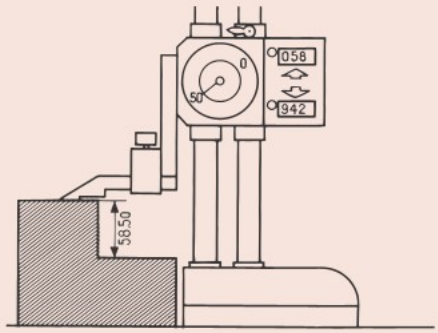

Reading off Counter : 58,00 mm
Counter : 58,00 mmDial Gauge : 0,50 mm
Dial Gauge : 0,50 mm----------
----------Result : 58,50 mm
Result : 58,50 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

ABSOLUTE Digimatic Height Gauges

Functions	Series 570
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET	●
ORIGIN (ABS-Zero)	●
DATA (output with cable) / HOLD (display value)	●
Low voltage alarm	●
±SWITCHING	●

Specifications

Scale	ABSOLUTE electrostatic linear encoder
Display	LCD
Max. response speed	Unlimited
Battery life	Approx. 5000 hours
Delivered	Including 1 battery, scriber and scriber clamp

Standard accessories

No.	Description
901338	Scriber Clamp, for 6,35x12,7mm Scriber
05GZA033	Scriber Clamp, for 9x9mm Scriber
900173	Carbide Tipped Scriber, 6,35x12,7mm, 47mm Length
905200	Carbide Tipped Scriber, 9x9mm, 150mm Length

901338, 900173: 570-227
05GZA033, 905200: 570-230

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
953639	Holding Bar for Swivel Clamp, 6,25x12,7mm, 2" Length
953638	Holding Bar for Swivel Clamp, 9x9mm, 50mm Length
900209	Holding Bar for Swivel Clamp, 9x9mm, 100mm Length
900321	Swivel Clamp, for D=4/8mm, Dovetail

953639: 570-227
953638, 900209: 570-230

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Series 570

ABSOLUTE®

This Digimatic height gauge is very precise and reliable, and offers you the following benefits:


- Its built-in ABSOLUTE linear encoder means you don't have to set the reference point at every power-on, improving reliability as over-speed errors cannot occur.
- Fine-adjustment gives you precise positioning.
- A carbide-tipped scriber is provided.



570-227 570-230

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Fine adjustment	Remarks	Mass [kg]
570-227	0 - 200	0,01 mm	±0,03 mm	4 mm	2 x PRESET	1,3
570-230	0 - 1000	0,01 mm	±0,07 mm	6 mm		16,8

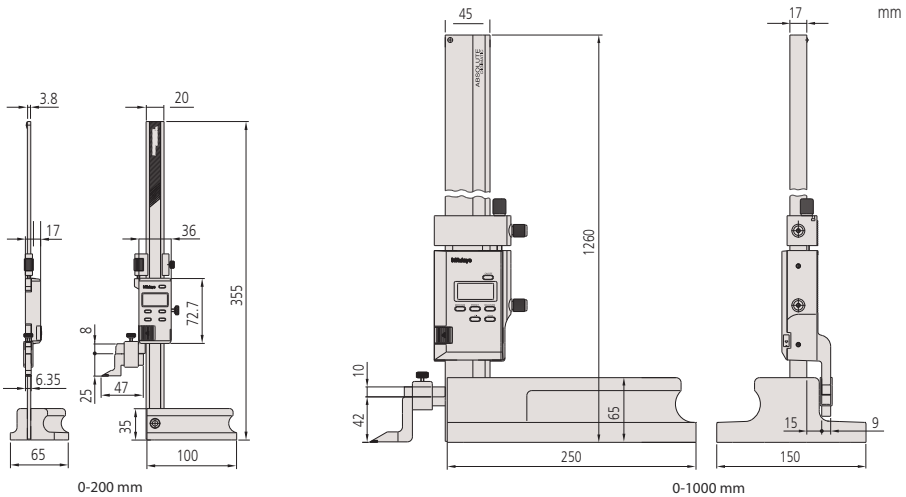

0-200 mm 0-1000 mm

M & B Calibr, s.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Height Gauges with Slider Adjustment Wheel

Series 570

ABSOLUTE®

This Digimatic height gauge is very precise and reliable, and offers you the following benefits:

- Its built-in ABSOLUTE linear encoder means you don't have to set the reference point at every power-on, improving reliability as over-speed errors cannot occur.
- It comes with large and smooth-acting slider hand wheel
- A large display and buttons for easy operability.
- A carbide-tipped scriber is provided.




570-402



Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Mass [kg]
570-402	0 - 300	0,01 mm	±0,03 mm	4,6
570-404	0 - 600	0,01 mm	±0,05 mm	6,4

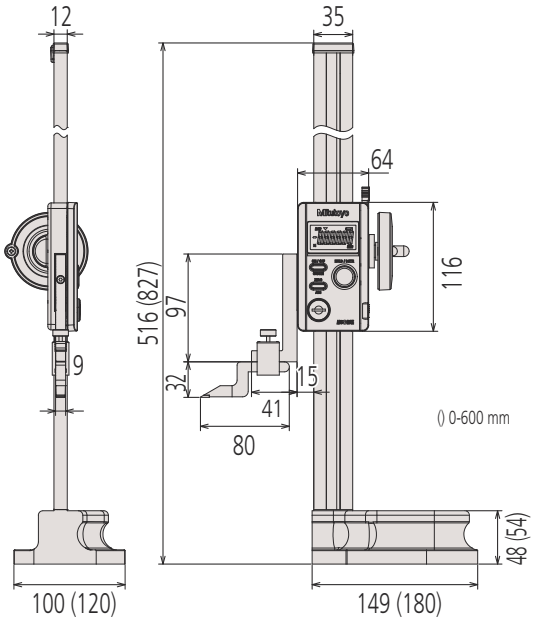



Functions	Series 570
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
ORIGIN (ABS-Zero)	●
DATA (output with cable) / HOLD (display value)	●
Low voltage alarm	●

Specifications

Scale	ABSOLUTE electrostatic linear encoder
Display	LCD, character height 11 mm
Max. response speed	Unlimited
Battery life	Approx. 20000 hours
Delivered	Including 1 battery, scriber and scriber clamp

Standard accessories

No.	Description
07GZA000	Carbide Tipped Scriber, 9x9mm, 80mm Length
05GZA033	Scriber Clamp, for 9x9mm Scriber
450291	Vinyl Cover Series 192, 300mm
450292	Vinyl Cover Series 192, 450mm, 600mm

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
953638	Holding Bar for Swivel Clamp, 9x9mm, 50mm Length
900321	Swivel Clamp, for D=4/8mm, Dovetail

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



953638



900321



Wireless data transmitter can be installed on the back of the display unit with double-sided tape

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Height Gauges Double Column Type

Series 192

This High Accuracy Height Gauge offers you the following benefits:

- Its double-column structure ensures high measuring accuracy.
- Large character height of 11 mm provides good readability.
- A Carbide-tipped scriber provided

Functions	Series 192
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET (2 values)	●
DATA (output with cable) / HOLD (display value) value)	●
Low voltage alarm	●
±SWITCHING	●

Specifications

Display	LCD, character height: 11 mm
Max. response speed	500 mm/s
Battery life	Approx. 3500 hours
Delivered	Including scriber, scriber clamp, 1 battery and cov-er er

Standard accessories

No.	Description
05GZA033	Scriber Clamp, for 9x9mm Scriber
07GZA000	Carbide Tipped Scriber, 9x9mm, 80mm Length Length
450291	Vinyl Cover Series 192, 300mm
450292	Vinyl Cover Series 192, 450mm, 600mm
450290	Vinyl Cover Series 192, 1000mm

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Trans-mitter mitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmit-ter ter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button Straight, without Data Button
953638	Holding Bar for Swivel Clamp, 9x9mm, 50mm Length 50mm Length
900321	Swivel Clamp, for D=4/8mm, Dovetail

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



953638



900321






192-613-10






Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Mass [kg]
192-613-10	0 - 300	0,01/0,005 mm	±0,02 mm	4,7
192-614-10	0 - 600	0,01/0,005 mm	±0,05 mm	8,3
192-615-10	0 - 1000	0,01/0,005 mm	±0,07 mm	15,7

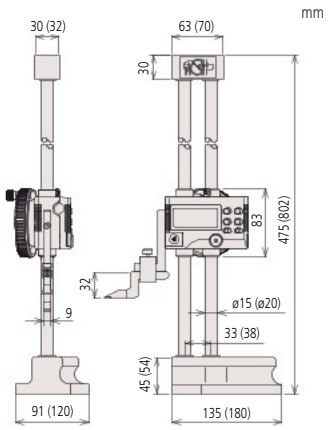

0-300 mm
(0-600 mm)

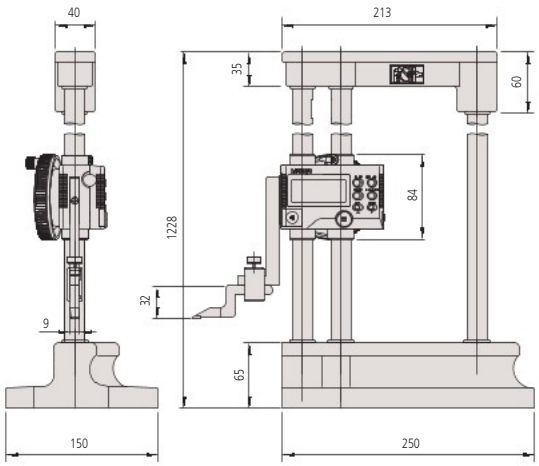

0-1000 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-itly agreed upon.

Mitutoyo

Digimatic Height Gauges Double Column Type with Touch Trigger Probe Connector

Series 192

This High Accuracy Height Gauge offers you the following benefits:

- Its double-column structure ensures high measuring accuracy.
- Large character height of 11 mm provides good readability.
- A Carbide-tipped scriber provided




192-663-10




Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	Mass [kg]
192-663-10	0 - 300	0,01/0,005 mm	±0,02 mm	5,7
192-664-10	0 - 600	0,01/0,005 mm	±0,04 mm	8,3
192-665-10	0 - 1000	0,01/0,005 mm	±0,06 mm	15,7

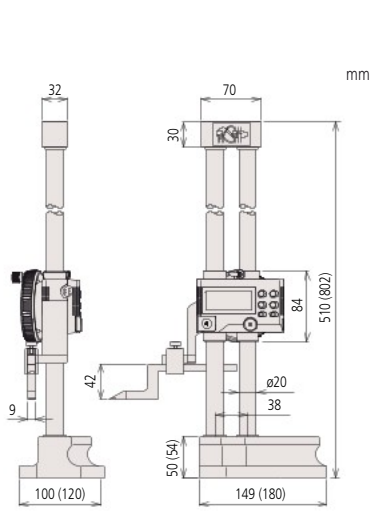

0-300 mm
(0-600 mm)

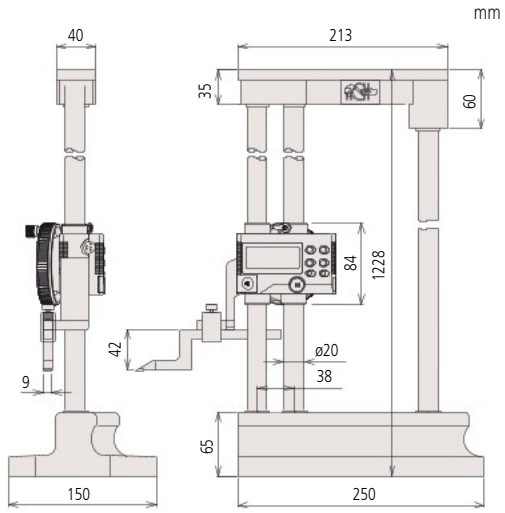

0-1000 mm

Functions	Series 192
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET (2 values)	●
Touch-trigger probe	●
Stylus tip diameter compensation	●
DATA (output with cable) / HOLD (display value) value)	●
Low voltage alarm	●
±SWITCHING	●

Specifications

Display	LCD, character height: 11 mm
Max. response speed	500 mm/s
Battery life	Approx. 3500 hours
Delivered	Including scriber, scriber clamp, 1 battery and cov-er er

Standard accessories

No.	Description
05GZA033	Scriber Clamp, for 9x9mm Scriber
905200	Carbide Tipped Scriber, 9x9mm, 150mm Length
450291	Vinyl Cover Series 192, 300mm
450292	Vinyl Cover Series 192, 450mm, 600mm
450290	Vinyl Cover Series 192, 1000mm

Optional accessories

No.	Description
192-007	Bi-Directional Touch Trigger Probe, for Series 192 Series 192, Metric
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m cable USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Trans-mitter mitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmit-ter ter
02AZD790F	Connection Cable F for U-WAVE, Straight, with Straight, without Data Button
953638	Holding Bar for Swivel Clamp, 9x9mm, 50mm 50mm Length
900209	Holding Bar for Swivel Clamp, 9x9mm, 100mm 100mm Length
900321	Swivel Clamp, for D=4/8mm, Dovetail

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



192-007

M &B Calibr, s.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Spare Parts for Height Gauges

Standard accessories for Height Gauges

These are optional accessories and spare parts for height gauges, that you can use for different tasks.


- Various accessories are available for using height gauges in different applications.
- Hard-wearing carbide-tipped scribers are available for all height gauges.



05GZA033



06AGR304

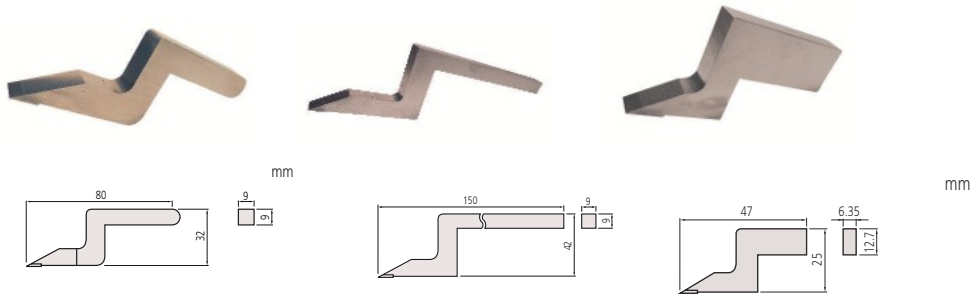

mm

07GZA000

905200

900173

Carbide-tipped scribers

No.	Applicable height gauges	Remarks
07GZA000	192-130, 192-131, 192-132, 192-133 192-613-10, 192-614-10, 192-615-10 514-102, 514-104, 514-106, 514-103, 514-105, 514-107 570-302, 570-304, 570-402, 570-404	Carbide tipped scriber (9 x 9 mm) 80 mm length
905200	192-663-10, 192-664-10, 192-665-10 514-108, 514-109 570-230	Carbide tipped scriber (9 x 9 mm) 150 mm length
900173	570-227, 570-244 506-207, 506-208	Carbide tipped scriber (12,7 x 6,35 mm) 47 mm length

Scriber clamp


No.	Applicable height gauges	Remarks
05GZA033	192-130, 192-131, 192-132, 192-133 192-613-10, 192-614-10, 192-615-10 192-663-10, 192-664-10, 192-665-10 514-102, 514-104, 514-106, 514-108 570-230 570-302, 570-304, 570-402, 570-404	Scriber clamp (9 x 9 mm)
06AGR304	570-227, 570-244, 506-207, 506-208	Scriber clamp with plastic screw (12,7 x 6,35 mm)

Optional Accessories for Height Gauges

Optional accessories for Height Gauges

These are optional accessories for height gauges, that you can use for different tasks.

- Various accessories are available for using height gauges in different applications.



900764



Depth measurement attachment

Depth measurement attachment

No.	Applicable height gauges	Remarks
900764	192-130, 192-131, 192-132, 192-133 192-613-10, 192-614-10, 192-615-10 514-102, 514-103, 514-104, 514-105, 514-106, 514-107 570-302, 570-304, 570-402, 570-404 192-663-10, 192-264-10, 192-665-10 514-108, 514-109	Depth measurement attachment (9 mm x 9 mm)
900878	570-227, 570-244 506-207, 506-208 192-150, 192-151, 192-152 192-630-10, 192-631-10, 192-632-10, 192-633-10 570-312, 570-313, 570-314 192-670-10, 192-671-10, 192-672-10, 192-673-10 570-248	Depth measurement attachment (12,7 mm x 6,35 mm)

M & B Calibr, s.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

QM-Height

Series 518

ABSOLUTE®

This is a high precision ABSOLUTE Digital Height Gauge that offers you the following benefits:


- It has a high accuracy, high resolution ABSOLUTE linear encoder for position detection.
- Types with and without pneumatic drive mechanism.
- Automatic running of prelearnt part programs.
- You can easily implement frequently used measurements, such as inside/outside diameter and pitch calculations, by icon-based commands that also support easy one-key operation.
- Extraordinary battery life.
- GO/±NG judgement is performed by setting the upper and lower tolerances.



518-254




518-256

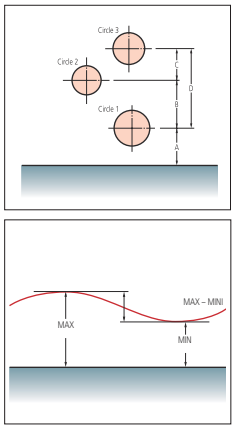

Metric

No.	Range	Digital step	Accuracy	Perpendicularity	Repeatability	Air floating	Mass [kg]
518-250	0-350 mm	0,001 mm/0,005 mm	±(2,4+2,1L/600) µm L = Measuring length (mm)	7 µm	(2σ) ≤ 1,8 µm	no	25
518-252	0-600 mm	0,001 mm/0,005 mm	±(2,4+2,1L/600) µm L = Measuring length (mm)	12 µm	(2σ) ≤ 1,8 µm	no	26
518-254	0-350 mm	0,001 mm/0,005 mm	±(2,4+2,1L/600) µm L = Measuring length (mm)	7 µm	(2σ) ≤ 1,8 µm	yes	29
518-256	0-600 mm	0,001 mm/0,005 mm	±(2,4+2,1L/600) µm L = Measuring length (mm)	12 µm	(2σ) ≤ 1,8 µm	yes	30



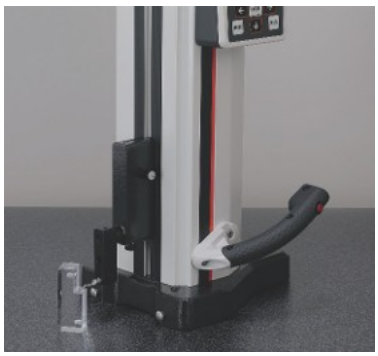

Specifications

Measuring force	1,5 ± 0,5 N
Scale	ABSOLUTE electromagnetic inductive
Display	TN monochrome LCD
Measuring function	1D measurement: height diameter, pitch, Max/Min/TIR (Max-Min), tolerance, preset, data memory
Drive method	Manual
Guiding method	Roller bearing
Power supply	Alkaline battery size AA LR6 (4 pcs.), rechargeable battery size AA Ni-MH (4 pcs.), AC-Adapter (optional)
Battery life	Approx. 1200 h (without air floating) approx. 90 h (with air floating)


Standard accessories

No.	Description
011037	Battery, LR6, 1,5V, 4 pcs.
12AAA715	Setting Block Linear Height/QM-Height, Probe Calibration
05HZA148	Ball Offset Probe QM-Height, D=5mm, Standard Accessory





05HZA148



Standard ball probe of 05HZA148

Scan QR Code with your mobile device and watch our product videos on YouTube.

Scan QR Code with your mobile to read the QM-Height leaflet.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Accessories for QM-Height

Series 518

Optional accessories

No.	Description
06AGZ369D	AC-Adapter, DC 6V 2A, CEE version Germany (Europe)
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
02AZE990	U-WAVE Transmitter Mounting Plate, for QM-Height
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
06AFZ050	USB Cable 1m, DP-1VA to PC etc., USB Type A to Micro USB Type B Plug
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter

Other probes and data management hardware, see optional accessories for QM-Height and Linear Height.



936937



06AFM380D



02AZE990




02AZE990



Inside diameter



Outside diameter

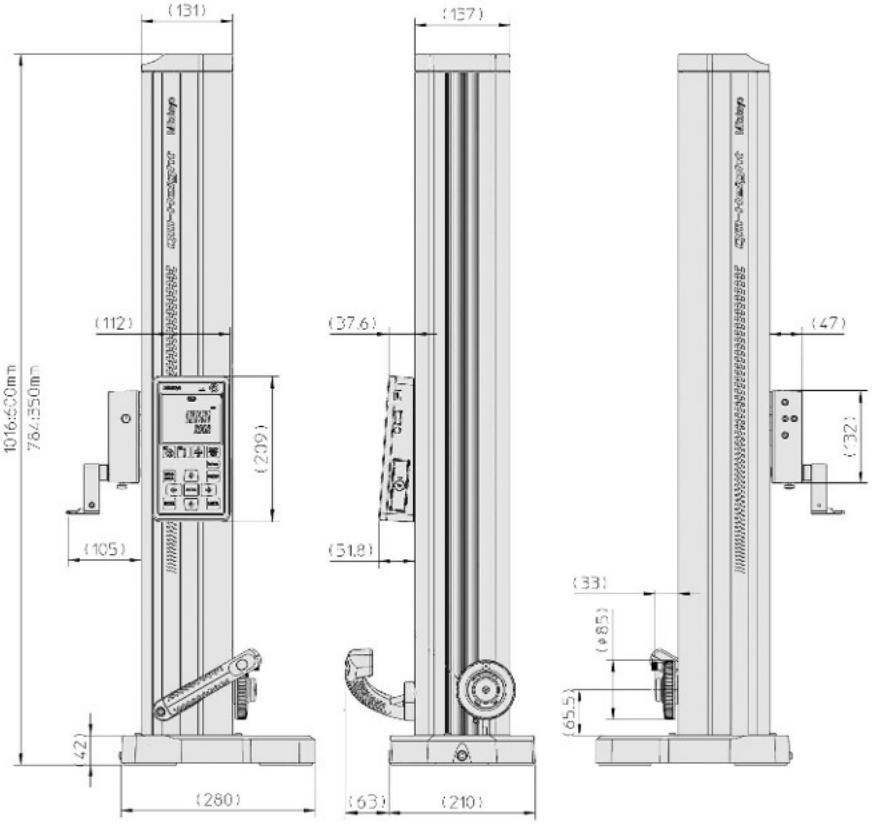

M & B Calibr, s.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Linear Height LH-600 F/FG

Series 518

The Linear Height LH-600F/FG is a high-end 2D height-measuring instrument exhibiting the perfect combination of intuitive operation and multifunctionality.

- Measurement operations can be performed by using the hybrid controller box with a touch screen and integrated sheet keyboard
- It is capable of measuring with a digital step of 0,1 µm
- Excellent accuracy of (1,1 + 0,6L/600) µm
- Bidirectional Digimatic data output (Digimatic S1)
- Measurement results can be printed from a receipt printer or Digimatic Printer (DP-1VA) and sent to a PC via wireless communication, USB cable or USB-Stick
- Pneumatic drive mechanism
- Automatic running of pre-learned part programs
- Excellent visualization of GO/±NG tolerance comparisons
- Independent operation with rechargeable battery
- LH-Communication Tool Software available online free of charge
- Dimensions L 492 mm x W 238 mm x H 996 mm



518-360-13



518-361-13 (model with power grip)



Measurements are supported via clear guidance on the large touch panel.



Rear panel

Specifications

Balancing method	Counterbalance
Drive method	Motor-driven (5, 10, 15, 20, 25, 30, 40 mm/s: 7 steps)/ manual
Sliding method	Rolling bearing
Slider balance adjustment method	Manual adjustment by adding/removing auxiliary weights
Scale	Photoelectric INC encoder, STVC-20Z (8,1x10-6/K)
Display	8,4" SVGA touch screen (800x600 dot, LED, with back lightning)
Language for display	English / German / French / Spanish / Italian / Dutch / Portuguese / Swedish / Turkish / Czech / Hungarian / Slovenian / Polish / Russian / Romanian / Bulgarian / Finnish / Traditional Chinese / Simplified Chinese / Korean / Japanese
Adjustment range of display unit orientation	Tilt direction: 0-40°, swivel direction: -30-180°
Power supply	AC adapter 100-240V, 50/60Hz / battery (Ni-MH)
Battery operation time	Approx. 4 hours
Battery charging time	Appr. 3,5 h
Power consumption	Max. 49,9 W
Number of stored part programs	50
Preventive maintenance function	Scale status notification, calibration status notification
Measuring force	1 N

Standard accessories

No.	Description
12AAY343	D=5mm Ball Stylus, with Stepped Holder
518-060-13	Probe Diameter Calibration Block, Metric/Inch, for LH-600
12BAS388	Probe Diameter Calibration Block Cover, LH-600F/FG
12AAY658	Probe Diameter Calibration Block Base, LH-600F/FG
12AAF712	Battery Pack, for Height Gauge LH-600 C/D/E/F
12BAR507	Touch-Pen
12BAS384	Protective Sheet, Touch Screen LH-600F/FG
357651	AC-Adapter 12V, CEE Type, for SJ-210/SJ-310/LH-600/QM-Data 200
12BAS276	Cap for Conveying Handles, LH-600F/FG
510434	Conveying Handles (2 pcs.), Linear Height, Profile Projector
12BAT198	Clear Cover (T0,15)
02ZAA000	Power Cord Set/PSE

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Linear Height LH-600 F/FG


Metric/Inch


No.	Range [mm]	Slider stroke	Digital step	Remarks
518-360-13	0-977	600 mm	0,0001/ 0,001/ 0,01/ 0,1 mm or 0,000001/ 0,00001/ 0,0001/ 0,001"	Without power grip
518-361-13	0-977	600 mm	0,0001/ 0,001/ 0,01/ 0,1 mm or 0,000001/ 0,00001/ 0,0001/ 0,001"	With power grip

No.	Accuracy	Perpendicularity	Straightness	Repeatability	Air floating	Mass [kg]
518-360-13	±(1,1 + 0,6L/600) µm L = length (mm)	5 µm (after compensation)	4 µm (mechanical)	(2σ) Plane : 0,4 µm (2σ) Bore : 0,9 µm	Full-floating (for moving), semi floating (for scanning measurement)	26,1
518-361-13	±(1,1 + 0,6L/600) µm L = length (mm)	5 µm (after compensation)	4 µm (mechanical)	(2σ) Plane : 0,4 µm (2σ) Bore : 0,9 µm	Full-floating (for moving), semi floating (for scanning measurement)	26,6

Scan QR Code with your mobile device and watch our product videos on YouTube.

Scan QR Code with your mobile to read the Linear-Height leaflet.

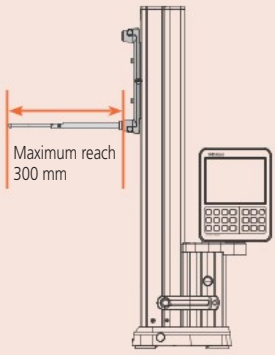

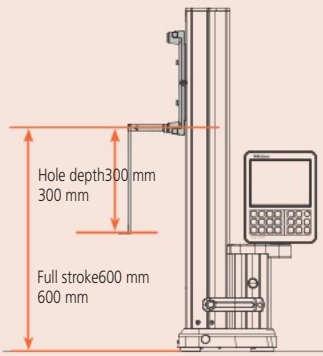



Measurement area with optional probes





Grafic support for 2D measurement




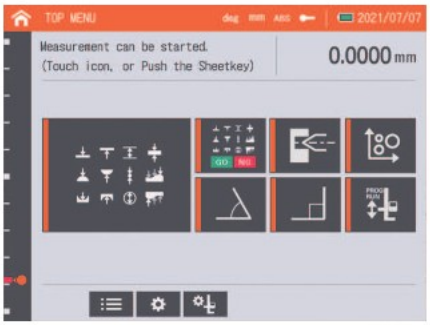

Home screen



Result screen

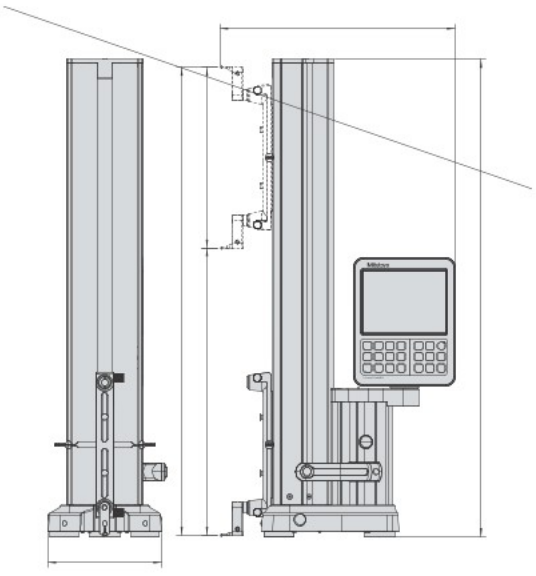


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Optional Accessories for Linear Height


Series 518




12AAF666




12AAF668




12AAF669




12AAF670




12AA671




12AAF672




12AAF673




226117




226118




12AAY597




12AAY598




12AAY599




12AAY600




12AAY601




12AAY602




12AAY603




12AAY604



12AAY605




12AAY606




12AAY607




Extension holder
12AAY595 or 12AAY596



Extension holder 100 mm or
200 mm for probes and stylus



12AAY599 + 12AAY595



12AAY606 + 12AAY595

Optional accessories

No.	Description
12AAF666	Ball Probe Coaxial Type, D=1mm, 72mm Length
12AAF668	Ball Probe Coaxial Type, D=10mm, 82mm Length
12AAF669	Ball Probe Coaxial Type, D=10mm, 120mm Length
12AAF670	Disk Probe Coaxial Type, D=5mm, 75mm Length
12AAF671	Disk Probe Coaxial Type, D=10mm, 59mm Length
12AAF672	Ball Probe Eccentric Type, D=1mm
12AAF673	Ball Probe Eccentric Type, D=2mm
226117	CMM Stylus Adapter M2
226118	CMM Stylus Adapter M3
12AAY597	Stylus, Eccentric Type, D=5mm, 130mm Length
12AAY598	Disk Stylus, Coaxial Type, D=25mm, 99,5mm Length
12AAY599	Depth Stylus for Height Gauge, for max. 70mm Depth
12AAY600	Depth Stylus for Height Gauge, for max. 150mm Depth
12AAY601	Depth Stylus for Height Gauge, for max. 300mm Depth
12AAY602	Depth Stylus for Height Gauge, Offset Type, for max. 70mm Depth, D=2mm Ball
12AAY603	Depth Stylus for Height Gauge, Offset Type, for max. 150mm Depth, D=2mm Ball
12AAY604	Depth Stylus for Height Gauge, Offset Type, for max. 300mm Depth, D=2mm Ball
12AAY605	Depth Stylus for Height Gauge, Offset Type, for max. 70mm Depth, D=4mm Ball
12AAY606	Depth Stylus for Height Gauge, Offset Type, for max. 150mm Depth, D=4mm Ball
12AAY607	Depth Stylus for Height Gauge, Offset Type, for max. 300mm Depth, D=4mm Ball
12AAY595	Extension Holder, 100mm, for Height Gauge
12AAY596	Extension Holder, 200mm, for Height Gauge

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Accessories for Linear Height


Series 518

Optional accessories

No.	Description
12AAC073	Tapered Measuring Insert, D=22mm
12AAA787	Setting Block Linear Height/QM-Height, Probe Calibration and Taper Probe
12AAB136	Cylindrical Probe, D=10mm
K650986	Stylus Kit M3 for Linear Height, with Holder, 5 Probes, 2 Extensions, 1 Dowel-key
02ZAA021	Power Cable CEE Type, for Europe (except UK)
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/Digimatic 2/Digimatic S1 Interface, 2 m
519-521	Inductive Probe Lever Head Design, +-0,5mm, appr. 0,2N
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/Digimatic S1 Interface
12AAY486	U-WAVE-T Transmitter Mounting Plate, for LH-600F/FG
02AZG011	Connection Cable SF for U-WAVE, for U-WAVE-T and Instruments with Digimatic S1 Interface
12BAF812	USB Cable, A-Type 2m
519-561D	Digital Display Unit for Inductive Probe, with CEE Power Cable
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter



K650986

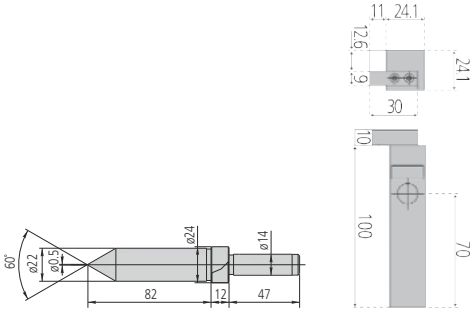

12AAC073 12AAA787 12AAB136



K650986



06AGL011



06AGL021




06AGQ001F



02AZG011



12AAY486

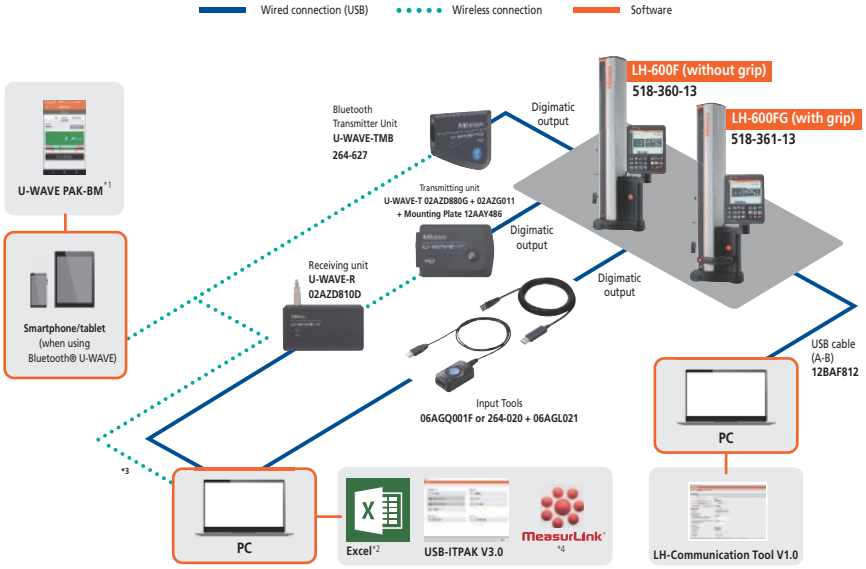

*1: Available at Apple Store and Google Play for free download. *2: Excel is a registered trademark of Microsoft Corporation. *3: It is also possible to connect with a Bluetooth-compatible PC.
*4: MeasurLink® is a registered trademark of Mitutoyo Corporation (Japan) and Mitutoyo America Corporation (USA).


M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Optional Accessories for QM-Height and Linear Height


Series 518




957261




12AAF667




957262




957263




12AAB552




957264




957265




12AAA788




12AAA789



12AAC072



12AAA792



12AAA793



264-020



02AZD880G
(IEEE 802.15.4 Transmitter)



02AZD810D
(IEEE 802.15.4 Receiver)



264-627
(Bluetooth Transmitter)

Optional accessories

No.	Description
957261	Ball Probe Coaxial Type, D=2mm, 72mm Length
12AAF667	Ball Probe Coaxial Type, D=2mm, Ruby, 72mm Length
957262	Ball Probe Coaxial Type, D=3mm, 72mm Length
957263	Ball Probe Coaxial Type, D=4mm, 76mm Length
12AAB552	Ball Probe, Coaxial Type, D=10mm
957264	Disk Probe Coaxial Type, D=14mm, 59mm Length
957265	Disk Probe Coaxial Type, D=20mm, 48mm Length
12AAA788	Ball Probe Eccentric Type, D=4mm
12AAA789	Ball Probe Eccentric Type, D=6mm
12AAC072	Depth Probe for Height Gauge, 90mm Reach
12AAA792	Indicator Holder LH-600, For 8mm Stem
12AAA793	Probe Extension Holder, Height Gauge, 85mm
264-020	USB Input Tool Interface Box, Digimatic/ Digimatic 2/Digimatic S1 Interface
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD810D	U-WAVE-R Wireless Receiver, Based on IEEE802.15.4 (2,4 GHz)
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/ Indicator
264-505D	Statistic Processing Printer DP-1VA, Data Printer and Logger CEE Type
543-701B	Digital Indicator ID-C, Inch/Metric, 0.5", 0.00002", Flat Back Plate
543-700B	Digital Indicator ID-C, 12,7mm, 0,0005mm, Flat Back Plate

For wireless transmitter, use connection cable 02AZG011 for Linear Height and 02AZD790D for QM-Height.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Indicators and Caliper Gauges



ABSOLUTE Digimatic Indicators
Page 228



Dial Indicators
Page 242



Accessories for Indicators
Page 261



Lever Indicators
Page 269



Accessories for Lever Indicators
Page 279



Thickness Gauges, Caliper Gauges, Dial Tension Gauges
Page 281

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Indicators ID-SX

Series 543

This is a standard model of indicator that is reliable and easy to use.
The ABSOLUTE Digimatic Indicator ID-S offers you the following benefits:

- The ABSOLUTE sensor means you don't have to carry out origin setting every time you power it on, saving you time and hassle.
- You can access all functions by using the large, user-friendly buttons on the front of the indicator.
- Large character height of 9 mm provides good readability.
- Exceptional battery life.



543-781B-10



543-790B-10




543-794B-10

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-781B-10	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤1,5 N	IP42	140
543-781-10	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤1,5 N	IP42	150
543-790B-10	12,7	0,001 mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	140
543-790-10	12,7	0,001 mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	150
543-794B-10	12,7	0,001 mm	0,003 mm	0,002 mm	0,002 mm	≤2,5 N	IP53	140
543-794-10	12,7	0,001 mm	0,003 mm	0,002 mm	0,002 mm	≤2,5 N	IP53	150

No. with "B": flat back plate

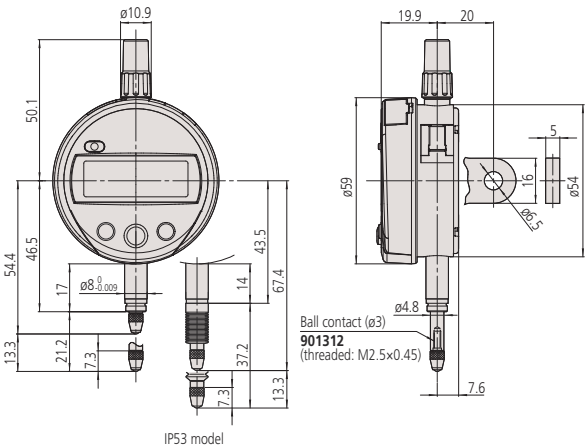

IP53 model



Application with spindle lifting cable

Functions	Series 543
Data output	●
ON/OFF	●
Counting direction switchable	●
ORIGIN (ABS-Zero)	●

Specifications

Display	LCD, character height 9 mm
Max. response speed	Unlimited
Alarm	Low voltage, counting value composition error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 battery SR-44
Battery life	Approx. 18000 hours (0,001 mm type), approx. 20000 hours (0,01 mm type)

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21EZA105	Spindle Lifting Knob, for 12,7mm Range
903594	Air Drive Unit, Indicator/Linear Gauge, for ID-S, ID-C, LGS, 12,7 mm and 0,5" Range
238774	Silicon rubber boot for ID-C, ID-N, ID-S

For USB Input Tool Direct cable:
a footswitch (no. 937179T), a USB- footswitch adapter (no. 06ADV384) and USB-ITPAK Software (no. 06AGR543) are required.
238774 for IP53 model only

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21EAA423	NBR Rubber Boot, Digital Gauge Series 543

21EAA423 for IP53 model only

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators ID-U

Functions	Series 575
Data output	●
ON/OFF	●
Counting direction switchable	●
ORIGIN (ABS-Zero)	●

Specifications

Display	LCD, character height 8,5 mm
Max. response speed	Unlimited
Alarm	Low voltage, counting value composition error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 battery SR-44
Battery life	Approx. 20000 hours

Standard accessories

No.	Description
21EAA426	Spindle Lifting Handle, for Indicators

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm

21JZA295: moving measuring range max. 12mm
For USB Input Tool Direct cable:
a footswitch (no. 937179T), a USB- footswitch adapter (no. 06ADV384) and USB-ITPAK Software (no. 06AGR543) are required.


Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

Series 575

This is a slim type of digital indicator with a 25 mm range.
The ABSOLUTE Digimatic Indicator ID-U offers you the following benefits:


- The ABSOLUTE sensor means you don't have to carry out origin setting every time you power it on, saving you time and hassle.
- Its compact design makes it ideal for installing into measuring fixtures.
- Exceptional battery life.

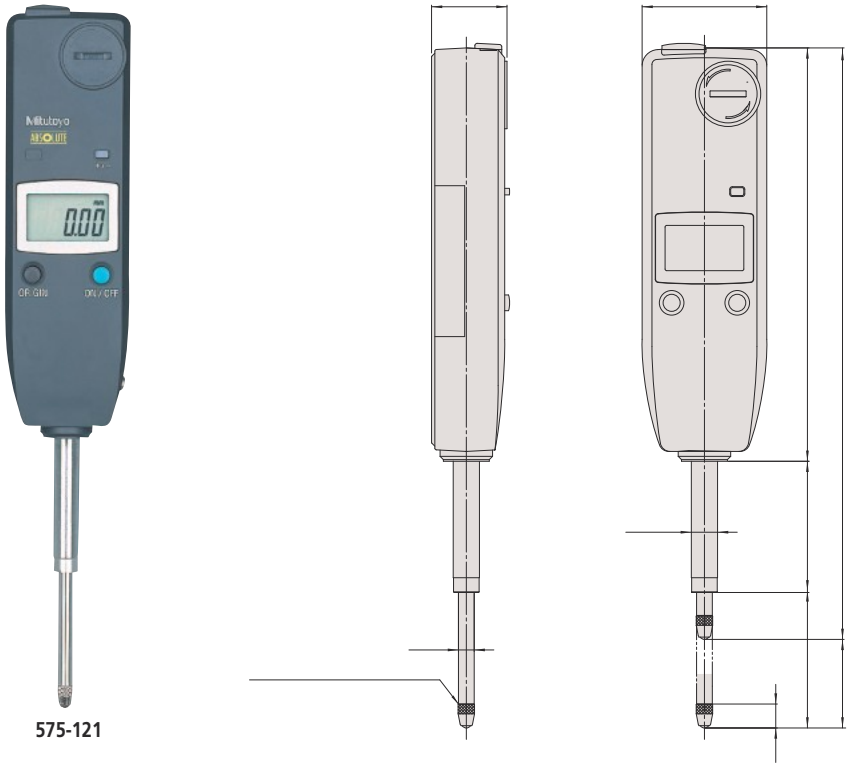

575-121

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
575-121	25,4	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤1,8 N	IP42	140

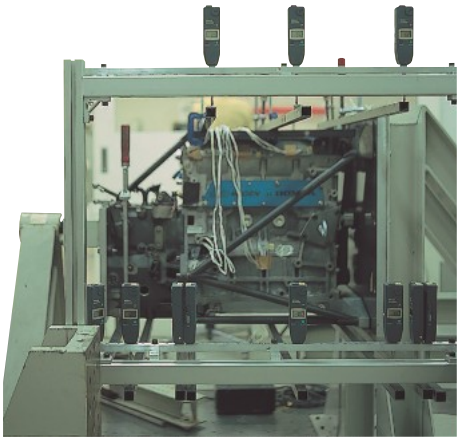

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators ID-C

Series 543 This is a multifunction standard indicator that is reliable and easy to use.

This is a multifunction standard indicator that is reliable and easy to use.

- Bidirectional communication e.g. to perform parameter setting from a PC (Digimatic S 1 interface) is possible.
- The ABSOLUTE sensor means you don't have to carry out origin setting every time you power it on, saving you time and hassle.
- Excellent visibility with a large digital/analog display.
- Model with 0,5 µm digital step is available.
- Measurements such as simple calculation and peak detection are possible.
- Equipped with a calibration schedule warning function.
- GO/±NG judgement is performed by setting the upper and lower tolerances.
- Display 330° rotatable.
- A function lock protects the display against unauthorised use.

Functions	Series 543
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Auto Power OFF setting	●
Counting direction switchable	●
Customizing keys	●
Calibration warning function	●
Low voltage alarm	
ZERO/ABS	●

Specifications

Display	LCD, character height 11 mm, rotable 330°
Max. response speed	UnlimitedMeasurement frequency
Measurement frequency (MAX/MIN/RANGE)	50 times/s (MAX/MIN/RANGE)
Alarm	Low voltage, counting value composition error, overflow overflow error, tolerance limit setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 battery CR-2032
Battery life	Continuous use: approx. 2700h
Digital step switchable	0,5 µm model only: 0,5 µm, 1 µm, 10 µm



543-700B 543-715B 543-720B 543-730B




330° rotary display




Calibration schedule warning




Large display



12,7 mm models



25,4 mm models

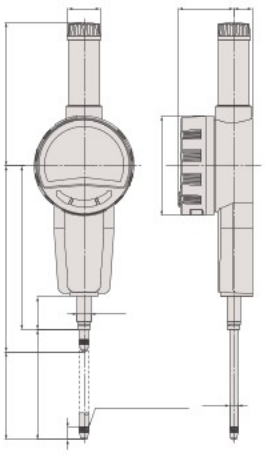

50,8 mm models

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

on. Product descriptions,

ABSOLUTE Digimatic Indicators ID-C

Optional accessories

No.	Description
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/Digimatic 2/Digimatic S1 Interface, 1 m Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/Digimatic 2/Digimatic S1 Interface, 2 m Digimatic 2/Digimatic S1 Interface, 2 m
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/Digimatic S1 Interface USB), 2m Cable, Digimatic/Digimatic 2/Digimatic S1 Interface Digimatic S1 Interface
264-020	USB Input Tool Interface Box, Digimatic/Digimatic 2/Digimatic S1 Interface Digimatic 2/Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Trans- mitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Trans- mitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wire- less Transmitter for Micrometer/Indica-tor tor
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indi-cator cator
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U- WAVE fit Bluetooth for Digimatic S1 In- terface
02AZG011	Connection Cable SF for U-WAVE, for U- WAVE-T and Instruments with Digimat-ic S1 Interface ic S1 Interface
02AZG021	Connection Cable SF for U-WAVE, for Foot Switch, for Digimatic S1 Interface Foot Switch, for Digimatic S1 Interface
21EZA198	Spindle Lifting Lever, for Digital Indica- tor, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm
21EZA105	Spindle Lifting Knob, for 12,7mm Range
903594	Air Drive Unit, Indicator/Linear Gauge, for ID-S, ID-C, LGS, 12,7 mm and 0,5" for ID-S, ID-C, LGS, 12,7 mm and 0,5" Range Range
21EZA197	Spindle Lifting Knob, for 25,4mm Range
21EZA200	Spindle Lifting Knob, for 50,8mm Range
02ACA571	Auxiliary Spindle Spring, for 25,4mm Range Range
02ACA773	Auxiliary Spindle Spring, for 50,8mm Range Range

02ACA571 and 02ACA773 : required when orienting the indicator upside down;
down;02AZF700, 21EZA198, 21JZA295, 21JZA301, 903594
02AZF700, 21EZA198, 21JZA295, 21JZA301, 903594for 12.7 mm model only
for 12.7 mm model only

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric 7,3mm Length, Carbide, Metric


Scan QR code for Leaflet

Scan QR code for Video


Metric

No.	Range [mm]	Digital step	Max. Permis-sible Error E MPE	H MPE (Hys-teresis)	R MPE (Re-peatability)	Measuring force MPL	Protec-tion	Mass [g]
543-700	12,7	0,0005 mm/0,001 mm/0,01mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	175
543-700B	12,7	0,0005 mm/0,001 mm/0,01mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	165
543-705	12,7	0,0005 mm/0,001 mm/0,01mm	0,003 mm	0,002 mm	0,002 mm	0,4-0,7 N	IP42	170
543-705B	12,7	0,0005 mm/0,001 mm/0,01mm	0,003 mm	0,002 mm	0,002 mm	0,4-0,7 N	IP42	160
543-710	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤0,9 N	IP42	170
543-710B	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤0,9 N	IP42	160
543-715	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	0,2-0,5 N	IP42	165
543-715B	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	0,2-0,5 N	IP42	155
543-720B	25,4	0,0005 mm/0,001 mm/0,01mm	0,003 mm	0,002 mm	0,002 mm	≤1,8 N	IP42	195
543-725B	25,4	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤1,8 N	IP42	190
543-730B	50,8	0,0005 mm/0,001 mm/0,01mm	0,005 mm	0,002 mm	0,002 mm	≤2,3 N	IP42	260
543-735B	50,8	0,01 mm	0,04 mm	0,02 mm	0,01 mm	≤2,3 N	IP42	245

No. with "B": flat back plate

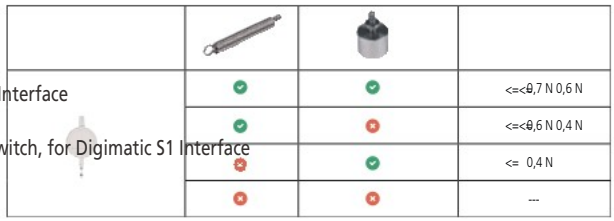


543-705(B)

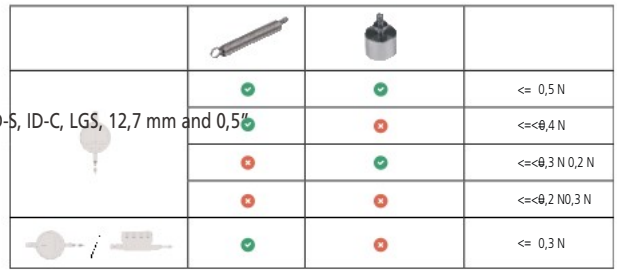

543-715(B)

Setting measuring force on low measuring force models with the help of a spring and/or weight.

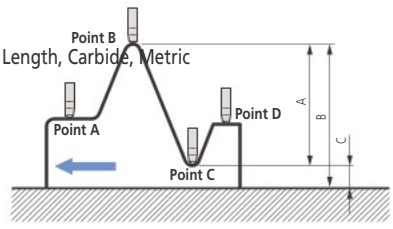

Difference/Runout measurement
Example : indicator travel from points A to D.
Difference (or Total Runout) is displayed as A. Dimensions B (maximum value) and C (minimum value) can be recalled from memory with a simple key sequence.
key sequence.



Application with spindle lifting cable

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-
itly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Indicators Max/Min/RANGE ID-C

Series 543

This indicator is the MAX/MIN/RANGE value holding function model

It offers the following benefits:

- The MAX/MIN/RANGE (run-out value) can be measured.
- A fast measurement frequency mode(detection cycle 20 ms or 50 times/s) is selectable to measure in the peak detection mode (MAX/MIN/RANGE) more reliably.
- Easy indicator setup via a setup menu.
- Analogue bar graph in the display (12 different scales switchable).
- GO/±NG tolerance judgement function.
- This indicator enables the use of a calculation function for the measured value Ax.
- Coefficient A is freely definable and x = displacement of the plunger.
- A USB interface box can be used to set up the indicator from PC via dedicated software.



543-300B-10



543-300B-10
7001-10

Functions	Series 543
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET 3x	●
ABS/INC switchable	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
Low voltage alarm	
MAX/MIN/RANGE	●
Calculation function (with formula)	●
Analog bar resolution switchable	●
Fast measurement mode	●

Specifications

Display	LCD, character height: 8 mm, rotatable 330°
Max. response speed	Unlimited
Measurement frequency (MAX/MIN/RANGE)	Standard mode: 10 times/s fast mode: 50 times/s (plunger speed max. 50 µm/s for peak measurement)
Alarm	Low voltage, overflow error, tolerance limit setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 Battery CR-2032
Battery life	Standard mode: approx. 1 year, fast mode: approx. 4,5 month
Digital step switchable	Yes

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21EZA105	Spindle Lifting Knob, for 12,7mm Range
21EZA313	USB Interface for PC Setup, ID-C Indicator


Consumable spares


No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-300-10	12,7	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	180
543-300B-10	12,7	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	170

No. with "B": flat back plate

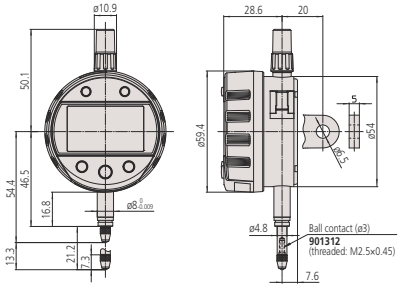

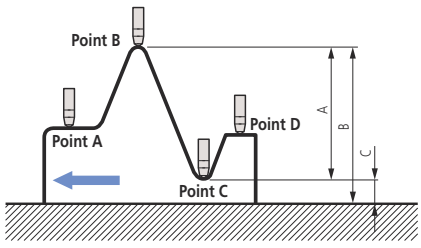

Difference/Runout measurement
Example : Indicator travel from points A to D : Difference (or Total Runout) is displayed as A. Dimensions B (maximum value) and C (minimum value) can be measured with a simple key sequence.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators Calculation ID-C

Functions	Series 543
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET 3x	●
ABS/INC switchable	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Low voltage alarm	
MAX/MIN/RANGE	●
Calculation function (with formula)	●
Analog bar resolution switchable	●
Fast measurement mode	●
Selectable resolution	●

Specifications

Digital step	0,0002/ 0,0005/ 0,001/ 0,002/ 0,005/0,01/ 0,02/ 0,05/ 0,01/ 0,02/ 0,05/0,1/ 0,2/ 0,5/ 1 mm or non-0,1/ 0,2/ 0,5/ 1 mm or non-unit unit(scale resolution is 0,001 (scale resolution is 0,001 mm) mm)
Display	LCD, character height 8 mm, rotatable 330°
Max. response speed	UnlimitedMeasurement frequenc
Measurement frequency (MAX/MIN/RANGE)	Standard mode: 10 times/sfast mode: 50 times/s fast mode: 50 times/s(plunger speed max. 50 (plunger speed max. 50 µm/s for peak measure-µm/s for peak measure-ment) ment)
Alarm	Low voltage, ABS compo-sition error, overflow er-ror, tolerance limit set-ting error ting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 Battery CR-2032
Battery life	Standard mode: approx. 1 yearfast mode: approx. 4,5 fast mode: approx. 4,5 month month

Series 543 This indicator allows you to use a calculation function for the measured value

This indicator allows you to use a calculation function for the measured valueAx+B+Cx Ax+B+Cx^{-1}

- The integrated calculation formula is useful in a variety of applications (e.g. roll diameter measurement)
- Coefficients A,B and C are freely definable. x = displacement of the plunger
- Analogue bar graph in the display (14 different scales switchable)
- GO/±NG tolerance judgement function
- MAX/MIN/RANGE function to measure peak values
- A fast measurement frequency mode(detection cycle 20 ms or 50 times/s) is selectable to measure in the peak detection mode (MAX/MIN/RANGE) more reliably reliably
- Easy indicator setup via a setup menu
- A USB interface box can be used to set up the indicator from PC via dedicated software




543-340B-10




543-590B-10




543-595B-10

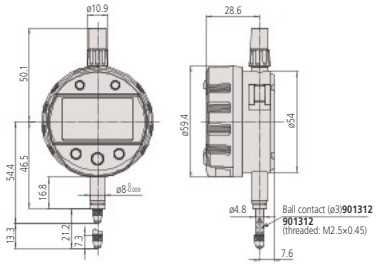

12,7 mm range models



25,4 mm range models

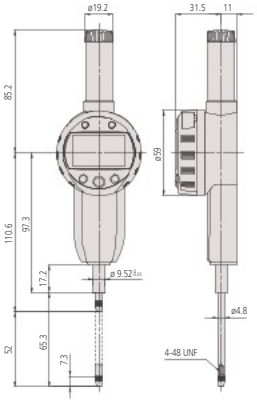

50,8 mm range models

Metric

No.	Range [mm]	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-340B-10	12,7	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	170
543-590B-10	25,4	0,003 mm	0,002 mm	0,002 mm	≤1,8 N	IP42	190
543-595B-10	50,8	0,006 mm	0,002 mm	0,002 mm	≤2,3 N	IP42	260

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators Calculation ID-C



K541282



011445 (similar)



Custom-made solution



21FAJ395 (similar)



21FAJ395 (similar)



543-340B-10 with 011445



21FAJ395



21FAJ394



K541281




K541282

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21EZA105	Spindle Lifting Knob, for 12,7mm Range
21EZA197	Spindle Lifting Knob, for 25,4mm Range
21EZA200	Spindle Lifting Knob, for 50,8mm Range
21EZA313	USB Interface for PC Setup, ID-C Indicator
21FAJ394	Angle Plate for Calc. ID-C, Radius: 25-70mm
K541281	Angle Plate for Calc. ID-C, Radius: 50-100mm
K541282	Angle Plate for Calc. ID-C, Radius: 100-200mm
21FAJ395	Roll Type Base, outside: 45-140mm / inside: 65-100mm
011445	Inner edge probe, 90°, D=0,5-20mm
011446	Setting Standard for 011445
011447	Inner edge probe, 90°, D=20-40mm
011448	Inner edge probe, 90°, D=40-60mm

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric



Setup software available for download at www.mitutoyo.eu (Registration is required) (optional USB Interface 21EZA313 is neccessary)



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators Bore Gauge ID-C

Functions	Series 543
Data output	●
ON/OFF	●
PRESET 3x	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
MIN Value Hold	●
Analog bar resolution switchable	●
Fast measurement mode	●

Specifications

Display	LCD, character height: 8 mm, rotatable 330°
Max. response speed	Unlimited
Measurement frequency (MAX/MIN/RANGE)	Standard mode: 10 times/s fast mode: 50 times/s (plunger speed max. 50 µm/s for peak measurement)
Alarm	Low voltage, composition error, overflow error, tolerance limit setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 Battery CR-2032
Battery life	Standard mode: approx. 1 year fast mode: approx. 4,5 month

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indicator
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
21EZA313	USB Interface for PC Setup, ID-C Indicator

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

Series 543

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE


IP42

This indicator is designed for inside diameter measurement applications on bore gauges
It offers the following benefits:

- Minimum value holding function that allows you to easily detect a hole diameter
- Analogue bar graph in the display (12 different scales switchable)
- The analogue bar graph enhances usability by adding a dial gauge “feel” to digital measurement
- GO/±NG tolerance judgement function
- A fast measurement frequency mode(detection cycle 20ms or 50times/s) is selectable to measure in the peak detection mode more reliably
- Easy indicator setup via a setup menu
- A USB interface box can be used to set up the indicator from PC via dedicated software




543-310B-10

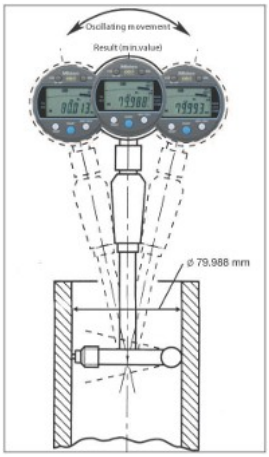




Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-310B-10	12,7	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤1,5 N	IP42	170

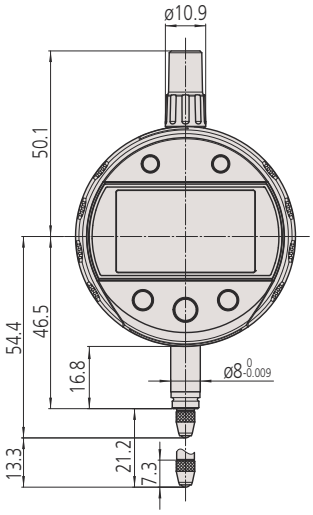

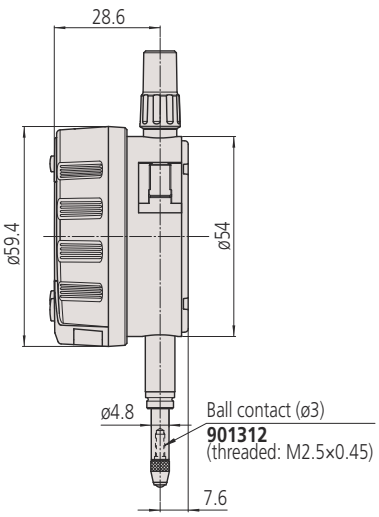

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Indicators Signal ID-C


Series 543

This is an externally-powered Digimatic Indicator with a N-ch open drain –NG, OK, +NG output.

- Dust-protected and protected against splashing water, complying with IEC 60529 (equivalent to IP54)
- Measures MAX/MIN/RANGE (run-out value).
- Saves three different Preset and Tolerance settings.
- Fast measurement frequency mode (detection cycle 50 times/s) for reliable measurement in the peak detection mode (MAX/MIN/RANGE)
- Calculation function Ax. Coefficient A freely definable, x = displacement of the plunger
- Analogue bar graph in the display (12 different scales switchable)
- GO/±NG tolerance judgment function



543-350B-10

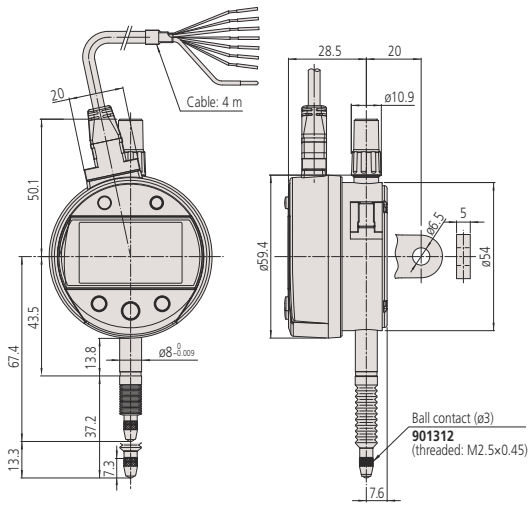

Functions	Series 543
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET 3x	●
Function lock	●
GO/±NG judgement	●
Counting direction switchable	●
MAX/MIN/RANGE	●
Calculation function (with formula)	●
Analog bar resolution switchable	●
Signal output: (+NG, OK, -NG)	●
Signal input: No-voltage input, (PRESET_RECALL/ZERO, HOLD_RESET)	●
GO/±NG judgement via LED	●

Specifications

Display	LCD, character height 8 mm
Max. response speed	Unlimited
Measurement frequency (MAX/MIN/RANGE)	100 times/s (if the plunger speed >0,1 mm/s the peak value could not be displayed correctly.)
Alarm	Counting value composition error, overflow error, tolerance limit setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	DC 5 - 24 V
Delivered	With signal cable 4 m. One end is fixed to the main unit. No connector is supplied for the other end.

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-350B-10	12,7	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤2,5 N	IP54	285
543-350-10	12,7	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤2,5 N	IP54	295

No. with "B": flat back plate

Optional accessories


No.	Description
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21EZA105	Spindle Lifting Knob, for 12,7mm Range
238774	Silicon rubber boot for ID-C, ID-N, ID-S

Consumable spares


No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21EAA423	NBR Rubber Boot, Digital Gauge Series 543

Logic of output signal	Signal name	Tolerance judgment results -NG	OK	+NG	Sensor signal synthesizing error Overflow error of display value
Negative logic	−NG (Orange)	Low	High	High	High
	OK (Green)	High	Low	High	High
	+NG (Brown)	High	High	Low	High
Positive logic	−NG (Orange)	High	Low	Low	Low
	OK (Green)	Low	High	Low	Low
	+NG (Brown)	Low	Low	High	Low

Normal mode, Maximum value detection mode, Minimum value detection mode

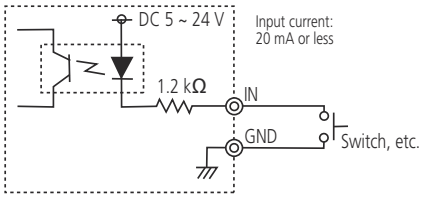


Circuit input

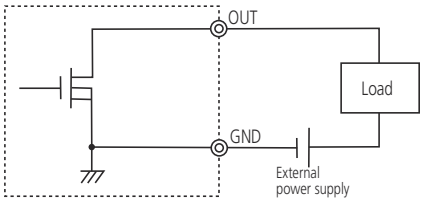

Load voltage: 5 ~ 24 V DC
Maximum load current: 100 mA or less

Circuit output

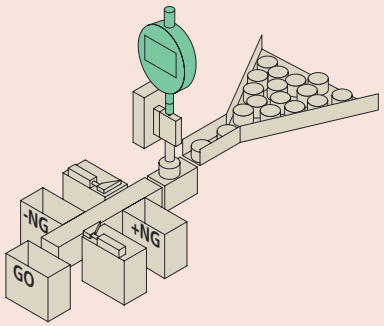

Application: GO/NG Sorting

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators ID-N

Functions	Series 543
Data output	●
ON/OFF	●
PRESET	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
External PRESET / ZERO	●

Specifications

Display	LCD, character hight: 6,2 mm
Max. response speed	Unlimited
Alarm	Low voltage, counting value composition error, overflow error, tolerance limit setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 battery SR-44
Battery life	Approx. 7000 hours

Optional accessories

No.	Description
21EAA194	Digimatic Cable for ID-N/ ID-B 1m, ID-N/ ID-B, 1 m
21EAA190	Digimatic Cable for ID-N/ ID-B 2m, for ID-N/ ID-B, 2 m
06AFM380G	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight for ID-N/ID-B
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/ Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF675	U-WAVE fit Transmitter Mounting Plate, for ID-N Digital Indicator
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZE200	U-WAVE Transmitter Mounting Plate, Universal Type
02AZD790G	Connection Cable G for U-WAVE, for IP66 Indicators ID-N and ID-B
21EAA210	Digimatic Cable for External Preset/ Zero, 1 m, ID-N/ID-B Indicator
21EAA211	Digimatic Cable for External Preset/ Zero, 2 m, ID-N/ID-B Indicator
21EZA105	Spindle Lifting Knob, for 12,7mm Range
21EZA145	Back Plate with Center Lug ISO Type, for ID-N/ID-B Indicator
238774	Silicon rubber boot for ID-C, ID-N, ID-S

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21EAA423	NBR Rubber Boot, Digital Gauge Series 543



21EAA210

Series 543

This is a slim model that is highly resilient and robust.
The ABSOLUTE Digimatic Indicator ID-N offers you the following benefits:

- It slim body design is ideal for multi-point measurements.
- The ABSOLUTE sensor means you don't have to carry out origin setting every time you power it on, saving you time and hassle.
- It has excellent resistance against water and dust (IP66 protection level) allowing you to use it in machining situations that include splashing coolant fluid.
- Switchable display orientation gives you more mounting options.
- You can perform GO/±NG judgement by setting the upper and lower tolerances.

Safety Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000007161

ABSOLUTE®

PROPRIETARY INSPECTION CERTIFICATE

IP66



543-575-10




Flexible installation options switchable display orientation (overhead use)



Wireless transmitter U-WAVE fit 264-623, mounting plate 02AZF675 and connection cable 02AZD790G

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-570	12,7	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤2,5 N	IP66	130
543-575-10	12,7	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤2,5 N	IP66	130

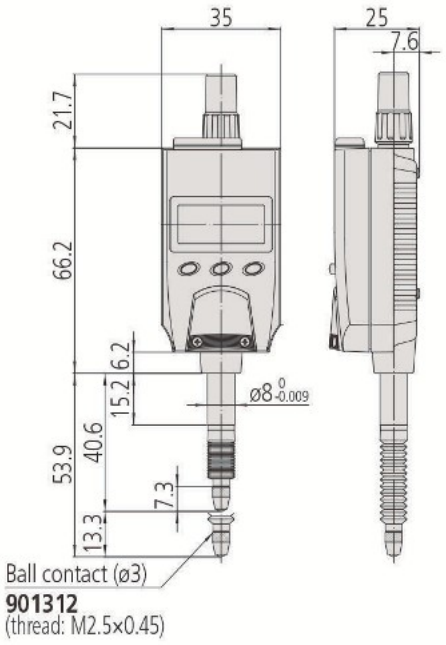



Rated to IP66 water-and dust-proofing standard, and oil resistance improved.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Indicators ID-B

Series 543

This is a back-plunger model that is highly resilient and robust.
The ABSOLUTE Digimatic Indicator ID-B offers you the following features:

- It is a back plunger type, with the display viewed from above.
- Its slim body design is ideal for multi-point measurements.
- The ABSOLUTE sensor means you don't have to carry out origin setting every time you power it on, saving you time and hassle.
- It has excellent resistance against water and dust (IP66 protection level) allowing you to use it in machining situations that include splashing coolant fluid.
- You can perform GO/±NG judgement.

Safety
Dust- and Water-Protected
TÜVRheinland CERTIFIED
www.tuv.com ID 0000007162

ABSOLUTE®

IP66



543-585-10



Flexible installation options with switchable display orientation (overhead use)


Functions	Series 543
Data output	●
ON/OFF	●
PRESET	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
External PRESET / ZERO	●

Specifications

Display	LCD, character height: 6,2 mm
Max. response speed	Unlimited
Alarm	Low voltage, counting value composition error, overflow error, tolerance limit setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	1 battery SR-44
Battery life	Approx. 7000 hours

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-580	5	0,01 mm	0,02 mm	0,02 mm	0,01 mm	≤2 N	IP66	130
543-585-10	5	0,001 mm/ 0,01 mm	0,003 mm	0,002 mm	0,002 mm	≤2 N	IP66	130

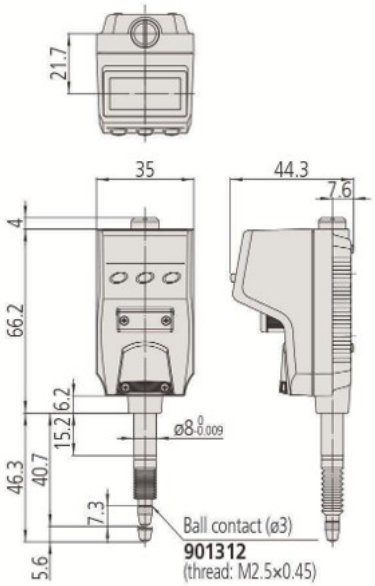

Optional accessories

No.	Description
21EAA194	Digimatic Cable for ID-N/ ID-B 1m, ID-N/ ID-B, 1 m
21EAA190	Digimatic Cable for ID-N/ ID-B 2m, for ID-N/ ID-B, 2 m
06AFM380G	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight for ID-N/ID-B
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790G	Connection Cable G for U-WAVE, for IP66 Indicators ID-N and ID-B
21EAA211	Digimatic Cable for External Preset/ Zero, 2 m, ID-N/ID-B Indicator
21EAA210	Digimatic Cable for External Preset/ Zero, 1 m, ID-N/ID-B Indicator
21EZA145	Back Plate with Center Lug ISO Type, for ID-N/ID-B Indicator
21EAA212	Silicon Rubber Boot, for ID-B, Series 1/2

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64



21EAA194



21EAA210

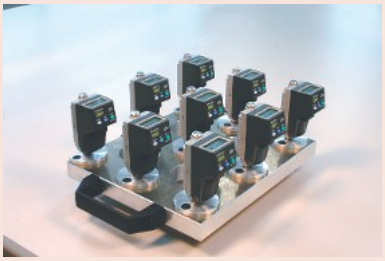

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Indicators ID-H

Series 543

This is a superior multi-function indicator that gives you high accuracy and high resolution of 0,0005 mm.
The Digimatic Indicator ID-H offers you the following benefits:

- 2-colour LCD backlight (green and red) provides you with visual GO/±NG tolerance judgement and analogue bar-graph display.
- You can display the maximum, minimum or range (runout value).
- Lifting mechanism over 30 mm with cable release (optional).
- You can carry out zero-setting and presetting with the optional remote controller, without having to touch the indicator.
- The remote control system can be implemented in advance with the built-in RS-232 interface and a PC.
- External power supply via AC-Adapter.

Functions	Series 543
Data output	●
ON/OFF	●
PRESET	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
MAX/MIN/RANGE	●
Analog bar resolution switchable	●
RS-232C Output/Input	●
RS-232C Input*	●
ZERO SET	●
Selectable resolution	●

Specifications

Display	LCD, character height: 9,5 mm
Max. response speed	1000 mm/s
Alarm	Counting value composition error, overflow error, tolerance setting error
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	AC adapter 6 V DC, 2A

Standard accessories

No.	Description
06AGZ369D	AC-Adapter, DC 6V 2A, CEE version Germany (Europe)
137693	Lifting Handle for Indicator, for Plunger

Optional accessories

No.	Description
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
21EAA130	Cable RS-232C for ID-H Indicator 1m
21EAA131	Cable RS-232C for ID-H Indicator 2m
21EZA099	Remote Controller, for ID-H Indicator
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21EZA101	Spindle Lifting Knob, for ID-H Indicator

21JZA295 : moving measuring range max. 30 mm

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

*** RS-232 Input/Output**
Connect this instrument with an external device such as a PC using the RS-232 dedicated cable (optional accessory). With this connection it is possible to perform initial setup of the instrument, control of switching a measurement mode, etc., and processing such as measurement data transfer.



543-561D



21EZA099:
Data export
Reset Max/Min/TIR
Max/Min/TIR switchover
Call PRESET value




The display switches from green to red backlight if the upper or lower tolerance limit is exceeded




21EZA101

Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-561D	30,4	0,0005mm/0,001 mm	0,0015 mm	0,0015 mm	0,001 mm	≤2 N	IP30	290
543-563D	60,9	0,0005mm/0,001 mm	0,0025 mm	0,0025 mm	0,001 mm	≤2,5 N	IP30	305

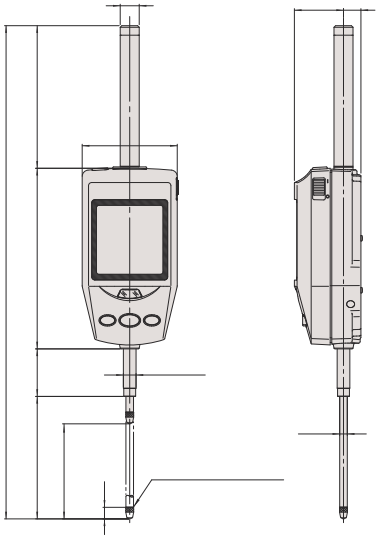



Difference/Runout measurement
Example : indicator travel from points A to D. Difference (or Total Runout) is displayed as A. Dimensions B (maximum value) and C (minimum value) can be recalled from memory with a simple key sequence.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators ID-F

Series 543

This is a superior multifunction indicator.
The ABSOLUTE Digimatic Indicator ID-F offers you the following benefits:

- Bidirectional Digimatic S1 interface
- Red/Green LCD backlight provides you with visual GO/±NG tolerance judgement
- Analogue bar-graph display
- MAX/MIN/RANGE (runout value) function with a frequency of 500 times/s
- External power supply via AC-Adapter
- High accuracy and 0,5 µm digital step



543-855B-D



543-851D




543-853D, 543-857D



Visual tolerance-monitoring



330° rotary mechanism

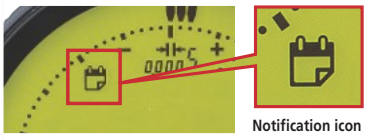

Calibration schedule warning function

Functions	Series 543
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
Customizing keys	●
Calibration warning function	●
MAX/MIN/RANGE	●
Calculation function (with formula)	●
Digimatic S1 Bidirectional interface	●
Analog bar resolution switchable	●
Selectable resolution	●

Specifications

Display	LCD with red/green backlight, character height 11 mm
Max. response speed	Unlimited
Measurement frequency (MAX/MIN/RANGE)	500 times/s
Alarm	Setting errors, sensor error, display overflow a.s.o.
Stem ∅	8 mm
Contact point	Carbide ball, thread M 2,5 x 0,45 mm
Power supply	AC adapter 5,9V DC, 2A

Standard accessories

No.	Description
06AGZ369D	AC-Adapter, DC 6V 2A, CEE version Germany (Europe)
21EAA426	Spindle Lifting Handle, for Indicators

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Indicators ID-F

Optional accessories


No.	Description
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/Digimatic 2/Digimatic S1 Interface, 1 m Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/Digimatic 2/Digimatic S1 Interface, 2 m Digimatic 2/Digimatic S1 Interface, 2 m
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/ USB), 2m Cable, Digimatic/Digimatic 2/Digimatic S1 Interface Digimatic S1 Interface
264-020	USB Input Tool Interface Box, Digimatic/Digimatic 2/Digimatic S1 Interface, Digimatic 2/Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Trans- mitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Trans- mitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wire- less Transmitter for Micrometer/Indica-tor tor
02AZG011	Connection Cable SF for U-WAVE, for U- WAVE-T and Instruments with Digimat-ic S1 Interface ic S1 Interface
02AZG021	Connection Cable SF for U-WAVE, for Foot Switch, for Digimatic S1 Interface Foot Switch, for Digimatic S1 Interface
02AZF670	U-WAVE fit Transmitter Mounting Plate, for ID-C, ID-S and ID-F Digital Indi-cator cator
21EZA198	Spindle Lifting Lever, for Digital Indica- tor, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm
21EZA105	Spindle Lifting Knob, for 12,7mm Range
21EZA197	Spindle Lifting Knob, for 25,4mm Range
21EZA200	Spindle Lifting Knob, for 50,8mm Range
02ACA571	Auxiliary Spindle Spring, for 25,4mm Range Range
02ACA773	Auxiliary Spindle Spring, for 50,8mm Range Range

02ACA571 and 02ACA773 : required when orienting the indicator upside down;
down;21EZA198, 21JZA295, 21JZA301
21EZA198, 21JZA295, 21JZA301for 12.7 mm model only
for 12.7 mm model only


Metric

No.	Range [mm]	Digital step	Max. Permissible Error E MPE	H MPE (Hysteresis)	R MPE (Repeatability)	Measuring force MPL	Protection	Mass [g]
543-855B-D	12,7	0,0005 mm/0,001 mm/0,01 mm	0,0025 mm	0,002 mm	0,002 mm	≤1,5 N	IP30	170
543-855-D	12,7	0,0005 mm/0,001 mm/0,01 mm	0,0025 mm	0,002 mm	0,002 mm	≤1,5 N	IP30	180
543-851D	25,4	0,0005 mm/0,001 mm/0,01 mm	0,0025 mm	0,002 mm	0,002 mm	≤1,8 N	IP30	240
543-853D	50,8	0,0005 mm/0,001 mm/0,01mm	0,004 mm	0,002 mm	0,002 mm	≤2,3 N	IP30	330
543-857D	50,8	0,0005 mm/0,001 mm/0,01mm	0,003 mm	0,002 mm	0,002 mm	≤2,3 N	IP30	330


No. with "B": flat back plate

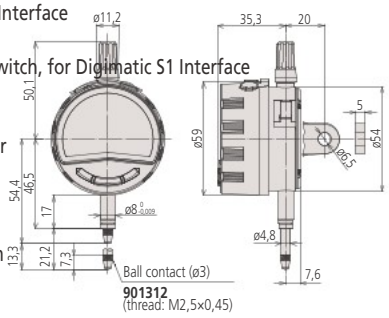


543-855B-D, 543-855-D

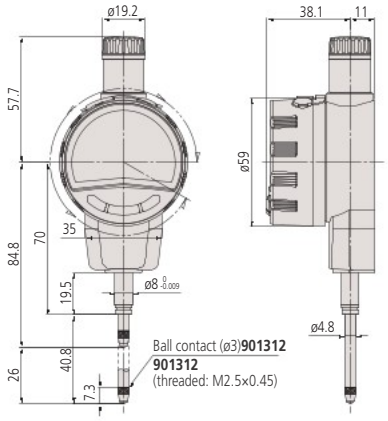

543-851D

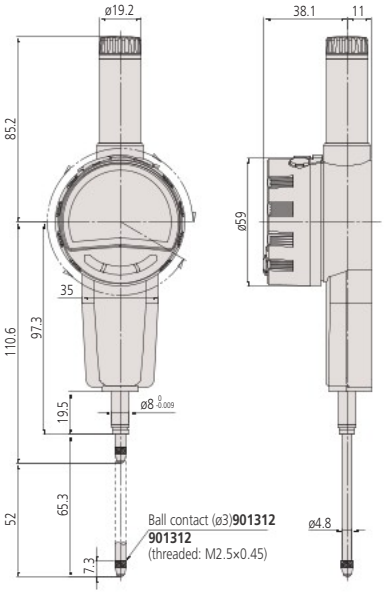

543-853D, 543-857D

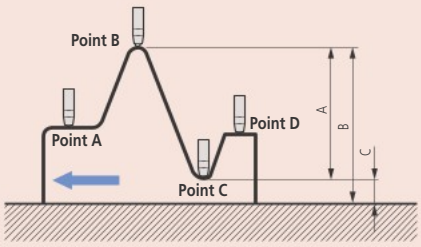

MAX/MIN/RANGE



543-853D + 7001-10

Scan the QR Code for the Leaflet

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-
itly agreed upon.

Mitutoyo

Metric Dial Indicators Series 1

Series 1

Compact Type, Extra Small Diameter - Metric

This is a compact, dial indicator with a bezel ∅ 31 / 36 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Functions	Series 1	
	1003A up to 1911AB-10	1913A-10 1913AB-10
Balanced dial	●	●
Jeweled bearing		●

Consumable spares

No.	Description
21AZA319	Contact Element Ball Point, M2,5x0,45, 8,3mm Length, Metric

For accessories and contact points, see end of dial indicators section.



1003A(B)



1911A(B)-10




1913A(B)-10

Metric


No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
1003A	4	1 mm	0-50-0	0,01	6	9	10	14	3,5	3
1003AB	4	1 mm	0-50-0	0,01	6	9	10	14	3,5	3
1911A-10	2,5	1 mm	0-50-0	0,01	6,5	10	11	13	3,5	3
1911AB-10	2,5	1 mm	0-50-0	0,01	6,5	10	11	13	3,5	3
1913A-10	0,5	0,2 mm	0-100-0	0,002	2,5	4,5	5	6	2,5	1
1913AB-10	0,5	0,2 mm	0-100-0	0,002	2,5	4,5	5	6	2,5	1

B-type delivered with flat back plate

No.	Measuring force [N]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
1003A	0,3-1,4	18	40,3	36	13,5	15	9,5	12,8	32	6	51
1003AB	0,3-1,4	18	40,3	36	13,5	15	9,5	12,8	32	6	48
1911A-10	0,3-1,8	15,5	42	31	12,7	19,4	15,1	11,5	30	6	55
1911AB-10	0,3-1,8	15,5	42	31	12,7	19,4	15,1	11,5	30	6	51
1913A-10	0,3-1,8	15,5	39,4	31	12,7	19,4	15,1	8,9	30	6	55
1913AB-10	0,3-1,8	15,5	39,4	31	12,7	19,4	15,1	8,9	30	6	51

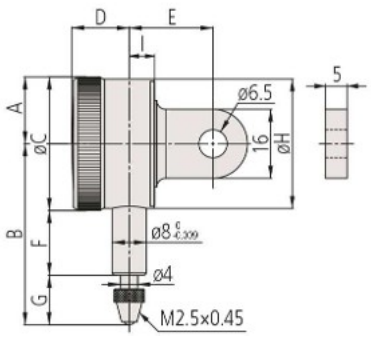

1911A(B)-10
1913A(B)-10

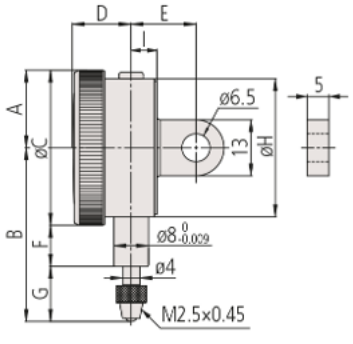

1003A(B)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Metric Dial Indicators Series 1

Series 1

Compact Type 1 and 3,5 mm Range Small Diameter - Metric

This is a compact, dial indicator with a bezel ∅ 40 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Functions	Series 1			
	1013A-10 up to 1109AB-10	1041A 1041AB	1040A 1040AB	1124A 1124AB
Balanced dial	●	●		
Continuous dial			●	●
Double scale spacing		●	●	
Shockproof	●			
Jeweled bearing	●			


Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator
21RZA149	Bezel Clamp for Dial Gauge, Series 1
902100	Spindle Lifting Lever, for S-Type and A-Type Serie 1
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

For accessories and contact points, see end of dial indicators section.

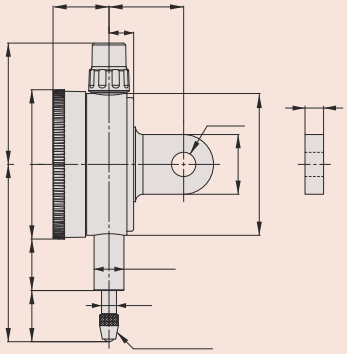



1109A(B)-10



1013A(B)-10



1124A(B)



1040AB



1041AB

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]
1109A-10	1	0,2 mm	0-100-0	0,001	2,5	4	4,5	5	2
1109AB-10	1	0,2 mm	0-100-0	0,001	2,5	4	4,5	5	2
1013A-10	1	0,2 mm	0-100-0	0,002	2,5	4	4,5	6	2
1013AB-10	1	0,2 mm	0-100-0	0,002	2,5	4	4,5	6	2
1124A	3,5	0,5 mm	±0-50	0,005	5	8	9	12	3
1124AB	3,5	0,5 mm	±0-50	0,005	5	8	9	12	3
1040A	3,5	0,5 mm	±0-50	0,01	5	8	9	12	3
1040AB	3,5	0,5 mm	±0-50	0,01	5	8	9	12	3
1041A	3,5	0,5 mm	0-25-0	0,01	5	8	9	12	3
1041AB	3,5	0,5 mm	0-25-0	0,01	5	8	9	12	3

B-type delivered with flat back plate

No.	R MPE (Repeatability) [µm]	Measuring force [N]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
1109A-10	1	0,4-1,5	32,5	49	40	15	20	13,8	15,2	38	6,6	95
1109AB-10	1	0,4-1,5	32,5	49	40	15	20	13,8	15,2	38	6,6	75
1013A-10	1	0,4-1,5	32,5	49	40	15	20	13,8	15,2	38	6,6	95
1013AB-10	1	0,4-1,5	32,5	49	40	15	20	13,8	15,2	38	6,6	75
1124A	3	0,4-1,4	32,5	46	40	15	20	13,8	12,2	38	6,6	90
1124AB	3	0,4-1,4	32,5	46	40	15	20	13,8	12,2	38	6,6	70
1040A	3	0,4-1,4	32,5	46	40	15	20	13,8	12,2	38	6,6	90
1040AB	3	0,4-1,4	32,5	46	40	15	20	13,8	12,2	38	6,6	70
1041A	3	0,4-1,4	32,5	46	40	15	20	13,8	12,2	38	6,6	90
1041AB	3	0,4-1,4	32,5	46	40	15	20	13,8	12,2	38	6,6	70

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Metric Dial Indicators Series 1

Series 1

Compact Type 5 mm Range Small Diameter - Metric

This is a compact, dial indicator with a bezel ∅ 40 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

PROPRIETARY INSPECTION CERTIFICATE

IP63

1044A(B)-60

Functions	Series 1			
	1044A 1044AB	1044A-60 1044AB-60	1044A-15 1044AB-15	1045A 1045AB
Balanced dial				●
Continuous dial	●	●	●	
Jeweled bearing			●	
IP63		●		



1044A(B)
1044A(B)-15



1044A(B)-60
IP63



1045A(B)

Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator
21RZA149	Bezel Clamp for Dial Gauge, Series 1
902100	Spindle Lifting Lever, for S-Type and A-Type Serie 1
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64

21AAB562: for 1044A(B)-60 (IP model)

21JZA295 and 21JZA301: not for IP63 type

For accessories and contact points, see end of dial indicators section.

Metric


No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
1044A	5	1 mm	±0-100	0,01	5
1044AB	5	1 mm	±0-100	0,01	5
1044A-15	5	1 mm	±0-100	0,01	5
1044AB-15	5	1 mm	±0-100	0,01	5
1044A-60	5	1 mm	±0-100	0,01	5
1044AB-60	5	1 mm	±0-100	0,01	5
1045A	5	1mm	0-50-0	0,01	5
1045AB	5	1 mm	0-50-0	0,01	5


1044A(B)-15: Low measuring force model. Use in vertical position only (contact point downward)

B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
1044A	9	10	12	3	3	0,4-1,4
1044AB	9	10	12	3	3	0,4-1,4
1044A-15	9	10	12	3	3	0,1-0,4
1044AB-15	9	10	12	3	3	0,1-0,4
1044A-60	9	10	12	3	3	0,4-2
1044AB-60	9	10	12	3	3	0,4-2
1045A	9	10	12	3	3	0,4-1,4
1045AB	9	10	12	3	3	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
1044A	32,5	47,5	40	15	20	13,8	13,7	38	6,6	90
1044AB	32,5	47,5	40	15	20	13,8	13,7	38	6,6	70
1044A-15	32,5	47,5	40	15	20	13,8	13,7	38	6,6	90
1044AB-15	32,5	47,5	40	15	20	13,8	13,7	38	6,6	70
1044A-60	32,5	57	40	15	20	12,2	24,8	38	6,6	90
1044AB-60	32,5	57	40	15	20	12,2	24,8	38	6,6	70
1045A	32,5	47,5	40	15	20	13,8	13,7	38	6,6	90
1045AB	32,5	47,5	40	15	20	13,8	13,7	38	6,6	70

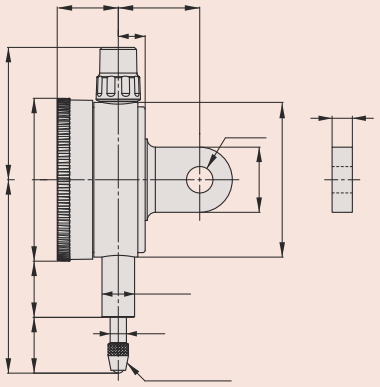

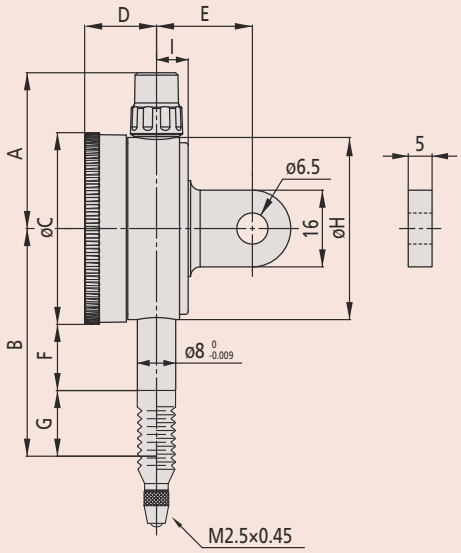

1044A(B)-60

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

One Revolution Dial Indicators Series 1

Series 1

This is a compact, dial indicator with a bezel ∅ 40 mm. It offers you the following benefits:

- It eliminates the possibility of reading errors due to miscounting multiple revolutions.

PROPRIETARY INSPECTION CERTIFICATE

IP52

1900A(B)-72
1929A(B)-62

Functions	Series 1			
	1900A-10 1900AB-10	1900A-72 1900AB-72	1929A 1929AB	1929A-62 1929AB-62
Balanced dial	●	●	●	●
One revolution	●	●	●	●
Shockproof	●	●	●	●
Jeweled bearing	●	●		
IP52		●		●


Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator
21RZA149	Bezel Clamp for Dial Gauge, Series 1
902100	Spindle Lifting Lever, for S-Type and A-Type Serie 1
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

For accessories and contact points, see end of dial indicators section.

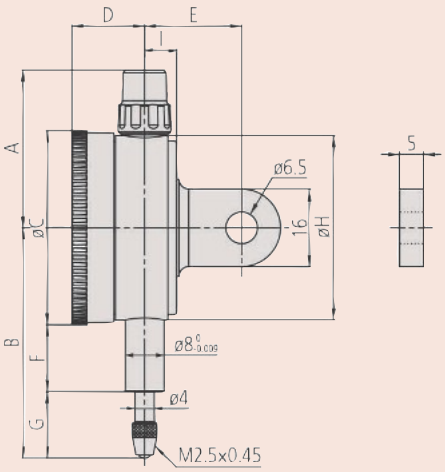



1929A(B)
1929A(B)-62



1900A(B)-10
1900A(B)-72

Metric

No.	Range [mm]	Plunger Stroke [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
1900A-10	0,1	2	0,14 mm	50-0-50	0,001	2
1900AB-10	0,1	2	0,14 mm	50-0-50	0,001	2
1900A-72	0,1	2	0,14 mm	50-0-50	0,001	2
1900AB-72	0,1	2	0,14 mm	50-0-50	0,001	2
1929A	1	3,5	1,4 mm	50-0-50	0,01	5
1929AB	1	3,5	1,4 mm	50-0-50	0,01	5
1929A-62	1	3,5	1,4 mm	50-0-50	0,01	5
1929AB-62	1	3,5	1,4 mm	50-0-50	0,01	5

B-type delivered with flat back plate

No.	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
1900A-10	4	2	1	0,4-1,5
1900AB-10	4	2	1	0,4-1,5
1900A-72	4	2	1	0,4-1,5
1900AB-72	4	2	1	0,4-1,5
1929A	9	3	3	0,4-1,4
1929AB	9	3	3	0,4-1,4
1929A-62	9	3	3	0,4-1,4
1929AB-62	9	3	3	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
1900A-10	32,5	53,5	40	15	20	16,8	16,7	38	6,6	95
1900AB-10	32,5	53,5	40	15	20	16,8	16,7	38	6,6	75
1900A-72	32,5	53,5	40	15	20	16,8	16,7	38	6,6	95
1900AB-72	32,5	53,5	40	15	20	16,8	16,7	38	6,6	75
1929A	32,5	47,5	40	15	20	13,8	13,7	38	6,6	90
1929AB	32,5	47,5	40	15	20	13,8	13,7	38	6,6	70
1929A-62	32,5	47,5	40	15	20	13,8	13,7	38	6,6	90
1929AB-62	32,5	47,5	40	15	20	13,8	13,7	38	6,6	70

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Metric Dial Indicators Series 2

Series 2

Standard Type, 5 mm Range, 0,01 mm Graduation

This is a standard dial indicator with a bezel ∅ 57 mm. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

PROPRIETARY INSPECTION CERTIFICATE

IP64

2044A(B)-60

Functions	Series 2			
	2044A 2044AB	2044A-60 2044AB-60	2044A-09 2044AB-09	2045A 2045AB
Balanced dial				●
Continuous dial	●	●	●	
Shockproof			●	
IP64		●		



2044A(B)
2044A(B)-09



2044A(B)-60



2045A(B)

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2044A	5	1 mm	±0-100	0,01	5
2044AB	5	1 mm	±0-100	0,01	5
2044A-09	5	1 mm	±0-100	0,01	5
2044AB-09	5	1 mm	±0-100	0,01	5
2044A-60	5	1 mm	±0-100	0,01	5
2044AB-60	5	1 mm	±0-100	0,01	5
2045A	5	1 mm	0-50-0	0,01	5
2045AB	5	1 mm	0-50-0	0,01	5

B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2044A	9	10	12	3	3	0,4-1,4
2044AB	9	10	12	3	3	0,4-1,4
2044A-09	9	10	12	3	3	0,4-1,4
2044AB-09	9	10	12	3	3	0,4-1,4
2044A-60	9	10	12	3	3	0,4-2,5
2044AB-60	9	10	12	3	3	0,4-2,5
2045A	9	10	12	3	3	0,4-1,4
2045AB	9	10	12	3	3	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2044A	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	145
2044AB	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	136
2044A-09	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	147
2044AB-09	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	138
2044A-60	47,2	70	57	18,1	20	12,3	29,2	52	7,6	147
2044AB-60	47,2	70	57	18,1	20	12,3	29,2	52	7,6	138
2045A	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	145
2045AB	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	136

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm


Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64


21AAB562: for 2044A(B)-60 (IP model)

21JZA295 and 21JZA301: not for IP64 type

For accessories and contact points, see end of dial indicators section.

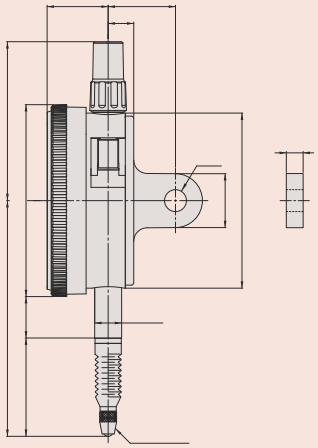

2044A(B)-60

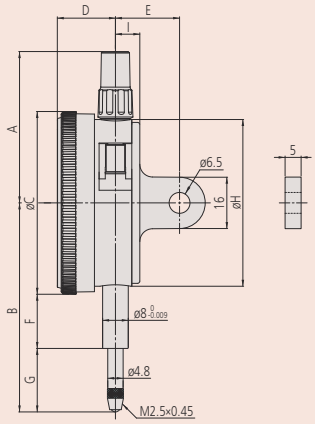

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Metric Dial Indicators Series 2

Series 2

Standard Type, 10 mm Range, 0,01 mm Graduation

This is a standard dial indicator with a bezel ∅ 57 mm. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame as well as the use of an O-ring prevents water or oil penetration.

PROPRIETARY INSPECTION CERTIFICATE

IP64

2046A(B)-60

Functions	Series 2						
	2046A 2046AB	2046A-60 2046AB-60	2046A-09 2046AB-09	2310A-10 2310AB-10	2902A 2902AB	2047A 2047AB
Balanced dial						●
Continuous dial	●	●	●	●	●	
Reverse reading					●	
Coaxial revolution counter				●		
Shockproof			●			
Jeweled bearing				●		
IP64		●				

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm


Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64


21AAB562: for 2046A(B)-60 (IP model)

21JZA295 and 21JZA301: not for IP64 type

For accessories and contact points, see end of dial indicators section.

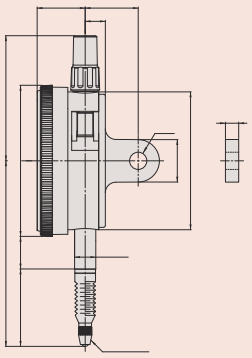

2046A(B)-60





2046A(B)
2046A(B)-09



2046A(B)-60



2310A(B)-10



2902A(B)

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
2046A	10	1 mm	±0-100	0,01	5	9	10	13	3	3
2046AB	10	1 mm	±0-100	0,01	5	9	10	13	3	3
2046A-09	10	1 mm	±0-100	0,01	5	9	10	15	3	3
2046AB-09	10	1 mm	±0-100	0,01	5	9	10	15	3	3
2046A-60	10	1 mm	±0-100	0,01	5	9	10	13	3	3
2046AB-60	10	1 mm	±0-100	0,01	5	9	10	13	3	3
2310A-10	10	1 mm	±0-100	0,01	5	9	10	15	3	3
2310AB-10	10	1 mm	±0-100	0,01	5	9	10	15	3	3
2902A	10	1 mm	100-0	0,01	5	9	10	13	3	3
2902AB	10	1 mm	100-0	0,01	5	9	10	13	3	3
2047A	10	1 mm	0-50-0	0,01	5	9	10	13	3	3
2047AB	10	1 mm	0-50-0	0,01	5	9	10	13	3	3

B-type delivered with flat back plate

No.	Measuring force [N]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2046A	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	144
2046AB	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	135
2046A-09	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	146
2046AB-09	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	137
2046A-60	0,4-2,5	47,2	74,7	57	18,1	20	12,3	33,9	52	7,6	146
2046AB-60	0,4-2,5	47,2	74,7	57	18,1	20	12,3	33,9	52	7,6	137
2310A-10	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	146
2310AB-10	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	137
2902A	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	144
2902AB	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	135
2047A	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	144
2047AB	0,4-1,4	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	135

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Metric Dial Indicators Series 2

Series 2

Standard Type, 1 mm Range, 0,001 mm Graduation

This is a standard dial indicator with a bezel ∅ 57 mm. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

PROPRIETARY INSPECTION CERTIFICATE

IP64

2109A(B)-70
2110A(B)-70

Functions	Series 2			
	2109A-10 2109AB-10	2109A-70 2109AB-70	2110A-10 2110AB-10	2110A-70 2110AB-70
Balanced dial	●	●		
Continuous dial			●	●
Double scale spacing			●	●
Shockproof	●	●	●	●
Jeweled bearing	●	●	●	●
IP64		●		●



2110A(B)-10



2110A(B)-70



2109A(B)-10



2109A(B)-70

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2110A-10	1	0,1 mm	±0-100	0,001	2,5
2110AB-10	1	0,1 mm	±0-100	0,001	2,5
2110A-70	1	0,1 mm	±0-100	0,001	2,5
2110AB-70	1	0,1 mm	±0-100	0,001	2,5
2109A-10	1	0,2 mm	0-10-0	0,001	2,5
2109AB-10	1	0,2 mm	0-10-0	0,001	2,5
2109A-70	1	0,2 mm	0-100-0	0,001	2,5
2109AB-70	1	0,2 mm	0-100-0	0,001	2,5

B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2110A-10	4	4,5	5	2	1	0,4-1,8
2110AB-10	4	4,5	5	2	1	0,4-1,8
2110A-70	4	4,5	5	2	1	0,4-2
2110AB-70	4	4,5	5	2	1	0,4-2
2109A-10	4	4,5	5	2	1	0,4-1,5
2109AB-10	4	4,5	5	2	1	0,4-1,5
2109A-70	4	4,5	5	2	1	0,4-2
2109AB-70	4	4,5	5	2	1	0,4-2

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2110A-10	47,2	66,5	57	18,1	20	16,9	21,1	52	7,6	149
2110AB-10	47,2	66,5	57	18,1	20	16,9	21,1	52	7,6	140
2110A-70	47,2	67,5	57	18,1	20	12,3	26,7	52	7,6	150
2110AB-70	47,2	67,5	57	18,1	20	12,3	26,7	52	7,6	141
2109A-10	47,2	60,5	57	18,1	20	16,9	15,1	52	7,6	148
2109AB-10	47,2	60,5	57	18,1	20	16,9	15,1	52	7,6	139
2109A-70	47,2	65,3	57	18,1	20	12,3	24,5	52	7,6	149
2109AB-70	47,2	65,3	57	18,1	20	12,3	24,5	52	7,6	140

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm


Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64
21AAB563	NBR Rubber Boot, Dial Gauge IP64


21AAB562: for 2110A(B)-70
21AAB563: for 2109A(B)-70

21JZA295 and 21JZA301: not for IP64 type

For accessories and contact points, see end of dial indicators section.

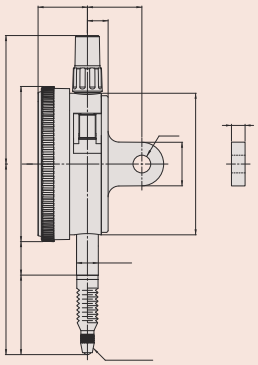

2110A(B)-70
2109A(B)-70



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Metric Dial Indicators Series 2

Functions	Series 2		
	2113A-10 2113AB-10	2119A-10 2119AB-10	2118A-10 up to 2124AB-10
Balanced dial	●	●	
Continuous dial			●
Shockproof	●		
Jeweled bearing	●	●	●


Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

For accessories and contact points, see end of dial indicators section.

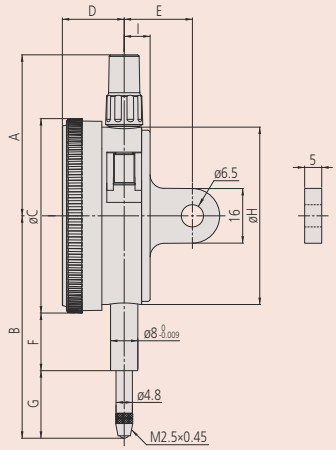

Series 2

Standard Type, 2 and 5 mm Range, 0,001 / 0,005 mm Graduation

This is a standard dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.


2113A(B)-10


2118A(B)-10


2119A(B)-10


2124A(B)-10

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2113A-10	2	0,2 mm	0-100-0	0,001	2,5
2113AB-10	2	0,2 mm	0-100-0	0,001	2,5
2118A-10	5	0,2 mm	0-100-100	0,001	4
2118AB-10	5	0,2 mm	0-100-100	0,001	4
2119A-10	5	0,2 mm	0-100-0	0,001	4
2119AB-10	5	0,2 mm	0-100-0	0,001	4
2124A-10	5	0,5 mm	±0-50	0,005	5
2124AB-10	5	0,5 mm	±0-50	0,005	5

B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2113A-10	4	4,5	7	2	1	0,4-1,5
2113AB-10	4	4,5	7	2	1	0,4-1,5
2118A-10	6	6,5	10	2,5	2	0,4-1,5
2118AB-10	6	6,5	10	2,5	2	0,4-1,5
2119A-10	6	6,5	10	2,5	2	0,4-1,5
2119AB-10	6	6,5	10	2,5	2	0,4-1,5
2124A-10	9	10	11	3	2	0,4-1,5
2124AB-10	9	10	11	3	2	0,4-1,5

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2113A-10	47,2	61	57	18,1	20	16,9	15,6	52	7,6	148
2113AB-10	47,2	61	57	18,1	20	16,9	15,6	52	7,6	139
2118A-10	47,2	60,7	57	18,1	20	16,9	15,3	52	7,6	146
2118AB-10	47,2	60,7	57	18,1	20	16,9	15,3	52	7,6	137
2119A-10	47,2	60,7	57	18,1	20	16,9	15,3	52	7,6	146
2119AB-10	47,2	60,7	57	18,1	20	16,9	15,3	52	7,6	137
2124A-10	47,2	60,7	57	18,1	20	16,9	15,3	52	7,6	146
2124AB-10	47,2	60,7	57	18,1	20	16,9	15,3	52	7,6	137

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicators with 20 mm Stroke Series 2

Series 2

Standard Type, 20 mm Range, 0,01 mm Graduation

This is a standard dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

PROPRIETARY INSPECTION CERTIFICATE

IP64

2050A(B)-60

Functions	Series 2			
	2050A 2050AB	2050A-19 2050AB-19	2050A-60 2050AB-60	2320A-10 2320AB-10
Continuous dial	●	●	●	●
Coaxial revolution counter				●
Cushioned end point	●	●		●
Shockproof		●		
Jeweled bearing		●		●
IP64			●	



2050A(B)
2050A(B)-19



2050A(B)-60



2320A(B)-10

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB573	NBR Rubber Boot, Dial Gauge IP64, 20 mm Range

21AAB573: for 2050A(B)-60 (IP model)


For accessories and contact points, see end of dial indicators section.


Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
2050A	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2050AB	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2050A-19	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2050AB-19	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2050A-60	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2050AB-60	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2320A-10	20	1 mm	±0-100	0,01	6	10	11	20	4	3
2320AB-10	20	1 mm	±0-100	0,01	6	10	11	20	4	3

B-type delivered with flat back plate

No.	Measuring force [N]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2050A	0,4-2	38,5	75,2	57	18,1	20	16,9	29,8	52	7,6	149
2050AB	0,4-2	38,5	75,2	57	18,1	20	16,9	29,8	52	7,6	140
2050A-19	0,4-2	38,5	75,2	57	18,1	20	16,9	29,8	52	7,6	149
2050AB-19	0,4-2	38,5	75,2	57	18,1	20	16,9	29,8	52	7,6	140
2050A-60	0,4-2,5	58,2	87,2	57	18,1	20	12,3	46,4	52	7,6	155
2050AB-60	0,4-2,5	58,2	87,2	57	18,1	20	12,3	46,4	52	7,6	146
2320A-10	0,4-2	38,5	75,2	57	18,1	20	16,9	29,8	52	7,6	150
2320AB-10	0,4-2	38,5	75,2	57	18,1	20	16,9	29,8	52	7,6	141

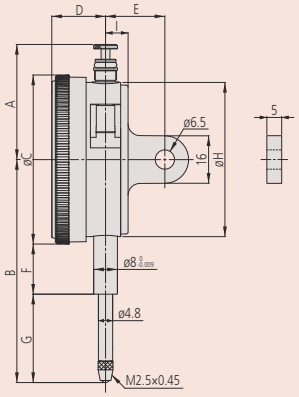

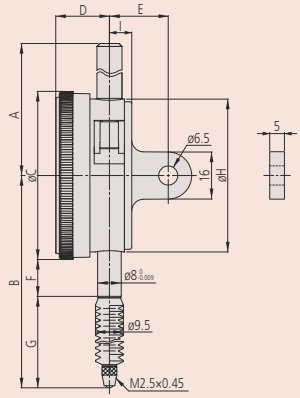

2050A(B)-60

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicators with 30 mm Stroke Series 2

Series 2

Standard Type, 30 mm Range, 0,01 mm Graduation

This is a standard dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Functions	Series 2			
	2052A 2052AB	2052A-19 2052AB-19	2330A-10 2330AB-10	2952A 2952AB
Continuous dial	●	●	●	
Reverse reading				●
Coaxial revolution counter			●	
Cushioned end point	●	●	●	●
Shockproof		●		
Jeweled bearing		●	●	


Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

For accessories and contact points, see end of dial indicators section.

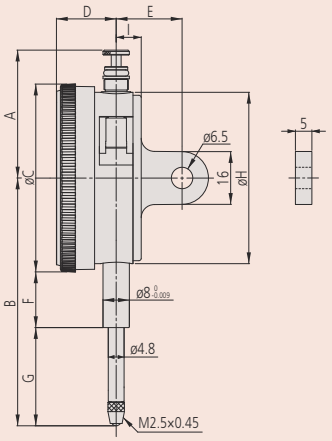



2052A(B)
2052A(B)-19



2330A(B)-10



2952A(B)

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
2052A	30	1 mm	±0-100	0,01	7	11	12	25	5	3
2052AB	30	1 mm	±0-100	0,01	7	11	12	25	5	3
2052A-19	30	1 mm	±0-100	0,01	7	11	12	25	5	3
2052AB-19	30	1 mm	±0-100	0,01	7	11	12	25	5	3
2330A-10	30	1 mm	±0-100	0,01	7	11	12	25	5	3
2330AB-10	30	1 mm	±0-100	0,01	7	11	12	25	5	3
2952A	30	1 mm	100-0	0,01	7	11	12	25	5	3
2952AB	30	1 mm	100-0	0,01	7	11	12	25	5	3

B-type delivered with flat back plate

No.	Measuring force [N]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2052A	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	152
2052AB	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	143
2052A-19	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	152
2052AB-19	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	143
2330A-10	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	153
2330AB-10	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	144
2952A	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	152
2952AB	0,4-2,5	38,5	88,7	57	18,1	20	16,9	43,3	52	7,6	143

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Special Dial Indicators Series 2

Series 2

This special dial indicators offer you the following benefits:

- In an adjustable pointer type the pointer can be adjusted independently of the position of the spindle by rotating the top knob.
- In a peak hold type a mechanism holds the pointer and the spindle at the position of maximum depression and hence displays the maximum value.



2048A(B)-10



2046A(B)-80

Functions	Series 2	
	2046A-80 2046AB-80	2048A-10 2048AB-10
Continuous dial	●	●
Coaxial revolution counter		●
Peak retaining	●	
Adjustable pointer		●
Jeweled bearing		●

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AZA319	Contact Element Ball Point, M2,5x0,45, 8,3mm Length, Metric

901312: for 2046A(B)-80
21AZA319: for 2048A(B)-10

For accessories and contact points, see end of dial indicators section.


Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2048A-10	10	1 mm	±0-100	0,01	5
2048AB-10	10	1 mm	±0-100	0,01	5
2046A-80	10	1 mm	±0-100	0,01	5
2046AB-80	10	1 mm	±0-100	0,01	5


B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2048A-10	9	10	15	3	3	0,4-1,4
2048AB-10	9	10	15	3	3	0,4-1,4
2046A-80	9	10	15	3	3	0,4-5
2046AB-80	9	10	15	3	3	0,4-5

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2048A-10	47,4	64,9	57	18,1	20	16,9	19,5	52	7,6	144
2048AB-10	47,4	64,9	57	18,1	20	16,9	19,5	52	7,6	135
2046A-80	55,8	65,2	57	18,1	20	16,9	19,8	52	7,6	158
2046AB-80	55,8	65,2	57	18,1	20	16,9	19,8	52	7,6	149

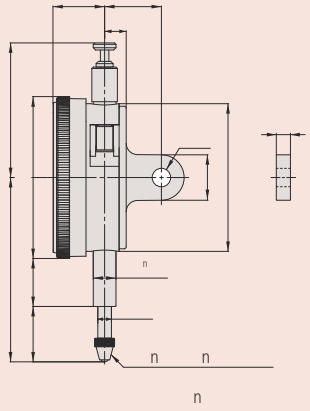

2048A(B)-10

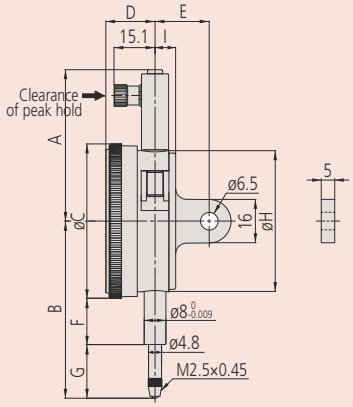

2046A(B)-80

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

One Revolution Dial Indicators Series 2

Functions	Series 2
One revolution	●
Cushioned end point	●
IP52	●

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
546666	Self-tapping Screw for Plastic, For Dial Gauge

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

For accessories and contact points, see end of dial indicators section.

Series 2

Lightweight type

This is a one revolution dial indicator. It offers you the following benefits:

- Excellent water and drip-proof characteristics
- It eliminates the possibility of reading errors due to miscounting multiple revolutions.



2971AB



2972AB




2973AB

Metric

No.	Range [mm]	Plunger Stroke [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2971AB	0,5	3,5	0,7 mm	25-0-25	0,01	5
2972AB	1	3,5	1,4 mm	50-0-50	0,01	5
2973AB	1,6	3,5	2 mm	80-0-80	0,02	8

No.	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2971AB	7	3	3	0,4-1,4
2972AB	7	3	3	0,4-1,4
2973AB	16	4	5	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	D [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2971AB	43,2	65,6	57	16,9	20,3	16,8	55	7,6	70
2972AB	43,2	66	57	16,9	20,3	17,2	55	7,6	70
2973AB	43,2	66,3	57	16,9	20,3	17,5	55	7,6	75

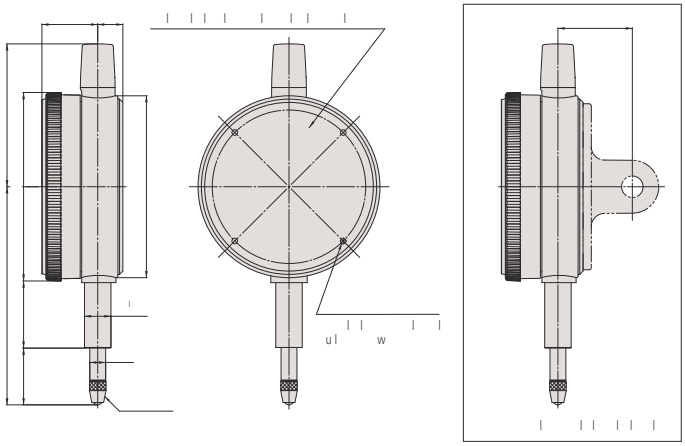

When installing an optional back, 4 retaining screws (no. 546666) must also be obtained.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

One Revolution Dial Indicators Series 2

Series 2

Graduation 0,01 / 0,1 mm

This is a one revolution dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

PROPRIETARY INSPECTION CERTIFICATE

IP52

2929A(B)-62

IP64

2929A(B)-60



2928A(B)



2929A(B)
2929A(B)-62



2929A(B)-60



2959A(B)

Functions	Series 2		
	2928A up to 2959AB	2929A-60 2929AB-60	2929A-62 2929AB-62
One revolution	●	●	●
Shockproof	●	●	●
IP52			●
IP64		●	

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64

21AAB562: for 2929A(B)-60 (IP model)

21JZA295 and 21JZA301: not for IP64 type

For accessories and contact points, see end of dial indicators section.


Metric


No.	Range [mm]	Plunger Stroke [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2928A	4	10	5 mm	2-0-2	0,1	15
2928AB	4	10	5 mm	2-0-2	0,1	15
2929A	0,8	5	1 mm	40-0-40	0,01	5
2929AB	0,8	5	1 mm	40-0-40	0,01	5
2929A-62	0,8	5	1 mm	40-0-40	0,01	5
2929AB-62	0,8	5	1 mm	40-0-40	0,01	5
2929A-60	0,8	5	1 mm	40-0-40	0,01	5
2929AB-60	0,8	5	1 mm	40-0-40	0,01	5
2959A	1,6	5	2 mm	80-0-80	0,01	5
2959AB	1,6	5	2 mm	80-0-80	0,01	5

B-type delivered with flat back plate

No.	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2928A	25	12	20	0,4-1,4
2928AB	25	12	20	0,4-1,4
2929A	7	3	3	0,4-1,4
2929AB	7	3	3	0,4-1,4
2929A-62	7	3	3	0,4-2
2929AB-62	7	3	3	0,4-2
2929A-60	7	3	3	0,4-2
2929AB-60	7	3	3	0,4-2
2959A	9	4	3	0,4-1,4
2959AB	9	4	3	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2928A	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	145
2928AB	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	136
2929A	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	145
2929AB	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	136
2929A-62	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	145
2929AB-62	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	136
2929A-60	47,2	70	57	18,1	20	12,3	29,2	52	7,6	146
2929AB-60	47,2	70	57	18,1	20	12,3	29,2	52	7,6	137
2959A	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	145
2959AB	47,2	65,2	57	18,1	20	16,9	19,8	52	7,6	136

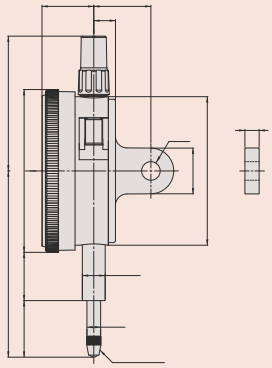

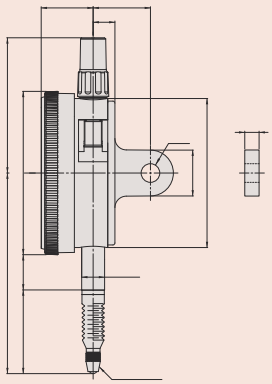

2929A(B)-60

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

One Revolution Dial Indicators Series 2

Series 2

Graduation 0,001 mm

This is a one revolution dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side.
- No through screw holes on the frame as well as the use of an O-ring prevents water or oil penetration.
- It eliminates the possibility of reading errors due to miscounting multiple revolutions.

PROPRIETARY INSPECTION CERTIFICATE

IP52
2900A(B)-72

IP64
2900A(B)-70

Functions	Series 2: 2900A-10 up to 2901AB-10	2900A-70 2900AB-70	2900A-72 2900AB-72
One revolution	●	●	●
Shockproof	●	●	●
Jeweled bearing	●	●	●
IP52			●
IP64		●	

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4
21JZA295	Spindle Lifting Cable, for Indicator, L=500mm
21JZA301	Spindle Lifting Cable with Auto Stop, for Indicator, L=300mm


Consumable spares


No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AAB562	NBR Rubber Boot, Digital Gauge ID-B, Dial Gauge IP63/IP64

21AAB562: for 2900A(B)-70 (IP model)

21JZA295 and 21JZA301: not for IP64 type

For accessories and contact points, see end of dial indicators section.

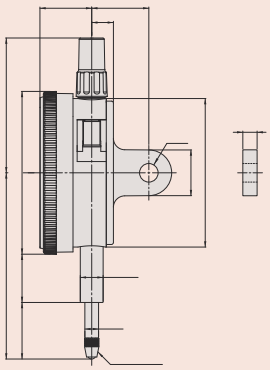

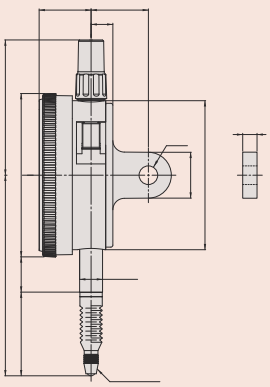

2900A(B)-70



2900A(B)-10
2900A(B)-72



2900A(B)-70



2901A(B)-10

Metric

No.	Range [mm]	Plunger Stroke [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2900A-10	0,08	4	0,1 mm	40-0-40	0,001	2
2900AB-10	0,08	4	0,1 mm	40-0-40	0,001	2
2900A-70	0,08	4	0,1 mm	40-0-40	0,001	2
2900AB-70	0,08	4	0,1 mm	40-0-40	0,001	2
2900A-72	0,08	4	0,1 mm	40-0-40	0,001	2
2900AB-72	0,08	4	0,1 mm	40-0-40	0,001	2
2901A-10	0,16	4,1	0,2 mm	80-0-80	0,001	2
2901AB-10	0,16	4,1	0,2 mm	80-0-80	0,001	2

B-type delivered with flat back plate

No.	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
2900A-10	3	2	1	0,4-1,4
2900AB-10	3	2	1	0,4-1,4
2900A-70	3	2	1	0,4-2
2900AB-70	3	2	1	0,4-2
2900A-72	3	2	1	0,4-2
2900AB-72	3	2	1	0,4-2
2901A-10	4	2	1	0,4-1,5
2901AB-10	4	2	1	0,4-1,5

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
2900A-10	47,2	66	57	18,1	20	16,9	20,6	52	7,6	149
2900AB-10	47,2	66	57	18,1	20	16,9	20,6	52	7,6	140
2900A-70	47,2	67	57	18,1	20	12,3	26,2	52	7,6	150
2900AB-70	47,2	67	57	18,1	20	12,3	26,2	52	7,6	141
2900A-72	47,2	66	57	18,1	20	16,9	20,6	52	7,6	149
2900AB-72	47,2	66	57	18,1	20	16,9	20,6	52	7,6	140
2901A-10	47,2	66,1	57	18,1	20	16,9	20,7	52	7,6	149
2901AB-10	47,2	66,1	57	18,1	20	16,9	20,7	52	7,6	140

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Metric Dial Indicators with Large Dial Face Series 3

Series 3

This is a standard dial indicator. It offers you the following benefits:
- Large-diameter dial face ø = 78 mm for easy reading
- 0,01 / 0,001 mm graduation



3046A(B)



3047A(B)



3050A(B)



3052A(B)-19



3058A(B)-19



3060A(B)-19



3062A(B)-19



3109A(B)-10

Functions	Series 3					
	3046A 3046AB	3050A 3050AB	3052A-19 up to 3062AB-19	3058A-19 3058AB-19	3047A 3047AB	3109A-10 3109AB-10
Balanced dial					●	●
Continuous dial	●	●	●			
Coaxial revolution counter			●	●		
Cushioned end point		●				
Shockproof			●	●		●
Jeweled bearing			●	●		●

Optional accessories


No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AZA319	Contact Element Ball Point, M2,5x0,45, 8,3mm Length, Metric

901312: for 3046A(B), 3047A(B), 3050A(B), 3109A(B)
21AZA319: for 3052A(B)-19, 3058A(B)-19, 3060A(B)-19, 3062A(B)-19

For accessories and contact points, end of dial indicators section.

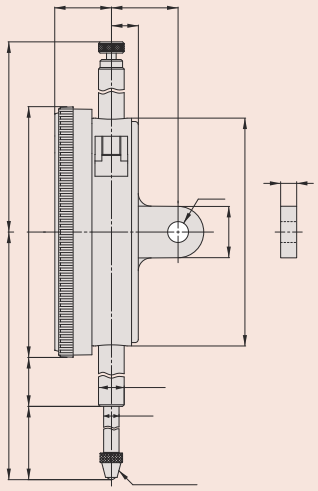

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Metric Dial Indicators with Large Dial Face Series 3

Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
3046A	10	1 mm	±0-100	0,01	5
3046AB	10	1 mm	±0-100	0,01	5
3047A	10	1 mm	0-50-0	0,01	5
3047AB	10	1 mm	0-50-0	0,01	5
3050A	20	1 mm	±0-100	0,01	8
3050AB	20	1 mm	±0-100	0,01	8
3052A-19	30	1 mm	±0-100	0,01	10
3052AB-19	30	1 mm	±0-100	0,01	10
3058A-19	50	1 mm	±0-100	0,01	10
3058AB-19	50	1 mm	±0-100	0,01	10
3060A-19	80	1 mm	±0-100	0,01	10
3060AB-19	80	1 mm	±0-100	0,01	10
3062A-19	100	1 mm	±0-100	0,01	12
3062AB-19	100	1 mm	±0-100	0,01	12
3109A-10	1	0,2 mm	0-100-0	0,001	2,5
3109AB-10	1	0,2 mm	0-100-0	0,001	2,5

3060A(B)-19 and 3062A(B)-19: use in a vertical position only

B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
3046A	9	10	15	3	3	0,4-1,4
3046AB	9	10	15	3	3	0,4-1,4
3047A	9	10	15	3	3	0,4-1,4
3047AB	9	10	15	3	3	0,4-1,4
3050A	10	11	20	4	3	0,4-2
3050AB	10	11	20	4	3	0,4-2
3052A-19	11	12	25	5	3	0,4-2,5
3052AB-19	11	12	25	5	3	0,4-2,5
3058A-19	12	13	30	6	3	0,4-3
3058AB-19	12	13	30	6	3	0,4-3
3060A-19	14	15	45	9	3	0,4-3
3060AB-19	14	15	45	9	3	0,4-3
3062A-19	17	20	50	9	3	0,4-3,5
3062AB-19	17	20	50	9	3	0,4-3,5
3109A-10	4	4,5	5	2	1	0,4-1,5
3109AB-10	4	4,5	5	2	1	0,4-1,5

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
3046A	59,6	75,5	78	17,7	21	15,9	20,6	71	9	252
3046AB	59,6	75,5	78	17,7	21	15,9	20,6	71	9	237
3047A	59,6	75,5	78	17,7	21	15,9	20,6	71	9	252
3047AB	59,6	75,5	78	17,7	21	15,9	20,6	71	9	237
3050A	52,6	94	78	17,7	21	25,9	29,1	71	9	272
3050AB	52,6	94	78	17,7	21	25,9	29,1	71	9	257
3052A-19	72,9	104,3	78	17,7	21	25,9	39,4	71	9	285
3052AB-19	72,9	104,3	78	17,7	21	25,9	39,4	71	9	270
3058A-19	81,9	142,3	78	17,7	21	43,9	59,4	71	9	298
3058AB-19	81,9	142,3	78	17,7	21	43,9	59,4	71	9	283
3060A-19	120,9	202,3	78	17,7	21	73,9	89,4	71	9	314
3060AB-19	120,9	202,3	78	17,7	21	73,9	89,4	71	9	299
3062A-19	141,9	243,3	78	17,7	21	94,9	109,4	71	9	332
3062AB-19	141,9	243,3	78	17,7	21	94,9	109,4	71	9	317
3109A-10	59,6	79	78	17,7	21	15,9	14,1	71	9	270
3109AB-10	59,6	79	78	17,7	21	15,9	14,1	71	9	255

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicators with Extra Large Dial Face Series 4

Series 4

This is a standard dial indicator. It offers you the following benefits:

- Large-diameter dial face ø = 92 mm for easy reading



4046A(B)

Functions	Series 4
Continuous dial	●

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

For accessories and contact points, see end of dial indicators section.


Metric

No.	Range [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
4046A	10	1 mm	±0-100	0,01	5
4046AB	10	1 mm	±0-100	0,01	5

B-type delivered with flat back plate

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
4046A	9	10	15	3	3	0,4-1,4
4046AB	9	10	15	3	3	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
4046A	59,6	84	92	21,5	21	18,9	19,1	71	9	345
4046AB	59,6	84	92	21,5	21	18,9	19,1	71	9	330

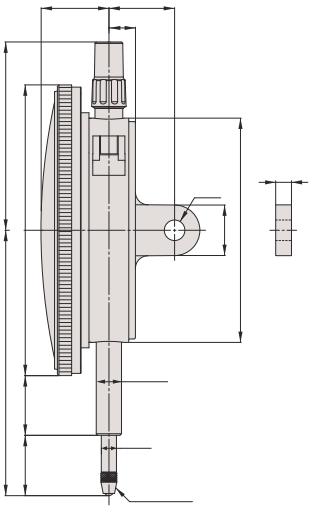

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicators Back Plunger Type Series 1

Series 1

This is a back plunger, dial indicator with bezel ø 40 mm. It offers you the following benefits:

- It is ideal for use in applications where space is limited.

Functions	Series 1		
	1160A	1960A	1162A
Balanced dial	●	●	
Continuous dial			●
Reverse reading			●
One revolution		●	
Shockproof		●	

Specifications

Delivered	Delivered with factory certificate

Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator

Consumable spares

No.	Description
21AZA319	Contact Element Ball Point, M2,5x0,45, 8,3mm Length, Metric

For accessories and contact points, see end of dial indicators section.



With optional holding bar



1160A



1162A




1960A

Metric

No.	Range [mm]	Plunger Stroke [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
1160A	5		1 mm	±0-100	0,01	7
1162A	5		1 mm	100-0	0,01	7
1960A	1	4	1,27 mm	50-0-50	0,01	7

No.	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
1160A	11	12	18	4	3	0,4-1,4
1162A	11	12	18	4	3	0,4-1,4
1960A			15	3,5	3	0,4-1,4

No.	A [mm]	B [mm]	C [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Mass [g]
1160A	40	22,7	35,6	24,3	25	13,8	43,3	80
1162A	40	22,7	35,6	24,3	25	13,8	43,3	80
1960A	40	22,7	35,6	24,3	28,7	12,8	46	80

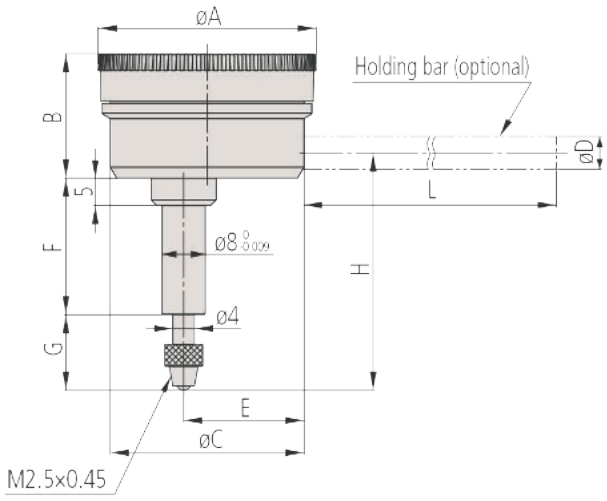

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicators Back Plunger Type Series 2

Series 2

This is a back plunger type dial indicator with bezel ø 57 mm.



2960A




2990A-10


Metric

No.	Range [mm]	Plunger Stroke [mm]	Range per rev.	Dial reading	Graduation [mm]	MPE any 1/10 revolution [µm]
2960A	1	4	1,27 mm	50-0-50	0,01	7
2990A-10	0,1	4	0,14 mm	50-0-50	0,001	2

No.	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]	Mass [g]
2960A	15	3,5	3	0,4-1,4	115
2990A-10	4	2	1	0,4-1,5	205

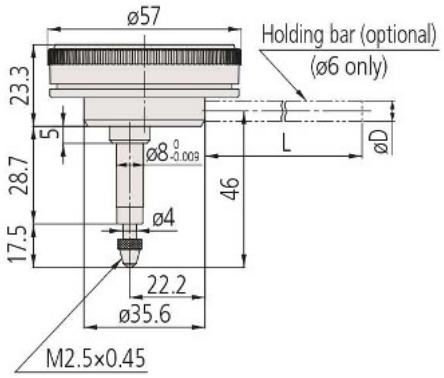

2960A

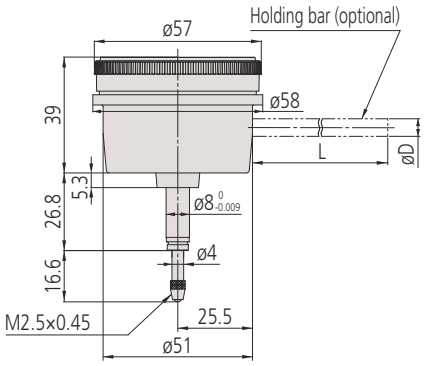

2990A-10

Functions	Series 2 2960A	Series 2 2990A-10
Balanced dial	●	●
One revolution	●	●
Shockproof	●	●
Jeweled bearing		●

Specifications

Delivered	Delivered with factory certificate

Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric
21AZA319	Contact Element Ball Point, M2,5x0,45, 8,3mm Length, Metric

901312: for 2990A-10
21AZA319: for 2960A

2960A: holding bar 136567 and 21AAA166 only

For accessories and contact points, see end of dial indicators section.




Back plunger indicator with optional holding bar and limit hands.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Contact Points


Contact Points with Radius




Ball point (901312)




Ball point (902119)




Ball point (21AZA319)




Ball point (21AZA320)




Ball point with attached ball



Shell type point



Spherical point steel



Spherical point carbide

Metric — Ball Point

No.	Type	Material	A	L [mm]
901312		Carbide	M2,5x0,45	7,3
120045D		Carbide	M2,5x0,45	8
902119	Waterproof Type S-Type Series	Carbide	M2,5x0,45	8,3
21AZA319		Carbide	M2,5x0,45	8,3
21AZA320	Waterproof Type S-Type Series	Carbide	M2,5x0,45	12,1
21JAA225		Carbide	M2,5x0,45	14
120049D		Carbide	M2,5x0,45	15
21JAA224		Carbide	M2,5x0,45	17
21AZA321	Waterproof Type S-Type Series	Carbide	M2,5x0,45	19,3
137391		Carbide	M2,5x0,45	20
21JAA226		Carbide	M2,5x0,45	22
120053D		Carbide	M2,5x0,45	25
21AAA252		Carbide	M2,5x0,45	30
901994		Plastic	M2,5x0,45	7,3
120047D		Ruby	M2,5x0,45	8
120051D		Ruby	M2,5x0,45	15
137392		Ruby	M2,5x0,45	20
120055D		Ruby	M2,5x0,45	25
21AAA253		Ruby	M2,5x0,45	30
120046D		Sapphire	M2,5x0,45	8
120050D		Sapphire	M2,5x0,45	15
120054D		Sapphire	M2,5x0,45	25



Ball point (901312)



Ball Point with attached ball (101122)

Metric — Ball point with attached ball

No.	Material	A	D [mm]
21AAA349	Carbide	M2,5x0,45	1
21AAA350	Carbide	M2,5x0,45	1,5
101122	Steel	M2,5x0,45	1,8
21AAA351	Carbide	M2,5x0,45	2,5
21AAA352	Carbide	M2,5x0,45	4



Shell Type Point (101118)

Metric — Shell Type Point

No.	Material	A	L [mm]
101386	Steel	M2,5x0,45	5
101118	Steel	M2,5x0,45	10
137393	Steel	M2,5x0,45	15
101387	Steel	M2,5x0,45	20
101388	Steel	M2,5x0,45	25
21AAA254	Steel	M2,5x0,45	30



Spherical Point Steel (101119)

Metric — Spherical Point

No.	Material	A	D [mm]	L [mm]	R [mm]
111460	Steel	M2,5x0,45	5,5	3	5
125258	Steel	M2,5x0,45	7,9	5	5
101119	Steel	M2,5x0,45	10	5	7
120058D	Carbide	M2,5x0,45	5,5	5	5
120059D	Carbide	M2,5x0,45	7,5	10	7
120060D	Carbide	M2,5x0,45	10	10	10



Spherical Point Carbide (120058D)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Contact Points

Contact Points Flat



Cylinder Point (137257)



Flat Point carbide (120056D)



Flat Point carbide (21AZB754)



Flat Point steel (131365)



Flat Point steel (21AAB711)

Metric

Cylinder Point

No.	Material	A	D [mm]	L [mm]
120066D	Carbide	M2,5x0,45	0,45	3
21AAA329	Carbide	M2,5x0,45	0,45	5
120065D	Carbide	M2,5x0,45	1	3
21AAA330	Carbide	M2,5x0,45	1	5
21AAA331	Carbide	M2,5x0,45	1	8
21AAA332	Carbide	M2,5x0,45	1	10
21AAA333	Carbide	M2,5x0,45	1	20
21AAA334	Carbide	M2,5x0,45	1	40
21AAA335	Carbide	M2,5x0,45	1,5	5
21AAA336	Carbide	M2,5x0,45	1,5	10
120064D	Carbide	M2,5x0,45	1,5	13
21AAA337	Carbide	M2,5x0,45	1,5	20
21AAA338	Carbide	M2,5x0,45	1,5	40
137257	Carbide	M2,5x0,45	2	8
21AAA257	Carbide	M2,5x0,45	2	18
21AAA258	Carbide	M2,5x0,45	2	28
21AAA339	Carbide	M2,5x0,45	2	40

Metric


Flat Point carbide

No.	Material	A	Flatness [µm]	D [mm]	d [mm]	L [mm]
120056D	Carbide	M2,5x0,45	3	5	2	8
120041D	Carbide	M2,5x0,45	3	5,2	4,3	5
120042D	Carbide	M2,5x0,45	3	7	6,5	10
120043D	Carbide	M2,5x0,45	3	10,5	9,5	10
21AZB760	Carbide	M2,5x0,45	5	17	15	10
21AZB761	Carbide	M2,5x0,45	5	22	20	10
21AZB762	Carbide	M2,5x0,45	5	27	25	10
21AZB763	Carbide	M2,5x0,45	5	32	30	10
21AZB754	Carbide	M2,5x0,45	3	7	3	10
21AZB755	Carbide	M2,5x0,45	3	9	4,5	10


Metric

Flat Point steel


No.	Material	A	Flatness [µm]	D [mm]	L [mm]
131365	Steel	M2,5x0,45	3	5	8
21AAB715	Steel	M2,5x0,45	3	5	10
101117	Steel	M2,5x0,45	5	10	10
21AAB711	Steel	M2,5x0,45	5	15	10
21AAB712	Steel	M2,5x0,45	5	20	10
21AAB713	Steel	M2,5x0,45	5	25	10
21AAB714	Steel	M2,5x0,45	5	30	10




Cylinder Point




Flat point carbide (120056D)




Flat point carbide (120041D)




Flat point carbide (21AZB754)



Flat point carbide (21AZB755)



Flat point steel
Flatness 3 µm




Flat point steel
Flatness 5µm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Contact Points


Contact Points Others




Blade point




Conical point steel (101385)




Conical point steel (101120)




Conical point carbide (120057D)




Knife edge point

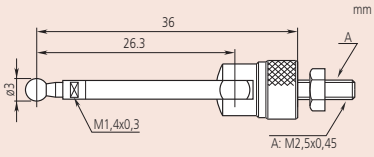

Lever Point



Needle Point



Roller point

Metric — Blade Point

No.	Material	A	D [mm]	T [mm]
120061D	Carbide	M2,5x0,45	2	0,4
120062D	Carbide	M2,5x0,45	2	0,6
120063D	Carbide	M2,5x0,45	4	1

Metric — Conical Point

No.	Material	A	Tip angle	L [mm]
101385	Steel	M2,5x0,45	90°	5
101120	Steel	M2,5x0,45	60°	10
120057D	Carbide	M2,5x0,45	90°	9
120068D	Carbide	M2,5x0,45	90°	15

Metric — Knife Edge Point

No.	Material	A	R [mm]
120067D	Carbide	M2,5x0,45	0,2

Metric — Lever Point

No.	Material	A
900391	Steel	M2,5x0,45

Metric — Needle Point

No.	Material	A	L [mm]	N [mm]	R [mm]
101121	Steel	M2,5x0,45	15	11	0,4
137413	Steel	M2,5x0,45	17	13	0,2
21AAA255	Steel	M2,5x0,45	25	21	0,4
21AAA256	Steel	M2,5x0,45	35	31	0,4

Metric — Roller Point

No.	Material	A
901954	Steel	M2,5x0,45



Blade Point (120062D)



Conical Point (101385)



Knife Edge Point (120067D)



Lever Point (900391)



Needle Point (101121)



Roller Point (901954)


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Contact Points

Contact Point Set

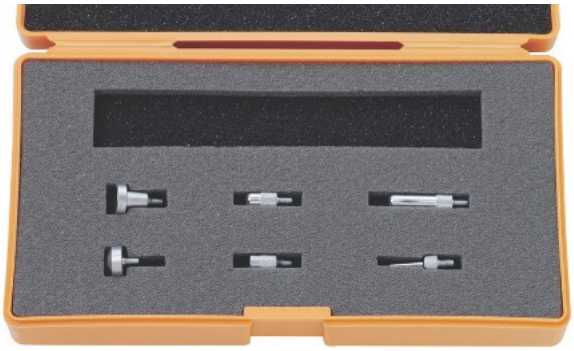

Metric — Contact Point Set

No.	Material	A
7822	Steel	M2,5x0,45

Extension Rods

Extensions




303611

Metric


No.	Material	A	L [mm]
303611	Steel	M2,5x0,45	10
21AAA259A	Steel	M2,5x0,45	15
303612	Steel	M2,5x0,45	20
21AAA259B	Steel	M2,5x0,45	25
303613	Steel	M2,5x0,45	30
21AAA259C	Steel	M2,5x0,45	35
21AAA259D	Steel	M2,5x0,45	40
21AAA259E	Steel	M2,5x0,45	45
21AAA259F	Steel	M2,5x0,45	50
21AAA259G	Steel	M2,5x0,45	55
304146	Steel	M2,5x0,45	60
21AAA259H	Steel	M2,5x0,45	65
21AAA259J	Steel	M2,5x0,45	70
21AAA259L	Steel	M2,5x0,45	75
21AAA259M	Steel	M2,5x0,45	80
304147	Steel	M2,5x0,45	90
303614	Steel	M2,5x0,45	100
21AAA011	Steel	M2,5x0,45	9,5
21AAA012	Steel	M2,5x0,45	9,5

Standard accessories


No.	Description
131365	Contact Element Flat, M2,5x0,45, 5mm, Steel, Metric
101117	Contact Element Flat, M2,5x0,45, 10mm, Steel, Metric
101121	Contact Element Needle, M2,5x0,45, R=0,4mm, Steel, Metric
101119	Contact Element Spherical, M2,5x0,45, R=7mm, Steel, Metric
101118	Contact Element Shell, M2,5x0,45, R=2,5mm, 10mm Length, Steel, Metric
101387	Contact Element Shell, M2,5x0,45, R=2,5mm, 20mm Length, Steel, Metric

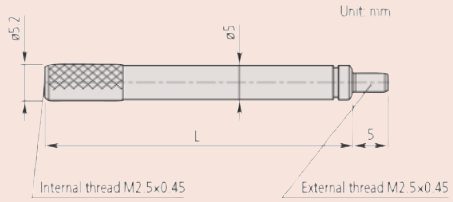

A = M 2,5 x 0,45 mm (metric)



21AAA011
Adapter AGD/ANSI Indicator (INCH) to EN ISO M2,5x0,45 thread



21AAA012
Adapter EN ISO Indicator (Metric) to ANSI/AGD 4-48UNF thread

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Bases for Indicators

Optional accessories

No.	Description
21JAA269	Set Screw for Base (Indicator)

Bases




21JZA208



21JZA209

No.	Base (W x T)	Remarks
21JZA208	63,5 x 16 mm	Delivered without set screw for base/indicator
21JZA209	101,6 x 16 mm	Delivered without set screw for base/indicator

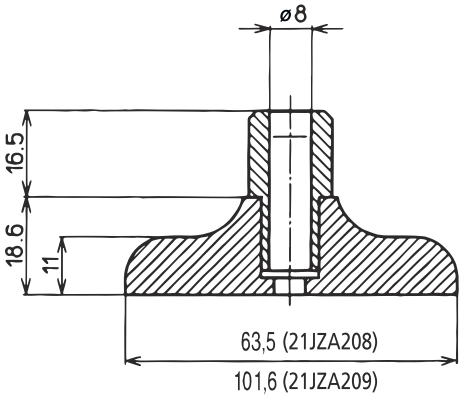

Thickness : 16 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Interchangeable Backs

Interchangeable Backs


With centre lug


Flat Back Plate


With magnet


With laterally offset back lug


With post



With screw mount


With adjustable back



With rack


With adjustable bracket


No.	For Series	Dimensions [mm]	Remarks
191559	1911AB-10, 1913AB-10, 1921AB-10, 1923AB-10, 1925AB-10	a = 1 mm	Flat back plate
101211	1	a = 2,2 mm	Flat back plate
136872	1 (waterproof)	a = 1,5 mm	Flat back plate
137906	1003A	a = 1 mm	Flat back plate
101039	2/ ID-C/ ID-S/ ID-SS	a = 2,5 mm	Flat back plate
21AZB231	2 (waterproof S type and A type)	a = 2,5 mm	Flat back plate
100836	3/ 4	a = 3 mm	Flat back plate
190561	1911A-10, 1913A-10		Back plate with centre lug
101210	1		Back plate with centre lug
137905	1003A		Back plate with centre lug
101040	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS		Back plate with centre lug
21AZB230	2 (waterproof S type and A type)		Back plate with centre lug
100691	3/ 4		Back plate with centre lug
21EZA145	ID-N, ID-B		Back plate with centre lug
900928	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS		Back plate with magnet
900929	3/ 4		Back plate with magnet
101167	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS		Back plate with laterally offset back lug
193172	1		Back plate with post
101169	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS		Back plate with post
193173	1	M 6 x 1	Back plate with screw mount
136023	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS	M 6 x 1	Back plate with screw mount
136025	1	M 6 x 1	Back plate with adjustable back
136026	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS	M 6 x 1	Back plate with adjustable back
129902	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS		Back plate with rack
901963	2/ ID-C/ ID-F/ ID-H/ ID-S/ ID-SS		Back plate with adjustable bracket




Unit : mm
With centre lug




Unit : mm
Flat back plate




Unit : mm
With magnet




Unit : mm
With laterally offset back lug




Unit : mm
With post



Unit : mm
With screw mount



Unit : mm
With adjustable back

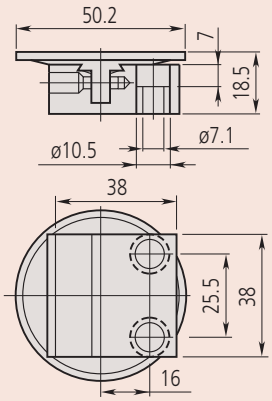

Unit : mm
With adjustable bracket

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Spindle Lifting Accessories

Spindle Lifting Accessories

- The spindle lifting accessories are attached to the indicators for improved inspection efficiency.



Application 21JZA301 and 21JZA295



21JZA301



21JZA295



902100



21AZB149



21AZB150



21EAA426



21EZA198




21EZA105



21EZA197




21EZA200



Application 21EAA426

No.	Remarks
21JZA301	Spindle lifting cable with auto-stop function, 300 mm length for all digital indicators with range 12,7 mm (0,5") and ID-U/ID-H indicators except ID-N and ID-B indicators, except all dial indicators with range >10 mm (0,5") except 2048A(B)-10, 2046A(B)-80, 1911A(B)-10, 1913(B)-10, 1921A(B)-10, 1923A(B)-10, 1925A(B)-10, except back plunger dial indicators and waterproof dial indicators, except 2971AB, 2972AB, 2973AB, 2976AB, 2977AB, 2978AB
21JZA295	Spindle lifting cable without auto-stop function, 500 mm length for all digital indicators with range 12,7 mm (0,5") and ID-U/ID-H indicators except ID-N and ID-B indicators, except all dial indicators with range >10 mm (0,5") except 2048A(B)-10, 2046A(B)-80, 1911A(B)-10, 1913(B)-10, 1921A(B)-10, 1923A(B)-10, 1925A(B)-10, except back plunger dial indicators and waterproof dial indicators, except 2971AB, 2972AB, 2973AB, 2976AB, 2977AB, 2978AB
902100	Spindle lifting lever S-type and A-type dial indicators Series 1
21AZB149	Spindle lifting lever S-type dial indicators Series 2,3 and 4 up to 10 mm/0,4"
21AZB150	Spindle lifting lever S-type and A-type dial indicators Series 2,3 >10 mm/0,4" up to 20 mm/0,8"
21EZA198	Spindle lifting lever digital indicators ID-C & ID-F (up to 12 mm range), ID-S, ID-SS and A-type dial indicators Series 2, 3 and 4 up to 10 mm/0,5" range
21EZA105	Spindle lifting knob for 12,4 mm digital indicator. This knob allows you to lift the spindle from above by hand.
21EZA197	Spindle lifting knob for 25,4 mm digital indicator. This knob allows you to lift the spindle from above by hand.
21EZA200	Spindle lifting knob for 50,8 mm digital indicator. This knob allows you to lift the spindle from above by hand.
21EZA101	Spindle lifting knob for ID-H digital indicator. This knob allows you to lift the spindle from above by hand.
21EAA426	Spindle lifting handle suitable for 4,8 mm spindle (plunger) diameter

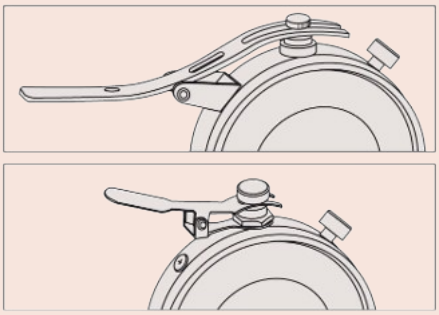

Application spindle lifting lever

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Other Accessories for Dial Indicator

Colour-coded Spindle Caps

- 9 colour-coded spindle caps are available for dial indicators with a range of 10 mm or less.

No.	Colour	Remarks
193051	Black	For standard type
193051B	Blue	For standard type
193051D	Orange	For standard type
193051G	Green	For standard type
193051P	Pink	For standard type
193051R	Red	For standard type
193051S	Dark blue	For standard type
193051W	White	For standard type
193051Y	Yellow	For standard type
193595	Black	For waterproof type
193595B	Blue	For waterproof type
193595D	Orange	For waterproof type
193595G	Green	For waterproof type
193595P	Pink	For waterproof type
193595R	Red	For waterproof type
193595S	Dark blue	For waterproof type
193595W	White	For waterproof type
193595Y	Yellow	For waterproof type



This accessory is not applicable to 1003A(B), 1911A(B)-10, 1913A(B)-10, 1921A(B)-10, 1923A(B)-10, 1925A(B)-10, 2971AB, 2972AB, 2973AB, 2976AB, 2977AB, 2978AB

Limit Stickers

- 10 pieces per set.



136420 136421 136422

No.	For Series	Colour
136420	Series 2 Dial Indicator 55,6 or 57 mm bezel/outside diameter	Red
136421	Series 2 Dial Indicator 55,6 or 57 mm bezel/outside diameter	Green
136422	Series 2 Dial Indicator 55,6 or 57 mm bezel/outside diameter	Yellow



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Test Indicators Lever Type

Lever Indicator Overview



Choices of dial position
Our product lineup offers four models, each with a different dial orientation on the frame to allow best readability in any situation.
•Horizontal type: standard model - with dial on the top of the frame
•Vertical type: dial on the end of the frame
•Horizontal (20° tilted face) type: dial on top of the frame, tilted backward by 20°
•Parallel type: dial on the side of the frame






Stylus length is on the dial face
The length of the applied stylus affects the indicator's scale factor. The appropriate length is indicated on the dial face to assist a customer when ordering the correct replacement stylus.

ø8 stem to fit dovetails is a standard accessory
A ø8mm plain stem (21CAB104) for the Metric models that attaches to any dovetail on the frame is supplied as a standard accessory. Other sizes of stem to fit the dovetails are available as optional accessories:
ø4mm stem: 21CAB106
ø6mm stem: 21CAB103



Attachable limit hands
Limit hands (optional) can be attached to the bezel as for dial indicators, allowing easy identification of the upper and lower limits of tolerance.

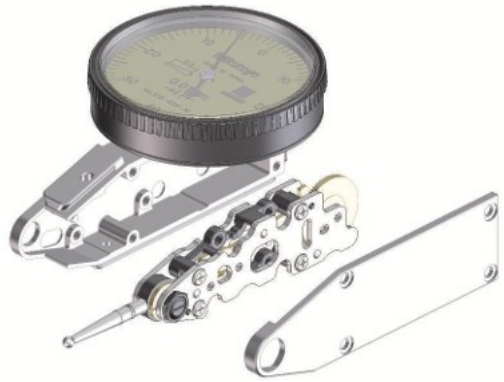

Improved stylus bearing
The conventional method of mounting the stylus pivot bearing screw in the frame is prone to allowing looseness to develop with prolonged use.
A unique sub-plate structure to house this screw has now been incorporated in all models and eliminates this drawback.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Lever Indicators Horizontal Type - 0,01 mm

Series 513

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.



513-466-10E



513-424-10E



513-414-10E



513-464-10E



513-404-10E



513-415-10E




513-426-10E



513-466-10E



513-424-10E



513-414-10E




513-464-10E



513-404-10E



513-415-10E



513-426-10E

Specifications

Contact point	Thread M 1,7 x 0,35

For optional accessories, see end of lever indicators section.


Standard accessories


No.	Description
900321	Swivel Clamp, for D=4/8mm, Dovetail
900209	Holding Bar for Swivel Clamp, 9x9mm, 100mm Length

Optional accessories


No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator

Set Configuration: Metric

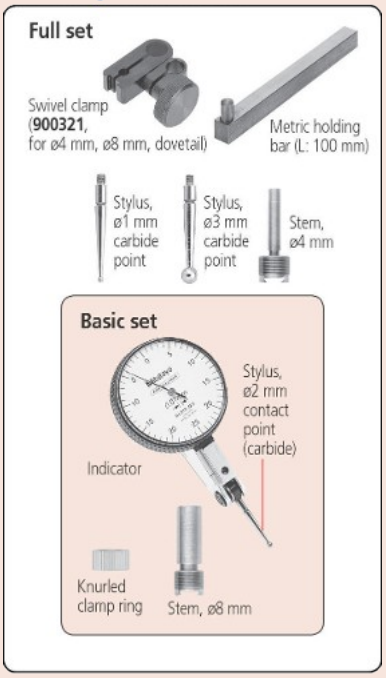

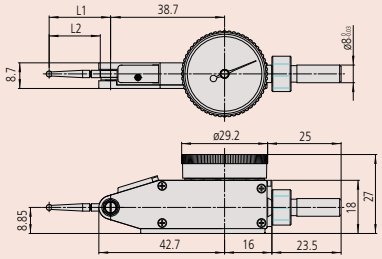

513-466-10E, 513-464-10E

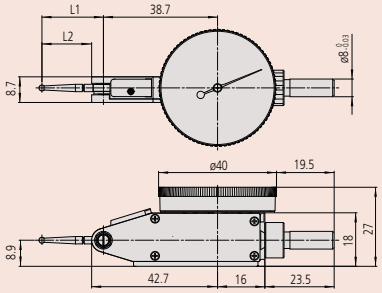

513-404-10E, 513-404-10T, 513-414-10E, 513-414-10T, 513-415-10E, 513-415-10T, 513-424-10E, 513-424-10T, 513-426-10E, 513-474-10E, 513-477-10E, 513-478-10E

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Lever Indicators Horizontal Type - 0,01 mm

Metric

No.	Range [mm]	Dial reading	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
513-466-10E	0,5	0-25-0	0,01	5			5	3	3
513-424-10E	0,5	0-25-0	0,01	5			5	3	3
513-414-10E	0,5	0-25-0	0,01	5			10	4	3
513-464-10E	0,8	0-40-0	0,01	5	6		8	3	3
513-404-10E	0,8	0-40-0	0,01	5	6		8	3	3
513-415-10E	1	0-50-0	0,01	5	8		10	4	3
513-426-10E	1,5	0-25-0	0,01	5		10	16	4	3
513-478-10E	0,5	0-25-0	0,01	5			5	3	3
513-474-10E	0,8	0-40-0	0,01	5	6		8	3	3
513-477-10E	1	0-50-0	0,01	5	8		10	4	3
513-424-10T	0,5	0-25-0	0,01	5			5	3	3
513-414-10T	0,5	0-25-0	0,01	5			10	4	3
513-404-10T	0,8	0-40-0	0,01	5	6		8	3	3
513-415-10T	1	0-50-0	0,01	5	8		10	4	3

No.	Measuring force [N]	Carbide stylus tip ø2 mm No.	Ruby stylus tip ø2 mm No.	L1 [mm]	L2 [mm]	L3 [mm]	Mass [g]
513-466-10E	0,01-0,3	137557		22,2	18,7		41
513-424-10E	0,01-0,3	137557		22,2	18,7	26,8	45
513-414-10E	0,01-0,2	131324		37,4	33,9	26,8	45
513-464-10E	0,01-0,3	103006		20,9	17,4		41
513-404-10E	0,01-0,3	103006		20,9	17,4	26,8	45
513-415-10E	0,01-0,2	136013		44,5	41	26,8	45
513-426-10E	0,01-0,4	137557		22,2	18,7	27,5	45
513-478-10E	0,01-0,3		21CZA210	22,2	18,7	26,8	45
513-474-10E	0,01-0,3		21CZA201	20,9	17,4	26,8	45
513-477-10E	0,01-0,3		21CZA211	44,5	41	26,8	45
513-424-10T	0,01-0,3	137557		22,2	18,7	26,8	45
513-414-10T	0,01-0,2	131324		37,4	33,9	26,8	45
513-404-10T	0,01-0,3	103006		20,9	17,4	26,8	45
513-415-10T	0,01-0,2	136013		44,5	41	26,8	45

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Lever Indicators - Horizontal Type - 0.001/0.002 mm

Series 513

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement.



513-401-10E



513-465-10E



513-405-10E



513-425-10E



513-401-10E



513-465-10E



513-405-10E



513-425-10E

Metric

No.	Range [mm]	Dial reading	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
513-401-10E	0,14	0-70-0	0,001	2	3		3	2	1
513-405-10E	0,2	0-100-0	0,002	2	3		3	2	1
513-465-10E	0,2	0-100-0	0,002	2	3		3	2	1
513-425-10E	0,6	0-100-0	0,002	2	3	5	7	4	1
513-471-10E	0,14	0-70-0	0,001	2	3		3	2	1
513-475-10E	0,2	0-100-0	0,002	2	3		3	2	1
513-405-10T	0,2	0-100-0	0,002	2	3		3	2	1

No.	Measuring force [N]	Carbide stylus tip ø2 mm No.	Ruby stylus tip ø2 mm No.	L1 [mm]	L2 [mm]	L3 [mm]	Mass [g]
513-401-10E	0,01 - 0,3	103010		14,7	11,2	26,8	45
513-405-10E	0,01 - 0,3	103011		18,7	15,2	26,8	45
513-465-10E	0,01 - 0,3	103011		18,7	15,2	26,8	41
513-425-10E	0,01 - 0,4	103011		18,7	15,2	27,5	45
513-471-10E	0,01 - 0,3		21CZA209	14,7	11,2	26,8	45
513-475-10E	0,01 - 0,3		21CZB068	18,7	15,2	26,8	45
513-405-10T	0,01 - 0,3	103011		18,7	15,2	26,8	45

Specifications


Contact point	Thread M 1,7 x 0,35


For optional accessories, see end of lever indicators section.

Optional accessories


No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator

Set Configuration: Metric

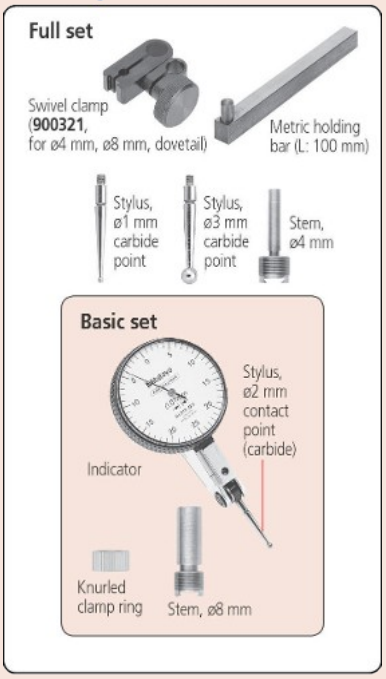

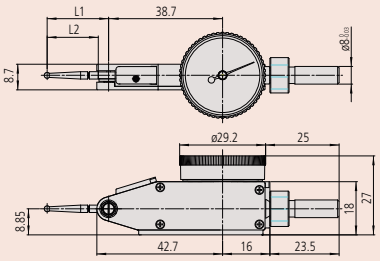

513-465-10E

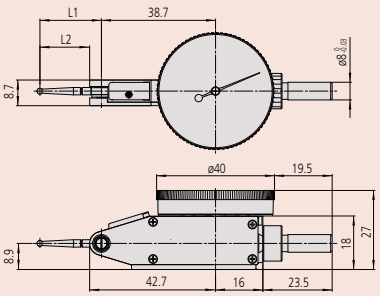

513-401-10E, 513-405-10E, 513-425-10E, 513-475-10E

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Lever Indicators and Magnet Stand

Series 513

This is a Dial Test Indicator (Lever Type) including mini magnet stand. It offers you the following benefits:

- It contains various accessories including a mini magnet stand, a swivel clamp and a stem with a knurled clamp ring.



513-908-10E
Indicator
Centered, bi-directional action for automatic reversal of measuring direction.
Jewelled bearings and precision gears and pinions for smooth, accurate movement and quick response.


Stand
Magnetic force : 150 N.
Mass : 180 g.



513-908-10E

Metric

No.	Content of Set	Range [mm]	Dial reading	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
513-908-10E	513-404-10E: Lever Indicator 7014-10: Mini Magnet Stand 902804: Stem with Knurled Clamp Ring	0,8	0-40-0	0,01	5	6	8	3	3

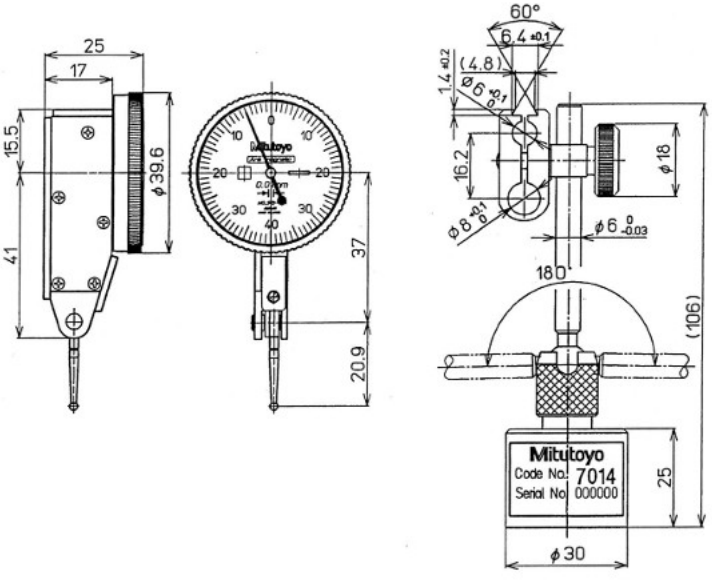

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Lever Indicators Horizontal (20° Tilted Face) Type


Series 513

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.



513-445-10E



513-445-10E



513-444-10E



513-444-10E

Metric

No.	Range [mm]	Dial reading	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE any 1 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
513-445-10E	0,4	0-100-0	0,002	2	3	5	6	4	1
513-444-10E	1,6	0-40-0	0,01	5	8	10	16	4	3
513-445-10T	0,4	0-100-0	0,002	2	3	5	6	4	1
513-444-10T	1,6	0-40-0	0,01	5	8	10	16	4	3

No.	Measuring force [N]	Carbide stylus tip ø2 mm No.	L1 [mm]	L2 [mm]	Mass [g]
513-445-10E	0,01-0,3	103011	18,7	15,2	48
513-444-10E	0,01-0,3	103006	20,9	17,4	48
513-445-10T	0,01-0,3	103011	18,7	15,2	48
513-444-10T	0,01-0,3	103006	20,9	17,4	48

Specifications


Contact point	Thread M 1,7 x 0,35


For optional accessories, see end of lever indicators section.

Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator

Set Configuration: Metric

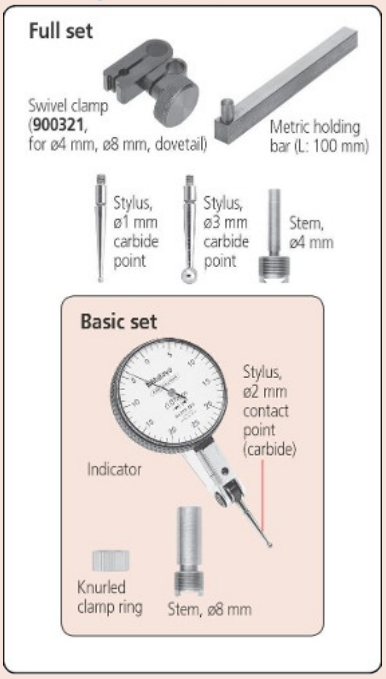

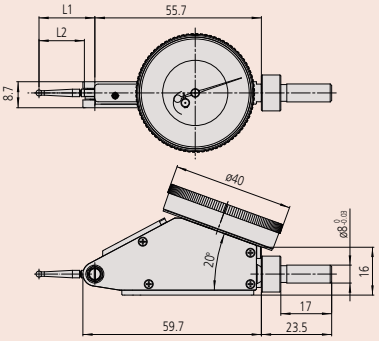

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Lever Indicators Vertical Type


Series 513

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.



513-455-10E



513-455-10E



513-454-10E



513-454-10E

Specifications


Contact point	Thread M 1,7 x 0,35


For optional accessories, see end of lever indicators section.

Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator

Set Configuration: Metric

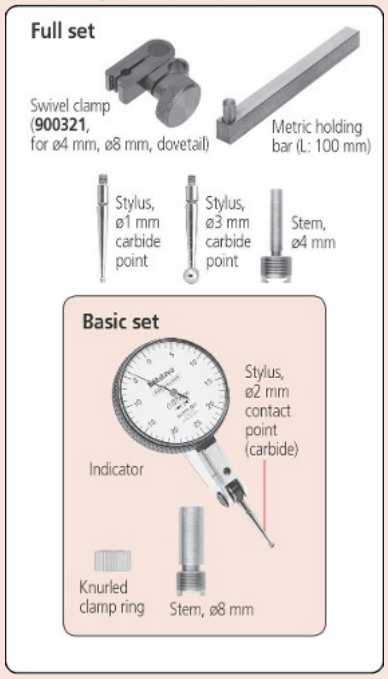



Metric

No.	Range [mm]	Dial reading	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
513-455-10E	0,2	0-100-0	0,002	2	3	3	2	1
513-456-10E	0,5	0-100-0	0,01	5		5	3	3
513-454-10E	0,8	0-40-0	0,01	5	6	8	3	3
513-455-10T	0,2	0-100-0	0,002	2	3	3	2	1
513-454-10T	0,8	0-40-0	0,01	5	6	8	3	3

No.	Carbide stylus tip ø2 mm No.	L1 [mm]	L2 [mm]	Mass [g]
513-455-10E	103011	18,7	15,2	46
513-456-10E	137557	22,2	18,7	46
513-454-10E	103006	20,9	17,4	46
513-455-10T	103011	18,7	15,2	46
513-454-10T	103006	20,9	17,4	46

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Lever Indicators Parallel Type


Series 513

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.



513-484-10E



513-485-10E



513-486-10E



513-484-10E

Metric

No.	Range [mm]	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]	Measuring force [N]
513-485-10E	0,2	0,002	2	3	3	2	1	0,01-0,3
513-486-10E	0,5	0,01	5		5	3	3	0,01-0,3
513-484-10E	0,8	0,01	5	6	8	3	3	0,01-0,3
513-484-10T	0,8	0,01	5	6	8	3	3	0,01-0,3

No.	Carbide stylus tip ø2 mm No.	L1 [mm]	L2 [mm]	Mass [g]
513-485-10E	103011	18,7	15,2	53
513-486-10E	137557	22,2	18,7	53
513-484-10E	103006	20,9	17,4	53
513-484-10T	103006	20,9	17,4	53

Specifications


Contact point	Thread M 1,7 x 0,35
Delivered	Delivered: In box as either a full set or a basic set.


For optional accessories, see end of lever indicators section.

Optional accessories

No.	Description
21AAB363	Limit Hands (Green) 2 pcs., Dial Indicator Series 1, Test Indicator

Set Configuration: Metric

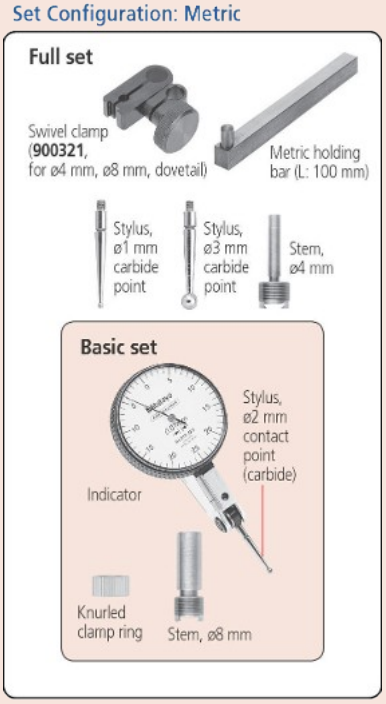

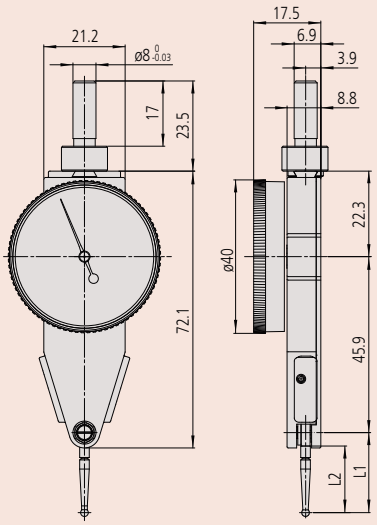

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Lever Indicators Universal Type

Series 513

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.




513-304-10E


Specifications

Contact point	Thread M 1,4 x 0,3

For optional accessories, see end of lever indicators section.

Set Configuration: Metric

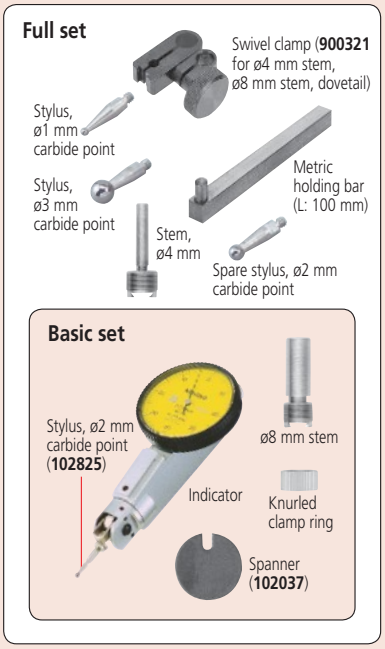


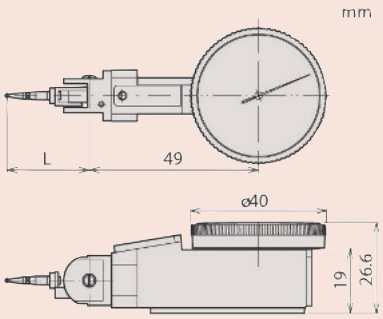

Metric

No.	Range [mm]	Dial reading	Graduation [mm]	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE measuring range [µm]	H MPE (Hysteresis) [µm]	R MPE (Repeatability) [µm]
513-304-10E	0,8 - 0,8	0-40-0	0,01	5	6	8	4	3
513-304-10T	0,8 - 0,8	0-40-0	0,01	5	6	8	3	3

No.	Measuring force [N]	Carbide stylus tip ø2 mm No.	L [mm]	Mass [g]
513-304-10E	0,01-0,3	102825	24	80
513-304-10T	0,01-0,3	102825	24	80

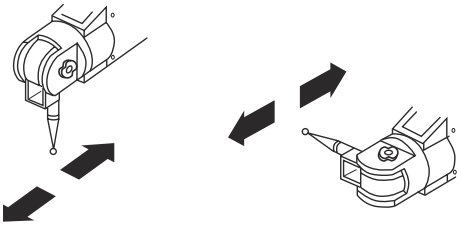

The direction of the probe movement can be freely changed by rotating the stylus section of the lever indicator.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Lever Indicators Small Type

Series 513

This is a small type Dial Test Indicator (Lever Type) which offers you the following benefits:

- Reversible measuring direction (clutch type)
- Jeweled bearings assure higher sensitivity and accuracy.



513-501-10E



513-514-10E



513-503-10E



513-517-10E



513-515-10E

Metric

No.	Range [mm]	Dial reading	Graduation [mm]	H MPE (Hysteresis)	MPE any 10 scale divisions [µm]	MPE any 1/2 revolution [µm]	MPE measuring range [µm]	R MPE (Repeatability) [µm]
513-501-10E	0,14	0-70-0	0,001	2 mm	2	3	3	1
513-503-10E	0,2	0-100-0	0,002	2 mm	2	3	3	1
513-514-10E	0,5	0-25-0	0,01	4 mm	5		10	3
513-517-10E	0,8	0-40-0	0,01	3 mm	5	6	8	3
513-515-10E	1		0,01	4 mm	5	8	10	3
513-501-10T	0,14	0-70-0	0,001	2 mm	2	3	3	1
513-503-10T	0,2	0-100-0	0,002	2 mm	2	3	3	1
513-514-10T	0,5	0-25-0	0,01	4 mm	5		10	3
513-517-10T	0,8	0-40-0	0,01	3 mm	5	6	8	3
513-515-10T	1	0-50-0	0,01	4 mm	5	8	10	3

No.	Measuring force [N]	Carbide stylus tip ø2 mm No.	Mass [g]	L1 [mm]	L2 [mm]	C [mm]
513-501-10E	≤ 0,5	136104	50	12,1	8,6	48,7
513-503-10E	≤ 0,4	103010	50	14,7	11,2	51,4
513-514-10E	≤ 0,3	131324	51	36,8	33,3	73,5
513-517-10E	≤ 0,3	103006	50	20,9	17,4	57,6
513-515-10E	≤ 0,3	136013	51	44,5	41	81,2
513-501-10T	≤ 0,5	136104	50	12,1	8,6	48,7
513-503-10T	≤ 0,4	103010	50	14,7	11,2	51,4
513-514-10T	≤ 0,3	131324	51	36,8	33,3	73,5
513-517-10T	≤ 0,3	103006	50	20,9	17,4	57,6
513-515-10T	≤ 0,3	136013	51	44,5	41	81,2

Specifications


Contact point	Thread M 1,7 x 0,35


For optional accessories, see end of lever indicators section.

Optional accessories

No.	Description
900322	Swivel Clamp, for D=4/9,52mm, Dovetail

Set Configuration: Metric

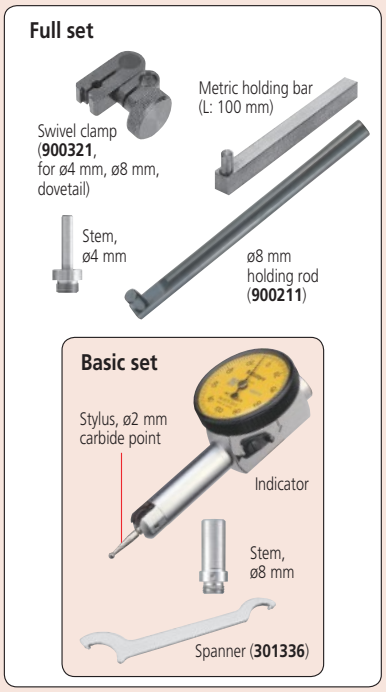

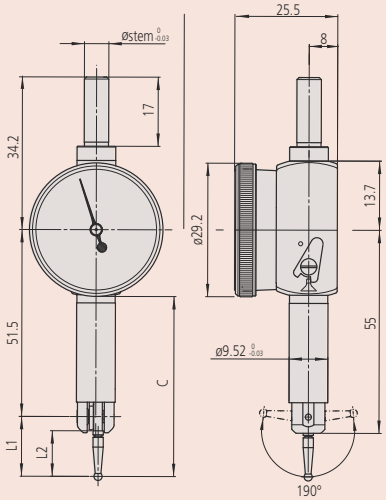




513-517-10E (full set)


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Styli, Stems and Holders



Styli for standard models

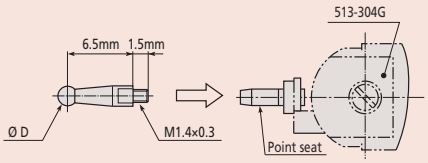

Syli for universal type
513-304-10E, 513-304-10T

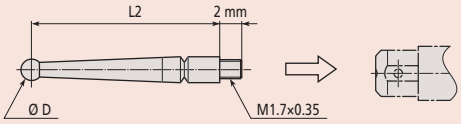

Styli for small type models

Styli for Lever Indicators

Stylus length affects the scale factor of an indicator, and the styli provided to you as standard give a scale factor of unity.



ø 0,5 mm ball-point



ø 0,7 mm ball-point



ø 1 mm ball-point Carbide



ø 2 mm ball-point Carbide



ø 2 mm ball-point Ruby



ø 3 mm ball-point Carbide

No.	Standard models	Small type models	L2 [mm]	D [mm]	Ø ball point
190547	●	●	11,2	0,5	0,5 mm steel
190549	●	●	17,4	0,5	0,5 mm steel
190654	●		18,7	0,5	0,5 mm steel
190656	●	●	41	0,5	0,5 mm steel
190548	●	●	11,2	0,7	0,7 mm steel
190550	●	●	17,4	0,7	0,7 mm steel
190653	●		18,7	0,7	0,7 mm steel
190655	●	●	41	0,7	0,7 mm steel
136756		●	8,6	1	1 mm carbide
21CZA044	●		9,4	1	1 mm carbide
103017	●	●	11,2	1	1 mm carbide
131314	●		15,2	1	1 mm carbide
103013	●	●	17,4	1	1 mm carbide
21CZA098		●	17,4	1	1 mm carbide*3
137558	●		18,7	1	1 mm carbide
102824	●		6,5	1	1 mm carbide*2
137746	●	●	33,9	1	1 mm carbide
131316	●		33,9	1	1 mm carbide
136235	●	●	41	1	1 mm carbide
136104		●	8,6	2	2 mm carbide
21CZA036	●		9,4	2	2 mm carbide
103010	●	●	11,2	2	2 mm carbide
103011	●		15,2	2	2 mm carbide
103006	●	●	17,4	2	2 mm carbide
21CZA097		●	17,4	2	2 mm carbide*3
137557	●		18,7	2	2 mm carbide
102825	●		6,5	2	2 mm carbide*2
129949	●	●	33,9	2	2 mm carbide
131324	●		33,9	2	2 mm carbide
136013	●	●	41	2	2 mm carbide
21CZA212	●		9,4	2	2 mm ruby
21CZA209	●	●	11,2	2	2 mm ruby
21CZB068	●		15,2	2	2 mm ruby
21CZA201	●	●	17,4	2	2 mm ruby
21CZA210	●		18,7	2	2 mm ruby
21CZA211	●	●	41	2	2 mm ruby
136758		●	8,6	3	3 mm carbide
21CZA045	●		9,4	3	3 mm carbide
103018	●	●	11,2	3	3 mm carbide
131315	●		15,2	3	3 mm carbide
103014	●	●	17,4	3	3 mm carbide
21CZA099		●	17,4	3	3 mm carbide*3
137559	●		18,7	3	3 mm carbide
102826	●		6,5	3	3 mm carbide*2
137747	●	●	33,9	3	3 mm carbide
131317	●		33,9	3	3 mm carbide
136236	●	●	41	3	3 mm carbide

*2 : Used extension 209829 for 513-304-10E, 513-304-10T
*3 : For 513-517W models

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Styli, Stems and Holders

Stems and Holders for Lever Indicators

Centering Holder

No.	Standard models	Stem ∅
901959	●	8 mm

Holding Bars

No.	Standard models	Small type models	Remarks	L [mm]
900211	●	●	ø 8 mm	115 mm
953638	●	●	9 x 9 mm	50 mm
900209	●	●	9 x 9 mm	100 mm

Spanner

No.	Standard models	Small type models
102037	●	
301336		●

Stems


No.	Standard models	Small type models	Stem ∅	Remarks
21CZB131	●		4 mm	Stem with knurled clamp ring
21CZB128	●		6 mm	Stem with knurled clamp ring
21CZB129	●		8 mm	Stem with knurled clamp ring
21CZB130	●		9,52 mm	Stem with knurled clamp ring
21CZB132	●		4 mm, 8 mm	2 stems with knurled clamp ring
21CZB133	●		4 mm, 9,52 mm	2 stems with knurled clamp ring
190322	●			Knurled clamp ring
21CAB106	●		4 mm	Stem
21CAB103	●		6 mm	Stem
21CAB104	●		8 mm	Stem
102036		●	4 mm	Stem
102389		●	6 mm	Stem
102822		●	8 mm	Stem

Swivel Clamps

No.	Standard models	Small type models	Remarks
900321	●	●	For ø 4, 8 mm stems and dovetail

Universal Holder

No.	Standard models	Small type models	Stem ∅
21CZA229	●		6 mm
21CZA233	●		8 mm
21CZA230		●	6 mm
21CZA234		●	8 mm

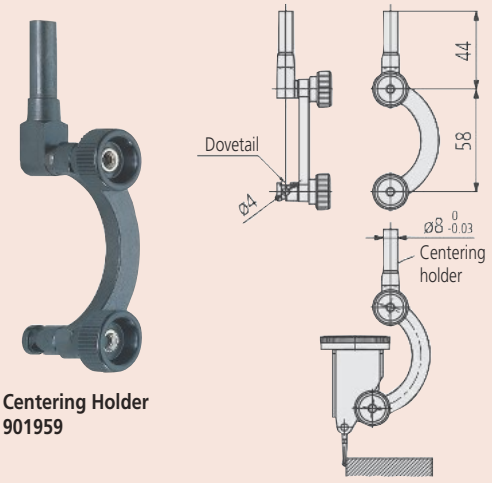

Centering Holder
901959



900211



Spanner 102037



Spanner 301336




190322 21CZB131 21CZB129



102822 102389



Universal Holder



Universal holder with standard type (left)
Universal holder with small type (right)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Thickness Gauges

Functions	Series 547
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
Calculation function (with formula)	●
Digimatic S1 Bidirectional interface	●
Analog bar resolution selection	●
Auto Power OFF setting	●
Analog bar resolution switchable	●
Customizing keys	●
Inch/Metric switchable	●
Calibration warning function	●
Digital step switchable	●

Specifications

Alarm	Low voltage, counting value composition error, overflow error, tolerance limit setting error
Power supply	1 battery CR-2032
Battery life	Continuous use: approx. 2700h

Optional accessories

No.	Description
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/ Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/ Digimatic 2/Digimatic S1 Interface, 2 m
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/ Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/ Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4

Series 547

ABSOLUTE IP42

This ABSOLUTE Digimatic Thickness Gauge enables you to measure tube wall thickness.


- Bidirectional communication e.g. to perform parameter setting from a PC (Digimatic S 1 interface) is possible.



547-360A

Metric

No.	Range [mm]	Type	Digital step	Accuracy	Protection	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
547-360A	0 - 10	Anvil D=3,5 mm, contact point D=3 mm (flat)	0,01 mm	±20 µm	IP42	543-710BS	20 mm	≤ 1,5	230

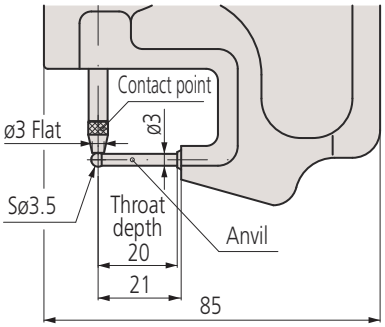

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Thickness Gauges

Series 547

ABSOLUTE® IP42

This ABSOLUTE Digimatic Thickness Gauge enables you to measure film, paper, etc., with flat contact points.

- Bidirectional communication e.g. to perform parameter setting from a PC (Digimatic S 1 interface) is possible.



547-301A



547-321A



547-313A




547-315A


Metric

No.	Range [mm]	Type	Digital step	Accuracy	Parallelism	Protection	Indicator No.
547-301A	0 - 10	Ceramic disc contact points	0,01 mm	±20 µm	10 µm	IP42	543-710BS
547-321A	0 - 10	Ceramic disc contact points and large jaw capacity	0,01 mm	±20 µm	10 µm	IP42	543-710BS
547-313A	0 - 10	Anvils and contact points are interchangeable	0,01 mm	±20 µm	10 µm	IP42	543-710BS
547-315A	0 - 10	Blade steel contact point	0,01 mm	±20 µm	10 µm	IP42	543-710BS


No.	Max. measuring depth	Measuring force [N]	Mass [g]
547-301A	30 mm	≤ 1,5	245
547-321A	120 mm	≤ 1,5	385
547-313A	30 mm	≤ 1,5	265
547-315A	30 mm	≤ 1,5	260




547-301A



547-321A



547-313A



547-315A

Functions	Series 547
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
Calculation function (with formula)	●
Digimatic S1 Bidirectional interface	●
Analog bar resolution selection	●
Auto Power OFF setting	●
Analog bar resolution switchable	●
Customizing keys	●
Inch/Metric switchable	●
Calibration warning function	●
Digital step switchable	●

Specifications


Alarm	Low voltage, counting value composition error, overflow error, tolerance limit setting error (ID-C only)
Power supply	1 battery CR-2032
Battery life	Continuous use: approx. 2700h

Optional accessories

No.	Description
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/Digimatic 2/Digimatic S1 Interface, 2 m
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4



only for 547-313A

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

ABSOLUTE Digimatic Thickness Gauges

Functions	Series 547
Data output	●
ON/OFF	●
ABS / INC (INC ZERO)	●
PRESET	●
Function lock	●
GO/±NG judgement	●
DATA/HOLD	●
Counting direction switchable	●
Calculation function (with formula)	●
Digimatic S1 Bidirectional interface	●
Analog bar resolution selection	●
Auto Power OFF setting	●
Analog bar resolution switchable	●
Customizing keys	●
Inch/Metric switchable	●
Calibration warning function	●
Digital step switchable	●

Specifications

Alarm	Low voltage, counting value composition error, overflow error, tolerance limit setting error
Power supply	1 battery CR-2032
Battery life	Continuous use: approx. 2700h

Optional accessories

No.	Description
06AGL011	Digimatic Cable, Straight, 1m, Digimatic/ Digimatic 2/Digimatic S1 Interface, 1 m
06AGL021	Digimatic Cable, Straight, 2m, Digimatic/ Digimatic 2/Digimatic S1 Interface, 2 m
06AGQ001F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2/ Digimatic S1 Interface
264-623	U-WAVE fit, Buzzer Type, Wireless Transmitter for Micrometer/Indicator
264-622	U-WAVE fit, IP67 Type, Wireless Transmitter for Micrometer/Indicator
264-627	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Micrometer/ Indicator
264-626	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Micrometer/Indicator
02AZF700	Connection Unit for ID-C Indicator, 12,7mm/0,5" Type, U-WAVE fit, U-WAVE fit Bluetooth for Digimatic S1 Interface

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.
21EZA198	Spindle Lifting Lever, for Digital Indicator, A-Type Dial Indicator Serie 2/3/4

Series 547

ABSOLUTE IP42

This ABSOLUTE Digimatic Thickness Gauge with 1 µm digital step enables you to measure film, paper, etc., with flat contact points.


- Bidirectional communication e.g. to perform parameter setting from a PC (Digimatic S 1 interface) is possible.



547-401A

Metric

No.	Range [mm]	Type	Digital step	Accuracy	Parallelism	Protection	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
547-401A	0 - 12	D= 6,3 mm carbide tipped	0,0005 mm/ 0,001 mm/ 0,1 mm	±3 µm	3 µm	IP42	543-700BS	21 mm	≤ 3,5	275

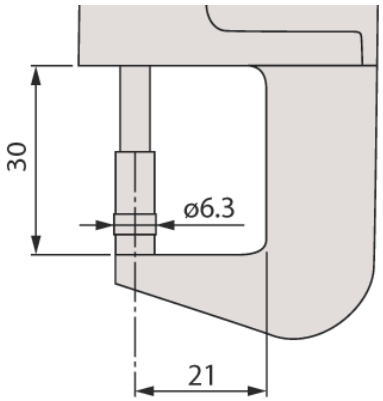

547-401A

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Quick Mini Thickness Gauges

Series 700


ABSOLUTE®

This is a lightweight, palm-sized thickness gauge.



700-119-30

No.	Range [mm]	Digital step	Accuracy	Measuring force [N]	Mass [g]
700-119-30	0 - 12	0,01 mm	±0,02 mm	2	70

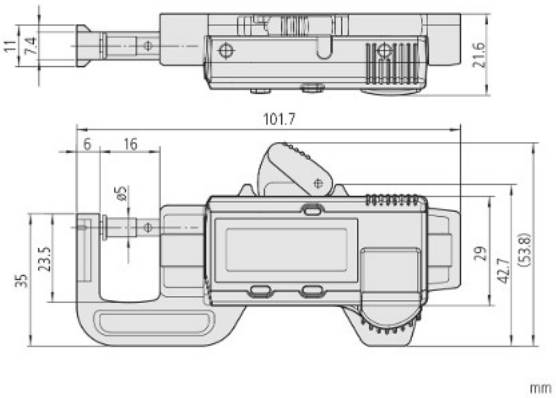

mm

Functions	Series 700
ON/OFF	●
ABS / INC (INC ZERO)	●

Specifications

Display	LCD, character height 9 mm
Power supply	1 Battery SR-44
Battery life	Approx. 5 years
Delivered	In case

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Dial Indicator Thickness Gauges

Series 7

This Dial Indicator Thickness Gauge enables you to measure tube wall thickness, film/paper etc. with flat contact points, resp. lens thickness or groove depth.



7313A



7327A



7315A



7321A



7360A


Optional accessories

No.	Description
21AZB195	Limit Hands (green) 2pcs, Dial Indicator Series 2/3/4
21AZB148	Bezel Clamp for Dial Gauge, Metric, Series 2/3/4


Consumable spares

No.	Description
21AZB149	Spindle Lifting Lever, for S-Type Series 2,3,4 up to 10mm/0,4"
21AZB150	Spindle Lifting Lever, for S and A-Type Series 2,3 >10/0,4" up to 20mm/0,8"


21AZB149 : for 7301A/7327A/7321A/7313A/7315A/7360A
21AZB150 : for 7305A/7323A




7327A / 7301A / 7305A




7321A / 7323A




7313A





7315A



7360A

Metric Adjustable Anvil

No.	Range [mm]	Graduation [mm]	Accuracy	Parallelism	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
7313A	0 - 10	0,01	±0,015 mm	5 µm	2046AB	30 mm	≤ 1,4	215

Metric Ceramic disc contact points

No.	Range [mm]	Graduation [mm]	Accuracy	Parallelism	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
7327A	0 - 1	0,001	±0,005 mm	5 µm	2109AB-10	30 mm	≤ 1,5	225
7301A	0 - 10	0,01	±0,015 mm	5 µm	2046AB	30 mm	≤ 1,4	205
7305A	0 - 20	0,01	±0,02 mm	5 µm	2050AB	30 mm	≤ 2	220

Metric Knife-edge contact point

No.	Range [mm]	Graduation [mm]	Accuracy	Parallelism	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
7315A	0 - 10	0,01	±0,015 mm	5 µm	2046AB	30 mm	≤ 1,4	220

Metric Large jaw capacity and ceramic disc contact points

No.	Range [mm]	Graduation [mm]	Accuracy	Parallelism	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
7321A	0 - 10	0,01	±0,015 mm	5 µm	2046AB	120 mm	≤ 1,4	355
7323A	0 - 20	0,01	±0,022 mm	5 µm	2050AB	120 mm	≤ 2	355

Metric Tube thicknesses - Minimum inside diameter 3,5 mm

No.	Range [mm]	Graduation [mm]	Accuracy	Indicator No.	Max. measuring depth	Measuring force [N]	Mass [g]
7360A	0 - 10	0,01	±0,015 mm	2046AB	20 mm	≤ 1,4	200

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Internal Dial Caliper Gauges

Internal Dial Caliper Gauges Metric

This analog Internal Dial Caliper Gauge offers you the following benefits:
- Excellent resistance against water and dust (IP65 protection level)
- Optimized measuring force
- Ergonomically designed to lie securely in your hand when measuring



209-901

Metric — Measuring contacts: carbide ball Ø 0,6 mm

No.	Range [mm]	Type	Graduation [mm]	Accuracy	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-301	5 - 15	Fig. 4	0,005	0,015 mm	0,8-1,2	2,3	0,8	35	160

Metric — Measuring contacts: carbide ball Ø 1,5 mm

No.	Range [mm]	Type	Graduation [mm]	Accuracy	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-901	15 - 65	Fig. 4	0,05	0,05 mm	0,9-1,9	5,5	1,9	188	355

Metric — Measuring contacts: carbide ball Ø 1 mm

No.	Range [mm]	Type	Graduation [mm]	Accuracy	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-302	10 - 30	Fig. 4	0,01	0,03 mm	1,1-1,6	5,2	1,2	85	180
209-303	20 - 40	Fig. 2	0,01	0,03 mm	1,1-1,6	7	1,2	85	180
209-304	30 - 50	Fig. 2	0,01	0,03 mm	1,1-1,6	7	1,2	85	185
209-305	40 - 60	Fig. 3	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	195
209-306	50 - 70	Fig. 3	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	195
209-307	60 - 80	Fig. 3	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	200
209-308	70 - 90	Fig. 3	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	200
209-309	80 - 100	Fig. 3	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	200

Metric — Measuring contacts: carbide ball Ø 2 mm

No.	Range [mm]	Type	Graduation [mm]	Accuracy	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-902	40 - 90	Fig. 3	0,05	0,05 mm	0,9-1,9	8,3	2,4	192	370
209-903	70 - 120	Fig. 3	0,05	0,05 mm	0,9-1,9	8,3	2,4	192	380

Metric — Measuring contacts: carbide bevel (R: 0,1 mm)

No.	Range [mm]	Type	Graduation [mm]	Accuracy	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-300	2,5 - 12,5	Fig. 1	0,005	0,015 mm	0,8-1,2	0,7	0,4	12	155

Metric — Measuring contacts: interchangeable, carbide ball Ø 1 mm

No.	Range [mm]	Type	Graduation [mm]	Accuracy	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-310	50 - 100	Fig. 5	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	220
209-311	90 - 140	Fig. 5	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	230
209-312	130 - 180	Fig. 5	0,01	0,03 mm	1,1-1,6	8,3	1,2	85	230



Figure 1




Figure 2




Figure 3





Figure 4




Figure 5

Optional accessories

No.	Description
63AAA437	Holder for Digital Caliper Gauge, for 209-901 up to 209-922
011530	Holder for Digital Caliper Gauge, for 209-300 up to 209-457 except: 209-310, -311, -312, -361, -362, -363



209-301



209-303



209-305




209-902




209-310



209-300

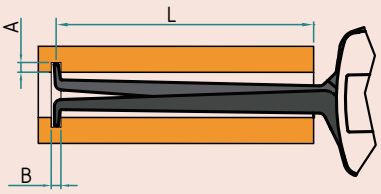

L=Maximum reach of contact arms over workpiece
A=Maximum groove depth
B=Minimum groove width

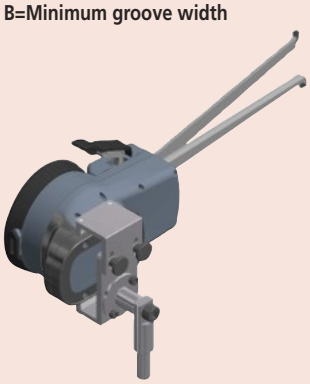

63AAA437

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Internal Digimatic Caliper Gauges

Series 209

- Digital Caliper Gauge enables measurements in hard-to-reach places
- Excellent resistance against water and dust IP67 level

Functions	Series 209
ABS/INC switchable	●
Auto Power OFF after 1/5/10 min. non use	●
OFFSET	●
Analog bar resolution switchable	●
mm/inch conversion	●
HOLD	●
SET key	●
DATA key	●
DATA-Logger (100 measured values)	●
Max. reading	●
Min. reading	●
Tolerance LED (green/red)	●
Tolerance judgement	●

Specifications

Digital step	0,001 / 0,002 / 0,005 / 0,01 / 0,02 / 0,05 mm
Power supply	2 batteries LR3 (AAA)

Optional accessories


No.	Description
011551	Digimatic Interface Series 209, Digital Caliper Gauge
937387	Digimatic Cable, Round 6-Pin Type, 1 m
965013	Digimatic Cable, Round 6-Pin Type, 2 m
06AFM380E	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Round 6-Pin Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790E	Connection Cable E for U-WAVE, Round 6-Pin Type
63AAA438	Holder for Digital Caliper Gauge, for 209-930 up to 209-958

Consumable spares


No.	Description
011511-1	Battery LR03 (AAA), 4x



209-935



L=Maximum reach of contact arms over workpiece
A=Maximum groove depth
B=Minimum groove width



63AAA438



209-945

Metric/Inch Measuring contacts: carbide ball Ø 0,6 mm

No.	Range [mm]	Type	Accuracy	Protection	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-935	5 - 15	Fig. 4	0,015 mm	IP67	0,8-1,2	2,3	0,8	35	260

Metric/Inch Measuring contacts: carbide ball Ø 1,3 mm

No.	Range [mm]	Type	Accuracy	Protection	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-944	13 - 43	Fig. 4	0,04 mm	IP67	1,2-1,7	5,7	1,5	127	360

Metric/Inch Measuring contacts: carbide ball Ø 1,5 mm

No.	Range [mm]	Type	Accuracy	Protection	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-945	15 - 65	Fig. 2	0,05 mm	IP67	1-1,8	5,5	1,9	188	415
209-946	30 - 60	Fig. 3	0,04 mm	IP67	1,2-1,7	6,2	1,8	132	370

Metric/Inch Measuring contacts: carbide ball Ø 1 mm

No.	Range [mm]	Type	Accuracy	Protection	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-936	10 - 30	Fig. 4	0,03 mm	IP67	1,1-1,6	5,2	1,2	85	270
209-937	20 - 40	Fig. 2	0,03 mm	IP67	1,1-1,6	7	1,2	85	270
209-938	30 - 50	Fig. 2	0,03 mm	IP67	1,1-1,6	7	1,2	85	275
209-939	40 - 60	Fig. 3	0,03 mm	IP67	1,1-1,6	8,3	1,2	85	285
209-940	50 - 70	Fig. 3	0,03 mm	IP67	1,1-1,6	8,3	1,2	85	285
209-941	60 - 80	Fig. 3	0,03 mm	IP67	1,1-1,6	8,3	1,2	85	290
209-942	70 - 90	Fig. 3	0,03 mm	IP67	1,1-1,6	8,3	1,2	85	290

Metric/Inch Measuring contacts: carbide ball Ø 2 mm

No.	Range [mm]	Type	Accuracy	Protection	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-947	50 - 80	Fig. 3	0,04 mm	IP67	1,2-1,7	8,3	2,4	132	370
209-948	70 - 100	Fig. 3	0,04 mm	IP67	1,2-1,7	8,3	2,4	132	375
209-949	90 - 120	Fig. 3	0,04 mm	IP67	1,2-1,7	8,3	2,4	132	380
209-950	40 - 90	Fig. 3	0,05 mm	IP67	1-1,8	8,3	2,4	192	420

Metric/Inch Measuring contacts: carbide bevel (R = 0,1 mm)

No.	Range [mm]	Type	Accuracy	Protection	Measuring force [N]	A [mm]	B [mm]	L [mm]	Mass [g]
209-934	2,5 - 12,5	Fig. 1	0,03 mm	IP67	0,8-1,2	0,7	0,4	12	245




Figure 1




Figure 2




Figure 3




Figure 4

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

External Dial Caliper Gauges

External Dial Caliper Gauges Metric

This analog External Dial Caliper Gauge offers you the following benefits:

- Excellent resistance against water and dust (IP65 protection level)
- Optimized measuring force
- Ergonomically designed to lie securely in your hand when measuring



209-405

Metric — Measuring contacts: bevel radius 0,4 mm (209-405), 0,75 mm (209-921)

No.	Range [mm]	Graduation [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-405	0 - 20	0,01	0,03 mm	IP 65	1,1-1,6	Fig. 1	24,6	24,6	85	210
209-921	0 - 50	0,05	0,05 mm	IP 65	0,8-1,7	Fig. 1	30	30	167	430

Metric — Measuring contacts: carbide ball Ø 1,5 mm, Ø 3 mm (209-911)

No.	Range [mm]	Graduation [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-400	0 - 10	0,005	0,015 mm	IP 65	0,8-1,2	Fig. 4	19,1	0,9	35	165
209-402	0 - 10	0,005	0,015 mm	IP 65	0,8-1,2	Fig. 2	19,1	18,6	35	170
209-404	0 - 20	0,01	0,03 mm	IP 65	1,1-1,6	Fig. 2	24,7	24,6	85	210
209-407	0 - 20	0,01	0,03 mm	IP 65	1,1-1,6	Fig. 4	24,7	2,5	85	200
209-911	0 - 50	0,05	0,05 mm	IP 65	0,8-1,7	Fig. 2	30	30	167	430

Metric — Measuring contacts: carbide ball Ø 1,5 mm / bevel radius 0,4 mm

No.	Range [mm]	Graduation [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-401	0 - 10	0,005	0,015 mm	IP 65	0,8-1,2	Fig. 6	18,8	0,9	35	165
209-406	0 - 20	0,01	0,03 mm	IP 65	1,1-1,6	Fig. 3	24,7	2,5	80	200

Metric — Measuring contacts: carbide ball Ø 3 mm/ carbide ball Ø 3 mm, bevel radius 0,75 mm (209-922)

No.	Range [mm]	Graduation [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-912	0 - 50	0,05	0,05 mm	IP 65	0,8-1,7	Fig. 4	30	4,6	169	400
209-922	0 - 50	0,05	0,05 mm	IP 65	0,8-1,7	Fig. 3	30	4,6	169	400

Metric — Measuring contacts: disk measuring faces Ø 6 mm

No.	Range [mm]	Graduation [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-403	0 - 10	0,005	0,02 mm	IP 65	0,8-1,2	Fig. 5	21,7	14,8	36	175



Figure 1



Figure 2



Figure 3



Figure 4



Figure 5



Figure 6

Optional accessories

No.	Description
63AAA437	Holder for Digital Caliper Gauge, for 209-901 up 209-901 up to 209-922
011530	Holder for Digital Caliper Gauge, for 209-300 up 209-300 up to 209-457 except: 209-310, -311, -31 -311, -312, -361, -362, -363



209-402




209-401




209-406



209-403

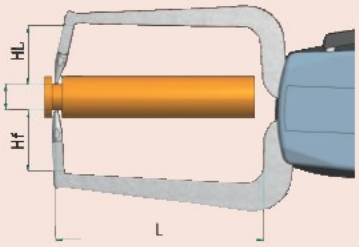

Figures 1/2/5



Figures 3/4/6L=Maximum reach of contact arms over workpiece L=Maximum reach of contact arms over workpieceHb=Maximum Hb=Maximum penetration depth of upper contactHf=Maximum Hf=Maximum penetration depth of lower contact

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

on. Product descriptions,

External Digimatic Caliper Gauges

Series 209

- Digital Caliper Gauge enables measurements in hard-to-reach places
- Excellent resistance against water and dust IP67 level

Functions	Series 209
ABS/INC switchable	●
Auto Power OFF after 1/5/10 min. non use	●
Analog bar resolution switchable	●
OFFSET	●
mm/inch conversion	●
HOLD	●
SET key	●
DATA key	●
DATA-Logger (100 measured values)	●
Max. reading	●
Min. reading	●
Tolerance LED (green/red)	●
Tolerance judgement	●

Specifications

Digital step	0,001 / 0,002 / 0,005 / 0,01 / 0,02 / 0,05 mm
Power supply	2 batteries LR3 (AAA)
Delivered	Including battery and certificate of inspection

Optional accessories

No.	Description
011551	Digimatic Interface Series 209, Digital Caliper Gauge
937387	Digimatic Cable, Round 6-Pin Type, 1 m
965013	Digimatic Cable, Round 6-Pin Type, 2 m
06AFM380E	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Round 6-Pin Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790E	Connection Cable E for U-WAVE, Round 6-Pin Type
63AAA438	Holder for Digital Caliper Gauge, for 209-930 up to 209-958
63AAA437	Holder for Digital Caliper Gauge, for 209-901 up to 209-922

Consumable spares


No.	Description
011511-1	Battery LR03 (AAA), 4x



209-931



209-953



L=Maximum reach of contact arms over workpiece
Hb=Maximum penetration depth of upper contact
Hf=Maximum penetration depth of lower contact



209-930



209-933



209-951



209-952

Metric/Inch Bevel radius 0,75 / carbide ball ø3 mm + bevel radius 0,75 (209-958)

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-957	0 - 50	0,06 mm	IP67	0,8-1,7	Fig. 5	30	30	167	490
209-958	0 - 50	0,06 mm	IP67	0,8-1,7	Fig. 6	30	4,3	169	460

Metric/Inch Measuring contacts: carbide ball Ø 1,5 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-930	0 - 10	0,015 mm	IP67	0,8-1,2	Fig. 1	19,1	18,6	36	240
209-932	0 - 20	0,03 mm	IP67	1,1-1,6	Fig. 1	24,7	24,6	81	270
209-943	0 - 10	0,015 mm	IP67	0,8-1,2	Fig. 2	19,1	9	36	255
209-933	0 - 20	0,03 mm	IP67	1,1-1,6	Fig. 2	24,7	2,5	86	430

Metric/Inch Measuring contacts: carbide ball Ø 3 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-951	0 - 30	0,04 mm	IP67	0,9-1,6	Fig. 1	30	30	114	430
209-952	0 - 30	0,04 mm	IP67	0,9-1,6	Fig. 2	30	4	116	410
209-954	0 - 50	0,05 mm	IP67	0,8-1,7	Fig. 1	30	30	167	490
209-955	0 - 50	0,05 mm	IP67	0,8-1,7	Fig. 2	30	4,3	169	460

Metric/Inch Measuring contacts: disk measuring faces Ø 50 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-953	0 - 30	0,06 mm	IP67	0,9-1,6	Fig. 4	36	24	116	430
209-956	0 - 50	0,06 mm	IP67	0,8-1,7	Fig. 4	36	24	167	500

Metric/Inch Measuring contacts: disk measuring faces Ø 6 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-931	0 - 10	0,02 mm	IP67	0,8-1,2	Fig. 3	21,7	14,8	36	245



Figure 1




Figure 2



Figure 3




Figure 4



Figure 5



Figure 6

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Internal / External Digimatic Caliper Gauges
Power Supply: Wireless Charging

Series 209

This External Dial Caliper Gauge offers you the following benefits:

- Excellent resistance against water and dust (IP67 protection level)
- Optimized measuring force
- Ergonomically designed to lie securely in your hand when measuring
- Wireless charging with integrated lithium polymer battery



209-927



209-928



209-929



209-925



209-926

Metric/Inch — 1. Measuring contacts: carbide R = 0,12 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	A [mm]	B [mm]	L [mm]	Mass [g]
209-927	2,5 - 12,5	0,01 mm	IP 67	0,8-1,3	Fig. 4	0,7	0,6	12	160

Metric/Inch — 2. Measuring contacts: carbide ball Ø 0,6 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	A [mm]	B [mm]	L [mm]	Mass [g]
209-928	5 - 20	0,01 mm	IP 67	0,8-1,3	Fig. 3	2,2	0,8	44	160

Metric/Inch — 3. Measuring contacts: carbide ball Ø 1 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	A [mm]	B [mm]	L [mm]	Mass [g]
209-929	10 - 25	0,01 mm	IP 67	0,8-1,3	Fig. 3	4	1,5	46	160

Metric/Inch — 4. Measuring contacts: carbide ball Ø 1,5 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-925	0 - 15	0,01 mm	IP 67	1,3-1,5	Fig. 2	17	17	45	170

Metric/Inch — 5. Measuring contacts: carbide R = 0,4 mm

No.	Range [mm]	Accuracy	Protection	Measuring force [N]	Type	Hb [mm]	Hf [mm]	L [mm]	Mass [g]
209-926	0 - 15	0,015 mm	IP 67	1,3-1,5	Fig. 1	12	12	45	170



Figure 1




Figure 2




Figure 3




Figure 4


Functions	Series 209
ABS/INC switchable	●
Auto Power OFFafter 1/5/10 min. non use after 1/5/10 min. non use	●
Analog bar resolution switchable	●
OFFSET	●
mm/inch conversion	●
HOLD	●
SET key	●
DATA key	●
DATA-Logger (100 measured values)	●
Max. reading	●
Min. reading	●
Tolerance LED (green/red)	●
Tolerance judgement	●

Specifications


Digital step	0,001 / 0,002 / 0,005 / 0,01 mm
Power supply	Lithium-Polymer power pack
Delivered	Including certificate of inspection and wireless re-charge charging pad


Optional accessories

No.	Description
63AAA158	Digimatic Interface Adapter, Series 209
937387	Digimatic Cable, Round 6-Pin Type, 1 m
965013	Digimatic Cable, Round 6-Pin Type, 2 m
06AFM380E	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Round 6-Pin Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Trans-mitter-mitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmit-ter-ter
02AZD790E	Connection Cable E for U-WAVE, Round 6-Pin Type
63AAA439	Holder for Digital Caliper Gauge, for 209-925 up 209-925 up to 209-929




63AAA158

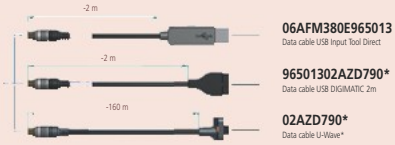



L=Maximum reach of contact arms over workpieceHb=Maxir
Hb=Maximum penetration depth of upper contactHf=Maxim
Hf=Maximum penetration depth of lower contact




L=Maximum reach of contact arms over workpiece
A=Maximum groove depth
B=Minimum groove width

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Dial Tension Gauges

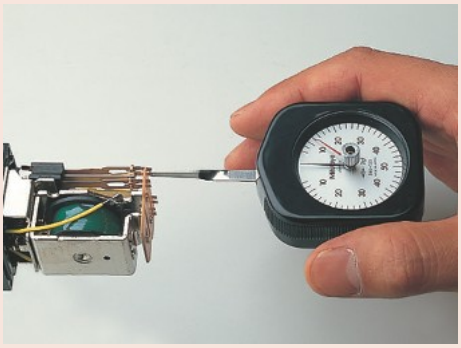

Series 546

This Dial Tension Gauge has a range of applications, offering you the following benefits:

- You can set micro switches, relay springs and valves.
- It enables you testing the measuring force of dial indicators.
- You can also use it for adjusting tension and compression springs.
- A divided dial plate allows you to make measurements in both directions.



546-112




546-137

Peak Hold

No.	Range [N]	Graduation	Accuracy	Mass [g]
546-133	0,01 - 0,1	5 mN	½ graduation	56
546-134	0,03 - 0,3	10 mN	½ graduation	56
546-135	0,06 - 0,5	0,02 N	½ graduation	56
546-136	0,1 - 1	0,05 N	½ graduation	56
546-137	0,15 - 1,5	0,05 N	½ graduation	56
546-138	0,3 - 3	0,1 N	½ graduation	56
546-139	0,6 - 5	0,2 N	½ graduation	56

Standard

No.	Range [N]	Graduation	Accuracy	Mass [g]
546-112	0,006 - 0,05	2 mN	½ graduation	56
546-113	0,01 - 0,1	5 mN	½ graduation	56
546-114	0,03 - 0,3	10 mN	½ graduation	56
546-115	0,06 - 0,5	0,02 N	½ graduation	56
546-116	0,1 - 1	0,05 N	½ graduation	56
546-117	0,15 - 1,5	0,05 N	½ graduation	56
546-118	0,3 - 3	0,1 N	½ graduation	56
546-119	0,6 - 5	0,2 N	½ graduation	56

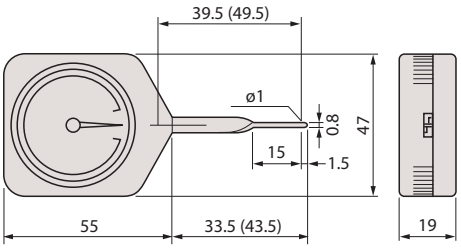


Dimensions in brackets refer to No. 546-112, 546-113, 546-133


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Indicator Stands
Page 293




Precision Vices
Page 303




Plates and Granite Squares
Page 305



Angle Measurement and Squares
Page 308



Feeler Gauges, Rules, Knife Edges
Page 311



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Stands with Hardened Steel Anvils

Series 519, Series 7

This gauge stand with hardened steel anvil offers you the following benefits:

- Standard version with round anvil


Standard accessories


No.	Description
101461	Flat Anvil for Gauge Stand, Ø58mm
101462	Serrated Anvil for Gauge Stand, Ø58mm
21JAA316	Stem Bush for Gauge Stand, 9,53mm to 8mm


Optional accessories

No.	Description
101463	Convex Anvil for Gauge Stand, Ø58mm

101461 for 7002-10
101462 for 7001-10, 519-109-10

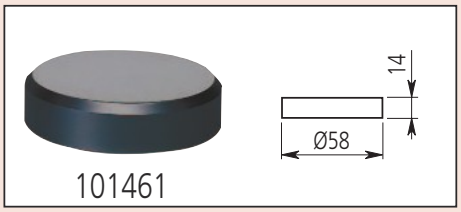

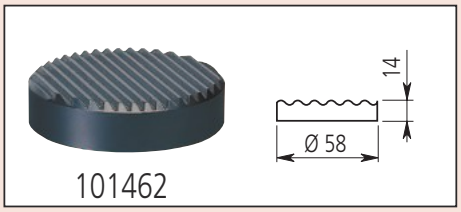

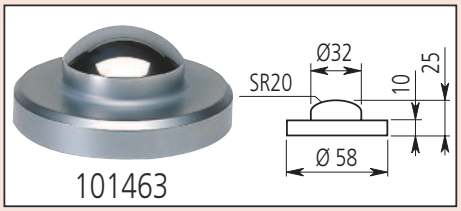



7001-10




7002-10




519-109-10

No.	Effective table dimensions [mm]	Column Ø [mm]	Max. measurement height [mm]	Measuring table	Fine adjustment	Stem hole ø	Perpendicularity table-stem hole [mm/mm]	Table flatness	Mass [kg]
7001-10	Ø 58	30	95	Serrated (101462)	1 mm	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	0,4/100	1,3 µm	4
7002-10	Ø 58	30	95	Flat (101461)	1 mm	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	0,4/100	1,3 µm	4
519-109-10	Ø 58	30	320	Serrated (101462)	1 mm	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	0,4/100	1,3 µm	5,6

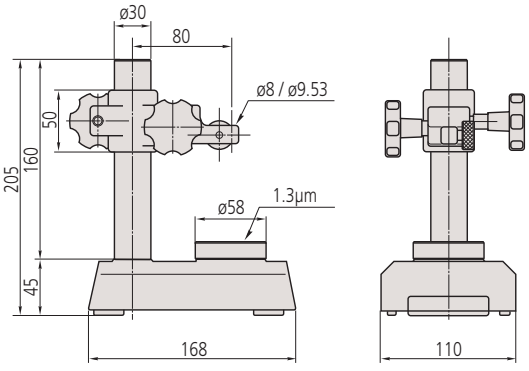

7001-10, 7002-10

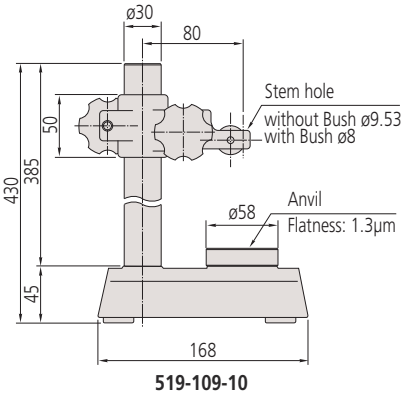

519-109-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Gauge Stands with Hardened Steel Anvils

Series 215, Series 7

This gauge stand with hardened steel anvil offers you the following benefits:

- Standard version with square anvil



7007-10




215-405-10




215-505-10


No.	Effective table dimensions [mm]	Column Ø [mm]	Max. measurement height [mm]	Fine adjustment	Stem hole ø	Perpendicularity table-stem hole [mm/mm]	Table flatness	Mass [kg]
7007-10	90 x 90	30	90	1 mm	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	0,4/100	1,3 µm	5
215-405-10	110 x 110	40	235	1 mm	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	0,4/100	2,3 µm	10,9
215-505-10	150 x 150	50	275	Screw on column	ø 20 mm, ø 3/8" / **9,53 mm**, 8 mm with bush (standard accessory)	0,4/100	2,3 µm	19,7

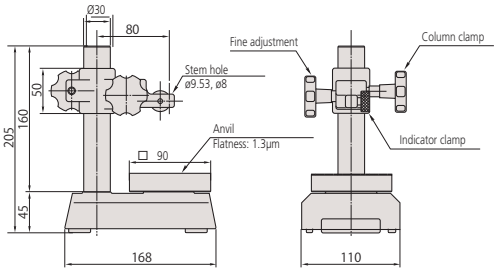

7007-10

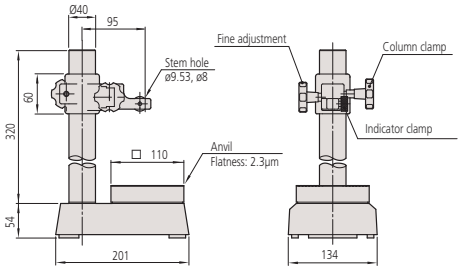

215-405-10

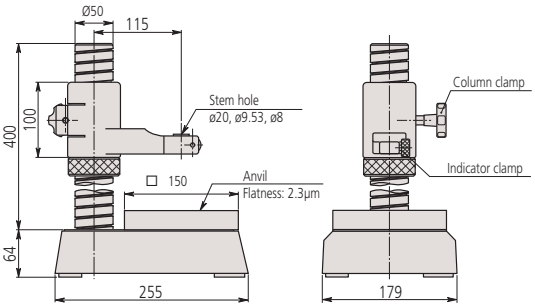

215-505-10

Standard accessories

No.	Description
21JAA316	Stem Bush for Gauge Stand, 9,53mm to 8mm
21JAA329	Stem Bush for Gauge Stand, 20mm to 8mm
21JAA330	Stem Bush for Gauge Stand, 20mm to 9,53mm

21JAA316 only for 7007-10 + 215-405-10
21JAA329 and 21JAA330 only for 215-505-10

Optional accessories

No.	Description
21JAA331	Stem Bush for Gauge Stand, 20mm to 15mm

21JAA331 : only for 215-505-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Stands with Hardened Steel Anvils

Series 913

Standard version

- Simple standard version.

Optional accessories


No.	Description
913-201	Horizontal Holder, for 913-101, 913-102




913-201



913-101




913-101






913-102



913-102



No.	Effective table dimensions [mm]	Column Ø [mm]	Max. measurement height [mm]	Stem hole ø	Mass [kg]
913-101	ø 50	22	100	8 mm	2,3
913-102	60 x 70	22	100	8 mm	3,6


Stands for Precision Bore Gauges

Series 215

- For efficient measurement of multiple small holes with a bore gauge Series 526


Optional accessories

No.	Description
902798	V-Attachment for 215-120-10, Stand for Bore Gauge Bore Gauge

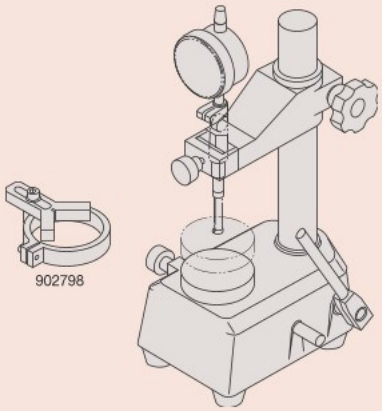



215-120-10

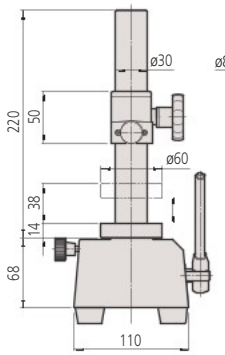

No.	Maximum measuring height [mm]	Measuring stroke [mm]	Effective table dimensions [mm]	Mass [kg]
215-120-10	110	max.38	Ø 60	6,5

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Stands with Granite Bases

Series 912

This gauge stand with granite base offers you the following benefits:

- The base is made of granite and stays free of burrs due to its fine grain composition and the base will stay free of corrosion



912-101

No.	Base size [mm]	Effective table dimensions [mm]	Column Ø [mm]	Max. measurement height [mm]	Throat [mm]	Arm ø [mm]	Stem hole ø	Table flatness	Mass [kg]
912-101	150 x 100 x 40	100 x 100	16	180	150	16	8 mm	2 µm	3

Series 912

This gauge stand with granite base offers you the following benefits:

- The base is made of granite that stays free of burrs due to its fine grain composition and the base will stay free of corrosion



912-105

No.	Base size [mm]	Effective table dimensions [mm]	Column Ø [mm]	Max. measurement height [mm]	Throat [mm]	Fine adjustment [mm]	Stem hole ø	Table flatness	Mass [kg]
912-105	260 x 140 x 50	200 x 140	35	180	120	8	8 mm	2 µm	9,5

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Stands with Granite Bases

Series 215

This gauge stand with granite base offers you the following benefits:

- The base is made of granite that stays free of burrs due to its fine grain composition and the base will stay free of corrosion

Standard accessories

No.	Description
21JAA316	Stem Bush for Gauge Stand, 9,53mm to 8mm
21JAA329	Stem Bush for Gauge Stand, 20mm to 8mm
21JAA330	Stem Bush for Gauge Stand, 20mm to 9,53mm

21JAA316 for 215-150-10, 215-151-10, 215-153-10
21JAA329 and 21JAA330 for 215-156-10


Optional accessories

No.	Description
21JAA331	Stem Bush for Gauge Stand, 20mm to 15mm


only for 215-156-10




215-150-10

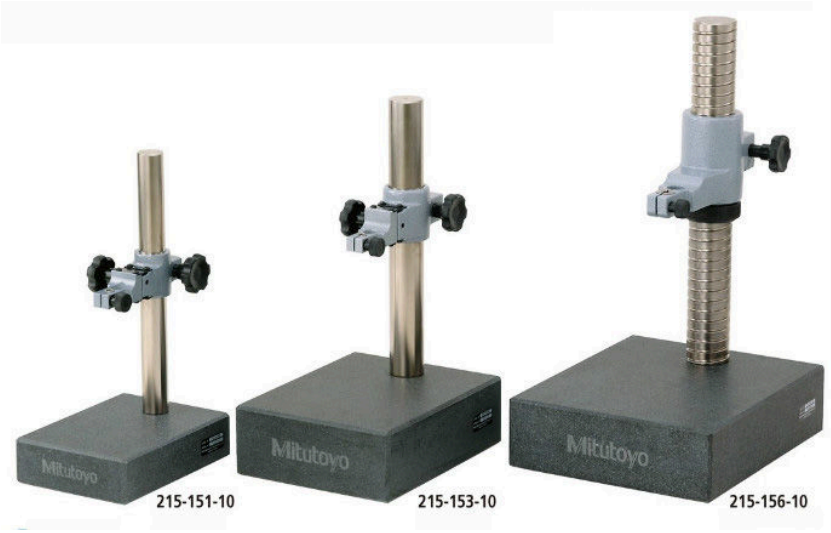


No.	Column Ø [mm]	Max. measure-ment height [mm]	Fine ad-justment [mm]	Stem hole ø	Table flatness	Perpendicu-larity table-stem hole [mm/mm]	Mass [kg]
215-150-10	30	120	1	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	3 µm	0,2/100	5,4
215-151-10	30	260	1	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	3 µm	0,2/100	7,5
215-153-10	40	250	1	ø 3/8" / **9,53 mm** , 8 mm with bush (standard accessory)	3,5 µm	0,2/100	16
215-156-10	50	300	1	ø 20 mm, ø 3/8" / **9,53 mm** 8 mm with bush (standard accessory)	3,5 µm	0,2/100	27,5

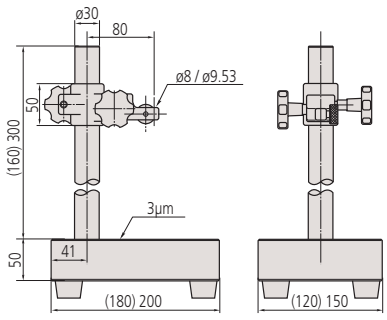

215-151-10 (215-150-10)

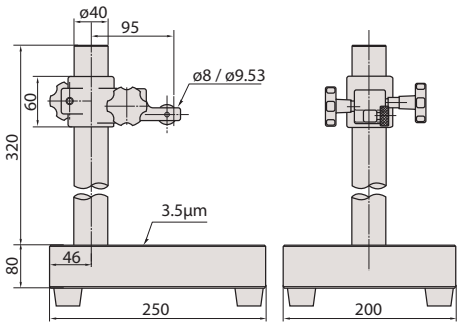

215-153-10

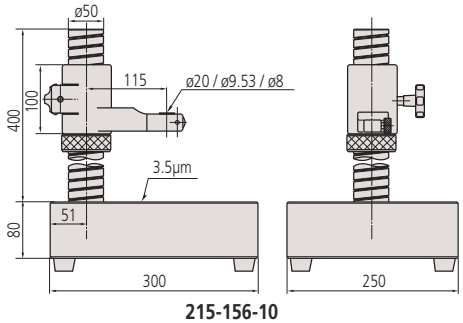

215-156-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Jointed Magnetic Stands

Series 011

- With mechanical locking system and fine adjustment
- Allows a dial indicator to be fixed in any position.



011533



011358




011359




011360

No.	Clamping device	Clamping force (vertical) [N]	Base size (LxWxH)	Total height [mm]	Fine adjustment
011533	magnetic	300	36 x 30 x 35 mm	220	with fine feed wheel 1,3 mm/rotation
011358	magnetic	750	58,5 x 50 x 55 mm	310	with fine feed wheel 1,3 mm/rotation
011359	magnetic	750	58,5 x 50 x 55 mm	397	with fine feed wheel 1,3 mm/rotation
011360	magnetic	900	73 x 50 x 55 mm	517	with fine feed wheel 1,3 mm/rotation


No.	Stem hole ø	Thread Arm/Base	Working radius [mm]	Mass [kg]
011533	8 mm, dovetail	M6 x 1	130	0,45
011358	8 mm, dovetail	M8 x 1,25	200	1,55
011359	8 mm, dovetail	M8 x 1,25	280	1,85
011360	8 mm, dovetail	M8 x 1,25	400	2,1

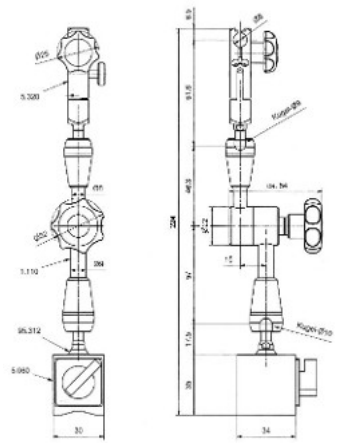


011533

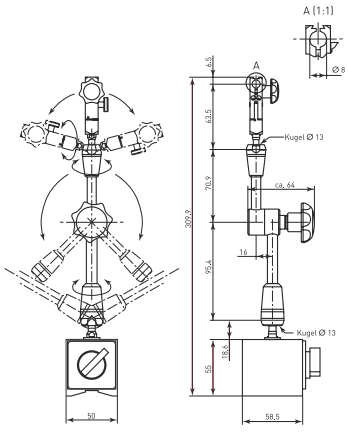

011358

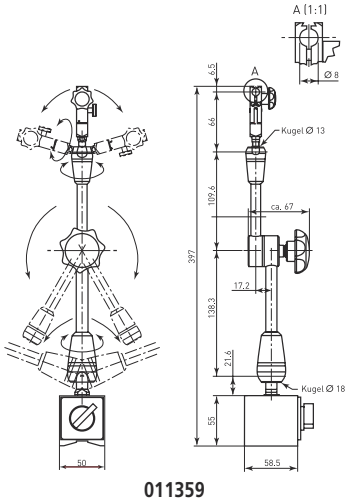

011359

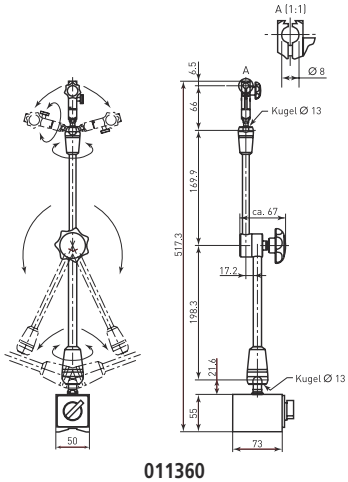

011360

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Jointed Magnetic Stands

Series 7

This jointed magnetic stand offers you the following benefits:

- It comes with a mechanical locking system and allows fine adjustment.
- You can also fix a dial indicator in any position by mechanically clamping the articulated arm.



7031-10




7032-10




7033-10

No.	Clamping device	Clamping force (vertical) [N]	Base size (LxWxH)	Total height [mm]
7031-10	magnetic	300	36 x 30 x 36 mm	214
7032-10	magnetic	600	59 x 50 x 55 mm	345
7033-10	magnetic	600	59 x 50 x 55 mm	425


No.	Fine adjustment	Stem hole ø	Thread Arm/Base	Working radius [mm]	Mass [kg]
7031-10	with fine feed wheel ±4°	6 mm, 8 mm, 9,53 mm, dovetail	M5 x 0,8	154	0,59
7032-10	with fine feed wheel ±4°	6 mm, 8 mm, 9,53 mm, dovetail	M8 x 1,25	250	1,6
7033-10	with fine feed wheel ±4°	6 mm, 8 mm, 9,53 mm, dovetail	M8 x 1,25	346	1,75

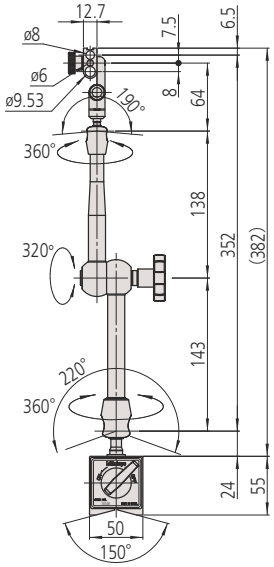

7033-10

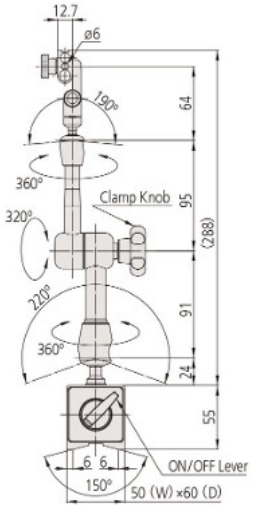

7032-10

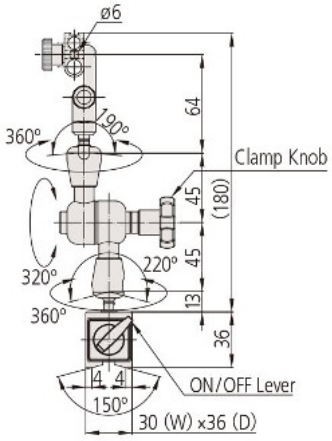

7031-10

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Flexible Jointed Arms

Arms without magnetic base



011361
Dimensions : see 011358



011362
Dimensions : see 011359



011363
Dimensions: see 011360

No.	Stem hole ø	Working radius [mm]	Mass [g]
63AAA130	8 mm, dovetail	Approx. 130	270
21JZA331	6, 8 mm, 3/8" (9,53 mm), dovetail	Approx. 154	380
011361	8 mm, dovetail	Approx. 200	400
21JZA332	6, 8 mm, 3/8" (9,53 mm), dovetail	Approx. 250	610
011362	8 mm, dovetail	Approx. 280	800
21JZA333	6, 8 mm, 3/8" (9,53 mm), dovetail	Approx. 346	830
011363	8 mm, dovetail	Approx. 400	900

Bases

Magnetic and pneumatic bases witout arm



63AAA470




7013-10



011364

No.	Clamping device	Clamping force (vertical) [N]	Base size (LxWxH)	Thread Arm/Base	Mass [g]
63AAA470	magnetic	300	36 x 30 x 35 mm	M6 x 1	200
63AAA131	magnetic	750	58,5 x 50 x 55 mm	M8 x 1,25	980
7013-10	magnetic	600	58,5 x 50 x 55 mm	M8 x 1,25	990
011364	magnetic	900	73 x 50 x 55 mm	M8 x 1,25	1260
63AAA671	pneumatic	300	D= 88 mm	M8 x 1,25	360



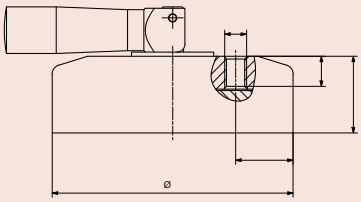

63AAA671

Application of the pneumatic base 63AAA671on a granite plate with indicator and flexible jointed arm (optional)







M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Magnetic Stands

Series 7

- V-block base type.

Standard accessories


No.	Description
02AZC291	Stem Bush for Magnet Stand, 9,53mm to 8mm

for 7010S-10, 7011S-10, 7015-10


Optional accessories

No.	Description
02AZC282	Cross arm for Magnet Stand, 300mm


for 7010S-10, 7011S-10, 7015-10

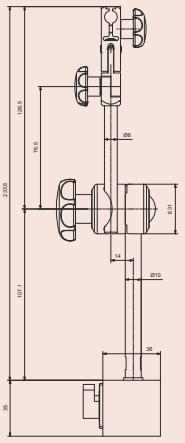

63AAA670

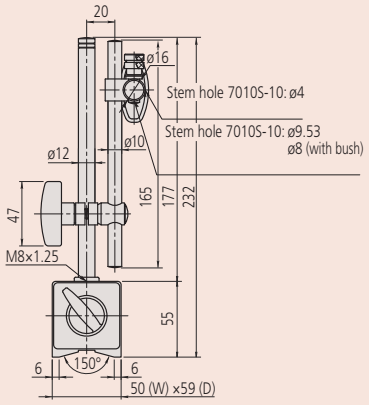

7010S-10

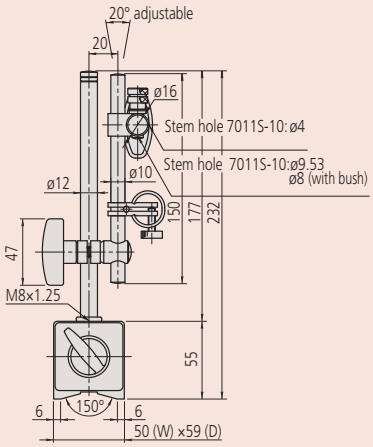

7011S-10



63AAA670



7010S-10



7011S-10



7015-10

No.	Clamping device	Clamping force (vertical) [N]	Base size (LxWxH)	Total height [mm]	Fine adjustment	Stem hole ø	Working radius [mm]	Thread Arm/Base	Mass [kg]
63AAA670	magnetic	300	36 x 30 x 35 mm	234	with fine feed wheel 1,3 mm/ rotation	8 mm, dove-tail	110	M6 x 1	0,47
7010S-10	magnetic	600	59 x 50 x 55 mm	232	None	3/8" / 9,53 mm, 4 mm, 8 mm (with stem bush)	165	M8 x 1,25	1,38
7011S-10	magnetic	600	59 x 50 x 55 mm	232	with fine adjustment knob	3/8" / 9,53 mm, 4 mm, 8 mm (with stem bush)	150	M8 x 1,25	1,49
7015-10	magnetic	600	59 x 50 x 55 mm	232	with fine feed wheel +-4°	3/8" / 9,53 mm, 6 mm, 8 mm (with stem bush)	170,5	M8 x 1,25	1,37



With fine feed wheel (63AAA670, 7015-10).



With fine adjustment knop (7011S-10).

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Magnetic Stands

Series 7

With V-block base and flexible arm.



7012-10

No.	Clamping device	Clamping force (vertical) [N]	Base size (LxWxH)	Total height [mm]	Stem hole ø	Thread Arm/ Base	Mass [kg]
7012-10	magnetic	600	59 x 50 x 55 mm	396	6 mm, 3/8" / 9,53 mm, 8 mm (with stem bush)	M8 x 1,25	1,5

Series 7

This is a mini type of magnetic stand that offers you the following benefits:

- Mini measuring stand without magnet ON/OFF.
- It is designed to accept dial test indicators with 6 mm or 8 mm diameter stems, or dovetail.





7014-10


No.	Clamping device	Clamping force (vertical) [N]	Base size [mm]	Total height [mm]	Stem hole ø	Working radius [mm]	Mass [g]
7014-10	magnetic	150	ø 30	106	6 mm, 8 mm, dove-tail	68	170

Standard accessories

No.	Description
02AZC291	Stem Bush for Magnet Stand, 9,53mm to 8mm

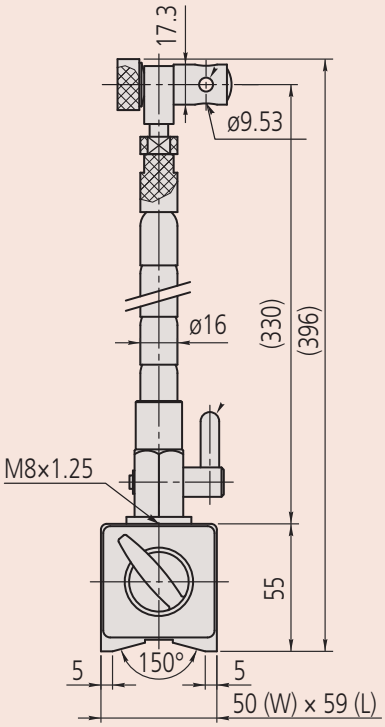



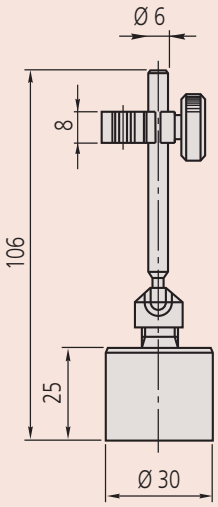

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Precision Vices

Series 930

- It is made of tool steel, hardened and precision ground.
- It has a horizontally ground V-groove in the moveable jaw.

Specifications


Parallelism	0,002 mm / 100 mm
Squareness	0,005 mm / 100 mm

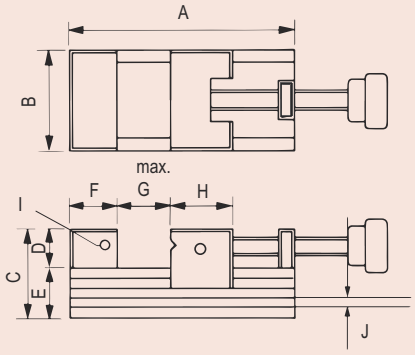

930-602



930-611

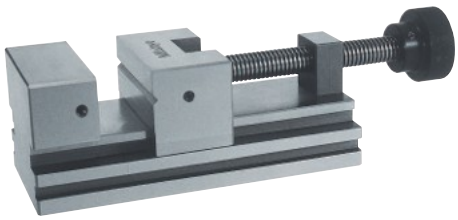

930-602


No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J H x D [mm]	Mass [kg]
930-611	90	60	50	25	25	25	30	30	M5	6 x 6	1,6
930-601	160	70	62	30	32	33	80	45	M6	7 x 7	4
930-602	210	90	80	40	40	40	120	50	M6	8 x 7	7,6
930-612	285	120	90	40	50	55	150	70	M6	10 x 7	17,4


Series 930

- It is made of tool steel, hardened and precision ground.
- With hydraulic system for max. clamping force of 14,7 kN.
- It has a horizontally ground V-groove in the movable jaw.

Specifications

Parallelism	0,002 mm / 100 mm
Squareness	0,03 mm / 100 mm

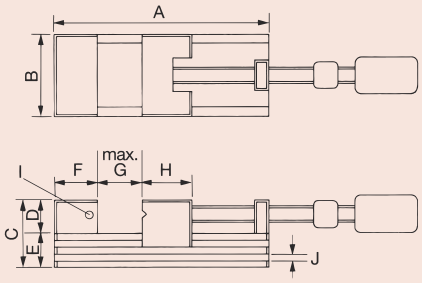

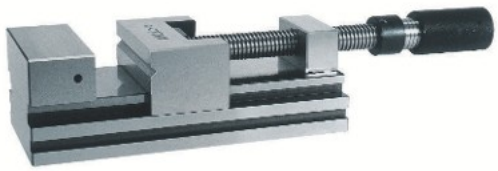

930-616


No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J H x D [mm]	Mass [kg]
930-616	285	120	90	40	50	55	150	70	M6	10 x 7	17,7


Series 930

- It is made of PET plastics, light weight, and protecting workpieces from scratches.

Specifications

Parallelism	0,02 mm
Squareness	0,03 mm (930-641), 0,05 mm (930-642)

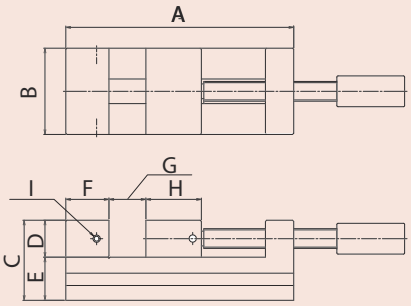

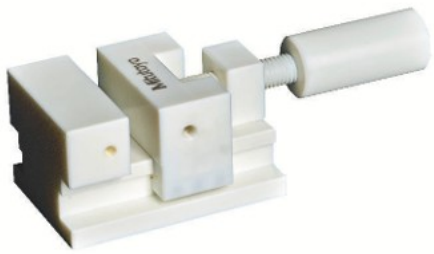

930-641

No.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	Mass [g]
930-641	90	60	50	25	25	25	30	30	M5	350
930-642	160	70	62	30	32	33	80	45	M6	700

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Precision Vices

Series 930


This precision vice has a pull-down clamping action and offers you the following benefits:
- It gives you high accuracy for precision grinding, milling, measuring and eroding.
- It is made of tool steel, hardened and precision ground.



930-630



930-631



930-607




930-632

No.	Remarks	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J H x D [mm]	Mass [kg]
930-606	V-groove (moveable jaw) vertical and horizontal	160	70	62	30	32	33	80	45	M6	8 x 7	3
930-607	V-groove (moveable jaw) vertical and horizontal	210	90	80	40	40	40	120	50	M6	10 x 7	5,8
930-630	V-groove (moveable jaw) vertical	75	34	35	15	20	20	25	30	M4	Ø 8 x 4	0,38
930-631	V-groove (moveable jaw) horizontal	110	45	45	20	25	25	50	35	M5	6 x 6	1
930-632	V-groove (moveable jaw) horizontal	285	120	90	40	50	60	150	70	M6	12 x 7	13,5
930-633	V-groove (moveable jaw) none	370	175	95	45	50	60	200	110	M8	12 x 10	28,7

Specifications

Parallelism	0,002 mm / 100 mm
Squareness	0,005 mm / 100 mm

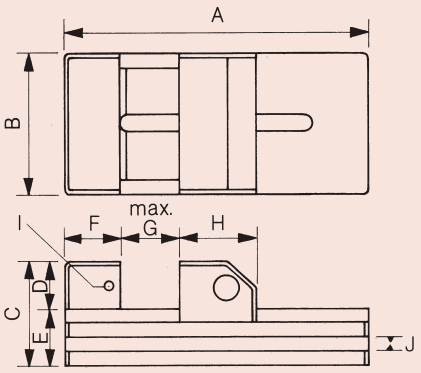


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Precision Sine Plates

Series 930


- Sine bar style of auxiliary plate.
- It is made of tool steel, hardened and precision ground.
- Accurate angle setting is made by gauge blocks, max. 45°.
- 930-626 Workpiece can be fixed on plate surface by tap holes and stoppers on side.
- 930-628 and 930-629 can set the angle at two directions which go straight angularly.
- 930-629 Permanently magnet chuck is adapted.

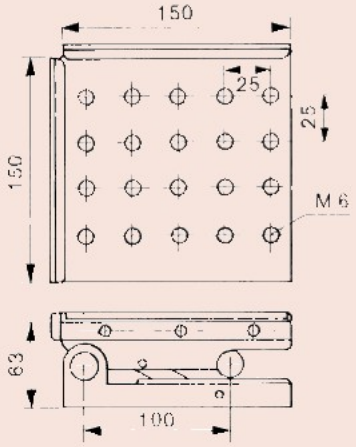

930-626

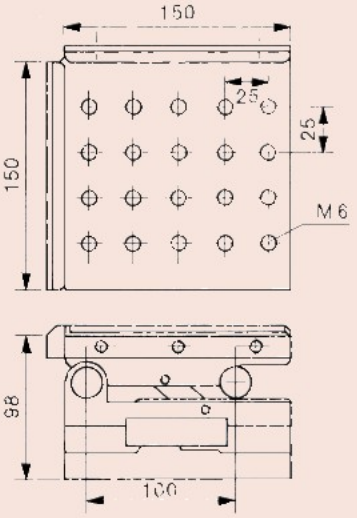

930-628

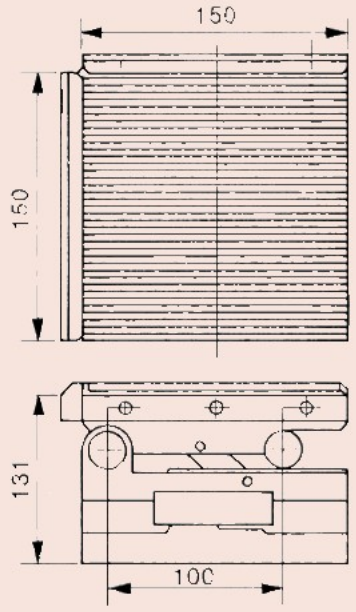

930-629



930-626



930-628



930-629

No.	Parallelism	Squareness	Remarks	Setting accuracy at 45°	Mass [kg]
930-626	0,002 mm / 100 mm	0,005 mm / 100 mm	With M6 clamping holes	±15"	7,6
930-628	0,002 mm / 100 mm	0,005 mm / 100 mm	Compound-axis type with angle in two directions With M6 clamping holes	±15"	11,3
930-629	0,002 mm / 100 mm	0,005 mm / 100 mm	Coumpound-axis type With lever-operated magnetic chuck	±15"	16,5


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Cast Iron Surface Plates

Series 902

- A ribbed design gives you rigidity with minimum weight, and a special cast iron confers a high degree of wear resistance.
- The suface of the plate is scraped.

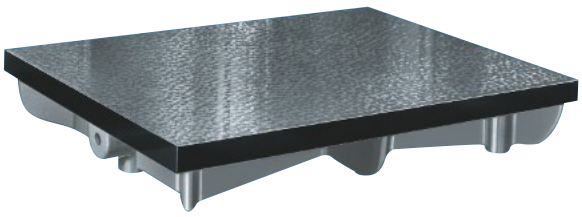

902-304

No.	Dimensions L x W x H [mm]	Accuracy	Mass [kg]
902-301	300 x 300 x 85	According to DIN 876; Grade 1 : fine scraped	15
902-302	400 x 400 x 90	According to DIN 876; Grade 1 : fine scraped	35
902-303	500 x 400 x 100	According to DIN 87; Grade 1 : fine scraped	40
902-304	600 x 500 x 120	According to DIN 876; Grade 1 : fine scraped	65
902-305	800 x 500 x 140	According to DIN 876; Grade 1 : fine scraped	95
902-306	1000 x 750 x 170	According to DIN 876; Grade 1 : fine scraped	210
902-101	300 x 300 x 85	According to DIN 876; Grade 3 : fine planed	15
902-102	400 x 400 x 90	According to DIN 876; Grade 3 : fine planed	35
902-103	500 x 400 x 100	According to DIN 876; Grade 3 : fine planed	40
902-104	600 x 500 x 120	According to DIN 876; Grade 3 : fine planed	65
902-105	800 x 500 x 140	According to DIN 876; Grade 3 : fine planed	95
902-106	1000 x 750 x 170	According to DIN 876; Grade 3 : fine planed	210

Granite Squares 90°

Series 972

- It is made of natural hard stone, with two sides precision ground.



972-106

No.	Length [mm]	Width [mm]	Accuracy	Delivered	Mass [kg]
972-106	300 x 200	50	Perpendicularity: DIN 875 Flatness: DIN 876 Grade 00	With certificate of inspection	6,5
972-107	400 x 250	50	Perpendicularity: DIN 875 Flatness: DIN 876 Grade 00	With certificate of inspection	10
972-108	500 x 300	60	Perpendicularity: DIN 875 Flatness: DIN 876 Grade 00	With certificate of inspection	17
972-109	600 x 400	70	Perpendicularity: DIN 875 Flatness: DIN 876 Grade 00	With certificate of inspection	30

Optional accessories

No.	Description
902-930	Stand (Angle Steel), for Cast Iron Plate 800x500x140mm
902-931	Stand (Angle Steel), for Cast Iron Plate 1000x750x170mm



Stand for Series 902
Only available for
902-305, 902-306, 902-105, 902-106

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Granite Surface Plates DIN 876

Specifications

Hardness	HV 850-900
Flexural strength	13-22 N/mm²
Compressive strength	Approx. 280 N/mm²
Coefficient of thermal expansion	(5 to 7,5) x 10^{-6} x K^{-1}



Granite plate and stand (optional)



Dimensions for stand

Series 901

- Surface diamond lapped, side face fine ground, backside fine sawn.
- The optional stand is a welded construction including 3 or 5-point bearings and two adjusting screws.
- Delivered with a certificate of inspection

1. Accuracy Grade 00

No.	Dimensions L x W x H [mm]	Accuracy	Max. workpiece load [kg]	Mass [kg]
901-131	400 x 250 x 50	DIN 876 grade 00	50	15
901-132	400 x 400 x 50	DIN 876 grade 00	60	25
901-133	630 x 400 x 70	DIN 876 grade 00	65	53
901-134	630 x 630 x 70	DIN 876 grade 00	75	83
901-135	1000 x 630 x 100	DIN 876 grade 00	150	189
901-136	1000 x 1000 x 100	DIN 876 grade 00	250	300
901-137	1200 x 800 x 160	DIN 876 grade 00	600	460
901-138	1600 x 1000 x 160	DIN 876 grade 00	650	768
901-139	2000 x 1000 x 220	DIN 876 grade 00	750	1.320

2. Accuracy Grade 0

No.	Dimensions L x W x H [mm]	Accuracy	Max. workpiece load [kg]	Mass [kg]
901-121	400 x 250 x 50	DIN 876 grade 0	100	15
901-122	400 x 400 x 50	DIN 876 grade 0	120	25
901-123	630 x 400 x 70	DIN 876 grade 0	130	53
901-124	630 x 630 x 70	DIN 876 grade 0	150	83
901-125	1000 x 630 x 100	DIN 876 grade 0	300	189
901-126	1000 x 1000 x 100	DIN 876 grade 0	500	300
901-127	1200 x 800 x 160	DIN 876 grade 0	1.200	460
901-128	1600 x 1000 x 160	DIN 876 grade 0	1.300	768
901-129	2000 x 1000 x 220	DIN 876 grade 0	1.500	1.320

3. Accuracy Grade 1

No.	Dimensions L x W x H [mm]	Accuracy	Max. workpiece load [kg]	Mass [kg]
901-111	400 x 250 x 50	DIN 876 grade 1	100	15
901-112	400 x 400 x 50	DIN 876 grade 1	120	25
901-113	630 x 400 x 70	DIN 876 grade 1	130	53
901-114	630 x 630 x 70	DIN 876 grade 1	150	83
901-115	1000 x 630 x 100	DIN 876 grade 1	300	189
901-116	1000 x 1000 x 100	DIN 876 grade 1	500	300
901-117	1200 x 800 x 160	DIN 876 grade 1	1.200	460
901-118	1600 x 1000 x 160	DIN 876 grade 1	1.300	768
901-119	2000 x 1000 x 220	DIN 876 grade 1	1.500	1.320

4. Accuracy Grade 2

No.	Dimensions L x W x H [mm]	Accuracy	Max. workpiece load [kg]	Mass [kg]
901-101	400 x 250 x 50	DIN 876 grade 2	100	15
901-102	400 x 400 x 50	DIN 876 grade 2	120	25
901-103	630 x 400 x 70	DIN 876 grade 2	130	53
901-104	630 x 630 x 70	DIN 876 grade 2	150	83
901-105	1000 x 630 x 100	DIN 876 grade 2	300	189
901-106	1000 x 1000 x 100	DIN 876 grade 2	500	300
901-107	1200 x 800 x 160	DIN 876 grade 2	1.200	460
901-108	1600 x 1000 x 160	DIN 876 grade 2	1.300	768
901-109	2000 x 1000 x 220	DIN 876 grade 2	1.500	1.320

Stand

No.	A [mm]	B [mm]	C [mm]	Mass [kg]
901-931	550	350	770	22
901-932	550	550	770	25
901-933	750	550	740	28
901-934	750	750	740	30
901-935	900	600	680	30
901-936	1050	750	680	35
901-937	1450	750	620	40

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Universal Bevel Protractors

Series 187

This universal bevel protector offers you the following benefits:

- Its high-precision angle gauge enables you to take accurate angle measurements of machines, moulds and jigs.
- You can attach it to height gauges.



187-201



187-901-10



187-907-10




187-908-10
with height gage holder

Metric

No.	Graduation	Blade edge angle	Blade length	Mass [g]
187-201	5 ' (0° - 90° - 0°)	30°, 60° edges	137 mm	212
187-901-10	5 ' (0° - 90° - 0°)	60°, 45°, 30° edges	150, 300 mm	390
187-907-10	5 ' (0° - 90° - 0°)	60°, 45° edges	150 mm	284
187-908-10	5 ' (0° - 90° - 0°)	60°, 45° edges	300 mm	318



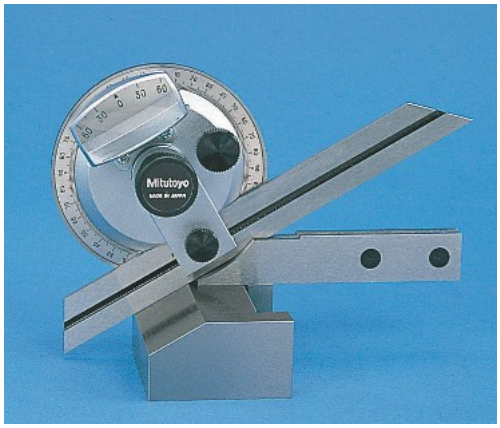

Specifications

Delivered	In a box

Standard accessories

No.	Description
187-106	Steel Rule, **150mm**/6", Metric/Inch
187-107	Steel Rule, **300mm**/12", Metric/Inch
950750	Holder for Mounting on Height Gauges, Metric, Series 187
187-105	Acute angle attachment, for Series 187

187-106 for 187-901-10, 187-907-10
187-107 for 187-901-10, 187-908-10
950750 for Height Gauge with 9x 9 mm scriber shaft
for 187-901-10, 187-907-10, 187-908-10
187-105 for 187-201 and 187-901-10



187-106



187-107



950750



187-105

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digimatic Universal Protractors

Functions	Series 187
ON/OFF	●
DATA (output with cable) / HOLD (display value)	●
Data output	●
ZERO SET	●
PRESET	●
Angle sexagesimal/decimal	●

Specifications

Power supply	1 battery CR-2032
Max. permissible error	2' (0,03°)
Repeatability	1' (0,01°)
Battery life	Approx. 2000 hours
Display	LCD with character height 6,5 mm
Delivered	in a box including battery

Standard accessories

No.	Description
187-106	Steel Rule, **150mm**/6", Metric/Inch
187-107	Steel Rule, **300mm**/12", Metric/Inch
950750	Holder for Mounting on Height Gauges, Metric, Series 187

187-106 for 187-501
187-107 for 187-502
950750 for 187-501, 187-502

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
06AFM380F	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat Straight Type
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790F	Connection Cable F for U-WAVE, Straight, without Data Button
187-105	Acute angle attachment, for Series 187

Consumable spares

No.	Description
05SAA217D	Lithium battery CR-2032, 1 pcs.



950750

Series 187

This is a Digimatic Universal Protractor with data output that offers you the following features:

- It has an easy-to-read digital display.
- It automatically turns off after 10 minutes, and gives you fixed reference points for easy adjustment.
- You can slide and clamp the measuring blade over the entire length.
- You can make fine adjustments to precisely adjust arbitrary angle dimensions.
- It comes with a mounting facility on height gauges and tracers of series 192 via holder.




187-501



187-502

Metric

No.	Digital step	Blade length	Mass [g]
187-501	1' (0,01°)	150 mm	624
187-502	1' (0,01°)	300 mm	662

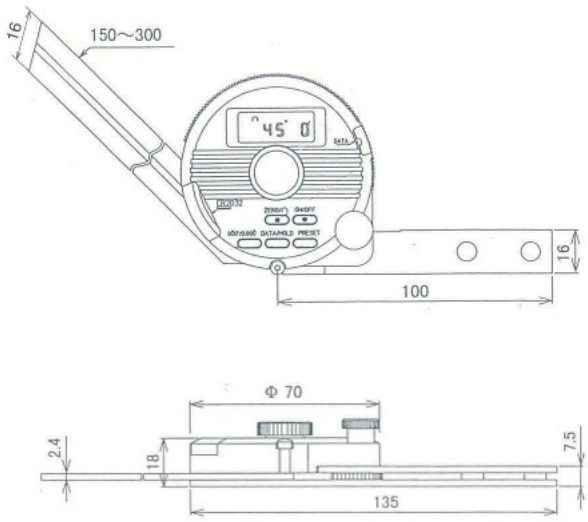

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo


Digital Precision Levels

Series 950

This Digital Precision Level offers you the following benefits:
- You can measure flatness, squareness and angularity.
- Precision support surfaces in aluminium frame provide you with high rigidity and low weight.



950-318

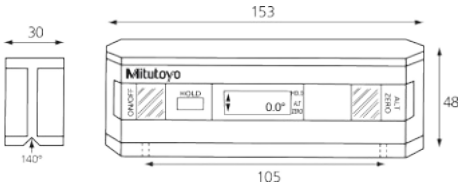

Distance between two M 3 x 0,5 mm Mounting holes


No.	Max. permissible error (degrees)	Repeatability (degrees)	Data output	Sensitivity (degrees)	Mass [kg]
950-317	Horizontal : 0,1 Vertical : 0,2	0,1		0,1	0,3
950-318	0,05 (0 to 10) 0,1 (80 to 90) 0,2 (10 to 80)	0,05	●	0,01 (0 to 9,99) 0,1 (10 to 90)	0,3

Specifications

Range	360° (4 x 90°)
Power supply	Standard battery (9 V) 6LR61
Battery life	Approx. 500 hours
Delivered	Including box

Optional accessories

No.	Description
50AAA983A	RS-232C Output Cable, for series 950

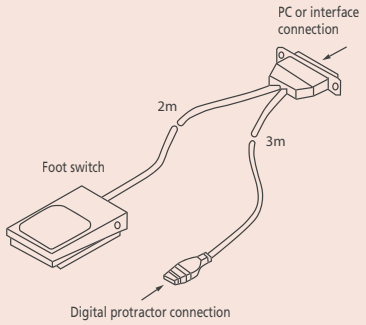

90° Steel Squares

Series 916

This 90° Steel Square offers you the following benefits:
- Three types of square are available.
- It is hardened, and has precision ground edges.

Try square


No.	Length [mm]	Cross section	Accuracy	Grade	Remarks	Mass [g]
916-222	75x50	15x5	According to DIN 875	1	steel	85
916-223	100x70	20x5	According to DIN 875	1	steel	130
916-224	150x100	25x5	According to DIN 875	1	steel	270
916-225	200x130	30x6	According to DIN 875	1	steel	585
916-226	250x165	35x7	According to DIN 875	1	steel	840
916-227	300x200	40x8	According to DIN 875	1	steel	1300
916-232	75x50	15x5	According to DIN 875	2	steel	85
916-233	100x70	20x5	According to DIN 875	2	steel	130
916-234	150x100	25x5	According to DIN 875	2	steel	270
916-235	200x130	30x6	According to DIN 875	2	steel	530

Try square with shoulders

No.	Length [mm]	Cross section	Accuracy	Grade	Remarks	Mass [g]
916-321	75x50	15x5	According to DIN 875	1	steel	60
916-322	100x70	20x5	According to DIN 875	1	steel	180
916-323	150x100	25x5	According to DIN 875	1	steel	400
916-324	200x130	30x6	According to DIN 875	1	steel	675
916-325	250x165	35x7	According to DIN 875	1	steel	1185
916-326	300x200	40x8	According to DIN 875	1	steel	1730
916-332	100x70	20x5	According to DIN 875	2	steel	180
916-333	150x100	25x5	According to DIN 875	2	steel	365
916-334	200x130	30x6	According to DIN 875	2	steel	790
916-335	250x165	35x7	According to DIN 875	2	steel	1320



Try square

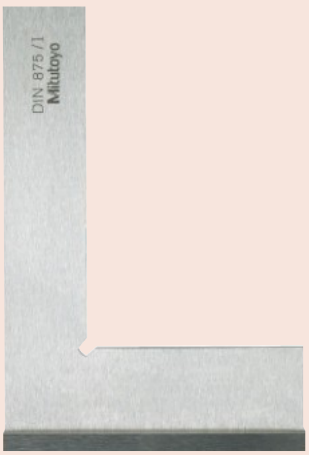

Try square with shoulders

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Feeler Gauges


Series 184 - Feeler Gauge

This feeler gauge is ideal for a variety of measuring tasks and offers you the following benefits:

- Size clearly stamped on each leaf
- Leaves are easy to remove and can be individually locked open.



184-303S

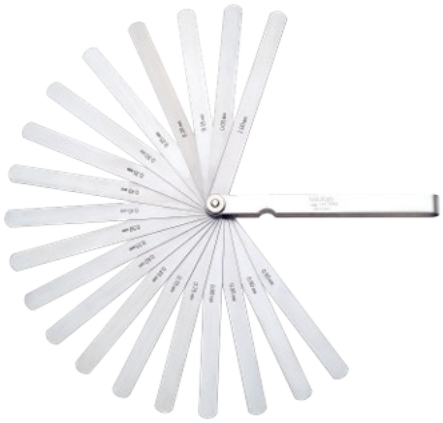

184-304S



184-308S

Metric

No.	Range	Accuracy	Number of leaves	Leaf length [mm]	Mass [g]
184-301S	0,05-0,3 mm by 0,05 mm, 0,4-1 mm by 0,1 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	13	150	121
184-302S	0,03-0,1 mm by 0,01 mm, 0,2-0,5 mm by 0,1 mm, 0,15 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	13	150	67
184-303S	0,05-0,15 mm by 0,01 mm, 0,2-1 mm by 0,05 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	28	150	195
184-304S	0,05-1 mm by 0,05 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	20	150	184
184-305S	0,05-0,3 mm by 0,05 mm, 0,4-1 mm by 0,1 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	13	100	82
184-306S	0,05-0,2 mm by 0,05 mm, 0,3-0,8 mm by 0,1 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	10	100	62
184-307S	0,03-0,1 mm by 0,01 mm, 0,2-0,5 mm by 0,1 mm, 0,15 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	13	100	47
184-308S	0,05-0,2 mm by 0,05 mm, 0,3-0,8 mm by 0,1 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	10	150	91
184-313S	0,05-0,15 mm by 0,01 mm, 0,2-1 mm by 0,05 mm	0,03-0,15 mm: ±0,005 mm, 0,2- 0,5 mm: ±0,012 mm, 0,55-1 mm: ±0,02 mm	28	100	129

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Knife Edge Straight Edge

Series 528

This Knife Edge Straight Edge offers you the following benefits:
- Its straight edges are especially suited to testing the flatness of surfaces.
- It has a hardened, ground and micro lapped measuring edge.



Series 528

No.	Cross section	Section	Accuracy	Length [mm]	Mass [g]
528-100	25 x 6 mm	60°	DIN 874-2	50	40
528-101	25 x 6 mm	60°	DIN 874-2	75	50
528-102	25 x 6 mm	60°	DIN 874-2	100	60
528-110	25 x 6 mm	60°	DIN 874-2	125	80
528-103	25 x 6 mm	60°	DIN 874-2	150	100
528-104	25 x 6 mm	60°	DIN 874-2	200	190
528-105	32 x 7 mm	60°	DIN 874-2	300	370
528-106	40 x 8 mm	60°	DIN 874-2	400	1080
528-107	50 x 10 mm	60°	DIN 874-2	500	1400

Steel Rules

Series 182

These are rigid and fully-flexible rules that offer you the following benefits:
- They have clear graduations on satin-chrome finish.
- The rules are stainless tempered.



182-211



182-131

Metric — Fully-flexible rule

No.	Range [mm]	Graduation	Accuracy	Width	Thickness	Mass [g]
182-211	0 - 150	1 mm / 0,5 mm (on both faces)	±0,15 mm	12 mm	0,4 mm	5
182-231	0 - 300	1 mm / 0,5 mm (on both faces)	±0,15 mm	12 mm	0,4 mm	10
182-251	0 - 450	1 mm / 0,5 mm (on both faces)	±0,15 mm	19 mm	0,4 mm	130
182-271	0 - 600	1 mm / 0,5 mm (on both faces)	±0,2 mm	19 mm	0,4 mm	90


Metric — Wide rigid rule

No.	Range [mm]	Graduation	Accuracy	Width	Thickness	Mass [g]
182-111	0 - 150	1 mm / 0,5 mm (on both faces)	±0,15 mm	19 mm	1,2 mm	27
182-131	0 - 300	1 mm / 0,5 mm (on both faces)	±0,15 mm	25 mm	1,2 mm	72
182-151	0 - 450	1 mm / 0,5 mm (on both faces)	±0,15 mm	30 mm	1,2 mm	130
182-171	0 - 600	1 mm / 0,5 mm (on both faces)	±0,2 mm	30 mm	1,2 mm	175


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Calibration Instruments

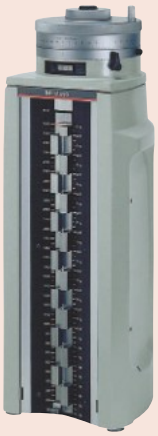

Height Masters
Page 314

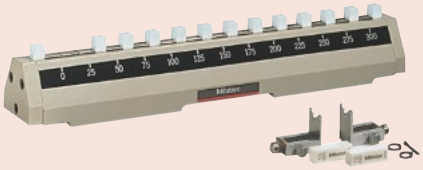

Check Masters
Page 318



Calibration Tools
Page 322

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Height Masters


Series 515

This height master offers you the following benefits:

- You can use it to calibrate and set height gauges and other measuring instruments.
- Models with the staggered arrangement of blocks have two measuring faces on the same level, one facing up and the other down.
- It is supplied in a fitted wooden case.



515-520

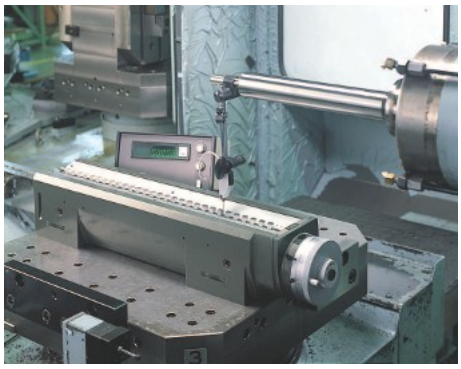

Using in horizontal orientation

Metric

No.	Range [mm]	Graduation [mm]	Block step	Feed error	Retrace error	Mass [kg]
515-520	5 - 610	0,001	10 mm straight	±1,2 µm	1,2 µm	45
515-523	5 - 1010	0,001	10 mm straight	±1,5 µm	1,5 µm	63,5

Specifications

Micrometer adjustment	20 mm
Micrometer feed	0,5 mm
Block pitch accuracy	Range ≤ 310 mm: ±1,5 µm 310 < range ≤ 610 mm: ±2,5 µm 610 < range ≤ 1010 mm: ±3,5 µm
Parallelism of blocks	Range ≤ 610 mm: 1,5 µm 610 < range ≤ 1010 mm: 2 µm


Optional accessories

No.	Description
515-110	Auxiliary Block Kit for Bore Gauge, for 515-520/515-523
900574	Supporting Base for Vertical Operation, for Height Master

900574 : supplied as a standard for 515-523




Single-row 10 mm blocks (movable)



Vertical orientation



Riser block (optional)



Horizontal orientation



900574 (optional)
Supporting base for vertical operation

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digital Height Masters

Functions	Series 515
DATA (output with cable) / HOLD (display value)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●
PRESET	●
ABS / INC (INC ZERO)	●

Specifications


Power supply	2 batteries SR-44
Micrometer adjustment	20 mm
Micrometer feed	0,5 mm
Block pitch accuracy	Range ≤ 310 mm: ±1,5 µm 310 < range ≤ 450 mm: ±2,5 µm 450 < range ≤ 610 mm: ±3,5 µm
Parallelism of blocks	Range ≤ 310 mm: 2 µm 310 < range ≤ 610 mm: 2,5 µm
Battery life	Approx. 1,8 years

Optional accessories


No.	Description
515-111	Auxiliary Block Kit for Bore Gauge, for 515-374/515-376/515-378
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD880G	U-WAVE-T, Buzzer Type, Wireless Transmitter
02AZD730G	U-WAVE-T, IP67 Type, Wireless Transmitter
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V



Staggered 20 mm blocks (movable)



Vertical orientation



Riser block (optional)

Series 515

This is a standard model with a digital display, that offers you the following benefits:

- It gives you all the essential specifications required for a versatile height standard.
- You can use it to calibrate and set height gauges and other measuring instruments.
- Models have two measuring faces on the same level, one facing up and the other down.
- It is supplied in a fitted wooden case



515-374

Metric

No.	Range [mm]	Graduation [mm]	Digital step	Block step	Feed error	Retrace error	Mass [kg]
515-374	10 - 310	0,002	0,001 mm	20 mm staggered	±2 µm	2 µm	9,5
515-376	10 - 460	0,002	0,001 mm	20 mm staggered	±2 µm	2 µm	13,6
515-378	10 - 610	0,002	0,001 mm	20 mm staggered	±2,5 µm	2,5 µm	16

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Universal Height Masters

Series 515

This Universal Height Master offers you the following benefits:


- It is designed for both vertical and horizontal orientations, enabling you to carry out a wide range of applications such as accuracy checking of machine tool table movements.
- It is supplied in a fitted wooden case.



515-322

Metric

No.	Range [mm]	Graduation [mm]	Block step	Feed error	Retrace error	Mass [kg]
515-322	5 - 310	0,001	20 mm staggered	±1 µm	1 µm	23

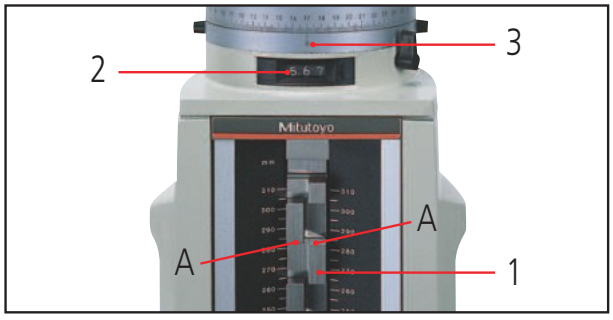

Height A
1. Scale 280 mm
2. Counter 5.67 mm
3. Thimble 0 mm


285.67 mm

Specifications


Micrometer adjustment	20 mm
Micrometer feed	0,5 mm
Block pitch accuracy	±1,5 µm
Parallelism of blocks	1 µm

Optional accessories


No.	Description
515-112	Auxiliary Block Kit for Bore Gauge, for 515-322



Staggered 20 mm blocks (movable)



Vertical orientation




Riser block (optional)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Accessories for Height Master

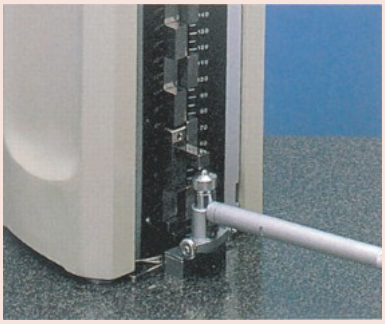

Bore Gauge Series 511
reference setting

Series 515

This is an auxiliary block kit that allows you to efficiently carry out reference-setting of dial bore gauges and tubular inside micrometers (18-150mm).



Metric

No.	Suitable for Height Master	Mass [kg]
515-112	515-322	0,142
515-110	515-520 / 515-523	0,14
515-111	515-374 / 515-376 / 515-378	0,142



Sample application

Series 515

These riser blocks offer you the following benefits:

- You can extend the measuring range up to 900mm by using 150, 300 or 600mm riser blocks.
- They can be used with both standard and digital Height Masters.



515-113



515-114



515-115

Metric

No.	Parallelism	Accuracy	Height [mm]	Mass [kg]
515-113	0,6 µm	±0,6 µm	150	5,7
515-114	0,8 µm	±1 µm	300	11,3
515-115	1 µm	±2 µm	600	31

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Check Masters

Series 515

This Check Master allows you to test precision tool and coordinate measuring machines, and offers you the following benefits:

- You can test the X, Y and Z-coordinate axes of precision tool machines and coordinate measuring machines.
- It consists of rigidly clamped gauge blocks with a step of 10 mm.
- It is supplied in a fitted wooden case.




515-722




515-724 515-723 515-722

Metric


No.	Range [mm]	Mass [kg]
515-720	0 - 310	7
515-721	0 - 450	10
515-722	0 - 610	13
515-723	0 - 1010	22
515-724	0 - 1510	30



Single-row 10 mm blocks



Horizontal orientation



Vertical orientation

Specifications

Block step	10 mm
Block pitch accuracy	Range ≤ 310 mm: ±2,5 µm 310 < range ≤ 610 mm: ±3,5 µm 610 < range ≤ 1010 mm: ±5,0 µm 1010 < range ≤ 1510 mm: ±8,0 µm
Parallelism of blocks	Range ≤ 310 mm: 1,2 µm 310 < range ≤ 610 mm: 1,5 µm 610 < range ≤ 1010 mm: 2,0 µm 1010 < range ≤ 1510 mm: 2,5 µm
Hardness	> 64 HRC
Delivered	In wooden box


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Depth Micro Checkers

Specifications

Anvil block accuracy	±0,5 µm
Block pitch accuracy	±(1+L/150)µm L= lenght to check (mm)

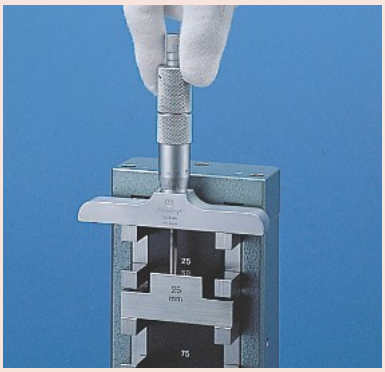

Series 515

This Depth Micro Checker offers you the following benefits:

- The Depth Micro Checker is designed to let you check and help set the range-end points of a depth micrometer.
- A 25 mm carbide gauge block is provided as the reference surface.




515-571

Metric


No.	Range [mm]	Reference length	Mass [kg]
515-570	0 - 150	25, 50, 75, 100, 125, 150 mm	3
515-571	0 - 300	25, 50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300 mm	17

mm

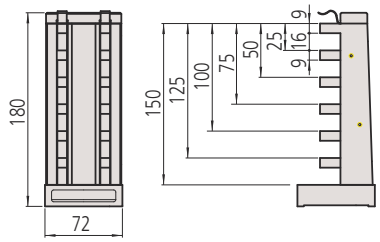

515-570

mm

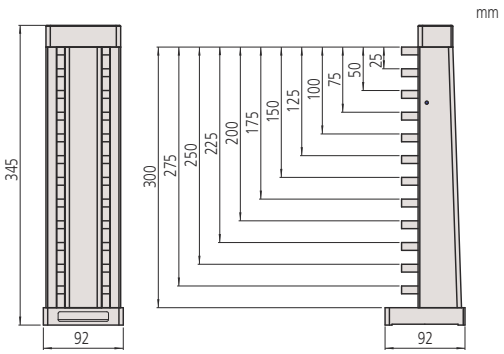

515-571


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CERA Caliper Checkers

Series 515

This CERA Caliper Checker offers you the following benefits:
- You can set and inspect caliper and height gauges.
- It comes with ceramic gauge blocks.

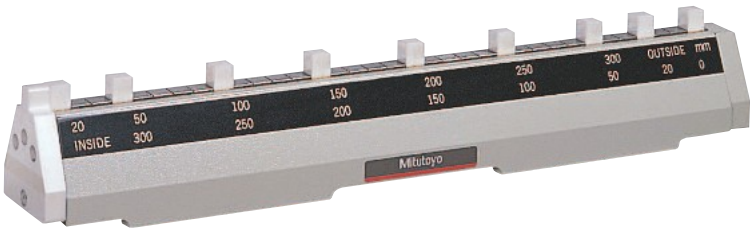


515-555


Metric


No.	Range [mm]	Reference checking lengths available for outside/inside measurement	Mass [kg]
515-555	0 - 300	20, 50, 100, 150, 200, 250 and 300 mm	4
515-556-2	0 - 600	20, 50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550 and 600 mm	8,5

515-555




515-556-2



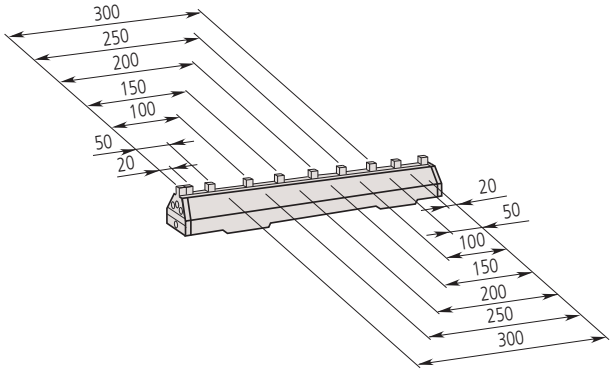

515-555

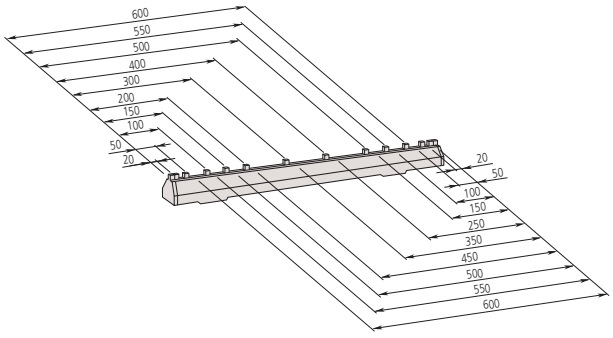


515-556-2


Specifications

Block pitch accuracy	20 - 300 mm: ±0,005 mm 350 - 600 mm: ±0,007 mm
Parallelism of blocks	20 - 300 mm: 0,002 mm 350 - 600 mm: 0,004 mm

Optional accessories

No.	Description
602162	Wooden Case (300 mm), for Caliper Checker
602164	Wooden Case (600 mm), for Caliper Checker

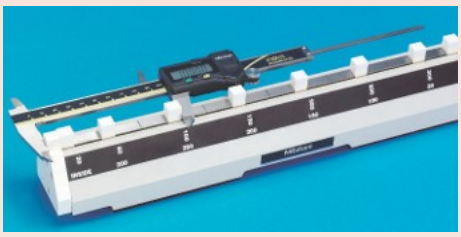

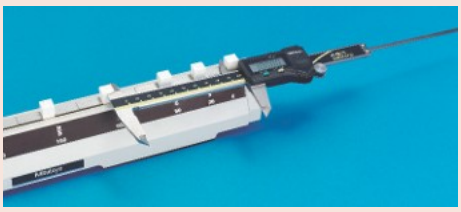



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Inside Micro Checkers

Specifications

Block pitch accuracy	±(1+L/150) µm L = Length to check (mm)



Standard accessories:
support clamps with 2x 10 mm ceramic gauge blocks grade 0

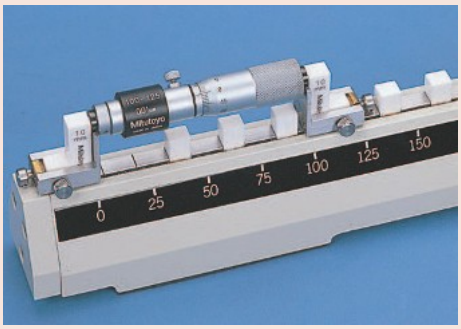


Application with Series 133

Series 515

This Inside Micro Checker offers you the following benefits:


- Applicable for Series 133, 139 and 145 (over 50 mm).
- Not applicable for Series 137, 141, 337 and 339
- It designed to act as a setting standard for inside micrometers.
- It comes with ceramic gauge blocks.

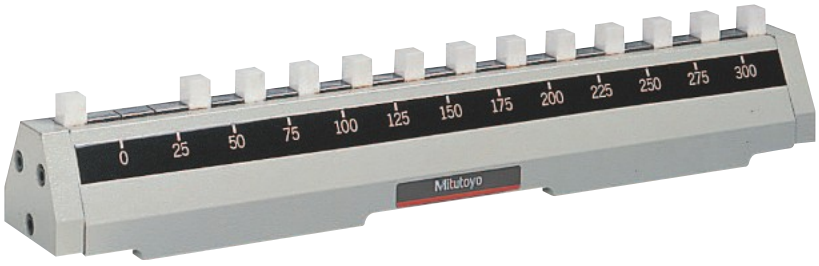


515-585

Metric

No.	Range [mm]	Graduation [mm]	Reference length	Mass [kg]
515-585	25 - 300	25	25, 50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300 mm	3,9
515-586	25 - 600	25	25, 50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300, 325, 350, 375, 400, 425, 450, 475, 500, 525, 550, 575, 600 mm	7

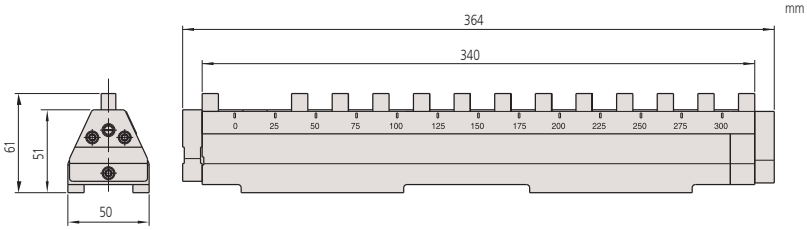

515-585

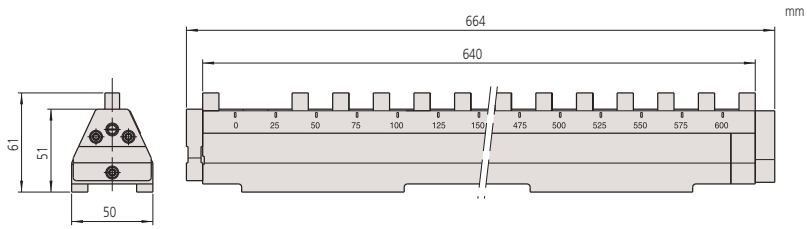

515-586

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Step Masters

Series 516

The Step Master is a gauge that provides you with four small increments in height and offers you the following benefits:

- It is constructed from an assembly of five highly accurate, steel or ceramic gauge blocks.
- Each adjacent step is calibrated to a resolution of 0,01 µm by using an interferometer with an accuracy tolerance of ±0,2 µm.
- It is supplied in a fitted wooden case.
-




516-499 Ceramic type



516-199 Steel type


Metric

No.	Block step	Material	Certificate	Mass [kg]
516-198	10, 5, 2, 1 µm	Steel	Inspection	0,15
516-198-24	10, 5, 2, 1 µm	Steel	Calibration, JCSS	0,15
516-199	300, 100, 50, 20 µm	Steel	Inspection	0,15
516-199-24	300, 100, 50, 20 µm	Steel	Calibration, JCSS	0,15
516-498	10, 5, 2, 1 µm	Ceramic	Inspection	0,14
516-498-24	10, 5, 2, 1 µm	Ceramic	Calibration, JCSS	0,14
516-499	300, 100, 50, 20 µm	Ceramic	Inspection	0,14
516-499-24	300, 100, 50, 20 µm	Ceramic	Calibration, JCSS	0,14

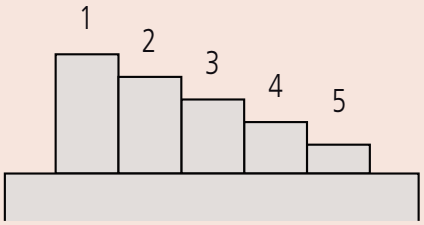

Step value

	1/2	2/3	3/4	4/5
516-198, 516-498	**10 µm**	**5 µm**	**2 µm**	**1 µm**
516-199, 516-499	**300 µm**	**100 µm**	**50 µm**	**20 µm**

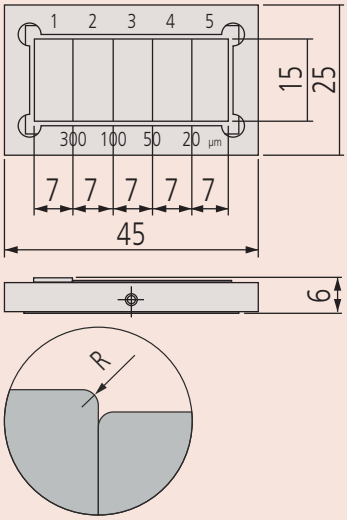

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Glass Scales

Specifications

Accuracy	(1,5+2L/1000) µm L = measured length (mm)
Material	Sodium glass
Thermal expansion coefficient	(8±1) x 10^{-6}/K

Series 182

These high precision glass scales offer you the following benefits:


- They are manufactured using Mitutoyo's leading-edge Linear Scale production technology.
- They are ideal for checking the magnification accuracy of profile projectors and microscopes, as well as the table feed accuracy of measuring equipment.
- It is supplied in a fitted wooden case.
-




182-525-10 / 182-523-10 / 182-522-10 / 182-513-10

Metric


No.	Range [mm]	Graduation [mm]	Thickness of graduation line [µm]	L [mm]	Mass [kg]
182-511-10	0 - 50	0,1	20	75	0,23
182-512-10	0 - 100	0,1	20	125	0,24
182-521-10	0 - 100	0,5	50	130	0,27
182-513-10	0 - 150	0,1	20	175	0,35
182-514-10	0 - 200	0,1	20	225	0,36
182-522-10	0 - 200	0,5	50	230	0,32
182-531-10	0 - 250	1	100	280	0,55
182-523-10	0 - 300	0,5	50	330	0,57
182-524-10	0 - 400	0,5	50	430	0,71
182-525-10	0 - 500	0,5	50	530	0,86
182-532-10	0 - 500	1	100	530	0,86
182-533-10	0 - 750	1	100	780	1,22
182-534-10	0 - 1000	1	100	1030	1,54

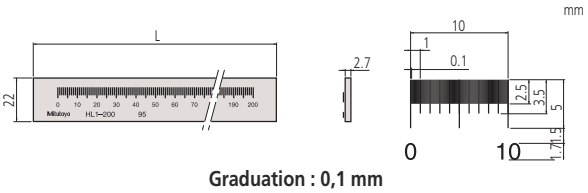

Graduation : 0,1 mm

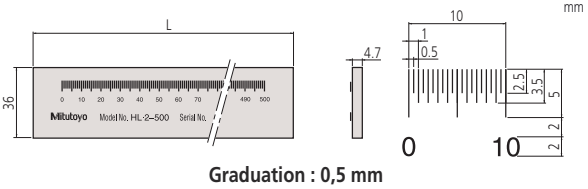

Graduation : 0,5 mm

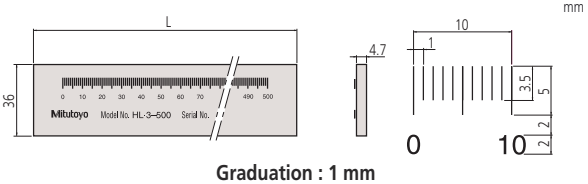

Graduation : 1 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Low Expansion Glass Scales

Series 182

These high precision glass scales offer you the following benefits:

- They are manufactured using Mitutoyo's leading-edge Linear Scale production technology.
- You can use them as a standard for calibrating graduating scales, with high accuracy.
- It is supplied in a fitted wooden case.
-




182-502-60
182-501-60

Metric

No.	Range [mm]	L [mm]	T [mm]	W [mm]	Certificate	Mass [kg]
182-501-50	0 - 250	280	10	20	Inspection	0,75
182-501-60	0 - 250	280	10	20	Calibration, JCSS	0,75
182-502-50	0 - 500	530	20	30	Inspection	1,8
182-502-60	0 - 500	530	20	30	Calibration, JCSS	1,8

mm

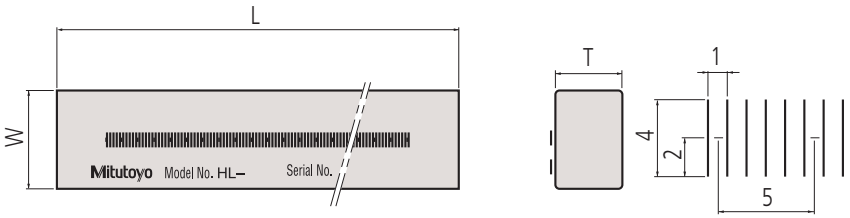

Specifications

Accuracy	(0,5+L/1000) µm L = measured length (mm)
Graduation	1 mm
Thickness of graduation line	4 µm
Material	Low expansion glass
Thermal expansion coefficient	(0±0,02) x 10^{-6}/K

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Calibration Testers

Specifications

Graduation	0.001 mm
Measuring face	Carbide tipped, rotating
Clamping range	Ø 6/8 mm

Optional accessories

No.	Description
12AAK824	Support for Calibration Tester, Horizontal Application with Bore Gauges





Bore Gauge holder 12AAK821 is standard accessory

Specifications

Graduation	0.0002 mm
Measuring face	Carbide tipped, non rotating
Clamping range	Ø 4-10 mm



Series 170

This Calibration Tester offers you the following benefits:

- It enables you to test dial indicators, lever gauges and bore gauges with 0.01mm scale graduation.
- Bore gauges can be supported both horizontally and vertically.



170-102-12

Metric

No.	Range [mm]	Spindle feed error [µm]	Hysteresis	Mass [kg]
170-102-12	0 - 25	±2	0,5 µm	7,5

Series 521

This allows the calibration of digital and analogue indicators, lever gauges and measuring probes with a maximum measuring span of 5 mm.



521-105

Metric

No.	Range [mm]	Spindle feed error [µm]	Hysteresis	Mass [kg]
521-103	0 - 1	±0,2	0,2 µm	7
521-105	0 - 5	±0,8	0,8 µm	7,5

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Calibration Testers i-Checker 2000

Series 170

- i-Checker is specially designed to calibrate dial indicators, dial test indicators, bore gauges, electronic digital indicator gauges and other electronic gauges.
- Inspection can be performed 2.5 times faster compared to the previous model.
- This instrument achieves the high accuracy and therefore guarantees ultra-reliable inspection results.
- Digital indicators equipped with a data output function are checked very efficiently due to spindle positioning at the inspection points and recording of measurement results being under fully automatic control.
- Analog type indicators are inspected in semi-automatic mode with the pointer of the indicator being manually adjusted at each measuring point with automatic transfer of inspection results and movement to the next measuring point.

PROPRIETARY INSPECTION CERTIFICATE



170-402D
with optional accessories

Metric

No.	Range [mm]	Digital step	Accuracy	Mass
170-402D	0 - 100	0,01 µm	±(0,1+4L/1000) µm L = measured length (mm)	20 kg







Specifications

Power supply	100VAC to 240VAC ±10%, 50/60Hz
Max. drive speed	10 mm/s
Drive method	Motor drive, semi automatic, fully automatic only for indicator with data output
Scale	Linear encoder
PC connection	USB

Optional accessories

No.	Description
02ASK000	Test Indicator Accessory Set, I-Checker, For Ø6mm Stem
02ASK180	Test Indicator Accessory Set, I-Checker, For Ø8mm Stem
02ASK040	Stem Bush for I-Checker, For Ø6mm Stem
02ASL150	Stem Bush for I-Checker, For ø10mm Stem
02ASK060	Stem Bush for I-Checker, For Ø12mm Stem
02ASK070	Stem Bush for I-Checker, For Ø15mm Stem
02ASK080	Stem Bush for I-Checker, For Ø20mm Stem
02ASK710	Stem Bush for I-Checker, For Ø28mm Stem
02ASK090	Stem Bush for I-Checker, For **Ø9,525mm** (3/8") Stem
02ASU162	Cylinder Gauge Set, IC-2000



Calibration of Dial Test Indicator
(Lever Type) with optional accessories

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Block Comparators GBCD-250

Optional accessories

No.	Description
02ASW561	Software GB-PAK-A, Vers. 4X, for New GBCD-250 Installation, English Version
02ASF040	Heat Protection Shield, For GBCD-250
02ASP422	RS-232C Cable
02ASD130	Square Gauge Block Holder, For GBCD-250
601644	Cerastone for Gauge Blocks, 150x50x20mm
158-120	Optical Flat, 15mm, D=60mm, 0,1µm
516-650E	Maintenance Kit for Gauge Blocks
516-145-E2	Calibration Master for GB-Comparator, 11pcs., Refer to EA-10/02

Series 565

This Manual Comparator with Dual Gauge Heads offers you the following benefits:

- It performs gauge block calibration according to EN ISO 3650.
- You can easily compare gauge blocks between 0,1 mm and 250 mm with reference gauge blocks.
- The upper and lower gauging heads give you of easy, high-accuracy measurement.



No.	Range [mm]	Measuring force [N]	Stroke [mm]	Measuring range	Resolution	Measuring unit	Mass [kg]
565-151D-01	0,1 - 250	0,4 N (upper) 0,2 N (lower)	10,5	0,2 - 8,2	0,001 µm	Linear Gauge (upper, lower)	55

Gauge Block Comparators GBCD-100A

Optional accessories

No.	Description
02ASW551	Software GB-PAK-A, Vers. 4X, for New GBCD-100A Installation, English Version
601644	Cerastone for Gauge Blocks, 150x50x20mm
601645	Cerastone for Gauge Blocks, 100x25x12mm
158-117	Optical Flat, 12mm, D=45mm, 0,2µm
613615-031	Gauge Block, Metric, Inspection Cert., ISO, Grade 1, Ceramic, 5mm
516-650E	Maintenance Kit for Gauge Blocks
516-146-E2	Calibration Master for GB-Comparator, 12pcs., Eng., GBCD, Cal. Cert., Trace.
02ASQ324	Square Gauge Block Holder, For GBCD-100A

Series 565

- It performs gauge block calibration according to EN ISO 3650
- Measures the length of rectangular gauge blocks in the size range 0,5 mm to 100 mm. It automatically compares a test block with an appropriate reference gauge block.
- The compensation result is not affected by any warping of thinner gauge blocks due to the use of upper and lower gage heads (dual-head system).
- Measurement configuration: 1 cycle of automatic comparison measurement with a standard gauge block.



No.	Range [mm]	Measuring force [N]	Resolution	Measuring unit
565-172	0,5 - 100	0,8 N (upper) 0,4 N (lower)	0,01 µm	Inductive probe (upper, lower)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Steel Gauge Block Sets
Page 329



Steel Individual Gauge Blocks
Page 337



Ceramic Gauge Block Sets
Page 339



Ceramic Individual Gauge Blocks
Page 346



Special Gauge Blocks
Page 347



Accessories for ISO Gauge Blocks
Page 349



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Steel Metric Gauge Block Sets Overview

Mitutoyo provides a wide selection of boxed sets of gauge blocks to meet the various needs of industry. Selecting the best set, or sets, to acquire usually depends on the accuracy required by the target applications, the level of convenience desired and the environmental conditions in which they will be used.



Steel 32-block set



Steel 34-block set



Steel 46-block set



Steel 47-block set



Steel 56-block set



Steel 76-block set



Steel 87-block set



Steel 88-block set



Steel 103-block set



Steel 112-block set

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Steel Metric Gauge Block Sets
Grade K with ISO JCSS Certificate

Grade K with ISO JCSS Certificate

Calibration Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-596-60	122	K	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 1,6-1,9 mm (0,1 mm step / 4 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 30-100 mm (10 mm step / 8 blocks) 25, 75 mm (50 mm step / 2 blocks)	3700
516-937-60	112	K	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3700
516-941-60	103	K	Steel	1005 mm (1 block) 1.01-1.49 mm (0.01 mm step / 49 blocks) 0.5-24.5 mm (0.5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3800
516-945-60	87	K	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-949-60	76	K	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-953-60	56	K	Steel	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2600
516-957-60	47	K	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2400
516-961-60	47	K	Steel	1005 mm (1 block) 1.01-1.19 mm (0.01 mm step / 19 blocks) 1.2-1.9 mm (0.1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-994-60	46	K	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-128-60	34	K	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-965-60	32	K	Steel	1005 mm (1 block) 1.01-1.09 mm (0.01 mm step / 9 blocks) 1.1-1.9 mm (0.1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1100

Specifications

Accuracy	EN ISO 3650



JCSS Calibration Certificate

These Gauge Block Sets are delivered with a JCSS Certificate of Calibration (Japan Calibration Service System).
A JCSS Certificate of Calibration is comparable with e.g. DAkkS COFRAC, RVA or UKAS Certificate of Calibration.
This calibration result is accepted internationally.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Steel Metric Gauge Block Sets
Grade 0 with ISO Inspection Certificate

Grade 0 with ISO Inspection Certificate

Specifications

Accuracy	EN ISO 3650

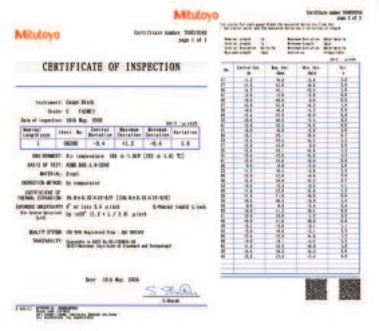

Inspection Certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Inspection Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-597-10	122	0	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 1,6-1,9 mm (0,1 mm step / 4 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 30-100 mm (10 mm step / 8 blocks) 25, 75 mm (50 mm step / 2 blocks)	3700
516-938-10	112	0	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3700
516-942-10	103	0	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3800
516-970-10	88	0	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-946-10	87	0	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-950-10	76	0	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-954-10	56	0	Steel	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2080
516-958-10	47	0	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2400
516-962-10	47	0	Steel	1,005 mm (1 block) 1,01-1,19 mm (0,01 mm step / 19 blocks) 1,2-1,9 mm (0,1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-995-10	46	0	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-129-10	34	0	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-966-10	32	0	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1100

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Steel Metric Gauge Block Sets
Grade 1 with ISO Inspection Certificate

Grade 1 with ISO Inspection Certificate


Inspection Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-598-10	122	1	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 1,6-1,9 mm (0,1 mm step / 4 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 30-100 mm (10 mm step / 8 blocks) 25, 75 mm (50 mm step / 2 blocks)	3700
516-939-10	112	1	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3700
516-943-10	103	1	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3800
516-971-10	88	1	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-947-10	87	1	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-951-10	76	1	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-955-10	56	1	Steel	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2600
516-959-10	47	1	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2400
516-963-10	47	1	Steel	1,005 mm (1 block) 1,01-1,19 mm (0,01 mm step / 19 blocks) 1,2-1,9 mm (0,1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-996-10	46	1	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-130-10	34	1	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-967-10	32	1	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1100

Specifications

Accuracy	EN ISO 3650

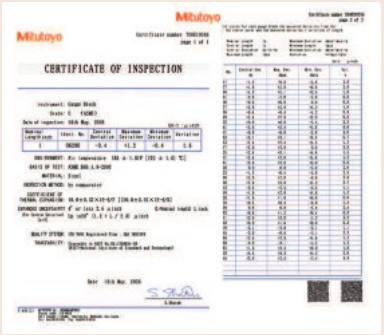

Inspection Certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Steel Metric Gauge Block Sets
Grade 2 with ISO Inspection Certificate

Grade 2 with ISO Inspection Certificate

Specifications

Accuracy	EN ISO 3650

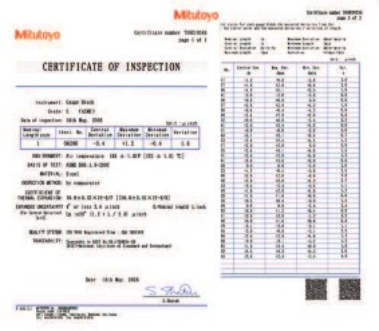

Inspection Certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Inspection Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-599-10	122	2	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 1,6-1,9 mm (0,1 mm step / 4 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 30-100 mm (10 mm step / 8 blocks) 25, 75 mm (50 mm step / 2 blocks)	3700
516-940-10	112	2	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3700
516-944-10	103	2	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3800
516-972-10	88	2	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-948-10	87	2	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3300
516-952-10	76	2	Steel	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-956-10	56	2	Steel	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2600
516-960-10	47	2	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2400
516-964-10	47	2	Steel	1,005 mm (1 block) 1,01-1,19 mm (0,01 mm step / 19 blocks) 1,2-1,9 mm (0,1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-997-10	46	2	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-131-10	34	2	Steel	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-968-10	32	2	Steel	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1100

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Steel Gauge Blocks - Thin Block Sets with 0,001/0,05 mm step and ISO Inspection Certificate

With ISO Inspection Certificate

Inspection Certificate






Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-974-10	18	0	Steel	0,991-0,999 mm (0,001 mm step / 9 blocks) 1,001-1,009 mm (0,001 mm step / 9 blocks)	500
516-975-10	18	1	Steel	0,991-0,999 mm (0,001 mm step / 9 blocks) 1,001-1,009 mm (0,001 mm step / 9 blocks)	500
516-976-10	18	2	Steel	0,991-0,999 mm (0,001 mm step / 9 blocks) 1,001-1,009 mm (0,001 mm step / 9 blocks)	500
516-982-10	9	0	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks)	200
516-983-10	9	1	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks)	200
516-984-10	9	2	Steel	1,001-1,009 mm (0,001 mm step / 9 blocks)	200
516-986-10	9	0	Steel	0,991-0,999 mm (0,001 mm step / 9 blocks)	200
516-987-10	9	1	Steel	0,991-0,999 mm (0,001 mm step / 9 blocks)	200
516-988-10	9	2	Steel	0,991-0,999 mm (0,001 mm step / 9 blocks)	200
516-990-10	9	0	Steel	0,10-0,50 mm (0,05 mm step / 9 blocks)	200
516-991-10	9	1	Steel	0,10-0,50 mm (0,05 mm step / 9 blocks)	200
516-992-10	9	2	Steel	0,10-0,50 mm (0,05 mm step / 9 blocks)	200

Specifications

Accuracy	EN ISO 3650

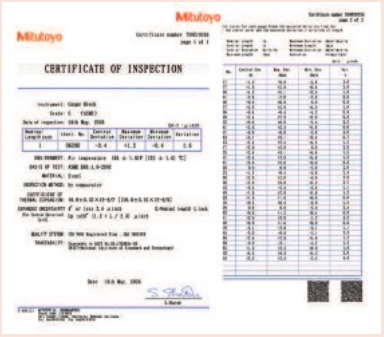

Inspection Certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Steel Gauge Blocks - Long Block Sets with ISO Inspection Certificate

With ISO Inspection Certificate

Inspection Certificate




Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-702-10	8	0	Steel	125-175 mm (25 mm step / 3 blocks) 200-250 mm (50 mm step / 2 blocks) 300-500 mm (100 mm step / 3 blocks)	7200
516-703-10	8	1	Steel	125-175 mm (25 mm step / 3 blocks) 200-250 mm (50 mm step / 2 blocks) 300-500 mm (100 mm step / 3 blocks)	7200
516-704-10	8	2	Steel	125-175 mm (25 mm step / 3 blocks) 200-250 mm (50 mm step / 2 blocks) 300-500 mm (100 mm step / 3 blocks)	7200

Specifications

Accuracy	EN ISO 3650



Inspection Certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Carbide Wear Gauge Block Sets Metric ISO Standard

Specifications

Accuracy	EN ISO 3650

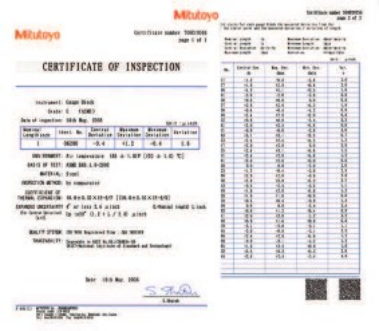

Inspection Certificate

Wear Block Sets Metric with ISO Inspection Certificate

This set is made up of two gauge blocks and offers you the following benefits:

- Wear-resistant even with frequent use of individual gauge blocks

Inspection Certificate





Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-807-10	2	0	Carbide	1 mm (2 blocks)	200
516-806-10	2	1	Carbide	1 mm (2 blocks)	200
516-803-10	2	0	Carbide	2 mm (2 blocks)	200
516-802-10	2	1	Carbide	2 mm (2 blocks)	200

Steel Caliper Inspection Gauge Block Sets Metric

Specifications

Accuracy	Accuracy EN ISO 3650
Delivered	In a wooden case with certificate of inspection (Gauge Blocks only)

Caliper Inspection Sets Metric

Inspection Certificate



516-124-10



516-527-10

Metric

No.	Blocks per set	Grade	Material	Calibration/Standard applications	Set configuration	Mass [g]
516-124-10	3	1	Steel	DIN 862:1988 VDI/VDE/DGQ 2618	3pcs.: 30, 41,3, 131,4 mm, Setting ring (ø4 mm, ø25 mm), Glove	1720
516-125-10	3	2	Steel	DIN 862:1988 VDI/VDE/DGQ 2618	3pcs.: 30, 41,3, 131,4 mm, Setting ring (ø4 mm, ø25 mm), Glove	1720
516-526-10	4	1	Steel	EN ISO 13385-1:2011	4pcs.: 10, 30, 50, 125 mm, Setting ring (ø4 mm, ø10 mm), Pin gage (ø10 mm), Glove	1720
516-527-10	4	2	Steel	EN ISO 13385-1:2011	4pcs.: 10, 30, 50, 125 mm, Setting ring (ø4 mm, ø10 mm), Pin gage (ø10 mm), Glove	1800

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Steel Micrometer Inspection Gauge Block Sets Metric

Series 516 - Micro Checker

- For securely holding a stack of gauge blocks to be used for micrometer inspection.
- Can be used vertically and horizontally.
- Parallelism of micrometer measuring faces is checked by optical parallel which can be attached.



516-607



516-607 with optional gauge blocks

Metric Micro Checker (stand only)

No.	Applicable gauge block sets	Applicable gauge block size [mm]	Mass [g]
516-607	516-106-xx, 516-107-xx, 516-108-xx, 516-156-xx, 516-157-xx, 516-158-xx	2,5 / 5,1 / 7,7 / 10,3 / 12,9 / 15 / 17,6 / 20,2 / 22,8 / 25	1300

Micrometer Inspection Sets Metric

Inspection Certificate

Metric With inspection certificate

No.	Blocks per set	Grade	Material	Calibration/Standard applications	Set configuration	Mass [g]
516-580-10	10	0	Steel	For Micrometer with 2 mm spindle pitch. (QuantuMike)	2,2, 4,8, 7,8, 10,4, 12, 15,2, 17,4, 19,6, 22,6, 25 mm	900
516-581-10	10	1	Steel	For Micrometer with 2 mm spindle pitch. (QuantuMike)	2,2, 4,8, 7,8, 10,4, 12, 15,2, 17,4, 19,6, 22,6, 25 mm	900
516-582-10	10	2	Steel	For Micrometer with 2 mm spindle pitch. (QuantuMike)	2,2, 4,8, 7,8, 10,4, 12, 15,2, 17,4, 19,6, 22,6, 25 mm	900
516-106-10	10	0	Steel	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Optical parallel (t = 12 mm)	1000
516-107-10	10	1	Steel	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Optical parallel (t = 12 mm)	970
516-108-10	10	2	Steel	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Optical parallel (t = 12 mm)	1000
516-135-10	10	0	Steel	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Micro Checker, Optical parallel (t = 12 mm)	2900
516-136-10	10	1	Steel	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Micro Checker, Optical parallel (t = 12 mm)	2900
516-137-10	10	2	Steel	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Micro Checker, Optical parallel (t = 12 mm)	2900

Specifications

Accuracy	EN ISO 3650
Delivered	In a wooden case with certificate of inspection (Gauge Blocks only)



516-135-10

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Steel Metric Individual Gauge Blocks


Specifications

Accuracy	EN ISO 3650
Delivered	Foamed material 0,1-500 mm in a wooden case 600-1000 mm

Suffix No. (-XXX)
for Selecting Certificate Provided

ISO/DIN/JIS

Suffix No.	Grade	Inspection Certificate	Calibration Certificate JCSS
-016	K	O	O
-021	0	O	—
-026	0	O	O
-031	1	O	—
-036	1	O	O
-041	2	O	—
-046	2	O	O

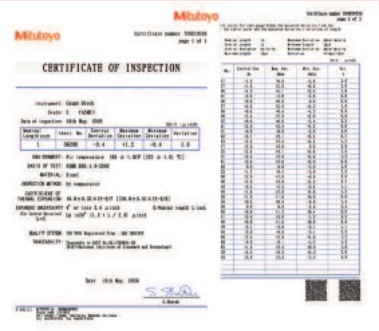

Inspection Certificate



JCSS Calibration Certificate

These Gauge Block Sets are delivered with a JCSS Certificate of Calibration (Japan Calibration Service System).
A JCSS Certificate of Calibration is comparable with e.g. DAkkS COFRAC, RVA or UKAS Certificate of Calibration.
This calibration result is accepted internationally.

Metric Blocks ≤ 1.19 mm

Ordering example: To order a 0.1mm ISO Standard grade 1 block with JCSS calibration certificate, choose No. 611821-036.

Calibration Certificate

Inspection Certificate





Length [mm]	No.
0,1	611821
0,11	611860
0,12	611861
0,13	611862
0,14	611863
0,15	611822
0,16	611864
0,17	611865
0,18	611866
0,19	611867
0,2	611823
0,21	611868
0,22	611869
0,23	611870
0,24	611871
0,25	611824
0,26	611872
0,27	611873
0,28	611874
0,29	611875
0,3	611825
0,31	611876
0,32	611877
0,33	611878
0,34	611879
0,35	611826
0,36	611880
0,37	611881
0,38	611882
0,39	611883
0,4	611827
0,41	611884
0,42	611885
0,43	611886
0,44	611887
0,45	611828
0,46	611888
0,47	611889
0,48	611890
0,49	611891
0,5	611506
0,51	611892
0,52	611893

Length [mm]	No.
0,53	611894
0,54	611895
0,55	611896
0,56	611897
0,57	611898
0,58	611899
0,59	611900
0,6	611901
0,61	611902
0,62	611903
0,63	611904
0,64	611905
0,65	611906
0,66	611907
0,67	611908
0,68	611909
0,69	611910
0,7	611911
0,71	611912
0,72	611913
0,73	611914
0,74	611915
0,75	611916
0,76	611917
0,77	611918
0,78	611919
0,79	611920
0,8	611921
0,81	611922
0,82	611923
0,83	611924
0,84	611925
0,85	611926
0,86	611927
0,87	611928
0,88	611929
0,89	611930
0,9	611931
0,91	611932
0,92	611933
0,93	611934
0,94	611935
0,95	611936

Length [mm]	No.
0,96	611937
0,97	611938
0,98	611939
0,99	611940
0,991	611551
0,992	611552
0,993	611553
0,994	611554
0,995	611555
0,996	611556
0,997	611557
0,998	611558
0,999	611559
1	611611
1,0005	611520
1,001	611521
1,002	611522
1,003	611523
1,004	611524
1,005	611525
1,006	611526
1,007	611527
1,008	611528
1,009	611529
1,01	611561
1,02	611562
1,03	611563
1,04	611564
1,05	611565
1,06	611566
1,07	611567
1,08	611568
1,09	611569
1,1	611570
1,11	611571
1,12	611572
1,13	611573
1,14	611574
1,15	611575
1,16	611576
1,17	611577
1,18	611578
1,19	611579

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Steel Metric Individual Gauge Blocks

Metric Blocks ≤ 1000 mm

Ordering example: To order a 1,2 mm ISO Standard grade K block with JCSS calibration certificate, choose 611580-016.

Inspection Certificate

Calibration Certificate

Length [mm]	No.
1,2	611580
1,21	611581
1,22	611582
1,23	611583
1,24	611584
1,25	611585
1,26	611586
1,27	611587
1,28	611588
1,29	611589
1,3	611590
1,31	611591
1,32	611592
1,33	611593
1,34	611594
1,35	611595
1,36	611596
1,37	611597
1,38	611598
1,39	611599
1,4	611600
1,41	611601
1,42	611602
1,43	611603
1,44	611604
1,45	611605
1,46	611606
1,47	611607
1,48	611608
1,49	611609
1,5	611641
1,6	611516
1,7	611517
1,8	611518
1,9	611519
2	611612
2,0005	611690
2,001	611691
2,002	611692
2,003	611693
2,004	611694
2,005	611695
2,006	611696
2,007	611697
2,008	611698
2,009	611699
2,01	611701
2,02	611702
2,03	611703
2,04	611704
2,05	611705
2,06	611706
2,07	611707
2,08	611708
2,09	611709
2,1	611710
2,11	611711
2,12	611712
2,13	611713
2,14	611714


Length [mm]	No.
2,15	611715
2,16	611716
2,17	611717
2,18	611718
2,19	611719
2,2	611720
2,21	611721
2,22	611722
2,23	611723
2,24	611724
2,25	611725
2,26	611726
2,27	611727
2,28	611728
2,29	611729
2,3	611730
2,31	611731
2,32	611732
2,33	611733
2,34	611734
2,35	611735
2,36	611736
2,37	611737
2,38	611738
2,39	611739
2,4	611740
2,41	611741
2,42	611742
2,43	611743
2,44	611744
2,45	611745
2,46	611746
2,47	611747
2,48	611748
2,49	611749
2,5	611642
2,6	611750
2,7	611751
2,8	611752
2,9	611753
3	611613
3,5	611643
4	611614
4,5	611644
5	611615
5,1	611850
5,5	611645
6	611616
6,5	611646
7	611617
7,5	611647
7,7	611851
8	611618
8,5	611648
9	611619
9,5	611649
10	611671
10,3	611852
10,5	611650
11	611621

Length [mm]	No.
11,5	611651
12	611622
12,5	611652
12,9	611853
13	611623
13,5	611653
14	611624
14,5	611654
15	611625
15,5	611655
16	611626
16,5	611656
17	611627
17,5	611657
17,6	611854
18	611628
18,5	611658
19	611629
19,5	611659
20	611672
20,2	611855
20,5	611660
21	611631
21,5	611661
22	611632
22,5	611662
22,8	611856
23	611633
23,5	611663
24	611634
24,5	611664
25	611635
25,25	611754
30	611673
35	611755
40	611674
41,3	611857
45	611756
50	611675
60	611676
70	611677
75	611801
80	611678
90	611679
100	611681
125	611802
131,4	611858
150	611803
175	611804
200	611682
250	611805
300	611683
400	611684
500	611685
600	611840
700	611841
750	611842
800	611843
900	611844
1000	611845

Suffix No. (-XXX) for Selecting Certificate Provided

ISO/DIN/JIS

Suffix No.	Grade	Inspection Certificate	Calibration Certificate JCSS
-016	K	O	O
-021	0	O	—
-026	0	O	O
-031	1	O	—
-036	1	O	O
-041	2	O	—
-046	2	O	O

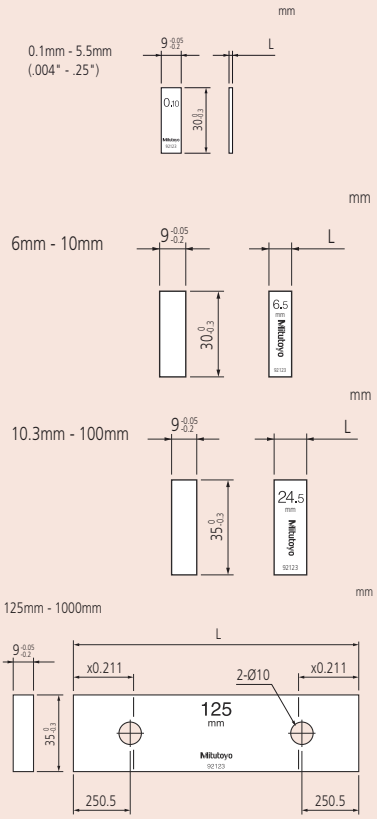

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceramic Metric Gauge Block Sets Overview

Mitutoyo provides a wide selection of boxed sets of gauge blocks to meet the various needs of industry. Selecting the best set, or sets, to acquire usually depends on the accuracy required by the target applications, the level of convenience desired and the environmental conditions in which they will be used.



CERA 32-block set



CERA 34-block set



CERA 46-block set



CERA 47-block set



CERA 56-block set



CERA 76-block set



CERA 103-block set



CERA 112-block set

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceramic Gauge Block Sets Grade 0 with Inspection Certificate

Grade 0 with Inspection Certificate

Inspection Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-338-10	112	0	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3200
516-342-10	103	0	Ceramic	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3000
516-370-10	88	0	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3200
516-346-10	87	0	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-350-10	76	0	Ceramic	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-354-10	56	0	Ceramic	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2200
516-358-10	47	0	Ceramic	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2000
516-362-10	47	0	Ceramic	1,005 mm (1 block) 1,01-1,19 mm (0,01 mm step / 19 blocks) 1,2-1,9 mm (0,1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2600
516-395-10	46	0	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2700
516-179-10	34	0	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-366-10	32	0	Ceramic	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1300

Specifications

Accuracy	EN ISO 3650


Mitutoyo

CERTIFICATE OF INSPECTION

Inspection certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceramic Gauge Block Sets Grade 1 with Inspection Certificate

Grade 1 with Inspection Certificate

Specifications

Accuracy	EN ISO 3650


Mitutoyo

Certificate number T0GE10369
page 1 of 1

CERTIFICATE OF INSPECTION

Instrument: Gauge Block
Grade: 0 (ASME)
Date of inspection: 18th May. 2006

Unit : μinch

Nominal Length inch	Ident. No.	Central Deviation	Maximum Deviation	Minimum Deviation	Variation
1	06280	-0.4	+1.2	-0.4	1.6

ENVIRONMENT: Air temperature (68 ± 1.0)°F [(20 ± 1.0) °C]
BASIS OF TEST: ASME B89.1.9-2002
MATERIAL: Steel
INSPECTION METHOD: by comparator
COEFFICIENT OF THERMAL EXPANSION: (6.0±0.3)×10-6/°F [(10.8±0.5)×10-6/K]
EXPANDED UNCERTAINTY 4" or less 2.4 μinch
Up to20" (1.2 + L / 2.3) μinch
(k=2)
QUALITY SYSTEM: ISO 9001 Registered Firm : JQA JA08109
TRACEABILITY: Traceable to NIST No.821/266834-03
(NIST=National Institute of Standard and Technology)

Date 18th May. 2006

S. Suzuki

Inspection certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

PROPRIETARY INSPECTION CERTIFICATE

Inspection Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-339-10	112	1	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3200
516-343-10	103	1	Ceramic	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3000
516-371-10	88	1	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3200
516-347-10	87	1	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-351-10	76	1	Ceramic	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-355-10	56	1	Ceramic	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2200
516-359-10	47	1	Ceramic	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2000
516-363-10	47	1	Ceramic	1005 mm (1 block) 1.01-1.19 mm (0.01 mm step / 19 blocks) 1.2-1.9 mm (0.1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2600
516-396-10	46	1	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2700
516-180-10	34	1	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-367-10	32	1	Ceramic	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1300

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Ceramic Gauge Block Sets Grade 2 with Inspection Certificate

Grade 2 with Inspection Certificate

Inspection Certificate

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-340-10	112	2	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3200
516-344-10	103	2	Ceramic	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-24,5 mm (0,5 mm step / 49 blocks) 25-100 mm (25 mm step / 4 blocks)	3000
516-372-10	88	2	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	3200
516-348-10	87	2	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-100 mm (10 mm step / 10 blocks)	2800
516-352-10	76	2	Ceramic	1,005 mm (1 block) 1,01-1,49 mm (0,01 mm step / 49 blocks) 0,5-9,5 mm (0,5 mm step / 19 blocks) 10-40 mm (10 mm step / 4 blocks) 50-100 mm (25 mm step / 3 blocks)	2400
516-356-10	56	2	Ceramic	0,5 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2200
516-360-10	47	2	Ceramic	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-24 mm (1 mm step / 24 blocks) 25-100 mm (25 mm step / 4 blocks)	2000
516-364-10	47	2	Ceramic	1,005 mm (1 block) 1,01-1,19 mm (0,01 mm step / 19 blocks) 1,2-1,9 mm (0,1 mm step / 8 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2600
516-397-10	46	2	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-100 mm (10 mm step / 10 blocks)	2700
516-181-10	34	2	Ceramic	1,0005 mm (1 block) 1,001-1,009 mm (0,001 mm step / 9 blocks) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-5 mm (1 mm step / 5 blocks) 10 mm (1 block)	1200
516-368-10	32	2	Ceramic	1,005 mm (1 block) 1,01-1,09 mm (0,01 mm step / 9 blocks) 1,1-1,9 mm (0,1 mm step / 9 blocks) 1-9 mm (1 mm step / 9 blocks) 10-30 mm (10 mm step / 3 blocks) 60 mm (1 block)	1300

Specifications

Accuracy	EN ISO 3650


Mitutoyo

CERTIFICATE OF INSPECTION

Inspection certificate

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceramic Gauge Blocks - Thin Block Sets with 0,001 mm step and ISO Inspection Certificate

With ISO Inspection Certificate

Specifications

Accuracy	EN ISO 3650

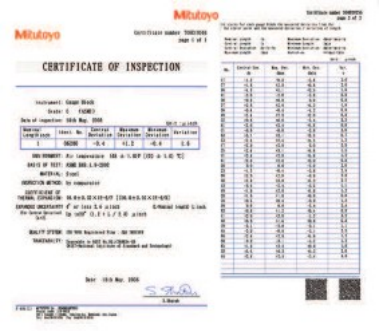

Mitutoyo Gauge Blocks and Inspection Certificates

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Inspection Certificate



Metric


No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-374-10	18	0	Ceramic	0,991-0,999 mm (0,001 mm step / 9 blocks) 1,001-1,009 mm (0,001 mm step / 9 blocks)	600
516-375-10	18	1	Ceramic	0,991-0,999 mm (0,001 mm step / 9 blocks) 1,001-1,009 mm (0,001 mm step / 9 blocks)	600
516-376-10	18	2	Ceramic	0,991-0,999 mm (0,001 mm step / 9 blocks) 1,001-1,009 mm (0,001 mm step / 9 blocks)	600
516-382-10	9	0	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks)	300
516-383-10	9	1	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks)	300
516-384-10	9	2	Ceramic	1,001-1,009 mm (0,001 mm step / 9 blocks)	300
516-386-10	9	0	Ceramic	0,991-0,999 mm (0,001 mm step / 9 blocks)	200
516-387-10	9	1	Ceramic	0,991-0,999 mm (0,001 mm step / 9 blocks)	200
516-388-10	9	2	Ceramic	0,991-0,999 mm (0,001 mm step / 9 blocks)	200

Ceramic Gauge Blocks - Long Block Sets with ISO Inspection Certificate

With ISO Inspection Certificate

Specifications

Accuracy	EN ISO 3650

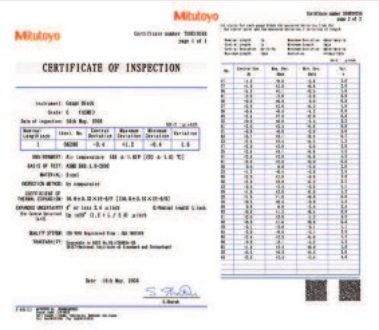

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Inspection Certificate



Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-732-10	8	0	Ceramic	125-175 mm (25 mm step / 3 blocks) 200-250 mm (50 mm step / 2 blocks) 300-500 mm (100 mm step / 3 blocks)	6200
516-733-10	8	1	Ceramic	125-175 mm (25 mm step / 3 blocks) 200-250 mm (50 mm step / 2 blocks) 300-500 mm (100 mm step / 3 blocks)	6200
516-734-10	8	2	Ceramic	125-175 mm (25 mm step / 3 blocks) 200-250 mm (50 mm step / 2 blocks) 300-500 mm (100 mm step / 3 blocks)	6200

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Ceramic Wear Gauge Block Sets Metric ISO Standard


Wear Block Sets Metric ISO Standard

This set is made up of two gauge blocks and offers you the following benefits:
- Wear-resistant even with frequent use of individual gauge blocks

Inspection Certificate




Ceramic 2-block set



Protection gauge blocks (highlighted in grey above) are placed at each end of the gauge block stack to absorb the wear caused by contact with workpieces.

Specifications

Accuracy	EN ISO 3650

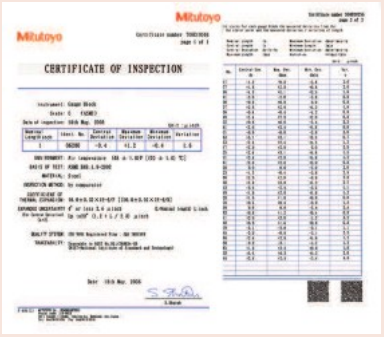

Mitutoyo Gauge Blocks and Inspection Certificates

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Metric

No.	Blocks per set	Grade	Material	Set configuration	Mass [g]
516-832-10	2	0	Ceramic	1 mm (2 blocks)	115
516-833-10	2	1	Ceramic	1 mm (2 blocks)	130
516-830-10	2	0	Ceramic	2 mm (2 blocks)	130
516-831-10	2	1	Ceramic	2 mm (2 blocks)	130

Ceramic Caliper Inspection Gauge Block Sets Metric

Caliper Inspection Sets Metric

Inspection Certificate



516-566-10

Specifications

Accuracy	Accuracy EN ISO 3650
Delivered	In a wooden case with certificate of inspection (Gauge Blocks only)

Metric

No.	Blocks per set	Grade	Material	Calibration/Standard applications	Set configuration	Mass [g]
516-566-10	4	1	Ceramic	EN ISO 13385-1:2011	4 pcs.: 10, 30, 50, 125 mm, Setting ring (ø4 mm, ø10 mm), Pin gage (ø10 mm), Glove	1750
516-567-10	4	2	Ceramic	EN ISO 13385-1:2011	4 pcs.: 10, 30, 50, 125 mm, Setting ring (ø4 mm, ø10 mm), Pin gage (ø10 mm), Glove	1750
516-150-10	3	1	Ceramic	DIN 862:1988 VDI/VDE/DGQ 2618	3 pcs.: 30, 41,3, 131,4 mm, Setting ring (ø4 mm, ø25 mm), Glove	1700
516-151-10	3	2	Ceramic	DIN 862:1988 VDI/VDE/DGQ 2618	3 pcs.: 30, 41.3, 131.4 mm, Setting ring (ø4 mm, ø25 mm), Glove	1720

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceramic Micrometer Inspection Sets Metric

Micrometer Inspection Sets Metric

Specifications

Accuracy	EN ISO 3650
Delivered	In a wooden case with certificate of inspection (Gauge Blocks only)



Micro checker 516-607
applicable gauge block sets
516-156-xx, 516-157-xx, 516-158-xx

Grad K/0/1/2 Gauge Block Sets with JCSS Calibration Certificate (issued by the Mitutoyo JCSS accredited laboratory) see online.

Inspection Certificate



516-156-10

Metric

With inspection certificate

No.	Blocks per set	Grade	Material	Calibration/Standard applications	Set configuration	Mass [g]
516-390-10	10	0	Ceramic	Especially for Micrometer with 2 mm spindle pitch. (QuantuMike)	2,2, 4,8, 7,8, 10,4, 12, 15,2, 17,4, 19,6, 22,6, 25 mm	900
516-391-10	10	1	Ceramic	Especially for Micrometer with 2 mm spindle pitch. (QuantuMike)	2,2, 4,8, 7,8, 10,4, 12, 15,2, 17,4, 19,6, 22,6, 25 mm	900
516-392-10	10	2	Ceramic	Especially for Micrometer with 2 mm spindle pitch. (QuantuMike)	2,2, 4,8, 7,8, 10,4, 12, 15,2, 17,4, 19,6, 22,6, 25 mm	900
516-156-10	10	0	Ceramic	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Optical parallel (t = 12 mm)	900
516-157-10	10	1	Ceramic	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Optical parallel (t = 12 mm)	900
516-158-10	10	2	Ceramic	EN ISO 3611 DIN 863 (1999) VDI/VDE/DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Optical parallel (t = 12 mm)	900
516-185-10	10	0	Ceramic	EN ISO 3611 DIN 863 (1999) VDI/VDE/ DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Micro Checker, Optical parallel (t = 12 mm)	2900
516-186-10	10	1	Ceramic	EN ISO 3611 DIN 863 (1999) VDI/VDE/ DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Micro Checker, Optical parallel (t = 12 mm)	2900
516-187-10	10	2	Ceramic	EN ISO 3611 DIN 863 (1999) VDI/VDE/ DGQ 2618	2,5, 5,1, 7,7, 10,3, 12,9, 15, 17,6, 20,2, 22,8, 25 mm, Micro Checker, Optical parallel (t = 12 mm)	2900

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceramic Metric Individual Gauge Blocks

Metric Blocks

Ordering example: To order a 0.5mm ISO Standard grade 1 block with JCSS calibration certificate, choose 613506-036.

Calibration Certificate

Inspection Certificate



Length [mm]	No.
0,5	613506
0,991	613551
0,992	613552
0,993	613553
0,994	613554
0,995	613555
0,996	613556
0,997	613557
0,998	613558
0,999	613559
1	613611
1,0005	613520
1,001	613521
1,002	613522
1,003	613523
1,004	613524
1,005	613525
1,006	613526
1,007	613527
1,008	613528
1,009	613529
1,01	613561
1,02	613562
1,03	613563
1,04	613564
1,05	613565
1,06	613566
1,07	613567
1,08	613568
1,09	613569
1,1	613570
1,11	613571
1,12	613572
1,13	613573
1,14	613574
1,15	613575
1,16	613576
1,17	613577
1,18	613578
1,19	613579
1,2	613580
1,21	613581
1,22	613582
1,23	613583
1,24	613584
1,25	613585
1,26	613586
1,27	613587
1,28	613588
1,29	613589

Length [mm]	No.
1,3	613590
1,31	613591
1,32	613592
1,33	613593
1,34	613594
1,35	613595
1,36	613596
1,37	613597
1,38	613598
1,39	613599
1,4	613600
1,41	613601
1,42	613602
1,43	613603
1,44	613604
1,45	613605
1,46	613606
1,47	613607
1,48	613608
1,49	613609
1,5	613641
1,6	613516
1,7	613517
1,8	613518
1,9	613519
2	613612
2,5	613642
3	613613
3,5	613643
4	613614
4,5	613644
5	613615
5,1	613850
5,5	613645
6	613616
6,5	613646
7	613617
7,5	613647
7,7	613851
8	613618
8,5	613648
9	613619
9,5	613649
10	613671
10,3	613852
10,5	613650
11	613621
11,5	613651
12	613622
12,5	613652

Length [mm]	No.
12,9	613853
13	613623
13,5	613653
14	613624
14,5	613654
15	613625
15,5	613655
16	613626
16,5	613656
17	613627
17,5	613657
17,6	613854
18	613628
18,5	613658
19	613629
19,5	613659
20	613672
20,2	613855
20,5	613660
21	613631
21,5	613661
22	613632
22,5	613662
22,8	613856
23	613633
23,5	613663
24	613634
25	613635
25,25	613754
30	613673
35	613755
40	613674
41,3	613857
45	613756
50	613675
60	613676
70	613677
75	613801
80	613678
90	613679
100	613681
125	613802
131,4	613858
150	613803
175	613804
200	613682
250	613805
300	613683
400	613684
500	613685

Specifications


Accuracy	EN ISO 3650
Delivered	Foamed material 0,5-100 mm in a wooden case 125-500 mm

Suffix No. (-XXX) for Selecting Certificate Provided

ISO/DIN/JIS

Suffix No.	Grade	Inspection Certificate	Calibration Certificate JCSS
-016	K	O	O
-021	0	O	—
-026	0	O	O
-031	1	O	—
-036	1	O	O
-041	2	O	—
-046	2	O	O




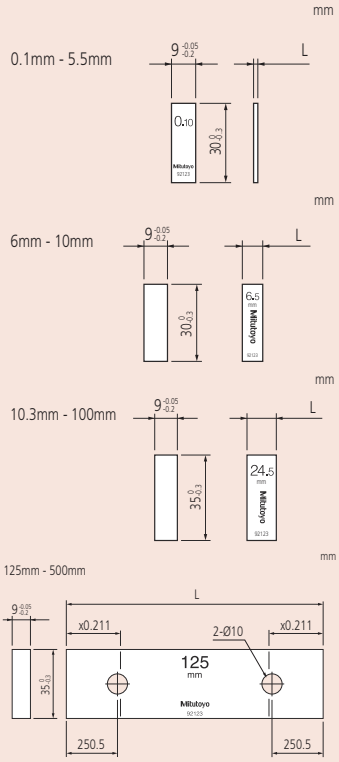

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Blocks with a Calibrated CTE

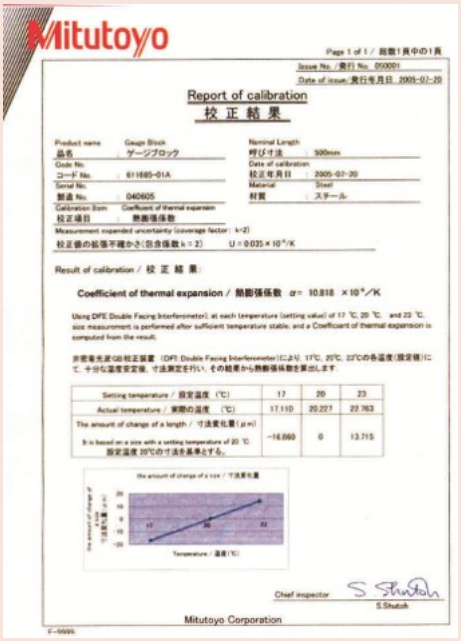

To each final dimension a factory certificate is supplied.
Uncertainty of thermal expansion coefficient : 0.035 x 10^{-6}/K (k=2)
Uncertainty of length measurement : 30 nm (k=2), for 100 mm blocks.

Gauge Blocks with a Calibrated Coefficient of Thermal Expansion

These are metric gauge blocks with a calibrated coefficient of thermal expansion. They offer you the following benefits:

- Mitutoyo offers top-level gauge blocks (steel and ceramic) which are superior to K class blocks, with their quality supported by Mitutoyo's best technologies.
- They feature an accurately calibrated thermal expansion coefficient measured with a proprietary double-faced interferometer (DFI).
- Each gauge block is calibrated for length on a highly accurate gauge block interferometer (GBI) system.
- Uncertainty of thermal expansion coefficient: 0,035 x 10-6 /K (k=2).
- Uncertainty of length measurement: 30 nm (k=2), for 100 mm blocks.

PROPRIETARY CALIBRATION CERTIFICATE
Calibration Certificate



Metric

Steel

No.	Length [mm]	Accuracy	Grade	Material	Mass [g]
611681-01B	100	EN ISO 3650, Grade K	K	Steel	245
611802-01B	125	EN ISO 3650, Grade K	K	Steel	306
611803-01B	150	EN ISO 3650, Grade K	K	Steel	368
611804-01B	175	EN ISO 3650, Grade K	K	Steel	430
611682-01B	200	EN ISO 3650, Grade K	K	Steel	490
611805-01B	250	EN ISO 3650, Grade K	K	Steel	613
611683-01B	300	EN ISO 3650, Grade K	K	Steel	735
611684-01B	400	EN ISO 3650, Grade K	K	Steel	980
611685-01B	500	EN ISO 3650, Grade K	K	Steel	1225

Ceramic

No.	Length [mm]	Accuracy	Grade	Material	Mass [g]
613681-01B	100	EN ISO 3650, Grade K	K	Ceramic	189
613802-01B	125	EN ISO 3650, Grade K	K	Ceramic	228
613803-01B	150	EN ISO 3650, Grade K	K	Ceramic	275
613804-01B	175	EN ISO 3650, Grade K	K	Ceramic	322
613682-01B	200	EN ISO 3650, Grade K	K	Ceramic	370
613805-01B	250	EN ISO 3650, Grade K	K	Ceramic	464
613683-01B	300	EN ISO 3650, Grade K	K	Ceramic	559
613684-01B	400	EN ISO 3650, Grade K	K	Ceramic	748
613685-01B	500	EN ISO 3650, Grade K	K	Ceramic	937

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ZERO CERA Blocks

Ultra-low Expansion Ceramic Gauge Blocks

These are ultra-low expansion ceramic gauge blocks.
The ZERO CERA Blocks offer you the following benefits:

- Thermal expansion at 20 ±1°C is less than 1/500 that of steel.
- There is almost no secular change either in the dimension or coefficient of thermal expansion.
- You will find them light and easy to handle.
- They are rust free.
- They are magnetisation free.





Calibration Certificate

Specifications

Accuracy	EN ISO 3650
Coefficient of thermal expansion	0 ± 0,02 x 10^{-6}/K (at 20°C)*2
Density	2,5 g/cm^3*2
Standard accessories	Inspection certificate, Calibration certificate and custom-made aluminium case

*1
If you require a grade other than K, please contact Mitutoyo.
*2
Value claimed by the material supplier.

Metric

No.	Accuracy	Blocks per set	Remarks	Length	Type	Mass [g]
617675-016	EN ISO 3650, Grade K			50 mm	Individual	40
617673-016	EN ISO 3650, Grade K			30 mm	Individual	24
617845-016	EN ISO 3650, Grade K			1000 mm	Individual	800
617844-016	EN ISO 3650, Grade K			900 mm	Individual	720
617685-016	EN ISO 3650, Grade K			500 mm	Individual	400
617843-016	EN ISO 3650, Grade K			800 mm	Individual	640
617684-016	EN ISO 3650, Grade K			400 mm	Individual	320
617683-016	EN ISO 3650, Grade K			300 mm	Individual	240
617841-016	EN ISO 3650, Grade K			700 mm	Individual	560
617682-016	EN ISO 3650, Grade K			200 mm	Individual	160
617681-016	EN ISO 3650, Grade K			100 mm	Individual	80
617840-016	EN ISO 3650, Grade K			600 mm	Individual	480
516-771-60	EN ISO 3650, Grade K	12	Zero Cera Block set. 12 blocks per set, 30 mm (1 block) 50 mm (1 block) 100 - 1000 mm (100 mm step / 10 blocks)		Set	4464

Characteristics comparison of gauge block materials

	ZERO CERA BLOCK	Low expansion glass	CERA BLOCK	Steel	Tungsten carbide
Coefficient of thermal expansion (10^{-6}/K)	0 ± 0.02 *2) *3)	0 ± 0.02 *2) *3)	9.3 ± 0.5	10.8 ± 0.5	5.5 ± 1
Thermal conductivity (W/m*K)	3.7	1.7	2.9	54.4	79.5
Specify gravity	2.5	2.55	6	7.8	14.8
Young modulus (GPa)	130	90	206	206	618
Poisson ratio	0.3	0.25	0.3	0.3	0.2
Flexural strength (3 points) (MPa)	210	143	1270	1960	1960
Fracture toughness (MPa*$m^{1/2}$)	1.2	0.69 *4)	7	120	12
Vickers hardness (HV)	826 *3)	680	1350	800	1650

1) Material for Mitutoyo Products
2) Value at 20°C
3) Claimed value by the material supplier
4) Value measured by the material supplier (reference)


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Gauge Block Accessories

Series 516


Specially designed for long gauge blocks over 100 mm which have two coupling holes on the body.




Holder base : 619009



Half-round jaw : 619013



Plain jaw : 619018



Scriber point : 619019




516-605

No.	Included in set	Mass [g]
516-605	Holder A (**619031**)-1 pc. Holder B (**619032**)-1 pc. Holder C (**619033**)-1 pc. Holder D (**619034**)-1 pc. Holder E (**619035**)-1 pc. Adapter (**619036**)-3 pcs. Holder base 35mm (**619009**)-1 pc. Half-round jaw 12mm (**619013**)-2 pcs. Plain jaw (**619018**)-2 pcs<.br />Scriber point (**619019**)-1 pc.	4120




Holder A: 619031
Used for coupling two long gauge blocks.



619031






619032 / 619033


Holder B and C :
Used for coupling two long gauge blocks together with other gauge blocks up to 35 mm (Holder B) or 140 mm Holder C). Also used for attaching jaws with two adapters.
Holder B : 619032 (R max.= 90 mm- L= 126 mm)
Holder C : 619033 (R max.= 200 mm- L= 236 mm)



Holder D : 619034
Used for attaching to the holder base.



619034



Holder E: 619035
Used for attaching to the holder base together with other gauge blocks up to 125mm. Used for attaching jaws with one adapter.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Gauge Block Accessories

Series 619

These accessories are specially designed for long gauge blocks over 100 mm which have two coupling holes on the body.



516-601J



516-602J

1. Set

No.	Blocks per set	Included in set	Mass [g]
516-602J	14	(1 x 619002; 1 x 619003; 1 x 619004; 1 x 619005; 1 x 619009; 2 x 619010; 2 x 619011; 2 x 619012; 1 x 619019; 1 x 619020; 1 x 619022)	2590
516-601J	22	(1 x 619003; 1 x 619004; 1 x 619005; 1 x 619009; 2 x 619010; 2 x 619011; 2 x 619012; 2 x 619013; 2 x 619014; 2 x 619018; 1 x 619019; 1 x 619020; 2 x 619021; 1 x 619022; 1 x 619023)	3260

2. Holder

No.	L [mm]	Mass [g]
619005	20-250	360
619004	15-160	320
619003	5-100	170
619002	15-60	150

3. Holder base

No.	Description	Mass [g]
619009	35 mm	1200

4. Half-round jaw


No.	A [mm]	B [mm]	C [mm]	H [mm]	Mass [g]
619010	5,5	40	7,5	2 ±0,0005	20
619011	14	45	7,5	5 ±0,0005	25
619012	18,5	50	8,5	8 ±0,0005	35
619013	25	75	13	12 ±0,0005	50
619014	25	125	20,5	20 ±0,0005	115

5. Miscellaneous jaws

No.	Description	Mass [g]
619018	Plain jaw	165
619019	Scriber point	20
619020	Centre point	20
619021	Tram point	20


6. Triangular straight edge

No.	Length [mm]	A [mm]	L [mm]	Mass [g]
619022	100	16	100	40
619023	160	19,5	160	120




Holder : 619002 to 619005


Used to clamp plain jaws, a scriber point, etc., to a gauge block stack.



Holder base 35 mm : 619009
Acts as base for a stack of gauge blocks that carry one of the many types of point.




Half round jaw : 619010 to 619014
Used for gauging an outside or inside diameter if used when a pair of jaws in a holder.




Plain jaw : 619018

Gauges outside and inside dimensions (not inside diameters) when used as a pair of jaws in a holder.




Scriber point : 619019

Scribes a straight line on a workpiece a known distance from a datum plane if used in a holder and holder base.



Centre point : 619020
Pushed into a small hole, or conical punch mark, this point provides the pivot for scribing a circular line with a gauge block trammel assembly.



Tram point : 619021

For checking distances between lines and points.



Triangular straight edge : 619022/619023
Can be used to indicate parallelism.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Ceraston



Removing burrs

1 Wipe any dust and oil films from the gauge block and the Ceraston (or Arkansas stone) using a solvent.
2 Place the gauge block on the Ceraston so that the measuring face that has burrs is on the abrasive surface of the stone. While applying light pressure, move the gauge block to and fro about ten times (Fig. 1). Use a block rubber for thin gauge blocks to apply even pressure (Fig. 2).
3 Check the measuring face for burrs with an optical flat. If the burrs have not been removed, repeat step 2. If burrs are too large, they may not be removed with an abrasive stone. If so, discard the gauge block.

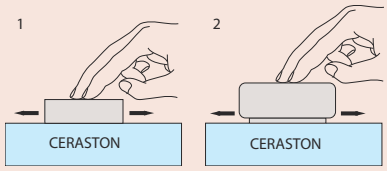

Accessory for Gauge Block Maintenance

This accessory for gauge block maintenance offers you the following benefits:
- Alumina-ceramic abrasive stone lets you remove burrs from hard materials such as ceramics, that ordinary stones cannot handle.
- You can use them for both steel gauge blocks and CERA Blocks.



601644



601645

No.	Dimensions (WxDxH)	Length [mm]	Mass [g]
601644	150 x 50 x 20 mm	150	530
601645	100 x 25 x 12 mm	100	110

Consumable spares

No.	Description
601645	Cerastone for Gauge Blocks, 100x25x12mm
600004	Tweezer for Gauge Blocks
600005	Blower Brush for Gauge Blocks
600006	Cleaning Paper for Gauge Blocks
600007	Artificial Leather Mat for Gauge Blocks
600008	Reagent Bottle, 100 ml
600009D	Cotton Gloves, White
158-117	Optical Flat, 12mm, D=45mm, 0,2µm

Maintenance Kit for Gauge Blocks

Series 516

This is a maintenance kit for gauge blocks that offers you the following benefits:
- It includes all maintenance tools needed for the daily care and storage of gauge blocks.
- It is supplied in a fitted wooden case for portable use.




No.	Tools and accessories included	Mass [g]
516-650E	Ceraston (**601645**): Used for removing burrs on the measuring surface. Tweezers (**600004**): Used for handling thin gauge blocks. Blower brush (**600005**): Used for blowing dust off the measuring surface. Cleaning paper (**600006**): Used for wiping off rust preventive oil and contamination. Artificial leather mat (**600007**): Used as a gauge block mat. Reagent bottle (**600008**): Bottle for wiping solution (100 ml). Solution not included. Gloves (**600009D**) Optical flat **(158-117)**	2270

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Linear Gauge Application Examples
Page 353



Digimatic and Incremental Linear Gauge
Page 354



Counters and Display Units
Page 360



SENSORPAK
Page 364



Motorized Low Force High Precision Gauges LITEMATIC
Page 365



Surface Measure
Page 367




M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Linear Gauge Application Examples


Linear Gauge Applications

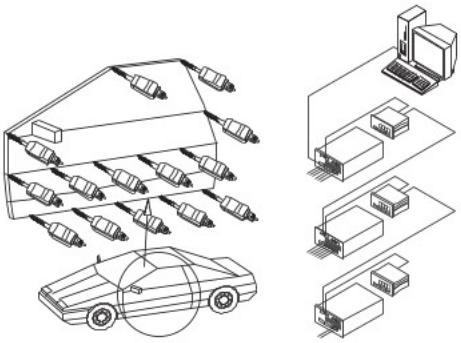


Multi-point measurement on car doors

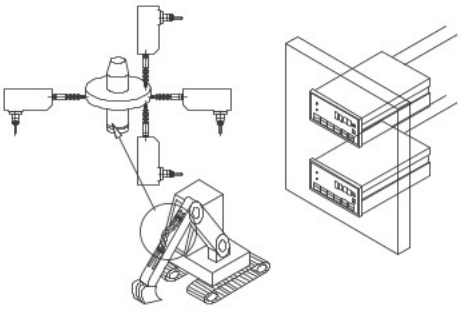


Dimensional measurement of fluid flywheels

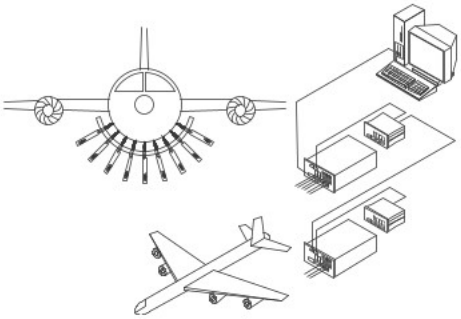


Measurement of aeroplane body deformation

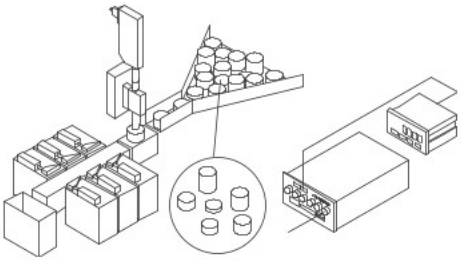


Sorting of parts according to size

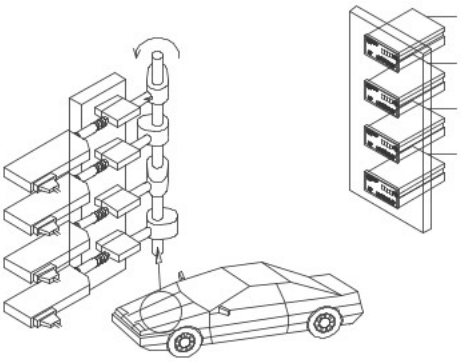


Cam measurement

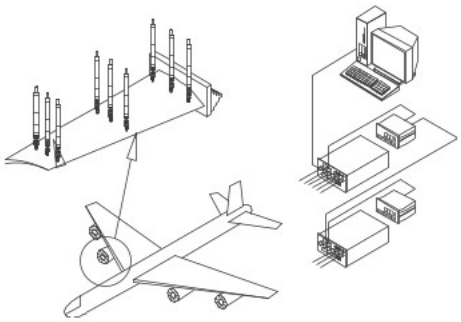

Multi-point measurement on turbine blades

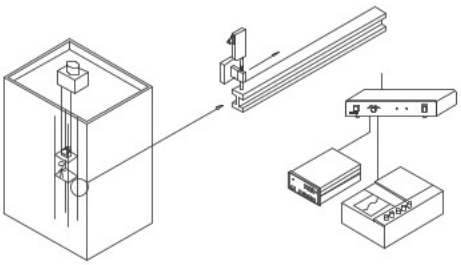

Measurement of deflection of lift guiding rails

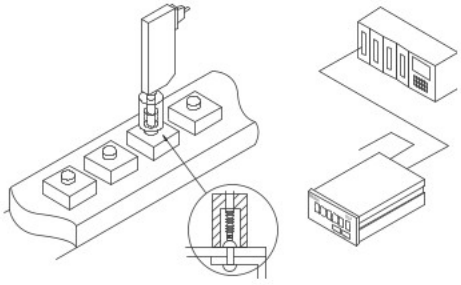

Rivet head testing

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Linear Gauge LG100 Series

Linear Gauge LG100 Series

The LG100 is a very robust and economical linear gauge for in-line use and automatic machines, in combination with the EJ Counter. EH-counters can be used as well.

- The advanced construction of the plunger guidance assembly makes it very resistant to external shocks and vibrations.
- Its differential square-wave signal output allows for a wide range of applications.
- Long-lasting due to linear ball-bearings in the spindle unit.
- Repeatability of 0.3 µm.
- Narrow range accuracy: 0.5 µm (20 µm range).
- Operation temperature range: 0 - 50°C.



LG100

No.	Range [mm]	Accuracy	Measuring force	Resolution [mm]	Stem ∅	Max. response speed [mm/s]	Signal pitch [µm]	Mass [g]
542-190	0 - 10	(1,5+L/50) µm L=measured length in mm	1,4 N with spindle down, 1,3 N with spindle horizontal, 1,2 N with spindle upwards	0,001	8 mm	1500	4	260
542-191	0 - 10	(1,5+L/50) µm L=measured length in mm	1,4 N with spindle down, 1,3 N with spindle horizontal, 1,2 N with spindle upwards	0,0005	8 mm	1500	2	260
542-192	0 - 10	(0,8+L/50) µm L=measured length in mm	1,4 N with spindle down, 1,3 N with spindle horizontal, 1,2 N with spindle upwards	0,0001	8 mm	400	0,4	260
542-193	0 - 25	(1,5+L/50) µm L=measured length in mm	4,6 N with spindle down, 4,3 N with spindle horizontal, 4 N with spindle upwards	0,001	15 mm	1500	4	300
542-194	0 - 25	(1,5+L/50) µm L=measured length in mm	4,6 N with spindle down, 4,3 N with spindle horizontal, 4 N with spindle upwards	0,0005	15 mm	1500	2	300
542-195	0 - 25	(0,8+L/50) µm L=measured length in mm	4,6 N with spindle down, 4,3 N with spindle horizontal, 4 N with spindle upwards	0,0001	15 mm	400	0,4	300
542-196	0 - 50	(1,5+L/50) µm L=measured length in mm	5,7 N with spindle down, 5,3 N with spindle horizontal, 4,9 N with spindle upwards	0,001	15 mm	1500	4	400
542-197	0 - 50	(1,5+L/50) µm L=measured length in mm	5,7 N with spindle down, 5,3 N with spindle horizontal, 4,9 N with spindle upwards	0,0005	15 mm	1500	2	400

if no EJ-Counter is used, an adapter is necessary (for all LG100 models)

Specifications

Cable length	2 m
Scale	Photoelectric linear encoder
Contact point	Ø3 mm carbide ball, thread: M 2,5 x 0,45
Output signal	90° phase difference, differential square wave (RS-422 equivalent)
Environmental conditions	0°C to 50°C (20% to 80% rel. humidity, no condensation)
Bearing type	Linear ball bearing
Power supply	DC 5 V ±0,2 V ripple voltage 200 mVpp max
Minimum edge distance	500 ns (1 µm type), 250 ns (0,5/0,1 µm type)
Scale reference point	3 mm from the lowest rest point (10 mm type), 5mm from the lowest rest point (25/50 mm type)

Optional accessories

No.	Description
21HAA331	HNBR Rubber Boot (for 10 mm range model), 10 mm model
21HZA176	HNBR Rubber Boot (for 25 mm range model), 25 mm model
21HZA184	HNBR Rubber Boot (for 50 mm range model), 50 mm model
21HZA197	Extension Cable 5 m (10P-10P)
21HZA198	Extension Cable 10 m (10P-10P)
21HZA199	Extension Cable 20 m (10P-10P)
21HZA196	Exchange Plug (for Z-Counter)
21HZA261	Exchange cable (for Z-Counter)
21HZA195	Exchange Plug (for P-Counter)
21HZA260	Exchange cable (for P counter)
02ADE230	Air Drive Unit for Linear Gauges 10 mm, 10 mm
02ADE250	Air Drive Unit for Linear Gauges 25 mm, 25 mm
02ADE270	Air Drive Unit for Linear Gauges 50 mm, 50 mm
02ADB680	Thrust Stem Set (for 10 mm model)
02ADB681	Thrust Stem (part)
02ADB682	Nut (part)
02ADB683	Spanner Wrench (for 02ADB682)
02ADN370	Thrust Stem Set (for 25 mm and 50 mm range model)
02ADN371	Thrust Stem (part), for 25 mm and 50 mm model
02ADB692	Nut (part)
02ADB693	Spanner Wrench (for 02ADB692)
238772	Silicone Rubber Boot (for 10 mm model)
962504	Silicone Rubber Boot (for 25 mm model)
962505	Silicone Rubber Boot (for 50 mm model)
542-071D	Linear Gauge Counter EH, (need 21HZA195)
542-075D	Linear Gauge Counter EH, (need 21HZA195)
542-073D	Linear Gauge Counter EH, (need 21HZA196)
542-080	EJ-Counter -102N
542-081	EJ Counter-102NE

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Linear Gauge LG200 Series

Linear Gauge LG200 Series

IP67 G

This slim type linear gauge allows you to meet a variety of measurement needs.

- Differential square wave signal output enables use for a wide range of applications.
- Due to its compact design, you can install it even where space is restricted.
- Its photoelectric scale delivers high precision across the entire measuring range.
- Extremely long-lasting due to linear ball-bearings in the spindle unit.
- Perfect for use in tough environments, they come with a high IP class of IP67G.
- Ideal for in-line measurement and embedded in automatic machines.

Specifications

Scale	Photoelectric linear encoder
Stem ∅	8 mm
Contact point	Ø 3 mm carbide ball, thread: M 2,5 x 0,45
Repeatability (±2σ)	0,3 µm (20°)
Cable length	2 m
Power supply	5 V (4,5 V to 5,2 V), 80 mA max.
Output signal	90° phase difference, differential square wave (RS-422A equivalent) minimum edge distance 500 ns (0,1 µm type), 250 ns (0,1 and 0,5 µm type)
Environmental conditions	0° C to 50° C (20% to 80% rel. humidity, no condensation)
Bearing type	Linear ball bearing

Optional accessories

No.	Description
21HZA197	Extension Cable 5 m (10P-10P)
21HZA198	Extension Cable 10 m (10P-10P)
21HZA199	Extension Cable 20 m (10P-10P)
21HZA195	Exchange Plug (for P-Counter)
21HZA260	Exchange cable (for P counter)
21HZA196	Exchange Plug (for Z-Counter)
21HZA261	Exchange cable (for Z-Counter)
02ADE230	Air Drive Unit for Linear Gauges 10 mm, 10 mm
02ADB680	Thrust Stem Set (for 10 mm model)
238772	Silicone Rubber Boot (for 10 mm model)
Connectable Counter	
542-080	EJ-Counter -102N
542-081	EJ Counter-102NE
542-075D	Linear Gauge Counter EH, (need 21HZA195)
542-071D	Linear Gauge Counter EH, (need 21HZA195)

*the EH-counter need 21HZA195

Consumable spares

No.	Description
21HAA331	HNBR Rubber Boot (for 10 mm range model), 10 mm model
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric


Refer to the Linear Gauge documentation for more details




LG200

No.	Range [mm]	Accuracy	Measuring force	Resolution [mm]	Signal pitch [µm]	Max. response speed	Mass [g]
542-186	0 - 10	(1,5 + L/50) µm L=measured length in mm	0,8 N with spindle down, 0,75 N spindle horizontal, 0,7 N spindle upwards	0,001	4	1500	175
542-187	0 - 10	(1,5 + L/50) µm L=measured length in mm	0,8 N with spindle down, 0,75 N spindle horizontal, 0,7 N spindle upwards	0,0005	2	1500	175
542-188	0 - 10	(0,8 + L/50) µm L=measured length in mm	0,8 N with spindle down, 0,75 N spindle horizontal, 0,7 N spindle upwards	0,0001	0,4	400	175

*1 Spindle DOWN/Horizontal/UP



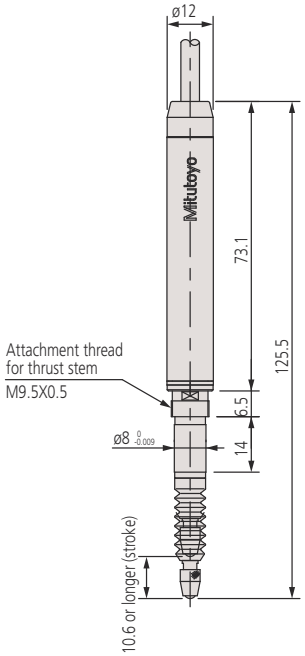

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

ABSOLUTE Digimatic Linear Gauge LGS Series

The LGS is a compact ABS linear gauge that offers you the following benefits:

- Its ABSOLUTE Digimatic data output and IP-66 protection class give you best-of-breed technology.




575-303

Metric

No.	Range [mm]	Accuracy	Measuring force	Stem ∅	Direction of counting	Mass [g]
575-303	0 - 12,7	15 µm	2 N with spindle down, 1,8 N spindle horizontal, 1,6 N spindle upwards	8 mm	positive	190

*1 Spindle DOWN/Horizontal/UP

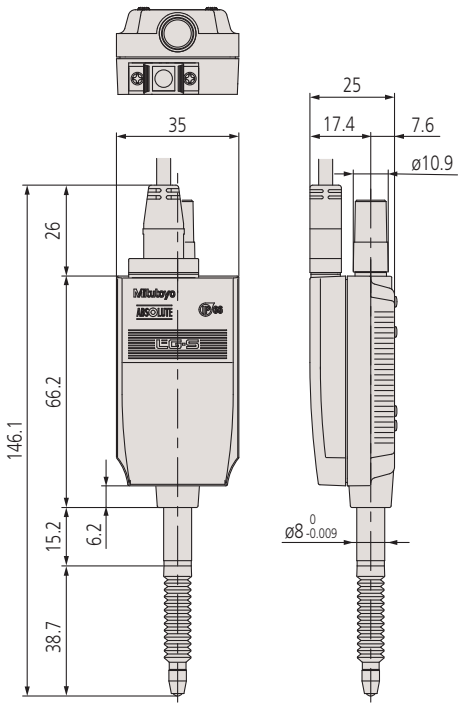

Specifications

Scale	Electrostatic capacitance-type ABSOLUTE linear encoder
Contact point	Ø3 mm carbide ball thread : M 2,5 x 0,45 mm
Cable length	2 m
Max. response speed	Unlimited (measuring by scanning cannot be performed)
Output signal	Digimatic
Environmental conditions	0 °C to 40 °C (20 % to 80 % rel. humidity, no condensation)
Bearing type	Slide bearing
Digital step	0,01 mm

Optional accessories

No.	Description
02ADF640	Extension Adaptor, for SPC Cables.
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
903594	Air Drive Unit, Indicator/Linear Gauge, for ID-S, ID-C, LGS, 12,7 mm and 0,5" Range
542-007D	Display Unit EC-Counter, CEE, for Digimatic Gauges
542-072D	Linear Gauge Counter EH, for LGS, LGD, Scale Units
63AAA033	Digimatic Interface DMX-8/2, 8x Digimatic Input, Serial D-SUB 9 Connector
63AAA026	Digimatic Interface DMX-16, 16x Digimatic Input, Serial D-SUB 9 Connector
63AAA106	Digimatic Interface DMX-16C, 16x Digimatic Input, Serial D-SUB 9 Connector

Consumable spares

No.	Description
238774	Silicon rubber boot for ID-C, ID-N, ID-S

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Air Drive Unit

Specifications

Throttle	Interior Ø 2,5 mm Exterior Ø 3,2 mm

Refer to the Linear Gauge documentation for more details

Air Drive Unit

- Provides smooth lifting and lowering of the contact point of a gauge by pneumatic cylinder.
- The speed of lift can be regulated by the throttle on the remote cylinder.




02ADE230



02ADE250/02ADE270

No.	Remarks	Suitable for gage model	Air supply [MPa]	Mass [g]
02ADE230	Need air filter, regulator and lubricator	LG200 and LG100 10mm models	0,2 to 0,4	
02ADE250	Need air filter, regulator and lubricator	LG100 25mm models	0,2 to 0,4	
02ADE270	Need air filter, regulator and lubricator	LG100 50mm models	0,2 to 0,4	
903594	Need air filter, regulator and lubricator	ID-S, ID-C, LGS 12,7mm range models	0,5	60

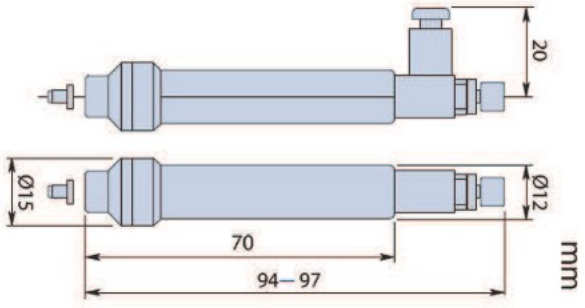

903594

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Laser Hologauge LGH

This is a highly precise dial gauge that uses optical interference so you can measure with unparalleled accuracy.
The Mitutoyo Laser Hologage offers you the following benefits:


- Through optical interference of laser light through a diffraction grating it gives you an extremely precise holographic scale with 0.00001mm resolution.
- You can use the Laser Hologage for extremely precise measurements, as well as a transducer in ultra-precise positioning and control systems.



542-715D

No.	Range [mm]	Accuracy	Measuring force	Resolution [µm]	Stem ∅	Repeatability	Mass [g]
542-715D	0 - 10	0,2 µm	0,65 N with spindle down, 0,55 N spindle horizontal, 0,45 N spindle upwards	0,01	15 mm	0,1 µm	220
542-716D	0 - 10	0,2 µm	0,12 N with spindle down/ - / -	0,01	15 mm	0,1 µm	220

*1 Spindle DOWN/Horizontal/UP

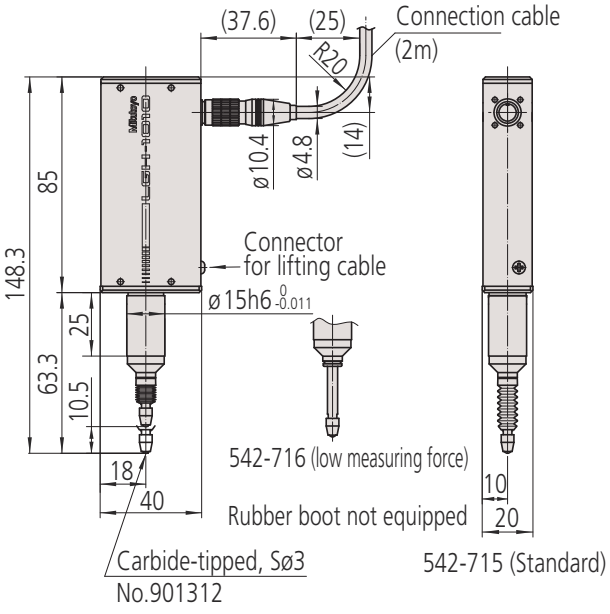

542-715D

Specifications

Scale	Laser-hologram measurement sensor
Max. response speed	700 mm/s
Contact point	Ø 3 mm carbide ball, thread: M 2,5 x 0,45
Output signal	90° phase difference, differential square wave (RS-422A equivalent)
Signal pitch	4 µm
Bearing type	High precision linear ball bearing
Environmental conditions	0C to 40°C (20% to 80% rel. humidity, no condensation)
Delivered	With Display Unit

Standard accessories

No.	Description
538610	Wrench Key/542

Optional accessories

No.	Description
971750	Laser Hologauge stand
971753	Spindle lifting cable
971751	Gage Fixture (A) LHG
971752	Fastening system, Laser Hologage

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric

Refer to the Linear Gauge documentation for more details

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Laser Hologauge LGH

Functions	
Data output	●
ON/OFF	●
Error display/output	●
MAX / MIN / difference measurement	●
Mm / inch switching	●
RS-232C Output	●
USB Output for SENSORPAK	●
Extern tolerance set (when a PC is used)	●

Specifications

Scale	Laser-hologram measurement sensor
Max. response speed	250 mm/s
Contact point radius	R=5 mm carbide
Bearing type	High precision linear ball bearing
Environmental conditions	10°C to 30°C (30% to 70% rel. humidity, no condesation)
Delivered	With Display Unit

Standard accessories

No.	Description
538610	Wrench Key/542

Optional accessories

No.	Description
971750	Laser Hologauge stand
971753	Spindle lifting cable
971751	Gage Fixture (A) LHG
971752	Fastening system, Laser Hologage

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric



Refer to the Linear Gauge documentation for more details

This is a highly precise dial gauge that uses optical interference so you can measure with unparallelled accuracy.
The Mitutoyo Laser Hologage offers you the following benefits:

- Through optical interference of laser light through a diffraction grating it gives you an extremely precise holographic scale with 0.005 µm resolution.
- The measuring head is very compact, enabling you to build it into various systems far less expensively than conventional laser technology.
- You can use the Laser Hologage for measuring extremely precise parts, as well as a transducer in ultra-precise positioning and control systems.




542-720D



Laser Hologage supplied with Display Unit (2 axis counter)

No.	Range [mm]	Accuracy	Measuring force	Resolution [µm]	Stem ∅	Repeatability	Mass [g]
542-720D	0 - 10	0,1µm	0,65 N with spindle down, 0,55 N spindle horizontal, 0,45 N spindle upwards	0,005	15 mm	0,02 µm	220
542-721D	0 - 10	0,1µm	0,1 N with spindle down/ - / -	0,005	15 mm	0,02 µm	220

*1 Spindle DOWN/Horizontal/UP

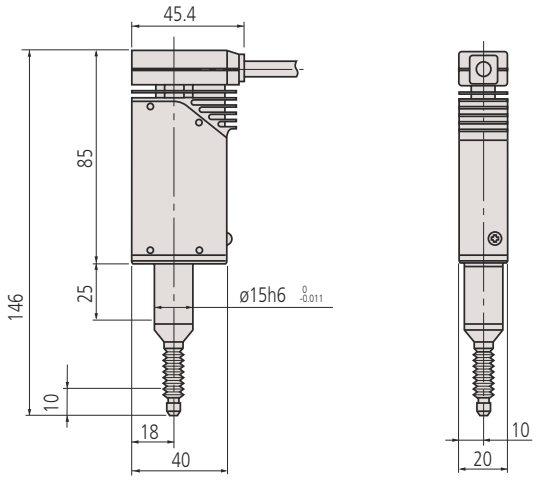

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

EJ Counter and Interfaces for Linear Gauges

The EJ-Counter is targeted at secondary and automatic embedded markets as well as conventional measurement rooms.


- Multipoint measuring systems with a maximum of 16 gauges can be configured.
- The EJ-Counter is attached to a DIN rail for use. Due to the small size of the unit, it can be installed inside of switchboards /equipment. When using multiple EJ Counters linked together, connection of power to one EJ Counter also supplies power to the other linked counters.
- In addition, through the industrial I/F unit (sold separately), data can be managed on the upper side, and it is possible to support smart factories such as IoT and M2M.
- Easy setup with the LG QuickSetup Tool software (free of charge) (USB interface is required).



EJ-Counter-102N



Counter unit (EJ-102N) + Interface unit (21HZA186)

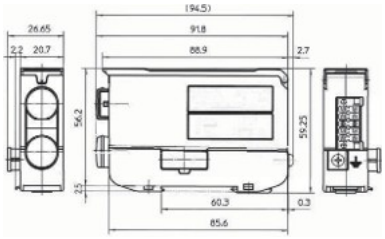

542-080

Functions	
ZERO SET	●
Origin detection	●
PRESET	●
External HOLD	●
External CLEAR	●
External 1 / 2 SELECT	●
MAX / MIN / difference measurement	●
Internal calculation	●
Tolerance indicator	●
Extern tolerance set (when a PC is used)	●
Tolerance judgement (3 or 5 step)	●
Counting direction switchable	●
External PRESET / ZERO	●

Specifications

Operating temperature / humidity	0°C to 50°C / 20% to 80% rel. humidity, no condensation
Storage temperature / humidity	-10°C to 60°C / 20% to 80% rel. humidity, no condensation
Power supply	Input voltage: 10 - 27V DC supplied from EJ-Counter Maximum power consumption: Single EJ Counter: 3W or less Maximum consolidation: 30W or less

Optional accessories

No.	Description
21HZA157	DIN Stoppers
21HZA149	USB I/F unit for EJ Counter
21HZA186	CC-Link / I/F unit for EJ Counter
21HZA187	PROFINET I/F unit for EJ Counter
21HZA188	Ethernet/IP I/F unit for EJ Counter
21HZA264	EtherCAT I/F unit for EJ Counter
21HZA193	Connector Adapter Cable (for P-Gage)
21HZA194	Connector Adapter Cable (for Z-Gage)
21HZA209	DC Jack with Pin Terminal
357651	AC-Adapter 12V, CEE Type, for SJ-210/ SJ-310/LH-600/QM-Data 200
02ZAA020	AC-Cordset CEE, 1,8m for EU (excl. UK)

Metric

EJ-Counter-102N

No.	Max. input frequency	Input signal type	Applicable gauge	Gauge inputs	External input / output	Mass [g]
542-080	5 MHz	differential square wave (RS422A equivalent)	LG100, LG200	2	In: 4 ports / Out: 4 ports Applicable communications standards: Supported by optional interface unit	120

Metric/Inch

EJ-Counter-102NE

No.	Max. input frequency	Input signal type	Applicable gauge	Gauge inputs	External input / output	Mass [g]
542-081	5 MHz	differential square wave (RS422A equivalent)	LG100, LG200	2	In: 4 ports / Out: 4 ports Applicable communications standards: Supported by optional interface unit	120

Interface unit CC-Link

No.	Baud rate	Connector type	Industrial I/F	Data transfered	Mass [g]
21HZA186	USB 2 Full speed (12Mbps)	Type C	CC-Link Ver. 1.10 CC-Link Ver. 2.00	Current value data* (No unit, signed 32bit data); Tolerance judgment result *only Ver. 2.00 supported	154

Interface unit EtherCAT

No.	Baud rate	Connector type	Industrial I/F	Data transfered	Mass [g]
21HZA264	USB 2 Full Speed (12Mbps)	Type C	EtherCAT	Current value data (No unit, signed 32 bit data), Tolerance judgment result	165

Interface unit Ethernet/IP

No.	Baud rate	Connector type	Industrial I/F	Data transfered	Mass [g]
21HZA188	USB 2 Full Speed (12 Mbps)	Type C	EtherNet/IP	Current value data (No unit, signed 32 bit data), Tolerance judgment result	165

Interface unit PROFINET

No.	Baud rate	Connector type	Industrial I/F	Data transfered	Mass [g]
21HZA187	USB 2 Full Speed (12 Mbps)	Type C	PROFINET RT (RT Class1)	Current value data (No unit, signed 32 bit data), Tolerance judgment result	165

Interface unit USB

No.	Baud rate	Connector type	Industrial I/F	Data transfered	Mass [g]
21HZA149	USB 2 Full speed (12Mbps)	Type C	None	Current value data (No unit, signed 32 bit data), Tolerance judgment result	115

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

EJ Counter and Interfaces for Linear Gauges



USB (21HZA149)



CC-Link (21HZA186)



PROFINET (21HZA187)




EtherNet/IP (21HZA188)




EtherCAT (21HZA264)




General settings

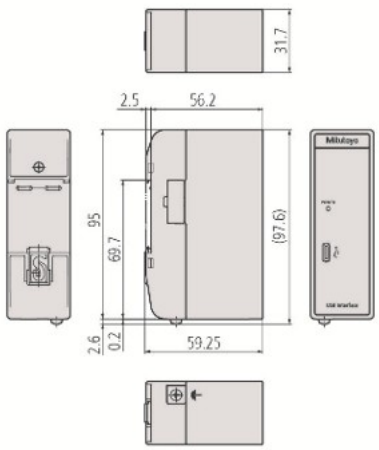


Interface unit USB (21HZA149)

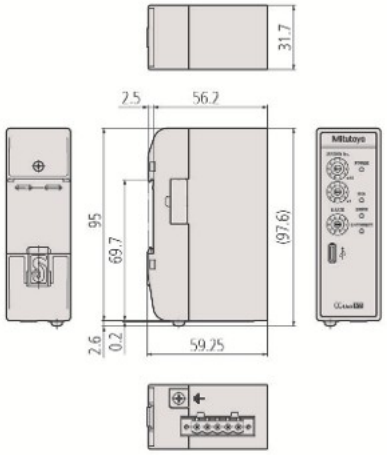


Interface unit CC-Link (21HZA186)

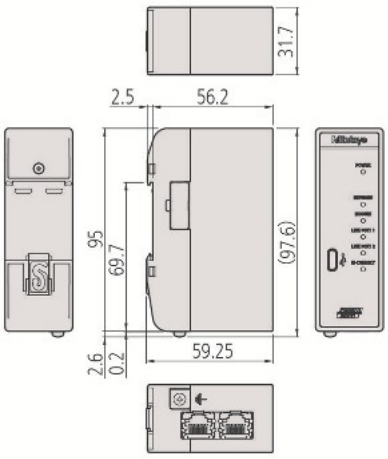

Interface unit PROFINET (21HZA187)

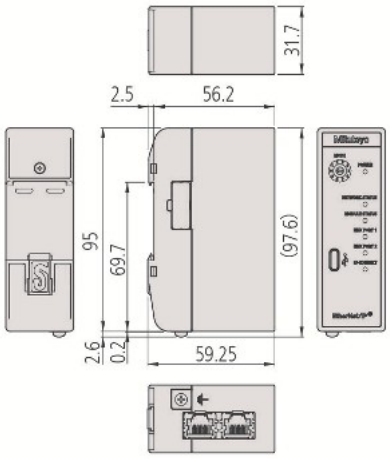

Interface unit EtherNet/IP (21HZA188)

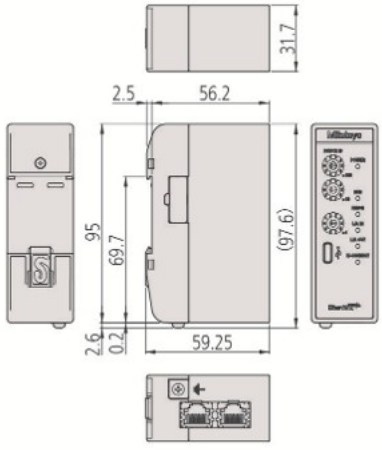

Interface unit EtherCAT (21HZA264)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

EH Counter for Linear Gauges

EH Counter for Linear Gauges

Multi-functional Counter


- The standard RS-232C and USB interfaces allows easy communication with an external PC (the USB can only be used with SENSORPAK).
- The built-in networking function allows you to easily create a multi-point measuring system (RS link, max. 10 Counter).
- The 2-gauge input type can calculate additions and subtractions between two gauges.



542-075D



542-071D, 542-073D, 542-072D



542-075D



542-071D




542-073D



542-072D

No.	Resolution [mm]	Max. input frequency	Input signal type	Applicable gauge	Gauge inputs	Mass [g]
542-075D	0,0001/0,001/0,01	2,5 MHz (2-phase square wave), response speed depends on gauge specification	Differential square-wave	LGF, LGK, LGB, LG, LGM, LGH (excluding LGF-Z with reference point, LGH with 0,01 µm resolution), LG100 with connector adapter plug 21HZA195	1	760
542-071D	0,0001/0,001/0,01	2,5 MHz (2-phase square wave), response speed depends on gauge specification	Differential square-wave	LGF, LGK, LGB, LG, LGM, LGH (excluding LGF-Z with reference point, LGH with 0,01 µm resolution), LG100 with connector adapter plug 21HZA195	2	800
542-073D	0,0001/0,001/0,01	2,5 MHz (2-phase square wave), response speed depends on gauge specification	Differential square-wave with reference point	LGF-Z with reference point, LG100 with connector adapter plug 21HZA196	2	800
542-072D	0,001/0,01 (automatic setting by gauge)	-	Digimatic code	Digimatic Indicator Digimatic Scale Units Linear Gauge LGS/LGD	2	800

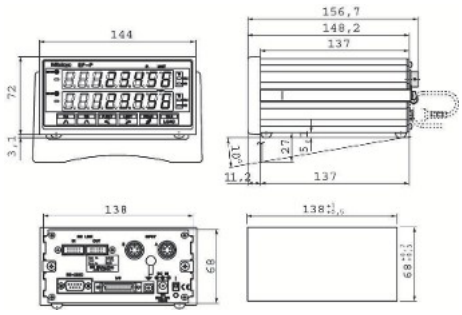

Functions	EH Counter for Linear Gauges 542-071D 542-073D	542-072D	542-075D
Data output	●	●	●
ON/OFF	●	●	●
Sum/difference calculation	●	●	
ABS/INC		●	
BCD output	●	●	●
Error display/output	●	●	●
External HOLD	●	●	●
MAX / MIN / Difference measurement	●	●	●
Mm / inch switching	●	●	●
Lower digit blank-out			●
RS link	●	●	●
RS-232C Output	●	●	●
ZERO SET	●	●	●
PRESET	●	●	●
I/O Output	●	●	●
USB Output for SENSORPAK	●	●	●
Extern tolerance set (when a PC is used)	●	●	●
Counting direction switchable	●	●	●
External PRESET / ZERO	●	●	●

Specifications

Power supply	Via AC Adapter (12-24 V DC, 700 mA)
Tolerance judgement display	LED display (3 steps : Amber, Green, Red/5 steps : Amber, Amber flashing, Green, Red flashing, Red)

Standard accessories

No.	Description
02ZAA020	AC-Cordset CEE, 1,8m for EU (excl. UK)

Optional accessories

No.	Description
02ADB440	Data Plug I/O Interface, for Litematic
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
12AAA807	Cable RS-232C, 2m for LH-600 B, C, D, E
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
21HZA195	Exchange Plug (for P-Counter)
21HZA196	Exchange Plug (for Z-Counter)
21HZA260	Exchange cable (for P counter)



02ADB440

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

EC Counter for Linear Gauges

Functions	
Data output	●
ON/OFF	●
ABS/INC	●
Error display/output	●
External HOLD	●
Mm / inch switching	●
ZERO SET	●
PRESET	●
Counting direction switchable	●
External PRESET / ZERO	●

This Digimatic display can be connected to any device with Digimatic output, including micrometers, indicators, calipers and LGS/LGD Linear Gauge.
It offers you the following benefits:

- It has a data output and tolerance evaluation function.



542-007D



Specifications

Power supply	+ 9 - 12 V DC 400 mA or AC adapter
Tolerance judgement display	LED display (3 steps: Amber, Green, Red)


No.	Resolution [mm]	Input signal type	Applicable gauge	Gauge inputs	Mass [g]
542-007D	0,001/0,01 (automatic setting by gauge)	Digimatic code	Digimatic Indicator Digimatic Scale Units Linear Gauge LGS/LGD	1	500

Optional accessories

No.	Description
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
21HZA195	Exchange Plug (for P-Counter)



Refer to the Linear Gauge documentation for more details

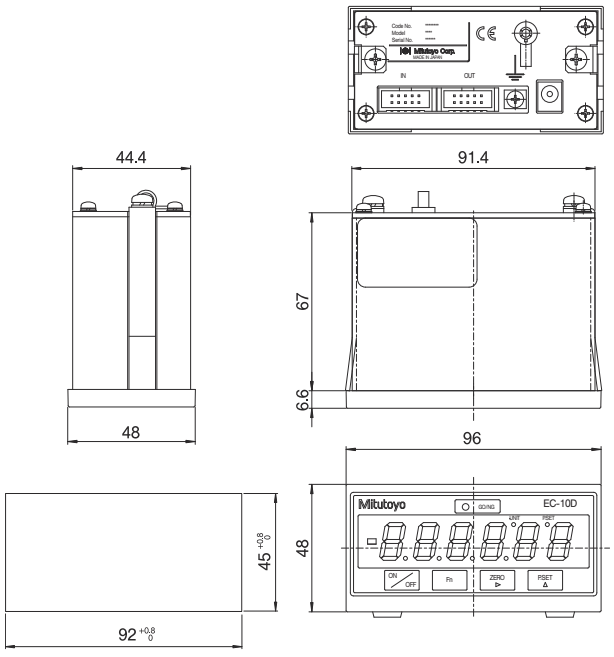

542-007D

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

SENSORPAK

MeasurLink ENABLED

The SENSORPAK supports the development of measuring facilities and measuring stations.
It offers you the following benefits:

- It can simultaneously display measurement values from up to 60 sensors in real time.
- You can make calculations using measurement values from up to 30 sensors in real time.
- It enables a huge range of different graphical presentations of using measurement, such as number representation, pointer representation, scale representation.
- Data registration can be made in control cards or data tables.
- You can also carry out further data processing with external software, such as Microsoft® Excel® or MeasurLink.



Measurement screen



Meter screen

Model	SENSORPAK
No.	**02NGB072**
Output function	Direct output to Microsoft® Excel® spreadsheet, CSV file output (compatible with MeasurLink)
Total tolerance judgement	GO/NG judgement (by specifying gauges to be used for total tolerance judgement) GO/NG signal output with optional I/O cable
Input function	Trigger function : by means of keys timer or external TRG (with optional I/O cable) Data input frequency : Max. 9999 times (with 60 gages connected) to 60000 times (with 6 gages connected)
Applicable counter	Counters with RS-232C interface (EH and EV), with USB interface (EH)
Display	Display type : Counter, bar graph, meter, chart (capable of simultaneous display) Tolerance judgement result : Colour display (green/red) Connectable gauges : Max. 60 gages

Specifications

OS compatibility	Windows® 7 (32/64 bit) Windows® 8. 1 (32/64 bit) Windows® 10 (64bit) Windows® 11 (64bit) Excel® 2007, 2010, 2013

Optional accessories

No.	Description
12AAA807	Cable RS-232C, 2m for LH-600 B, C, D, E

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

LITEMATIC VL-50
Motorized low force, high precision gauges

Functions	LITEMATIC VL-50S separate display type
ABS / INC (INC ZERO)	●
Data output	●
Key lock	●
Mm / inch switching	●
Tolerance input (3 or 5 levels)	●
Motorized plunger movement	●
Mode : max-min (TIR) reading	●

Specifications

Measuring range (inside)	0-50 mm
Data output	DIGIMATIC RS 232C INTERFACE I/O

Optional accessories


No.	Description
K543722	Vacuum holder for high accuracy thickness measurement of battery foil samples, Precision Vacuum Specimen Holder for VL-50 LITEMATIC
K543753	Adaptor plate for K543722 , for the attachment to stand 957460 for LITEMATIC head type
02ADB440	Data Plug I/O Interface, for Litematic
957460	Litematic Head Stand
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
12AAA807	Cable RS-232C, 2m for LH-600 B, C, D, E
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
02AZE375	Weight Part for VL
937179T	Footswitch for SPC

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric



Controller





Refer to the LITEMATIC documentation for more details

LITEMATIC VL-50S separate display type


This is a high-accuracy gauge head with a separate controller.
The LITEMATIC VL-50S offers you the following benefits:

- Measuring range: 0 - 50mm
- Measuring accuracy (20 °C) up to (0.5+L/100) µm
- L = arbitrary measuring length (mm)
- Repeatability up to σ 0.05 µm
- The granite stand shown is an optional accessory




LITEMATIC VL-50S with optional Head Stand (957460).

No.	Accuracy	Measuring force	Type	Mass [kg]
318-226-10D	up to (0,5 + L/100) µm L = Measurement height	0,01 N (1 gf)	VL-50S-B	5
318-227-10D	up to (0,5 + L/100) µm L = Measurement height	0,15 N (15 gf)	VL-50S-15-B	5
318-228-10D	up to (0,5 + L/100) µm L = Measurement height	1 N (102 gf)	VL-50S-100-B	5

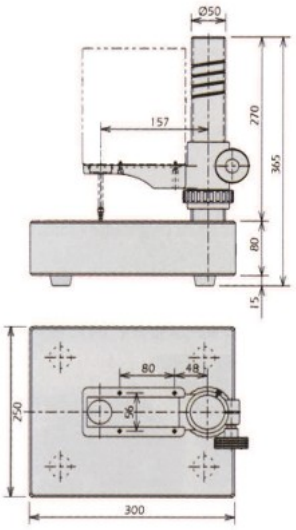

957460 Comparator stand

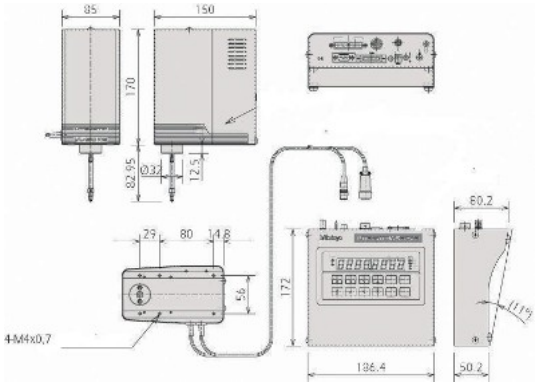

318-226-10D/318-227-10D/318-228-10D

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

LITEMATIC VL-50
Motorized low force, high precision gauges

LITEMATIC VL50 standard type


This is a high-accuracy motorised measuring machine with safe and easy operation.
The LITEMATIC VL-50 offers you the following benefits:

- Measuring range: 0 - 50mm
- Measuring accuracy (20 °C) up to (0.5+L/100) µm
- L = arbitrary measuring length (mm)
- Repeatability up to σ 0.05 µm



318-221-10D/318-222-10D/318-223-10D

No.	Accuracy	Measuring force	Type	Mass [kg]
318-221-10D	up to (**0,5 + L/100**) µm L = Measurement height	**0,01 N** (1 gf)	VL-50 B	16
318-222-10D	up to (**0,5 + L/100**) µm L = Measurement height	**0,15 N** (15 gf)	VL-50-15-B	16
318-223-10D	up to (**0,5 + L/100**) µm L = Measurement height	**1 N** (102 gf)	VL-50-100-B	16

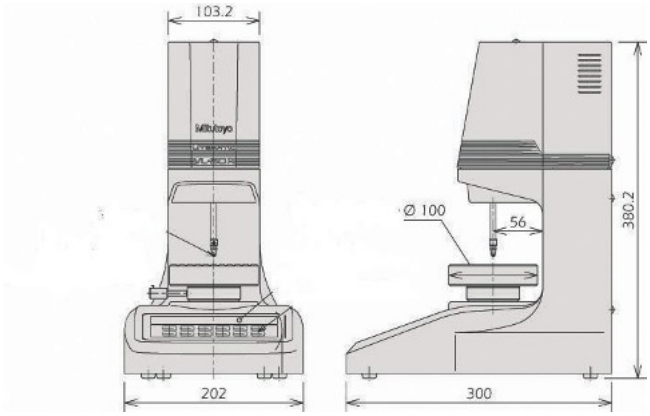

318-221-10D/318-222-10D/318-223-10D

Functions	LITEMATIC VL50 standard type
ABS / INC (INC ZERO)	●
Data output	●
Key lock	●
Mm / inch switching	●
Tolerance input (3 or 5 levels)	●
Motorized plunger movement	●
Mode : max-min (TIR) reading	●

Specifications

Measuring range (inside)	0-50 mm
Data output	Digimatic RS-232C INTERFACE I/O

Optional accessories

No.	Description
K543722	Vacuum holder for high accuracy thickness measurement of battery foil samples, Precision Vacuum Specimen Holder for VL-50 LITEMATIC
02ADB440	Data Plug I/O Interface, for Litematic
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
06AFM380D	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Flat 10-Pin Type
12AAA807	Cable RS-232C, 2m for LH-600 B, C, D, E
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
02AZE375	Weight Part for VL
937179T	Footswitch for SPC

Consumable spares

No.	Description
901312	Contact Element Ball Point, M2,5x0,45, 7,3mm Length, Carbide, Metric





Refer to the LITEMATIC documentation for more details

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surface Measure

Surface Measure

Stand-alone non-contact line-laser sensor with small measuring range for high accuracy applications.

Main benefits:

- High accuracy and environment-resistant sensor
- Supporting automated measurement
- Excellent operability simply by using a mouse
- Simple and intuitive interface
- Web-browser based, no need to install software
- Various built-in measurement
- 2D and 3D data can be obtained

Specifications

Power supply	24V to 48VDC (15W)
Laser Class EN/IEC	CLASS 2 (EN/IEC 60825-1:2014)
Laser Class JIS	CLASSE 2 (JIS C 6802:2014)
Line Laser Medium	Semiconductor laser
Operating Environment Temperature	0°C to 40°C
Operating Environment Humidity	RH 20% to 80%, non-condensing
Storage Environment Temperature	-30°C to 70°C
Storage Environment Humidity	RH 20% to 95%, non-condensing
IP Protection Class	IP67*2

Optional accessories

No.	Description
Multi Sensor System:	
02AQL401	Master810 Network Hub 8 Sensors, Multi Sensor Network Hub Master for max. 8 Sensors
02AQL402	Master2410 Network Hub 24 Sensors, Multi Sensor Network Hub Master for max. 24 Sensors
02AQL421	GoMax NX smart vision plug type: F, GoMax NX high-performance smart vision embedded device, plug type: F



553-100



553-110



553-120


No.	Maximum measuring width [mm]	Measuring range	Working distance [mm]	Scanning error (1σ)*1 [µm]	Frame rate	Line Laser Wavelength	Line Laser Max. Power [mW]	Mass
553-100	100	80	80	20	Max. 10kHz	405nm (visible)	2,2	650 g
553-110	32,5	25	60	9	Max. 10 kHz	405 nm (visible)	2,2	650 g
553-120	292	290	299,5	65	Max. 10 kHz	405 nm (visible)	2,2	1480 g

*1 Accuracy inspection environment: Temperature 20°C ± 1°C, Humidity 50%RH ± 10%RH
Measurement workpieces: Specified reference ball for inspection (Φ30 mm)
Inspection method: Determined by Mitutoyo-specified inspection method.
The operating environment and the storage environment are different from the guaranteed accuracy environment.
*2 Measuring accuracy may deteriorate if any water droplet or dust particle adheres to the optical path

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surface Measure

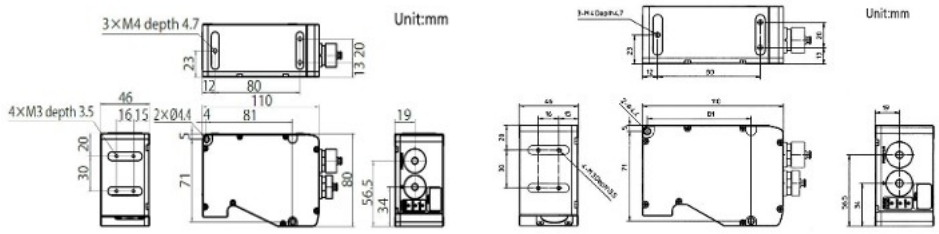


Mounting size SM1008S

Mounting size SM0303S

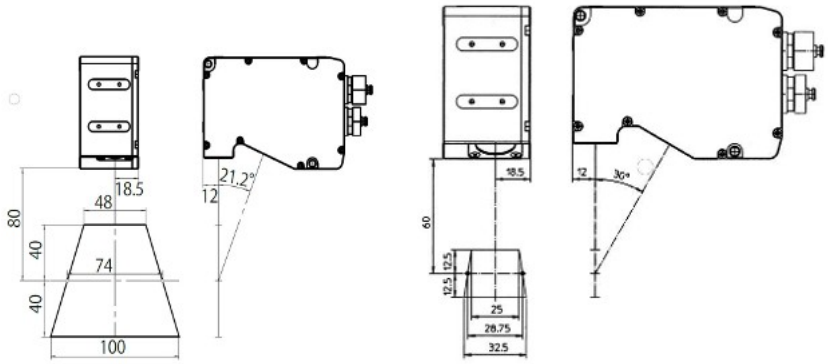

Measuring Range SM1008S
(553-100)

Measuring Range SM0303S
(553-110)

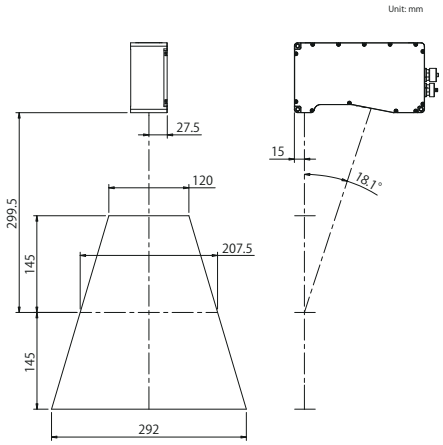

Measuring Range SM2929S
(553-120)




02AQL401



02AQL402



02AQL421

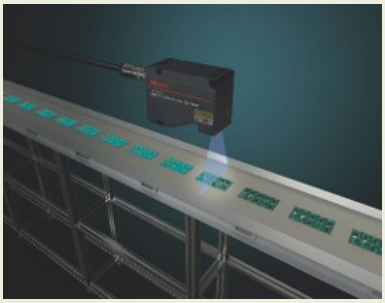

Application example

Refer to the Surface Measure documentation for more details.

Find more optional accessories at:
https://www.mitutoyo.eu.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.



Laser Scan Micrometer Measuring Unit
Page 370



Laser Scan Micrometer Controller Unit
Page 372



Laser Scan Micrometer Interface Unit
Page 373



Laser Scan Micrometer Optional Accessories
Page 374

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Laser Scan Micrometer Measuring Unit

LSM-02-A


High performance Laser Scan Micrometer

- IP67 rated
- Scan rate 3200 scans/s
- Repeatability (2 σ) : ±0,015 µm (ø1 mm)
- Linearity: ±0,3 µm
- Resolution: 0,01 µm



LSM-02-A

No.	Description	Measuring range
544-123	LSM-02-A	0,005 mm to 2 mm

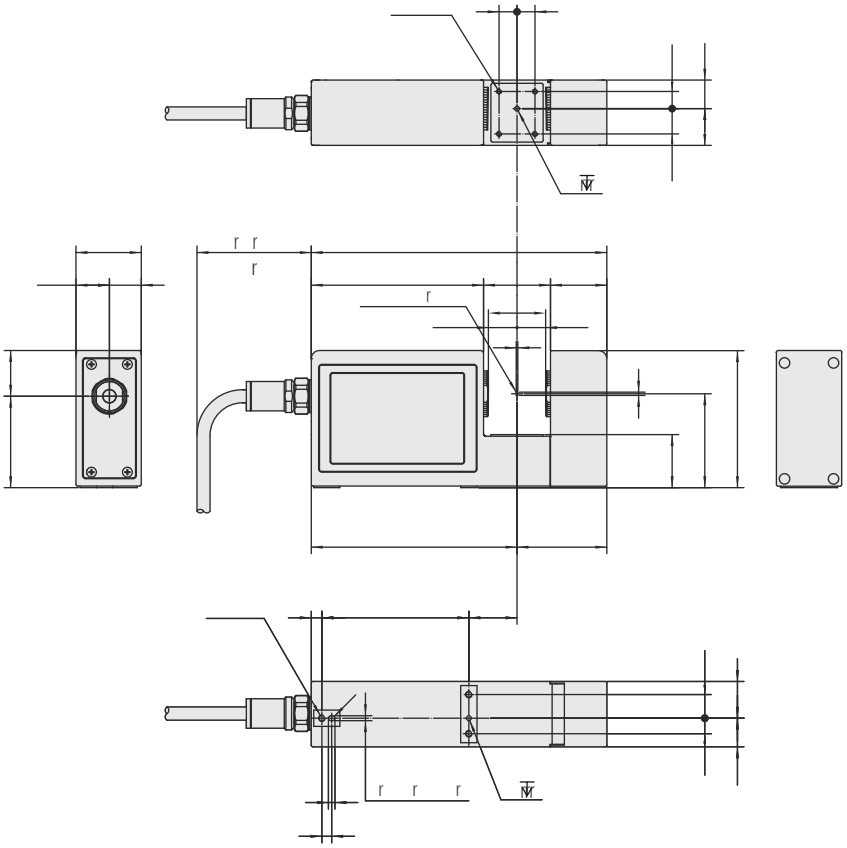


Specifications


Linearity at 20°C *1	±0,3 µm
Positional error *2	±0,4 µm
Measuring region	1 x 2 [optical axis depth] x [scanning width] mm
Laser wavelength	650 nm, visible
Scanning rate	3200 scans/s
Scanning speed	76 m/s
Applicable laser standards	JIS, IEC, FDA, Class 1
Repeatability (±2σ)	∅ 2 mm: ±0,03 µm ∅ 1 mm: ±0,015 µm

Optional accessories

No.	Description
02AGD200	Wire guiding pulley
02AGD110	Calibration Gauge Set, Ø 0,1 - 2 mm
Set consists of:	
02AGD111	Gage Stand for LSM-02-A
958200	Calibration Gauge, 0,1mm
958202	Calibration Gauge, 2mm
958203	Box for Specimens

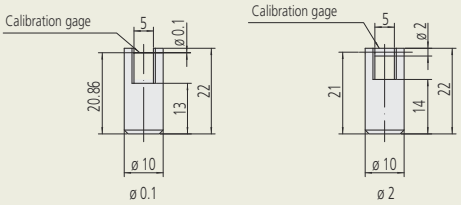

Calibration gage set for LSM-02-A

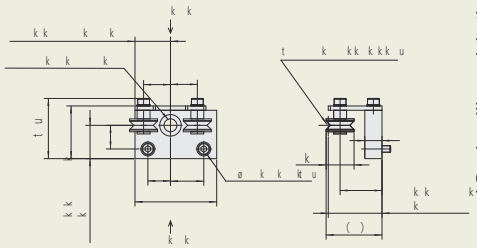

Wire guiding pulley for LSM-02-A

LSM-02-A: ø 0.1 mm to ø 1.5 mm.
Larger than ø1.5 mm, contact one of our sales or customer service representatives.
Use a calibration gage set (02AGD110) for LSM-02-A for any workpiece if calibration is necessary.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Laser Scan Micrometer Measuring Unit

LSM-30-A


High performance Laser Scan Micrometer

- IP67 rated
- Scan rate 3200 scans/s
- Repeatability (2 σ) : ±0,06 µm (ø10 mm)
- Linearity: ±1 µm



LSM-30-A

No.	Description	Measuring range
544-124	LSM-30-A	0,3 mm to 30 mm

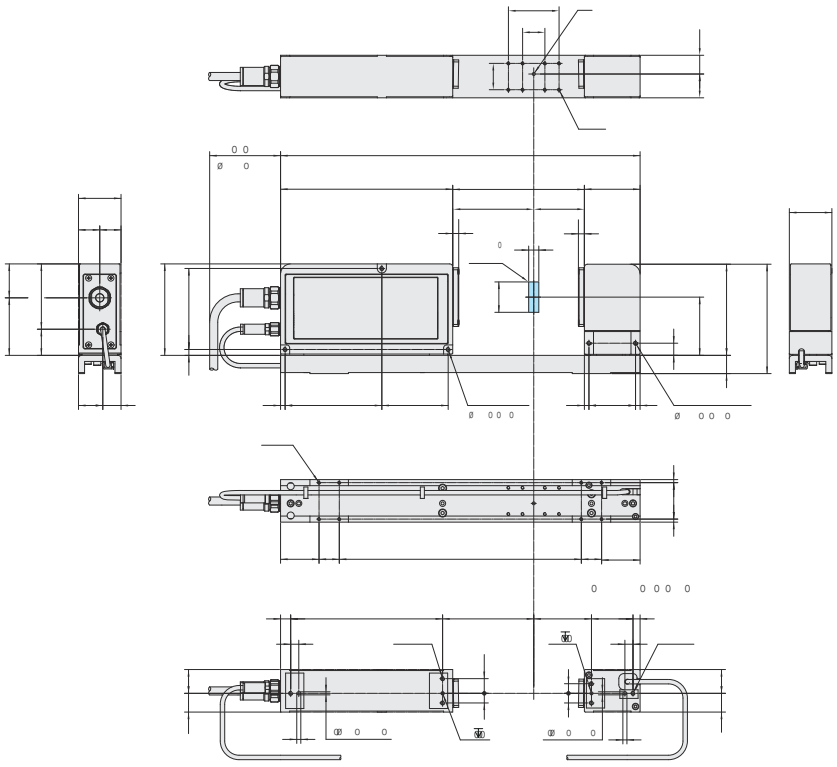


Specifications

Linearity at 20°C *1	Entire range: ± 1 µm Narrow range: ± (0,6 + 0,1 ΔD) µm
Positional error *2	Full range (10 x 30): ± 1,8 µm Middle range (5 x 20): ± 1 µm
Measuring region	10 x 30 [optical axis depth] x [scanning width] mm
Laser wavelength	650 nm, visible
Scanning rate	3200 scans/s
Scanning speed	226 m/s
Applicable laser standards	JIS, IEC, FDA, Class 1
Repeatability (±2σ)	∅ 30 mm: ±0,09 µm ∅ 10 mm: ±0,06 µm

Optional accessories

No.	Description
02AGD130	Calibration Gauge Set, Ø 1 - 30 mm
02AGQ450	Air Shield for LSM-30-A
02AGQ452	Laser Beam stabilization shield LSM-30-A
02AGQ461	LSM dual mode Kit small, Mounting Kit for LSM-30-A in dual mode for diameters from 40 to 90mm
02AGQ462	LSM dual mode Kit medium, Mounting Kit for LSM-30-A in dual mode for diameters from 90 to 140mm
02AGQ463	LSM dual mode Kit large, Mounting Kit for LSM-30-A in dual mode for diameters from 140 to 180mm
Set consists of:	
02AGD131	Gage Stand for LSM-30-A
02AGD920	Calibration Gauge, LSM Ø 1mm
02AGD961	Calibration Gauge, LSM Ø 30mm
02AGD980	GAGE SET CASE FOR LSM-30-A

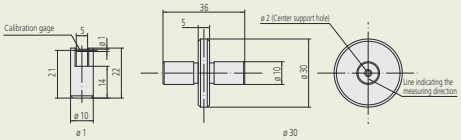

Calibration gage set for LSM-30-A

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Laser Scan Micrometer Controller Unit

LSM-CU-A


Modular industrial design controller unit for LSM-02/30-A

- Compact, slim design
- DIN rail compatible
- USB Type-C, I/O ports, and industrial interfaces (optional)
- Configuration software included



LSM-CU-A

No.	Description	Type	Mass
544-120	LSM-CU-A	metric	Approx. 550 g
544-121	LSM-CU-A	metric/inch	Approx. 550 g

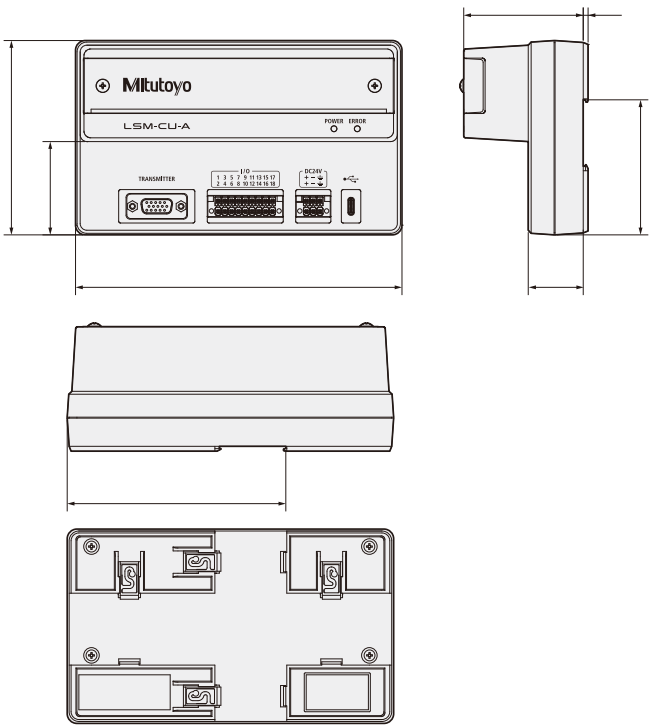

Specifications

Power supply	DC+24 V ± 10%, 3 A or more
Remarks	Transparent object measurement, Ultra-fine wire mode (LSM-2-A only), Simultaneous measurement of two items, Automatic workpiece detection, Outlier elimination, Judgment (lower limit/upper limit, multi-limit tolerance zone, target value and tolerance value), Dirt detection for protective glass, Sample measurement, Analog output, Parameter setting (Measurement condition): 20, Workpiece position, Calibration, Presetting, Offset, Statistical analysis, Calculation of two or more sets, Sensor model identification

Optional accessories

No.	Description
63AAA775	Low Power Connection Socket
63AAA679	Power Supply 24V/5A LSM, Connector 2.1mm x 5.5 center positive / EU power cord
02AGQ489	Controller Stand for LSM-CU-A

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Laser Scan Micrometer Interface Unit

Specifications

Communication ports	RJ45 x 2Communication speed
Communication speed kbps kbps	100.000
Communication cable	Cat. 5e or more STP cableOperating temperature / humidity
Operating temperature / humidity	0 °C to 50 °C,20% RH to 85% RH 20% RH to 85% RH(non-condensing) (non-condensing)
Storage temperature / hu-midity	-10 °C to 60 °C,20% RH to 85% RH 20% RH to 85% RH(non-condensing) (non-condensing)

LSM Interface Unit Optional module dedicated to LSM-CU-A.

Optional module dedicated to LSM-CU-A.Choose from four interface types to match your production lin

Choose from four interface types to match your production line requirements:
EtherNet/IP, PROFINET, EtherCAT and CC-Link IE TSN.Controller design allows for module insertion witho
Controller design allows for module insertion without altering the layout.



LSM EI-A



LSM CC-A




LSM PN-A




LSM EC-A


No.	Description	Industrial I/F
02AGQ300	LSM-EI-A	EtherNet/IP
02AGQ350	LSM-PN-A	PROFINET
02AGQ370	LSM-EC-A	EtherCAT
02AGQ390	LSM-CC-A	CC-Link IE TSN




LSM-EI-A



LSM-CC-A



LSM-PN-A



LSM-EC-A

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro



All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Laser Scan Micrometer Optional Accessories

Accessories

Refer to the LSM brochure

	No.	Application	Description
	**02AGQ450**	LSM-30-A	Air Shield
	**02AGQ452**	LSM-30-A	Laser Beam stabilization shield
	**02AGD110**	LSM-02-A	Calibration gauge set ø0.1-2 mm
	02AGD130	LSM-30-A	Calibration gauge set ø1-30 mm
	**02AGD200**	LSM-02-A	Wire guiding pulley
	**02AGD490**	LSM-30-A	Adjustable Workstage
	**02AGQ461**	LSM-30-A	Mounting Kit for LSM-30-A in dual mode for diameters from 40 to 90mm
	02AGQ462	LSM-30-A	Mounting Kit for LSM-30-A in dual mode for diameters from 90 to 140mm
	02AGQ463	LSM-30-A	Mounting Kit for LSM-30-A in dual mode for diameters from 140 to 180mm
	63AAA775	LSM-CU-A	Low Power Connection Socket
	63AAA679	LSM-02/30-A	Power Supply 24V/5A LSM
	02AGD270	LSM-30-A	Workstage
	02AGQ489	LSM-CU-A	Controller stand for LSM-CU-A
	02AGD440	LSM-30-A	Center support f. 02AGD490
	02AGD450	LSM-30-A	Adjustable V-Block f. 02ADG490
	02AGN780A	LSM-02/30-A	Extension signal cable 5 m
	02AGN780B	LSM-02/30-A	Extension signal cable 10 m
	02AGN780C	LSM-02/30-A	Extension signal cable 15 m
	02AGN780D	LSM-02/30-A	Extension signal cable 20 m

For LSM-02-A, the signal cable length is 20m max. and the relay cable is 2m max.
For LSM-30-A, the signal cable length is 29m max. and the relay cable is 5m max.
The total length of signal and relay cable is 29m max.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digital Scale and DRO Systems



DRO Linear Scales and Counters
Page 376



NC Linear Scales
Page 385




Scale Units
Page 390


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

DRO Linear Scales Selection Guide

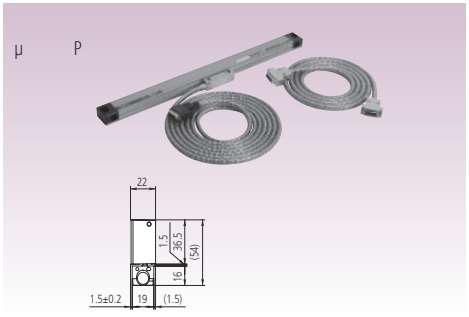

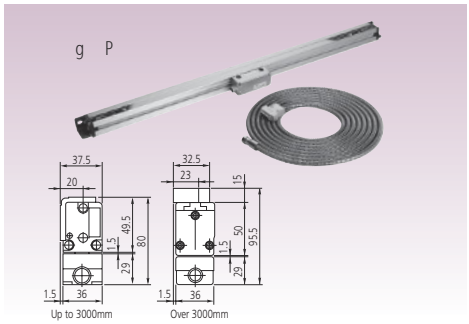



Specifications

P	P P	Pb P P c	
P			
P P		ng P P P P P P Pul	
P b P P P c	ml l PgPo l l l	ml l PgPl l l bml l PgPnl l l c	ml l PgPnql l bml l PgPnql l c
µ d P P dP P P P P mP	q Pb P vPnl l PgPql l c P s Pb P vPl l PgPml l c ml Pb P vPnl l PgPol l c	bqeq ı iml l l c d[m] bqeo ı iml l l c	bqeq ı iml l l c bqeo ı iml l l c
P P	ql i h	mnl i hd[o]	mnl i h
P P		µ P PqPl P	
P P		bt mc ml g i P	
P	q q[P	q q[P	
fP P	s l µ	s l µ d[p]Pbr l µvPµ mmoc	
P	l P Ppq		
P	gnl P Ps l		
P	nl PgPt l [		
P P			d[r]
P	q P P	q P P	
P d[q]	P Pb P P P P P P c		
i P P	r s	qo	

dmvPqet ıiml l c P P P Ponql P P P P
dqvP g P P P P P P P P P P P hP

dovPql i hP P P Ponql P P P dpvPmpl µP P P Ponql P P
drvPµ mi ovl ho fPP

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

DRO Linear Scales AT103

Sealed incremental - full size housing

IP53

These linear scales offer : Sturdy construction-high resistance to vibration-protection rating are similar in upright and reclining position

- The innovative rubber lips keep out contaminants when you are using the scale in a machine shop.
- An armoured signal cable is used to connect the scale unit to the DRO counter, so you can operate it safely even in hostile environments.
- The signal cable outlet can be positioned on either side of the slider so you can connect the signal cable from either direction.



539-133-30

Specifications

Accuracy	(5+5L/1000) µm L = Effective length (mm)
Output waveform	Two 90° phase-shifted sinusoidal signals (2Vpp)
Operation temperature	0°C to 45°C
Power supply	5V DC ± 10%
Cross section	80 x 37,5mm / 95,5 x 37,5mm
Max. drive speed	120 m/min.
Signal period	20 µm
Scale reference points	every 50 mm
Dust/water protection level	IP53

Optional accessories


No.	Description
09AAA033A	Extension Cable 2M
09AAA033B	Extension Cable 5M
09AAA033C	Extension Cable 7M
174-183D	Linear Scale Counter KA-212
174-185D	Linear Scale Counter KA-213



Extension cable


No.	Cable length [m]	Effective Length	L^0 [mm]	L^1 [mm]	L^2 [mm]	L^3 [mm]	L^4 [mm]	L^5 [mm]	L^6 [mm]	Mass [kg]
539-133-30	5	1600 mm	1600	1690	1818	1838		610		5,1
539-134-30	5	1700 mm	1700	1790	1918	1938		650		5,3
539-135-30	5	1800 mm	1800	1890	2018	2038		670		5,5
539-136-30	5	2000 mm	2000	2100	2228	2248		740		6
539-137-30	5	2200 mm	2200	2300	2428	2448		800		6,4
539-138-30	7	2400 mm	2400	2500	2628	2648	1314	1300	650	7,1
539-139-30	7	2500 mm	2500	2600	2728	2748	1364	1340	670	7,3
539-140-30	7	2600 mm	2600	2700	2828	2848	1414	1400	700	7,5
539-141-30	7	2800 mm	2800	2900	3028	3048	1514	1500	750	7,9
539-142-30	7	3000 mm	3000	3100	3228	3248	1614	1600	800	8,3


Legend
L0 Effective length
L1 Travel range
L2 Bore centre distance
L3 Total length
L4-L6 Support bracket position

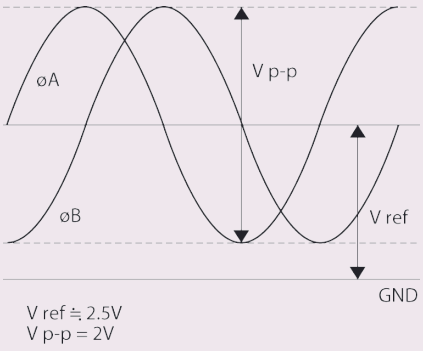

V ref ≒ 2.5V
V p-p = 2V

Output waveform

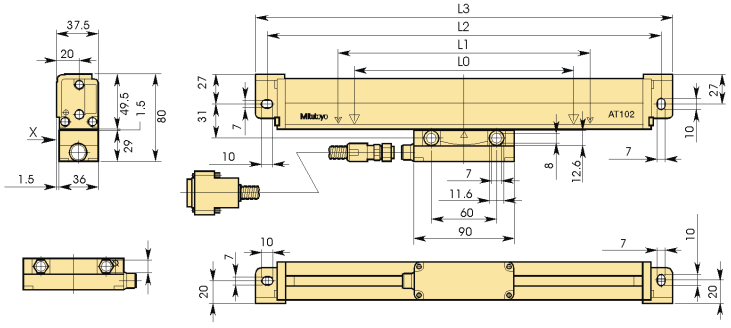

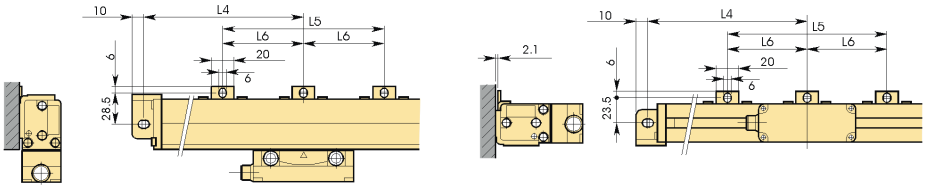

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

DRO Linear Scales AT103

Sealed incremental - full size housing -larger measuring lenght


These linear scales offer : Sturdy construction-high resistance to vibration-protection rating are similar in upright and reclining position

- The innovative rubber lips keep out contaminants when you are using the scale in a machine shop.
- An armoured signal cable is used to connect the scale unit to the DRO counter, so you can operate it safely even in harsh environments.
- The signal cable outlet can be positioned on either side of the slider, so you can connect the signal cable from either direction.



539-143-30

No.	Cable length [m]	Effective Length	L^0 [mm]	L^1 [mm]	L^3 [mm]	L^4 [mm]	L^5 [mm]	L^6 [mm]	Mass [kg]
539-143-30	10	3250 mm	3250	3350	3470	135	3200	800	10,8
539-144-30	10	3500 mm	3500	3600	3720	160	3400	850	11,4
539-145-30	10	3750 mm	3750	3850	3970	125	3720	930	12
539-146-30	10	4000 mm	4000	4100	4220	110	4000	1000	12,6
539-147-30	10	4250 mm	4250	4350	4470	135	4200	1050	13,2
539-148-30	10	4500 mm	4500	4600	4720	160	4400	1100	13,8
539-149-30	15	4750 mm	4750	4850	4970	85	4800	800	15,2
539-150-30	15	5000 mm	5000	5100	5220	120	4980	830	15,8
539-151-30	15	5250 mm	5250	5350	5470	125	5220	870	16,4
539-152-30	15	5500 mm	5500	5600	5720	130	5460	910	17
539-153-30	15	5750 mm	5750	5850	5970	135	5700	950	17,6
539-154-30	15	6000 mm	6000	6100	6220	110	6000	1000	18,2

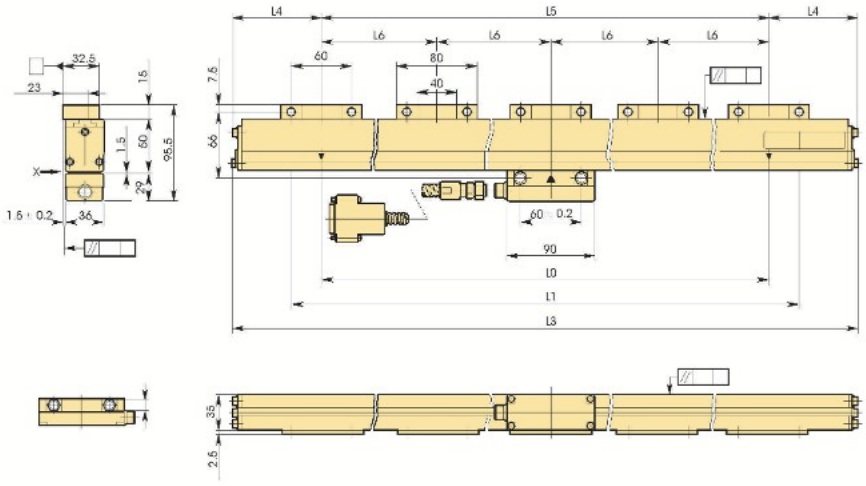

Specifications

Accuracy	(5+8L/1000) µm L = Effective legnth (mm)
Output waveform	Two 90° phased-shifted sinusoidal signals (2Vpp)
Operation temperature	0°C to 45°C
Power supply	5V DC ± 10%
Cross section	80 x 37,5mm / 95,5 x 37,5mm
Max. drive speed	50 m/min.
Signal period	20 µm
Scale reference points	every 50 mm
Dust/water protection level	IP53

Optional accessories

No.	Description
09AAA033A	Extension Cable 2M
09AAA033B	Extension Cable 5M
09AAA033C	Extension Cable 7M
174-183D	Linear Scale Counter KA-212
174-185D	Linear Scale Counter KA-213



Extension cable

Legend
L0 Effective length
L1 Travel range
L2 Bore centre distance
L3 Total length
L4-L6 Support bracket position

Please refer to the DRO leaflet for more details.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

DRO Linear Scales AT103 - High Accuracy

Sealed incremental - full size housing- with very high repeatability

IP53

These linear scales offer : Sturdy construction-high resistance to vibration-protection rating are similar in upright and reclining position.

- The innovative rubber lips keep out contaminants when you are using the scale in a machine shop.
- An armoured signal cable is used to connect the scale unit to the DRO counter, so you can operate it safely even in harsh environments.
- The signal cable outlet can be positioned on either side of the slider so you can connect the signal cable from either direction.

Specifications

Accuracy	(3+3L/1000) µm L = Effective length (mm)
Output waveform	Two 90° phase-shifted sinusoidal signals (2Vpp)
Operation temperature	0°C to 45°C
Power supply	5V DC ± 10%
Cross section	80 x 37,5mm / 95,5 x 37,5mm
Max. drive speed	up to 120 m/min.
Signal period	20 µm
Scale reference points	every 50 mm
Dust/water protection level	IP53

Optional accessories

No.	Description
09AAA033A	Extension Cable 2M
09AAA033B	Extension Cable 5M
09AAA033C	Extension Cable 7M
174-183D	Linear Scale Counter KA-212
174-185D	Linear Scale Counter KA-213




539-133-40




Extension cable

No.	Cable length [m]	Effective Length	L^0 [mm]	L^1 [mm]	L^2 [mm]	L^3 [mm]	L^5 [mm]	Mass [kg]
539-133-40	5	1600 mm	1600	1690	1818	1838	610	5,1
539-134-40	5	1700 mm	1700	1790	1918	1938	650	5,3
539-135-40	5	1800 mm	1800	1890	2018	2038	670	5,5
539-136-40	5	2000 mm	2000	2100	2228	2248	740	6

Legend
L0 Effective length
L1 Travel range
L2-L3 Mount interval
L4 Overall length
L5-L6 Support bracket position

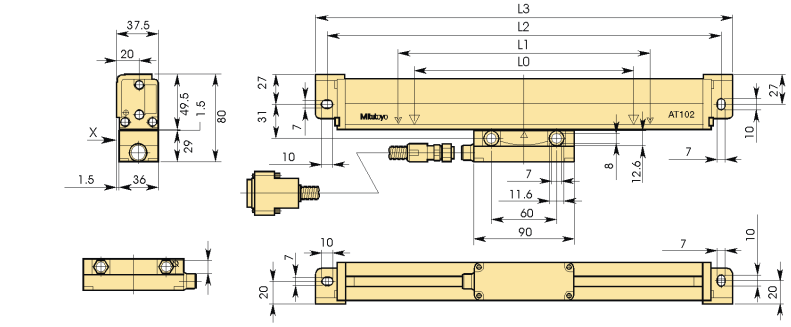

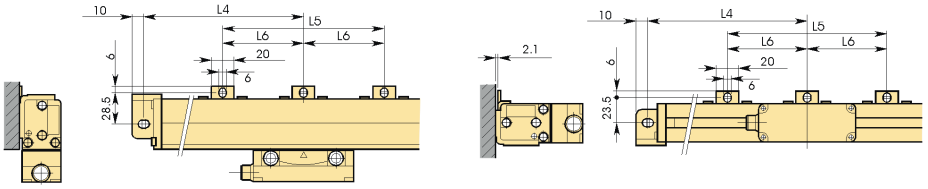

Refer to the DRO System leaflet for more details.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

DRO Linear Scales AT113

Sealed incremental - slimline scale housing


These linear scales are built for limited installation space

- Glass scale - Zero not coded
- Expansion factor (8 ± 1)x $10^{-6}/K^{-1}$
- An armoured inox signal cable is used to connect the DRO counter

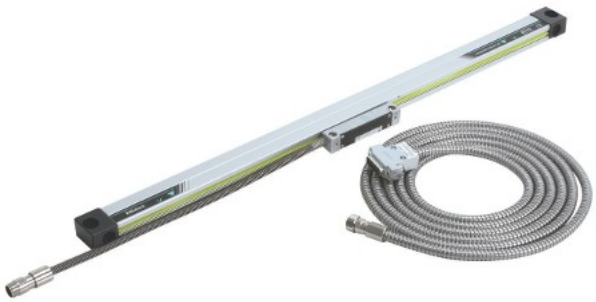

539-201-30

No.	Cable length [m]	Effective Length	L^0 [mm]	L^1 [mm]	L^2 [mm]	L^3 [mm]	L^4 [mm]	L^5 [mm]	L^6 [mm]	L^7 [mm]	Mass [kg]
539-201-30	3,5	100 mm	100	120	258	242	276				0,9
539-202-30	3,5	150 mm	150	170	308	292	326				0,905
539-203-30	3,5	200 mm	200	220	358	342	376				0,943
539-204-30	3,5	250 mm	250	270	408	392	426				0,981
539-205-30	3,5	300 mm	300	330	468	452	486				1,027
539-206-30	3,5	350 mm	350	380	518	502	536				1,064
539-207-30	3,5	400 mm	400	430	568	552	586				1,102
539-208-30	3,5	450 mm	450	480	618	602	636				1,14
539-209-30	3,5	500 mm	500	540	678	662	696	339	331		1,86
539-211-30	3,5	600 mm	600	640	778	762	796	389	381		1,3
539-213-30	3,5	700 mm	700	740	878	862	896	439	431		1,3
539-215-30	3,5	800 mm	800	840	978	962	996	489	481		1,4
539-216-30	3,5	900 mm	900	940	1078	1062	1096	539	531		1,4
539-217-30	5	1000 mm	1000	1040	1178	1162	1196	589	581		1,9
539-218-30	5	1100 mm	1100	1140	1278	1262	1296			430	1,9
539-219-30	5	1200 mm	1200	1240	1378	1362	1396			460	2
539-220-30	5	1300 mm	1300	1340	1478	1462	1496			490	2,2
539-221-30	5	1400 mm	1400	1440	1578	1562	1596			530	2,2
539-222-30	5	1500 mm	1500	1540	1678	1662	1696			560	2,2

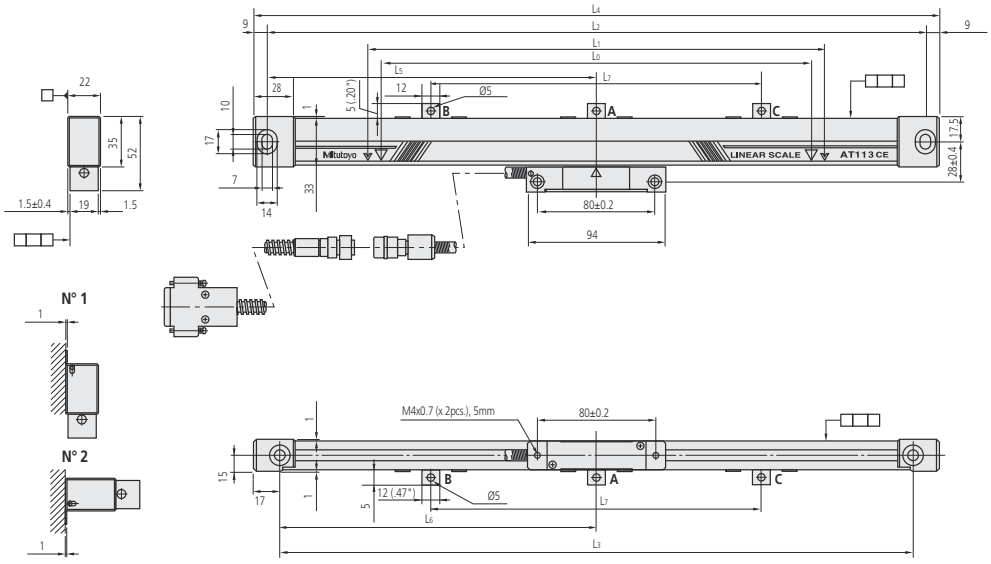

N°1-N°2 Mounting method

Specifications

Accuracy	(5+5L/1000) µm L = Effective length (mm)
Output waveform	Two 90° phase-shifted sinusoidal signals (2Vpp)
Operation temperature	0°C to 45°C
Power supply	5V DC ± 10%
Cross section	52 x 22mm
Max. drive speed	120 m/min
Signal period	20 µm
Scale reference points	every 50 mm
Dust/water protection level	IP53

Optional accessories

No.	Description
09AAA033A	Extension Cable 2M
09AAA033B	Extension Cable 5M
09AAA033C	Extension Cable 7M
174-183D	Linear Scale Counter KA-212
174-185D	Linear Scale Counter KA-213

Legend
L0 Effective length
L1 Travel range
L2-L3 Mount interval
L4 Overall length
L5-L7 Support bracket position

Refer to the DRO System leaflet for more details.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

DRO Linear Scales AT113 - High Accuracy

Sealed incremental - slimline housing - with very high repeatability

These linear scales are built for limited installation space

- Glass scale - Zero not coded
- Expansion factor (8 ± 1)x $10^{-6}/K^{-1}$
- An armoured inox signal cable is used to connect the DRO counter

Specifications

Accuracy	(3+3L/1000) µm L = Effective length (mm)
Operation temperature	0°C to 45°C
Power supply	5V DC ± 10%
Cross section	52 x 22mm
Max. drive speed	120 m/min
Signal period	20 µm
Scale reference points	every 50 mm
Dust/water protection level	IP53

Optional accessories

No.	Description
09AAA033A	Extension Cable 2M
09AAA033B	Extension Cable 5M
09AAA033C	Extension Cable 7M
174-183D	Linear Scale Counter KA-212
174-185D	Linear Scale Counter KA-213




539-201-40

No.	Cable length [m]	Effective Length	L^0 [mm]	L^1 [mm]	L^2 [mm]	L^3 [mm]	L^4 [mm]	L^5 [mm]	L^6 [mm]	L^7 [mm]	Mass [kg]
539-201-40	3,5	100 mm	100	120	258	242	276				0,9
539-202-40	3,5	150 mm	150	170	308	292	326				0,905
539-203-40	3,5	200 mm	200	220	358	342	376				0,943
539-204-40	3,5	250 mm	250	270	408	392	426				0,981
539-205-40	3,5	300 mm	300	330	468	452	486				1,027
539-206-40	3,5	350mm	350	380	518	502	536				1,064
539-207-40	3,5	400 mm	400	430	568	552	586				1,102
539-208-40	3,5	450 mm	450	480	618	602	636				1,14
539-209-40	3,5	500 mm	500	540	678	662	696	339	331		1,86
539-211-40	3,5	600 mm	600	640	778	762	796	389	381		1,3
539-213-40	3,5	700 mm	700	740	878	862	896	439	431		1,3
539-214-40	3,5	750 mm	750	780	918	902	936	459	451		1,4
539-216-40	3,5	900 mm	900	940	1078	1062	1096	539	531		1,4
539-217-40	5	1000 mm	1000	1040	1178	1162	1196	589	581		1,9
539-218-40	5	1100 mm	1100	1140	1278	1262	1296			430	1,9
539-219-40	5	1200 mm	1200	1240	1378	1362	1396			460	2
539-220-40	5	1300 mm	1300	1340	1478	1462	1496			530	2,2
539-221-40	5	1400 mm	1400	1440	1578	1562	1596			530	2,2
539-222-40	5	1500 mm	1500	1540	1678	1662	1696			560	2,2

Legend
L0 Effective length
L1 Travel range
L2-L3 Mount interval
L4 Overall length
L5-L7 Support bracket position

Refer to the DRO System leaflet for more details.

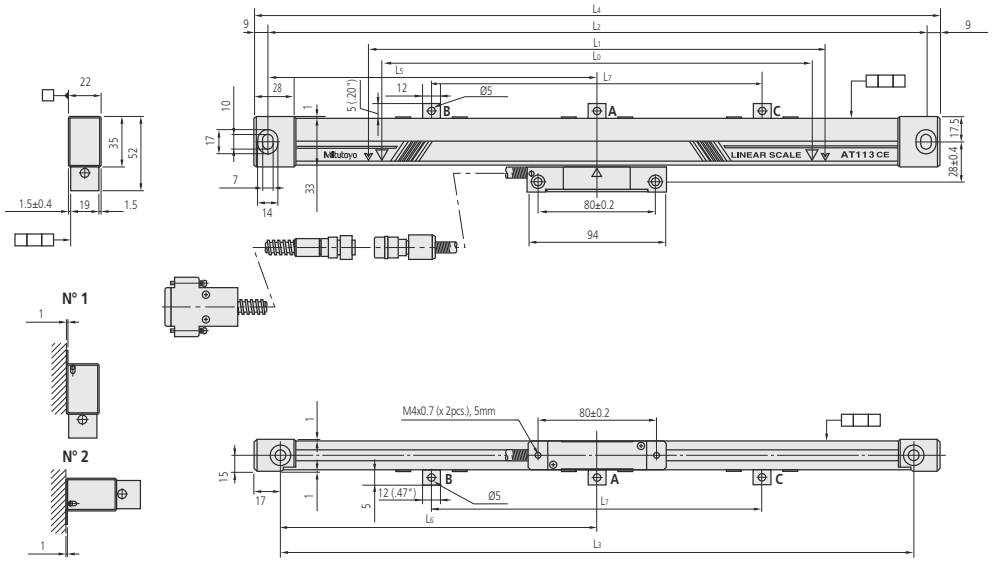

N°1-N°2 Mounting method

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

DRO ABS Linear Scales AT715

Sealed Absolute - IP 67 protection - medium scale housing - specific for new and old manual machine

This linear scale is based on electro magnetic induction principle thus offering you high enviroment protection IP level, in the mean time reference point is not necessary after each power on.

Only compatible with KA series display units.



539-807N

No.	Cable length [m]	Effective Length	L^1 [mm]	L^2 [mm]	L^3 [mm]	L^4 [mm]	L^5 [mm]	L^6 [mm]	L^7 [mm]	L^8 [mm]	Mass [kg]
539-801N	3,5	100 mm	120	258	242	278					0,7
539-802N	3,5	150 mm	170	308	292	328					0,75
539-803N	3,5	200 mm	220	358	342	378					0,8
539-804N	3,5	250 mm	270	408	392	428					0,85
539-805N	3,5	300 mm	330	468	452	488					0,9
539-806N	3,5	350 mm	380	518	502	538					0,95
539-807N	3,5	400 mm	430	568	552	588					1
539-808N	3,5	450 mm	480	618	602	638					1,05
539-809N	3,5	500 mm	540	678	662	698	339	331			1,1
539-811N	3,5	600 mm	640	778	762	798	389	381			1,2
539-813N	3,5	700 mm	740	878	862	898	439	431			1,3
539-814N	3,5	750 mm	780	918	902	938	459	451			1,35
539-815N	3,5	800 mm	840	978	962	998	489	481			1,4
539-816N	3,5	900 mm	940	1078	1062	1098	539	531			1,5
539-817N	5	1000 mm	1040	1178	1162	1198	589	581			1,65
539-818N	5	1100 mm	1140	1278	1262	1298	424	416	430		1,75
539-819N	5	1200 mm	1240	1378	1362	1398	459	451	460		1,85
539-820N	5	1300 mm	1340	1478	1462	1498	494	486	490		1,95
539-821N	5	1400 mm	1440	1578	1562	1598	524	516	530		2,05
539-822N	5	1500 mm	1540	1678	1662	1698	559	551	560		2,15
539-823N	5	1600 mm	1640	1778	1762	1798	459	451	430	215	2,25
539-824N	5	1700 mm	1740	1878	1862	1898	479	471	460	230	2,35
539-825N	5	1800 mm	1840	1978	1962	1998	459	451	530	280	2,45
539-860N	5	2000 mm	2040	2178	2162	2198	539	531	550		
539-861N	5	2200 mm	2240	2378	2362	2398	469	461	480		2,85
539-862N	7	2400 mm	2440	2578	2562	2598	509	501	520		3,05
539-863N	7	2500 mm	2540	2678	2662	2698	529	521	540		3,15
539-864N	7	2600 mm	2640	2778	2762	2798	549	541	560		3,25
539-865N	7	2800 mm	2840	2978	2962	2998	489	481	500		3,45
539-866N	7	3000 mm	3040	3178	3162	3198	529	521	530		3,65

2 m extension cable is attached to eff. length >= 2400 mm

Specifications

Measuring method	Electromagnetic induction system
Accuracy	100 to 500 mm ±5 µm; 600 to 1800 mm ±7 µm; 2000 to 3000 mm ±10 µm
Operation temperature	0-45 °C
Power supply	5V DC ± 10%
Cross section	54 x 22mm
Max. drive speed	50 m/min
Signal period	20 µm

Optional accessories

No.	Description
09AAB674A	Extension Cable 2m, for AT715
09AAB674B	Extension Cable 5m, for AT715
09AAB674C	Extension Cable 7m, for AT715
174-185D	Linear Scale Counter KA-213
174-183D	Linear Scale Counter KA-212

Legend
L0 Effective length
L1 Travel range
L2-L4 Mounting hole pitch
L5-L8 Middle support positions

Refer to the DRO System leaflet for more details.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Universal DRO KA-200 Counter

Functions	DRO counter for Linear Scales
Diameter display	●
1/2 calculation	●
mm/inch conversion	●
Bolt-hole circle machining	●
Scale reference points	●
Linearity error compensation	●
Zero approach function (Incremental mode)	●
Addition of 2-scale data	●
Coordinate system switching	●
Error message	●
Lower digit blanking out	●
Measurement direction setting	●
Memory backup	●
Pitch machinig	●
Resolution setting	●
Smoothing	●

Specifications

Display	7-segment, 8-digit + sign + 8-character alphabet LED display
Resolution	With AT100 Series: 0,05 - 0,0001 mm With AT715: 0,01 - 0,001 mm
Dimensions (WxDxH)	300 x 70 x 167 mm
Operation temperature	0°C to 45°C
Macro functions	Rectangular drilling and round milling newly added
Main features	Feed speed display; taper machining function; tool data; multipoint compensation; scale check function; calculation function
Output (optional)	RS-232C / USB

Optional accessories

No.	Description
06ACB393	Adapter C KA - LGF (OP)
06ACB913	Adapter A KA - LGF
06AET993	USB/RS 232 C code out unit
09EAA094	RS-232C Cable, DP1-VR/-VA to KA-Counter, 1m, 25 Pin Connector
63AAA108	RS-232C Signal Cable, D-Sub-25-D-Sub-9, 2m
937179T	Footswitch for SPC

DRO counter for Linear Scales

This counter displays length indication transmitted from a linear scale.
The KA-Counter offers you the following benefits:

- Can be used as a "standard counter" or a "lathe counter" by modifying parameters.
- Downsizing, weight saving and multiple function have been realized.
- Sub display for easy operation.
- Text data can be output using the optional USB interface.
- The optional external interface RS-232C enables connection to a PC and a printer.




174-183D



174-185D

No.	Axes	Mass
174-183D	2	1.25 kg
174-185D	3	1.33 kg

DRO Extension cables selection guide

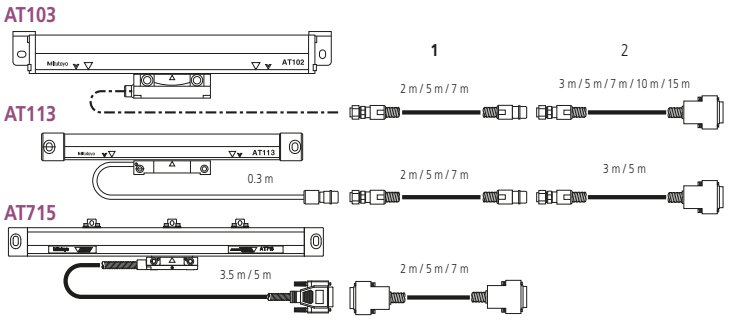

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Overview of NC Linear Scales System

	Model	Reference point	Absolute function	Output signal cycle of sinusoidal signal (µm)	Signal unit	No. of divisions	Resolution (µm)	Maximum response speed*1 (mm/s)	Minimum edge interval*2 (ns)
Separate Type Linear Scales	ST36B ST36C (ST36A) (ST36D)	Yes	—	4	— (PSU-200)	400	0.01	70	125
						200	0.02	150	
						80	0.05	360	
						40	0.1	720	
	ST46-EZA	Yes	—	20	—	400	0.05	450	100
						200	0.1	900	
						40	0.5	2600	
						20	1	2600	
						4	5	2600	
	ABS ST700	—	Yes	—	—	—	0.1	5000	—
	ABS ST1300	—	Yes	—	—	—	0.001	8000*3	—
							0.01		
Assembly Type Linear Scales	AT113	Yes	—	20	PSU-200	200	0.1	800	125
						100	0.2	1600	
						80	0.25	2000	
						40	0.5		
						20	1		
						10	2		
						8	2.5		
						4	5		
	AT211	Yes	—	20	—	200	0.1	710	125
						100	0.2	1400	
						40	0.5	2000	
						20	1		250
						8	2.5		500
						4	5		1000
	ABS AT1100	—	Yes	—	—	—	0.05	3000	—
	ABS AT1300	—	Yes	—	—	—	0.001	3000	—
							0.01		
							0.05		

*1 Maximum response speed of pulse output type uses the logical value (IC specification) with a margin of about 10%, and is limited depending on the scale response speed and resolution.
*2 For information on minimum edge interval, see "Explanation of Terms" on page 74.
The guaranteed value for minimum edge interval is +0%, -10%.
For some models, values other than shown above can also be selected.
*3 It depends on the interface.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

NC Linear Scales ABS AT1300

Absolute Scale Unit (Slim Type)

ABSOLUTE®

- High-rigidity (S-type) and high-accuracy (H-type) version available
- Outstanding resistance to contamination compared to conventional optical types by using a new detection principle
- Features a new coolant-proof design incorporating a high-performance rubber seal to provide higher reliability in the harsh factory environment.
- Delivers high accuracy and the outstanding resolution of 0,001 µm, the best-in-class in absolute scales.
- Allows space-saving design thanks to a slim form. (AT500-S and AT500-H are compatible with each other in installation.)
- Supports the interfaces of various manufacturers allowing a variety of system configurations

Specifications

Detection Method	Optical, Transmission double telecentric
Maximum effective range	100 to 2200 mm S-Type/ 100 to 1000mm H-Type
Cross section	66 x 23 mm / 24 x 65 mm
Response speed	3000 mm/s
Resolution	0,001/0,01/0,05 µm
Compatible interface	Fanuc, Mitsubishi, Mitutoyo, BiSS, DRIVE-CLiQ



Refer to the NC System leaflet for more details



S-Type



H-Type

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

NC Linear Scales ST36


Open scales with Sine & Square-Wave Output

This is a high resolution, high accuracy, portable model designed for exposed installations.
The ST36 offers you the following benefits:


- High reliability with stable signal output.
- Outputs two-phase sinusoidal signal (signal pitch 4µm) and two-phase square-wave signal simultaneously.
- Outputs two-phase sinusoidal signal (signal pitch 4µm) and two-phase square-wave signal simultaneously.
- You are provided with a compact interface box as standard.
  Installation dimensions are available from Mitutoyo – please contact.



ST36

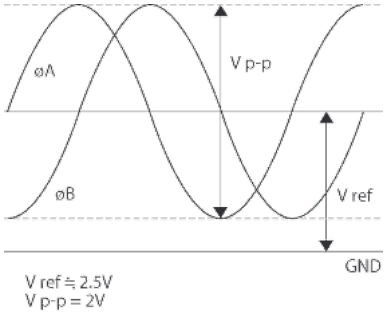

Model A/C

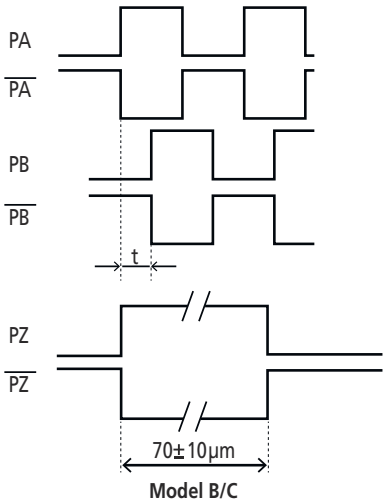

Model B/C

Specifications

Accuracy	10 - 300 mm ±0,5 µm 350 - 500 mm ±1 µm 600 - 1000 mm ±2 µm 1100 - 3000 mm ±2 µm/m
Output waveform	Two 90° phase-shifted sinusoidal signals 2Vpp (Model A and C) Two 90° phase-shifted square-wave signals (Model B and C) RS422 Line Driver
Scale reference points	10 -75 mm Center point scale 100 - 3000 mm every 50 mm
Max. drive speed	1200 mm/sec
Power supply	5V DC ± 10%
Signal period	8 µm
Cross section	22 x 14,9 mm
Resolution	0,01; 0,02; 0,05; 0,1 µm
Signal period	4 µm

Refer to the NC System leaflet for more details

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

NC Linear Scales ST46-EZA


Fotoelectric metal tape linear scales

- Grating pitch 20 µm
- Zero reference not coded
- Output signal sinusoidal 2Vpp or square wave signal(RS 422) sticky or double sided tape version
- LED display function anomalie


No.	Detection Method
ST46EZA Type B	Reflective photoelectric linear encoder
ST46EZA Type C	Reflective photoelectric linear encoder

Specifications


Effective range	10 to 3000 mm
Output signal	Type B: 2-phase square wave signals, reference point pulse, external reset input Type C: 2-phase square wave signals, reference point pulse, 2 phase sinusoidal signal
Scale reference point	With scale reference point (50 mm pitch, 10 to 80 mm: Center point)
Operating temperature / humidity	0 to 40°C, 20 to 80% RH (no condensation)
Storage temperature / humidity	-20 to 60°C, 20 to 80% RH (no condensation)
Power supply voltage	5VDC ± 5%
Cross section	12,5 x 12,1mm / 17,1 x 14mm / 20 x 9,33mm (depends on the type)
Maximum response speed	2,6 m/s (at sine wave amplitude -3dB)
Internal expansion coefficient	(8±1) x 10-6°C
Scale specifications	Grating pitch 20 µm, Material: metal tape (Glas on request)

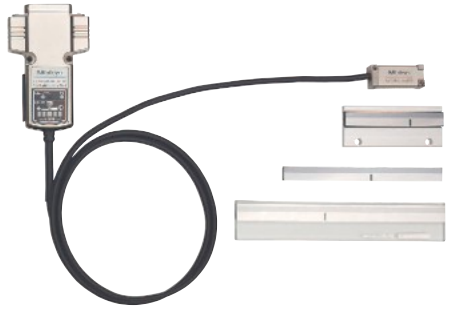


ST46-EZA

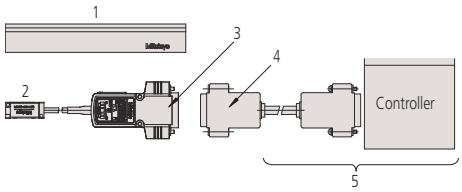

1: Main scale; 2: Detector unit; 3: Output connector (included); 4: Feedback cable; 5: To be supplied by customer (feedback cable/controller)

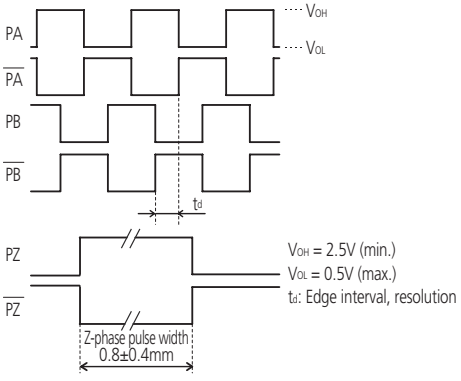

Output Signal Type B

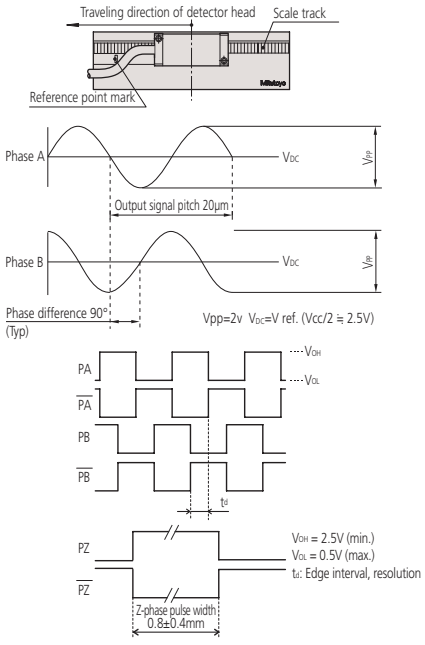

Output Signal Type C

Refer to the NC System leaflet for more details

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

NC Linear Scales ABS ST700

Electromagnetic induction Absolute Scale

ABSOLUTE scales have eliminated the need to re-establish the origin.
The ST700 offers you the following benefits:

- It is optimized for the control of linear motors.
- Optimized for high-speed, high-acceleration control.
- A non-contact detection system ensures a long service life for your product.
- Signal adjustment at installation is automatically performed with dedicated software.



Specifications

Detection Method	Electromagnetic induction
Effective Length	100mm - 3000 mm (3200mm - 6000mm optional)
Accuracy	(5+5L/1000)µm
Response speed	5000 mm/s
Applicable Interfaces	Fanuc, Mitsubishi, Yaskawa, Panasonic, Mitutoyo
Cross section	28 x 18,6mm
Resolution	0,1 µm

Refer to the NC System leaflet for more details

NC Linear Scales ABS ST1300

High-speed, high-resolution Absolte Tape Scales

Long, fast and diverse connectivity.

- Realizes a 12m maximum effective length, 8-m/s max. response speed and 1nm minimum resolution.
- Extensive interface compatibility. See specifications below for details.
- Outstanding robustness against contamination compared to earlier photoelectric types achieved using a new detection principle.
- Choice between double-sided tape, fixed-ends and center mounting methods
- Signal validation program facilitates mounting adjustment and maintenance



Double-ended mounting type



Double-sided tape mounting type



Center mounting type

Specifications

Max. response speed	8 m/s (Varies according to the interface)
Detection Method	Optical
Maximum effective range	12 m (depending on mounting type)
Accuracy	10 µm/m (± 5µm)
Cross section	22 x 30,1 or 22 x 25,45 mm (depending on mounting type)
Min. resolution	1 nm / 10 nm
Scale specifications	Metal tape
Applicable Interfaces	FANUC, Mitsubishi, Yaskawa, Panasonic, Mitutoyo

Refer to the NC System leaflet for more details

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

NC Linear Scales AT211

Specifications

Accuracy	100 to 1500 mm (3+3L/1000) µm (standard type) (2+2L/1000) µm (high-accuracy type) 500 to 1500 mm (3+3L/1000) µm L = Effective range (mm)
Output waveform	Two 90° phase-shifted quadrature signals (RS422) Differential line driver
Power supply voltage	5V DC ± 10%
Cross section	58 x 20mm / 52 x 22mm
Max. drive speed	up to 120 m/min
Resolution	0,1; 0,5; 1 µm
Signal period	20 µm



Refer to the NC System leaflet for more details

Sealed incremental - slimline size housing - high traverse speed-with very high repeteability

IP53


- 20 µm grating pitch-output signal square wave (RS 422)
- suggested resolution 1 - 0,5 µm
- high traverse speed
- Accuracy - standard version: from 100 up to 1500 mm =± 3 µm
- Accuracy - high repeteability from 100 up to 500 mm =± 2 µm
- Protection from IP 53 up to IP 64 (pressure device connection)



AT211A



AT211B



NC Linear Scales ABS AT1100

Specifications

Detection Method	Electromagnetic induction
Maximum effective range	3040 mm
Accuracy	3+5L/1000) µm L= 140 to 2040 mm (5+5L/1000) µm L= 2240 to 3040 mm
Cross section	85 x 37mm
Response speed	3 m/s
Resolution	0.05 µm
Compatible interface	FANUC, Mitsubishi, Siemens, Mitutoyo



Refer to the NC System leaflet for more details

Electromagnetic induction Absolute Scale

ABSOLUTE®

- New design to avoid infiltration of coolant and dust using a rubber highly resistant to coolant attack for highest reliability
- Widest sensor-to-scale air gap for electromagnetic induction scales of 0,4 mm - 4 times wider than conventional optical or electromagnetic encoder
- Increased air gap reduces the likelihood of failure due to the accumulation of contaminants and is one of the world's largest to be found in a machine tool scale
- De facto standard frame multipoint mounting method has been adopted to provide high resistance to vibration and shock
- 6 times higher accuracy than previous scales due to improved signal processing technology
- Compatible with the high-speed serial interface from leading machine-tool companies, allowing direct connection to an NC controller



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Horizontal ABSOLUTE Scale Coolant Proof IP66

You can use this scale unit in adverse environments with water and cutting oil due to it new detection method (electromagnetic induction).

- Specially designed output cables are developed to maintain the water resistant structure.
- You will have no overspeed error since the ABSOLUTE scale does not depend on counting scale graduations.
- Once an absolute zero (origin) point is set, the Digimatic Scale Unit shows the absolute distance from this point when it is powered on, rather than „0“.



572-600



572-601

Functions	
ORIGIN (ABS-Zero)	●
Low voltage alarm	●
Data output	●

Specifications

Repeatability	0,01 mm
Max. response speed	Unlimited

Optional accessories


No.	Description
02AZD790A	Connection Cable A for U-WAVE, with Data Button for IP Caliper Type
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Metric

No.	Range [mm]	Accuracy	L1 [mm]	L2 [mm]	Mass [kg]
572-600	0 - 100	0,03 mm	209	185	0,39
572-601	0 - 150	0,03 mm	259	235	0,41
572-602	0 - 200	0,03 mm	311	287	0,43

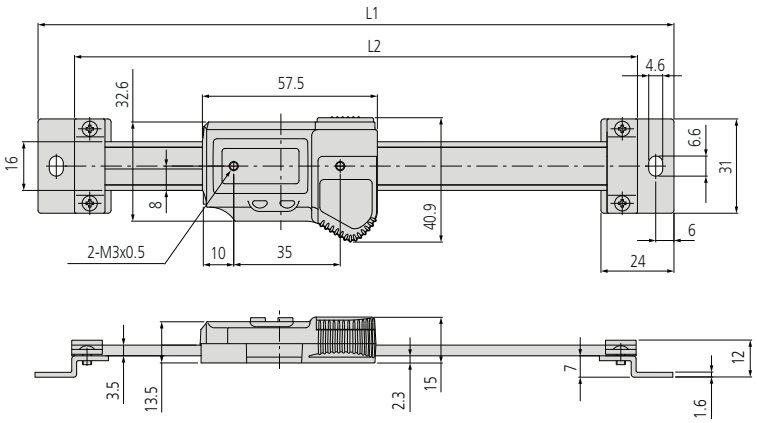

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Horizontal ABSOLUTE Scale Standard

Functions	
ON/OFF	●
Low voltage alarm	●
Data output	●
ORIGIN	●

Specifications

Max. response speed	Unlimited

Optional accessories

No.	Description
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
905689	Digimatic Cable, Flat L-Shape Type, 1 m
905690	Digimatic Cable, Flat L-Shape Type, 2 m
905691	Digimatic Cable, Flat L-Shape Right Type, 1 m
905692	Digimatic Cable, Flat L-Shape Right Type, 2 m
905693	Digimatic Cable, Flat L-Shape Left Type, 1 m
905694	Digimatic Cable, Flat L-Shape Left Type, 2 m
959143	Data Hold Unit, for Digital Caliper
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

ABSOLUTE®

This unit has an ABSOLUTE capacitive-type scale.


- The ZERO point is set only once and is stored as the absolute ZERO point until the next battery replacement.
- You can make the highest precision measurements even at the highest drive speed.
- The display has large characters, making it easy to read.



572-202-30

Metric

No.	Range [mm]	Accuracy	L1 [mm]	L2 [mm]	Mass [kg]
572-200-30	0 - 100	0,03 mm	209	185	0,23
572-201-30	0 - 150	0,03 mm	259	235	0,25
572-202-30	0 - 200	0,03 mm	311	287	0,27
572-203-10	0 - 300	0,04 mm	444	420	0,37

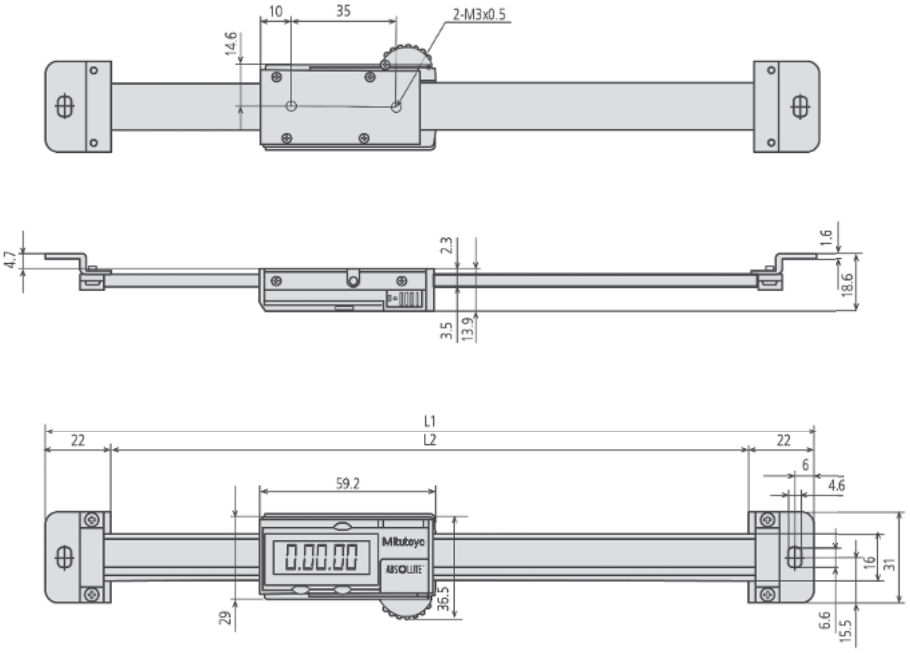

100-200 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Horizontal ABSOLUTE Scale Measurement Direction Switching

ABSOLUTE®

This unit has an ABSOLUTE capacitive-type scale.
It offers you the following benefits:

- The ZERO point is set only once and is stored as the ABSOLUTE ZERO point until the next battery replacement.
- You can make the highest precision measurements even at the highest drive speed.
- The display has large characters, making it easy to read.




572-461


Metric

Without diameter function, with reversible counting direction

No.	Range [mm]	Accuracy	t [mm]	L1 [mm]	L2 [mm]	H [mm]	Mass [kg]
572-460	0 - 100	0,03 mm		244	220		0,25
572-461	0 - 150	0,03 mm		294	270		0,28
572-462	0 - 200	0,03 mm		344	320		0,31
572-463	0 - 300	0,04 mm		444	420		0,37
572-464	0 - 450	0,04 mm	6	594	570	14,6	0,76
572-465	0 - 600	0,05 mm	6	774	750	14,6	0,9
572-466	0 - 800	0,06 mm	10	974	950	18,6	1,71
572-467	0 - 1000	0,07 mm	10	1174	1150	18,6	2,04

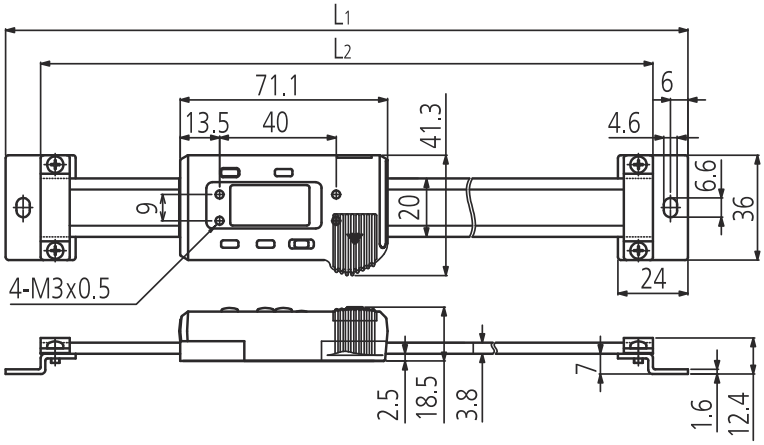

100-300 mm

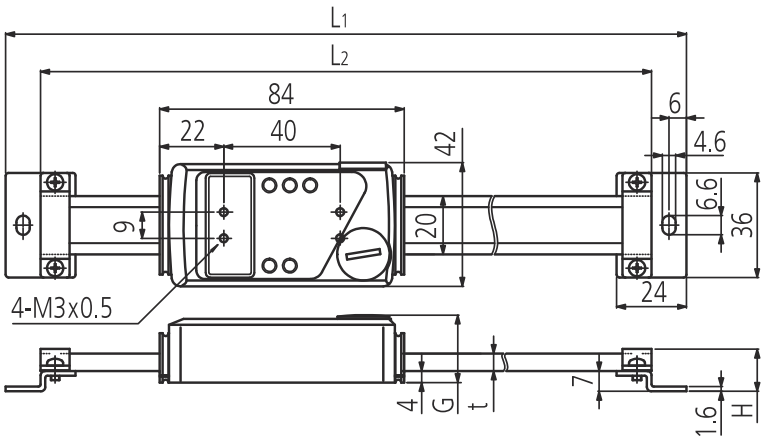

450-1000 mm

Functions	
ON/OFF	●
DATA (output with cable) / HOLD (display value)	●
Low voltage alarm	●
Data output	●
ORIGIN	●

Specifications

Max. response speed	Unlimited

Optional accessories

No.	Description
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
905689	Digimatic Cable, Flat L-Shape Type, 1 m
905690	Digimatic Cable, Flat L-Shape Type, 2 m
905691	Digimatic Cable, Flat L-Shape Right Type, 1 m
905692	Digimatic Cable, Flat L-Shape Right Type, 2 m
905693	Digimatic Cable, Flat L-Shape Left Type, 1 m
905694	Digimatic Cable, Flat L-Shape Left Type, 2 m

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Horizontal ABSOLUTE Scale Diameter Function

ABSOLUTE®

- The ZERO point is set only once and is stored as the ABSOLUTE ZERO point until the next battery replacement
- You can make the highest precision measurements even at the highest drive speed.

Functions	
ON/OFF	●
DATA (output with cable) / HOLD (display value)	●
Low voltage alarm	●
Data output	●
Diameter function	●
ORIGIN	●

Specifications

Max response speed	Unlimited

Optional accessories

No.	Description
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
905689	Digimatic Cable, Flat L-Shape Type, 1 m
905690	Digimatic Cable, Flat L-Shape Type, 2 m
905691	Digimatic Cable, Flat L-Shape Right Type, 1 m
905692	Digimatic Cable, Flat L-Shape Right Type, 2 m
905693	Digimatic Cable, Flat L-Shape Left Type, 1 m
905694	Digimatic Cable, Flat L-Shape Left Type, 2 m

Consumable spares


No.	Description
63AAA800	Battery SR44 1,5 V




572-483-10

Metric — Horizontal multi-function type with diameter displaying function

No.	Range [mm]	Accuracy	L1 [mm]	L2 [mm]	H [mm]	t [mm]	Mass [kg]
572-480-10	0 - 100	0,03 mm	244	220			0,25
572-481-10	0 - 150	0,03 mm	294	270			0,28
572-482-10	0 - 200	0,03 mm	344	320			0,31
572-483-10	0 - 300	0,04 mm	444	420			0,37
572-484-10	0 - 450	0,04 mm	594	570	14,6	6	0,76
572-485-10	0 - 600	0,05 mm	774	750	14,6	6	0,9
572-486-10	0 - 800	0,06 mm	974	950	18,6	10	1,71
572-487-10	0 - 1000	0,07 mm	1174	1150	17,8	10	2,04

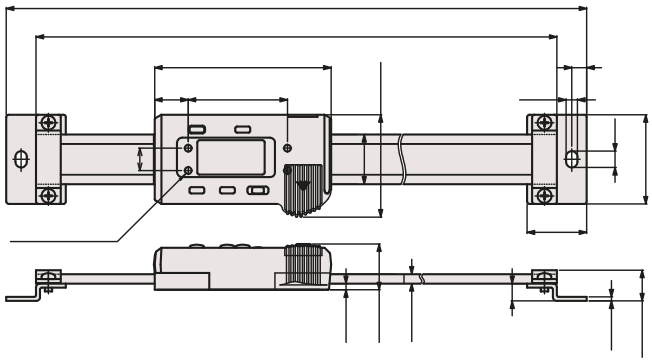

100-300 mm

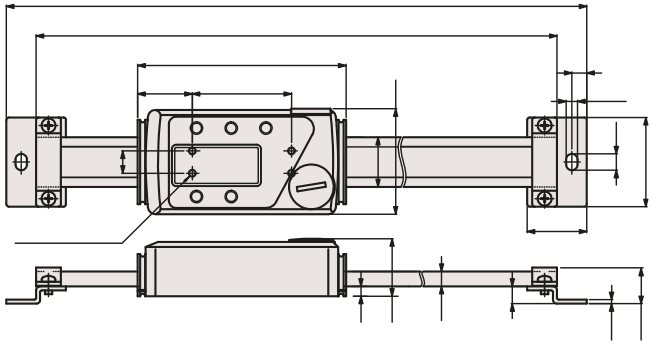

450-1000 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Vertical ABSOLUTE Scale Standard

ABSOLUTE®

This unit has an ABSOLUTE capacitive-type scale.
It offers you the following benefits:


- The ZERO point is set only once and is stored as the absolute ZERO point until the next battery replacement.
- You can make the highest precision measurements even at the highest drive speed.
- The display has large characters, making it easy to read.



572-302-10

Metric

No.	Range [mm]	Accuracy	L1 [mm]	L2 [mm]	Mass [kg]
572-300-10	0 - 100	0,03 mm	244	220	0,25
572-301-10	0 - 150	0,03 mm	294	270	0,28
572-302-10	0 - 200	0,03 mm	344	320	0,31
572-303-10	0 - 300	0,04 mm	444	420	0,37

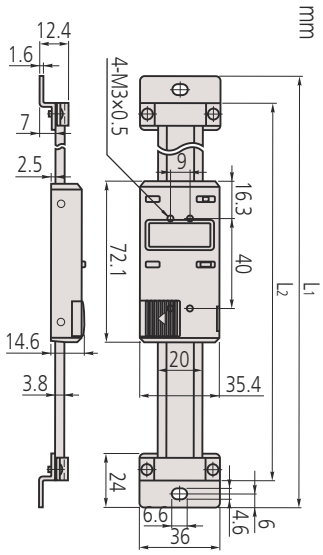

Functions	
ON/OFF	●
Low voltage alarm	●
Data output	●
ORIGIN	●

Specifications

Max. response speed	Unlimited

Optional accessories

No.	Description
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
905689	Digimatic Cable, Flat L-Shape Type, 1 m
905690	Digimatic Cable, Flat L-Shape Type, 2 m
905691	Digimatic Cable, Flat L-Shape Right Type, 1 m
905692	Digimatic Cable, Flat L-Shape Right Type, 2 m
905693	Digimatic Cable, Flat L-Shape Left Type, 1 m
905694	Digimatic Cable, Flat L-Shape Left Type, 2 m
959143	Data Hold Unit, for Digital Caliper
959149	Digimatic Cable, Straight, Data Button, 1 m
959150	Digimatic Cable, Straight, Data Button, 2 m

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vertical ABSOLUTE Scale Measurement Direction Switching

Functions	
ORIGIN (ABS-Zero)	●
ON/OFF	●
DATA (output with cable) / HOLD (display value)	●
Data output	●

Specifications

Max. response speed	Unlimited

Optional accessories

No.	Description
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
905689	Digimatic Cable, Flat L-Shape Type, 1 m
905690	Digimatic Cable, Flat L-Shape Type, 2 m
905691	Digimatic Cable, Flat L-Shape Right Type, 1 m
905692	Digimatic Cable, Flat L-Shape Right Type, 2 m
905693	Digimatic Cable, Flat L-Shape Left Type, 1 m
905694	Digimatic Cable, Flat L-Shape Left Type, 2 m

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

ABSOLUTE®

This unit has an ABSOLUTE capacitive-type scale.
It offers you the following benefits:


- The ZERO point is set only once and is stored as the absolute ZERO point until the next battery replacement.
- The display has large characters, making it easy to read.
- Measurement direction switching function is included.




572-560

Metric

No.	Range [mm]	Accuracy	L1 [mm]	L2 [mm]	H [mm]	t [mm]	Mass [kg]
572-560	0 - 100	0,03 mm	244	220			0,25
572-561	0 - 150	0,03 mm	294	270			0,28
572-562	0 - 200	0,03 mm	344	320			0,31
572-563	0 - 300	0,04 mm	444	420			0,37
572-564	0 - 450	0,04 mm	594	570	14,6	6	0,76
572-565	0 - 600	0,05 mm	774	750	14,6	6	0,9
572-566	0 - 800	0,06 mm	974	950	18,6	10	1,71
572-567	0 - 1000	0,07 mm	1174	1150	18,6	10	2,04

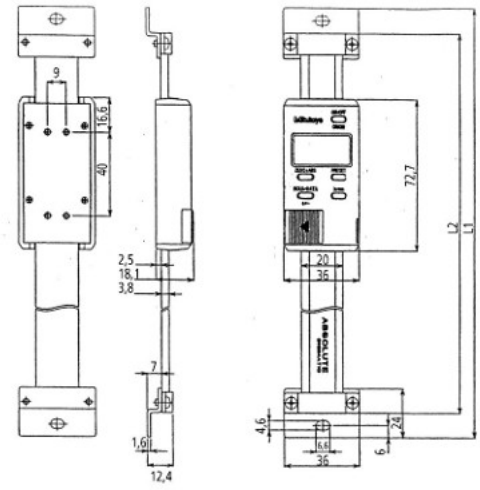

100-300 mm

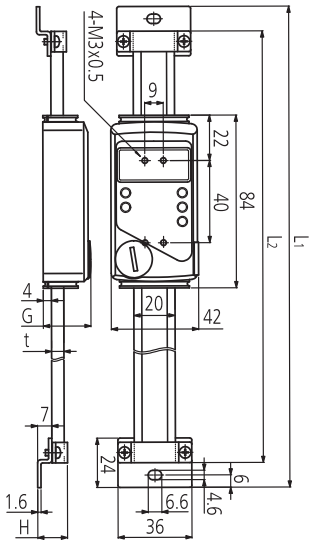

450-1000 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Vertical ABSOLUTE Scale Diameter Function

ABSOLUTE®

This unit has an ABSOLUTE capacitive-type scale.


- The ZERO point is set only once and is stored as the absolute ZERO point until the next battery replacement.
- The display has large characters, making it easy to read.
- Diameter measurement function is included.




572-580

Metric

No.	Range [mm]	Accuracy	L1 [mm]	L2 [mm]	H [mm]	t [mm]	Mass [kg]
572-580-10	0 - 100	0,03 mm	244	220			0,25
572-581-10	0 - 150	0,03 mm	294	270			0,28
572-582-10	0 - 200	0,03 mm	344	320			0,31
572-583-10	0 - 300	0,04 mm	444	420			0,37
572-584-10	0 - 450	0,04 mm	594	570	14,6	6	0,76
572-585-10	0 - 600	0,05 mm	774	750	14,6	6	0,9
572-586-10	0 - 800	0,06 mm	974	950	18,6	10	1,71
572-587-10	0 - 1000	0,07 mm	1174	1150	18,6	10	2,04

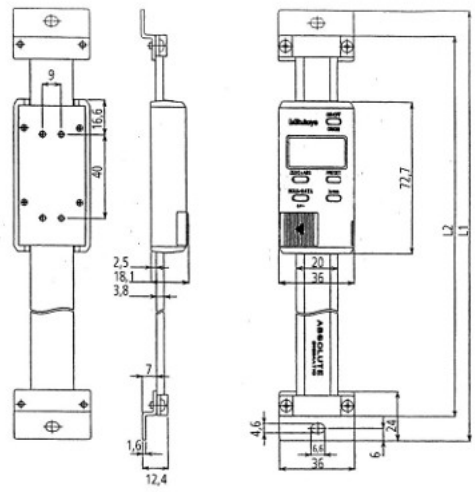

100-300 mm

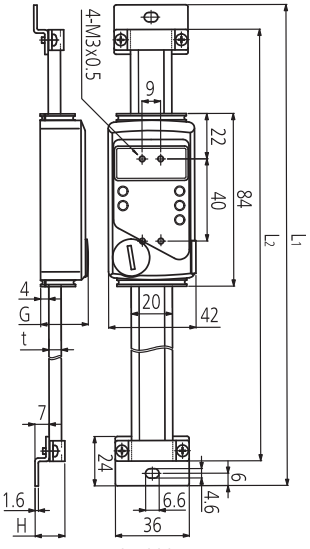

450-1000 mm

Functions	
ON/OFF	●
DATA (output with cable) / HOLD (display value)	●
Low voltage alarm	●
Data output	●
Diameter function	●
ORIGIN	●

Specifications

Max. drive speed	Unlimited

Optional accessories

No.	Description
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
905338	Digimatic Cable, Flat Straight Type, 1 m
905409	Digimatic Cable, Flat Straight Type, 2 m
905689	Digimatic Cable, Flat L-Shape Type, 1 m
905690	Digimatic Cable, Flat L-Shape Type, 2 m
905691	Digimatic Cable, Flat L-Shape Right Type, 1 m
905692	Digimatic Cable, Flat L-Shape Right Type, 2 m
905693	Digimatic Cable, Flat L-Shape Left Type, 1 m
905694	Digimatic Cable, Flat L-Shape Left Type, 2 m

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optical Measuring Systems



Measuring Microscopes
Page 398



Microscope Units
Page 413



TAGLENS
Page 415



Interferometer Units
Page 418



Long Working Distance Objectives
Page 419



Measuring Projectors
Page 434



M2 Software for Measuring Microscopes and Projectors
Page 447

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Measuring Microscope TM Generation B

TM Generation B

With this Toolmaker's Microscope you can measure dimensions and angles on small workpieces thanks to the optional analogue or digital micrometer heads and the built-in circular scale. Further benefits of the TM Generation B include:

- Toolmakers microscopes well-suited for measuring dimensions and angles of features on small workpieces with the XY stage and rotating eyepiece scale.
- Compact design with recessed grips for better portability. The slim design makes this microscope ideal for use in areas with limited space.
- Powerful adjustable LED light sources for contour and surface illumination provide optimum lighting conditions for workpiece inspection.
- The TM Generation B is available with work stages of 50 x 50 mm or 100 x 50 mm.
- **Please note that the Micrometer Heads or Digital Micrometer Heads are optional and not included.**




TM-505B fitted with optional digimatic micrometer heads




TM-1005B fitted with optional digimatic micrometer heads

No.	Model	XY stage table top size	Effective area of table	Remarks	XY stage travel range	Max. workpiece height	Mass
176-818-11	TM-505B	152 x 152 mm	96 x 96 mm	TM-505B with optional micrometer heads	50 x 50 mm	115 mm	14 kg
176-819-11	TM-1005B	240 x 152 mm	154 x 96 mm	TM-1005B with optional micrometer heads	100 x 50 mm	107 mm	15 kg

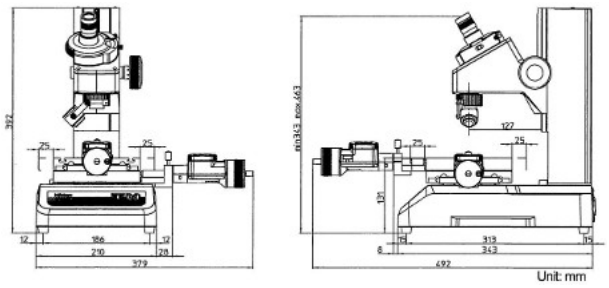

TM-505B

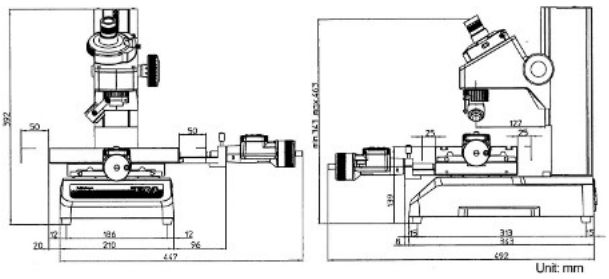

TM-1005B

Specifications


Observation image	Erect
Angle reading	Range: 360° Minimum reading: 6' (by vernier)
Objective lens	2X **(176-138)** Working distance: 67 mm Optional: 5X, 10X
Eyepiece	15X **(176-116)**, View field ø13 mm Optional: 10X, 20X
Total magnification	30X
Transmitted illumination	Light source: White LED with green filter Functions: Light intensity adjustable
Surface illumination	Light source: White LED Functions: Light intensity adjustable
Power supply	100/240V AC, 50/60Hz
Mass	TM-505B: 14 kg TM-1005B: 15 kg

Standard accessories

No.	Description
176-116	Eyepiece for TM, 15X Eyepiece
176-126	Reticle for TM, 90° Broken Cross-hair
176-138	Objective Lens for TM, 2X magnification



176-116



176-126



176-138


Refer to the TM microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Measuring Microscope TM Generation B

TM Generation B

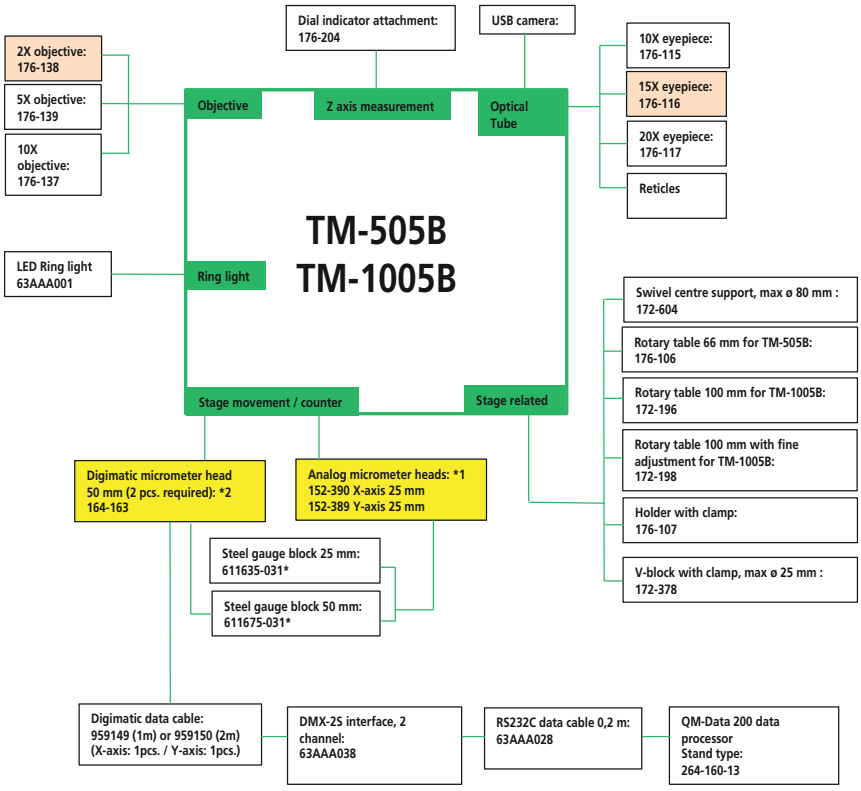

Standard accessory

Necessary option either chose *1 or *2

* Necessary gauge blocks for extending stage travel range:

Stage travel range	TM with analog micrometer heads 0-25 mm	TM with digimatic micrometer heads 0-50 mm
Range 25-50 mm	X-axis:611635-031 Y-axis:611635-031	
Range 25-75 mm	X-axis:611675-031	
Range 50-100 mm		X-axis:611675-031

Optional accessories

No.	Description
176-115	Eyepiece for TM 10X
176-117	Eyepiece for TM 20X
176-111	Reticle for TM, Concentric Circles (4 mm, P=0,05 mm)
176-114	Reticle for TM, 60° Angle
176-204	Dial Indicator Attachment, for TM
63AAA001	Ringlight LED, Illumination unit
63AAA455	M2 – Geometric Measuring Software for TM Microscope, Digimatic interface
63AAA795	ASUS AiO PC for M2 system, Intel Celeron N4500/8GB/256GB SSD M.2/ W11Pro/ 15.6" FHD Touch Screen
63AAA353	HDMI USB camera set for TM microscopes
Cables	
959150	Digimatic Cable, Straight, Data Button, 2 m
959149	Digimatic Cable, Straight, Data Button, 1 m
06AFM380C	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, Straight, with Data Button
02AZD790C	Connection Cable C for U-WAVE, Straight, with Data Button
Gauge blocks	
611675-031	Gauge Block, Metric, Inspection Cert., ISO, Grade 1, Steel, 50mm
611635-031	Gauge Block, Metric, Inspection Cert., ISO, Grade 1, Steel, 25mm
Indispensable optional accessories *	
152-389	Micrometer Head XY-Stage, Thimble 49mm, 0-25mm, Y-Axis
152-390	Micrometer Head XY-Stage, Thimble 49mm, 0-25mm, X-Axis
164-163	Digital Micrometer Head, 0-50mm, 0,001mm, 18mm Stem
Lenses	
176-137	Objective Lens for TM 10X
176-139	Objective Lens for TM 5X
Materials	
176-107	Fixture/clamping material, Holder with clamp
172-378	V-BLOCK, with clamp
172-604	Swivel center support, Fixture/clamping material
Rotary tables	
176-106	Rotary table
172-196	Rotary table, 100 mm for TM-1005B
172-198	Rotary table, 100 mm with fine feed knob for TM-1005B

HDMI USB camera set for TM microscopes (63AAA353) - Set includes:
63AAA059 - HDMI16MDPX camera, including HDMI cable, mouse and simple calculation and reporting software on SD card
63AAA060 - 0.37X C-mount to Eyepiece adapter for TM microscopes
63AAA155 - Mechanical adapter for mounting the HDMI camera on the ocular tube

Digital camera for TM microscopes
Mounting the HDMI6MDPX digital camera into the ocular tube transforms the TM microscope into a digital microscope.
1. HDMI6MDPX, 6 megapixel colour camera with direct HDMI output to a monitor, no PC necessary
2. Integrated SD card for saving images and pre-installed software for performing basic in-screen measurements
3. Intuitive operation of the software with standard supplied USB mouse
*At least one of the options is necessary for operation.


Refer to the TM microscopes brochure



63AAA353 HDMI USB camera set



Rotating eyepiece with angle reading



176-106 Rotary table



152-389



152-390



164-163

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Accessories for Measuring Microscope TM Generation B

Objectives and Eyepieces for TM



176-137



176-138




176-139

Objective Lenses and Eyepieces


No.	Objective Magnification	Numerical aperture	Working distance [mm]	Total Magnification with Eyepiece 10X **(176-115)**	Total Magnification with Eyepiece 15X **(176-116)**	Total Magnification with Eyepiece 20X **(176-117)**	Mass [g]
176-138	2X (1)	0.07	67	20X (6,5 mm)	30X (6,5 mm)	40X (5 mm)	140
176-139	5X	0.1	33	50X (2,6 mm)	75X (2,6 mm)	100X (2 mm)	85
176-137	10X	0.14	14	100X (1,3 mm)	150X (1,3 mm)	200X (1 mm)	100

(1) Standard accessory
The number in brackets is the diameter of the field of view


Reticles for TM



176-111



176-114



176-126

Reticles

No.	Remarks
176-111	Concentric circle (up to ø 4 mm, 0,05 mm increment)
176-114	60° angle
176-126	Cross-hair (standard accessory)

Ring Light for TM



LED Ring Light for TM including controller

No.	Remarks
63AAA001	LED illumination light can emphasize the contrast of projected workpiece images, providing stereo scopic and sharp observation. Projected image can be observed with high colour reproducibility, which is never realized by the existing halogen-type surface illumination.

Refer to the TM microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Measuring Microscope MF Generation D (Manual, 2- or 3-axis)

Manual MF-A/B Models

MF Generation D: Manual models

This versatile measuring microscope, whether you use it to boost the performance with Mitutoyo's vision unit, for data management on a PC or other applications, offers you further improved measuring efficiency.

The MF offers you the following benefits:

- Measuring accuracy that is one of the highest in its class.
- Proven high-NA objectives from the ML optical series (long working distance type).
- Integration of metallurgical and measurement microscope functions enabling you to make high-resolution observations and high-accuracy measurements.
- Illumination unit (reflected/transmitted) gives you the option of a high-intensity LED or halogen bulb.
- The variable aperture diaphragm (reflected/ transmitted) allows observation measurement while suppressing light diffraction.
- Variety of standardized stages in sizes up to 400 × 200 mm.
- Quick-release mechanism enabling you to move the stage quickly when measuring large or numerous workpieces.
- High-magnification eyepiece observation up to 2000X.
- A good choice of optional accessories, including a Vision Unit, various digital cameras or data management on a PC, promises a wide field of application and excellent measuring

Specifications

Observation image	Erect
Optical tube	Monocular or binocular tube (depression: 25°) Reticle projection method, with TV mount Optical path ratio (eyepiece/TV mount: 50/50)
Eyepiece	10X, 15X, 20X
Indication accuracy (at 20°C)	XY-axis: (2,2+0,02L) µm Z-axis: (5+0,04L) µm L: Measuring length (mm) when not loaded, JIS B 7153
Floating function	X and Y axes with Quick-release mechanism
Power supply	100/110/120/220/240 VAC, 50/60Hz
Objective lens	ML-series objectives Standard: 3X Optional: 1X, 5X, 10X, 20X, 50X, 100X

Standard accessories

No.	Description
375-037-1	ML Objective Lens 3x
12AAA645	Illumination Filter GIF

Optional reticles for 3X eyepiece

Optional accessories

No.	Description
1. Oculars including eyepiece*	
176-392	Monocular Tube, for MF
176-394	Binocular Tube, for MF
375-043	Protractor Eyepiece 10X, for MF
176-313-11	Digital Protractor Eyepiece, for MF
2. Illumination units*	
176-449	LED illumination unit MF, Transmitted/ Reflected illumination set
176-451	Halogen illumination unit MF, Transmitted/Reflected illumination set
63AAA770	M3 Soft-and hardware for MF-A/B Microscope, Metlogix M3 software, camera, interface box, 2x LED lighting modules

***Note:** At least one of the options is necessary for operation for 1. Oculars including eyepiece, 2. Illumination units.
In case of 63AAA770 illumination unit is included.



MF-B2010D

MF-A (2 axis)

No.	Model	XY stage travel range	Z-axis travel range	XY stage top size	Stage glass size [[mm]]	Max. stage loading	Max. work-piece height	Z-axis motor	Mass
176-961-13	MF-A1010D	100 x 100 mm	150 mm	280 x 280 mm	180 x 180 mm	10 kg	150 mm	No	67 kg
176-962-13	MF-A2010D	200 x 100 mm	150 mm	350 x 280 mm	250 x 150 mm	10 kg	150 mm	No	71 kg
176-963-13	MF-A2017D	200 x 170 mm	220 mm	410 x 342 mm	270 x 240 mm	20 kg	220 mm	No	148 kg
176-964-13	MF-A3017D	300 x 170 mm	220 mm	510 x 342 mm	370 x 240 mm	20 kg	220 mm	No	156 kg
176-965-13	MF-A4020D	400 x 200 mm	220 mm	610 x 342 mm	440 x 240 mm	15 kg	220 mm	No	162 kg


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Measuring Microscope MF Generation D(Manual, 2- or 3-axis) (Manual, 2- or 3-axis)

MF-B (3 axis)

No.	Model	XY stage travel range	Z-axis travel range	XY stage top size	Stage glass size [[mm]]	Max. stage loading	Max. work-piece piece height	Z-axis motor	Mass
176-966-13	MF-B1010D	100 x 100 mm	150 mm	280 x 280 mm	180 x 180 mm	10 kg	150 mm	No	67 kg
176-967-13	MF-B2010D	200 x 100 mm	150 mm	350 x 280 mm	250 x 150 mm	10 kg	150 mm	No	71 kg
176-968-13	MF-B2017D	200 x 170 mm	220 mm	410 x 342 mm	270 x 240 mm	20 kg	220 mm	No	148 kg
176-969-13	MF-B3017D	300 x 170 mm	220 mm	510 x 342 mm	370 x 240 mm	20 kg	220 mm	No	156 kg
176-970-13	MF-B4020D	400 x 200 mm	220 mm	610 x 342 mm	440 x 240 mm	15 kg	220 mm	No	162 kg

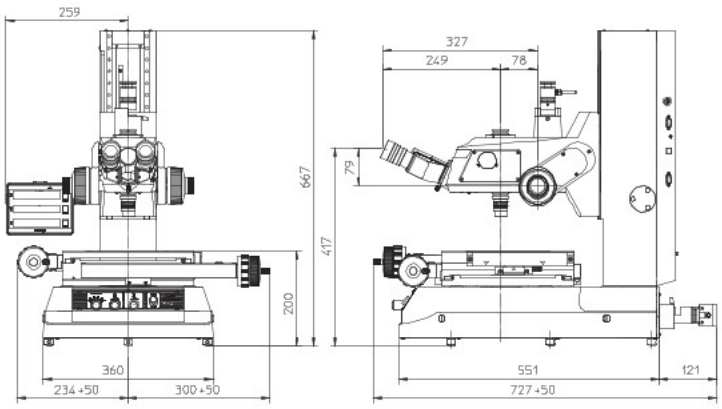

1010D

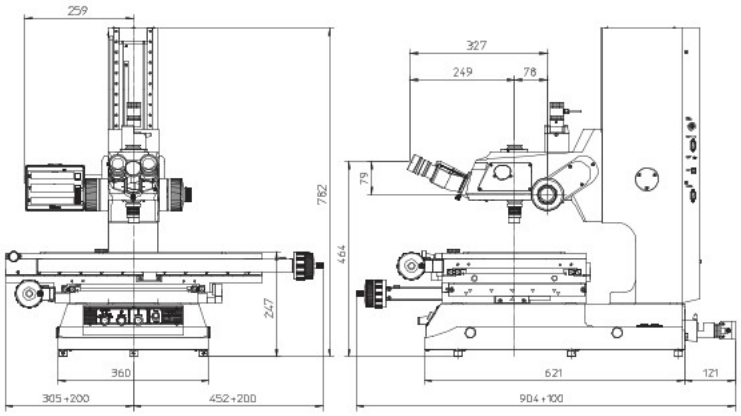

4020D



176-392Monocular
Monocular



176-394Binocular
Binocular



176-313-11
Digital protractor eyepiece



375-043
Protractor eyepiece



176-449LED illumination unit for MF-Gen D
LED illumination unit for MF-Gen D



176-451Halogen illumination unit for MF-Gen D
Halogen illumination unit for MF-Gen D

Refer to the MF / MF-U microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

on. Product descriptions,

Measuring Microscope MF Generation D (Z-axis Motor Drive)

Motor-Driven Z-axis MF-J Models

MF Generation D: Models with motorized Z-axis movement

The MF Generation D version with a motorized Z-axis. This feature renders fast and accurate Auto Focus possible when used in combination with the optional Vision Unit. The MF with motorized Z-axis is available in 3 stage sizes and incorporates all the functionality of the manual MF Generation D.
The MF Generation D with motorized Z-axis offers the following benefits:

- Auto Focus function when using the optional Vision Unit.
- A measuring accuracy that is one of the highest in its class.
- Proven high-NA objectives (long working distance type).
- Integration of metallurgical and measurement microscope functions enabling you to make high-resolution observations and high-accuracy measurements.
- Illumination unit (reflected/transmitted) offers the option of a high-intensity LED or halogen bulb.
- The variable aperture diaphragm (reflected/ transmitted) allows observation measurement while suppressing light diffraction.
- Variety of 3 standardized stages in sizes up to 400 × 200 mm.
- Quick-release mechanism enabling you to move the stage quickly when measuring large or numerous workpieces.
- High-magnification eyepiece observation up to 2000X.
- A large lineup of optional accessories, including a Vision Unit, various digital cameras and data management for a PC, grants a wide field of applications and excellent measuring efficiency.

Specifications

Observation image	Erect
Optical tube	Monocular or binocular tube (depression: 25°), Reticle projection method, with TV mount, Optical path ratio (eyepiece/TV mount: 50/50)
Eyepiece	10X, 15X, 20X
Indication accuracy (at 20°C)	XY-axis: (2,2+0,02L) µm Z-axis: (5+0,04L) µm L: Measuring length (mm) when not loaded, JIS B 7153
Floating function	X and Y axes with Quick-release mechanism
Power supply	100/110/120/220/240 VAC, 50/60Hz
Objective lens	ML-series objectives Standard: 3X Optional: 1X, 5X, 10X, 20X, 50X, 100X
Remote Box	- Speed adjustment - Coarse/Fine Speed switching - Jog shuttle - Emergency stop switch - AF button - Counter reset button - Data output button - Power switch - Limit setting (Z-axis) Remote Box

Standard accessories

No.	Description
375-037-1	ML Objective Lens 3x
12AAA645	Illumination Filter GIF

Optional reticles for 3X eyepiece

Optional accessories

No.	Description
1. Oculars including eyepiece*	
176-392	Monocular Tube, for MF
176-394	Binocular Tube, for MF
375-043	Protractor Eyepiece 10X, for MF
176-313-11	Digital Protractor Eyepiece, for MF
2. Illumination units*	
176-449	LED illumination unit MF, Transmitted/ Reflected illumination set
176-451	Halogen illumination unit MF, Transmitted/Reflected illumination set

***Note:** At least one of the options is necessary for operation for 1. Oculars including eyepiece, 2. Illumination units.



MF-J2017D

No.	Model	XY stage travel range	Z-axis travel range	XY stage top size	Max. stage loading	Stage glass size [[mm]]	Max. work-piece height	Z-axis motor	Mass
176-891-13	MF-J2017D	200 x 170 mm	220 mm	410 x 342 mm	20 kg	270 x 240 mm	220 mm	Yes	150 kg
176-892-13	MF-J3017D	300 x 170 mm	220 mm	510 x 342 mm	20 kg	370 x 240 mm	220 mm	Yes	158 kg
176-893-13	MF-J4020D	400 x 200 mm	220 mm	610 x 342 mm	15 kg	440 x 240 mm	220 mm	Yes	164 kg

Refer to the MF / MF-U microscopes brochure


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Accessories for Measuring Microscopes MF Series

Accessories for MF Manual and Motorized Z-axis Models

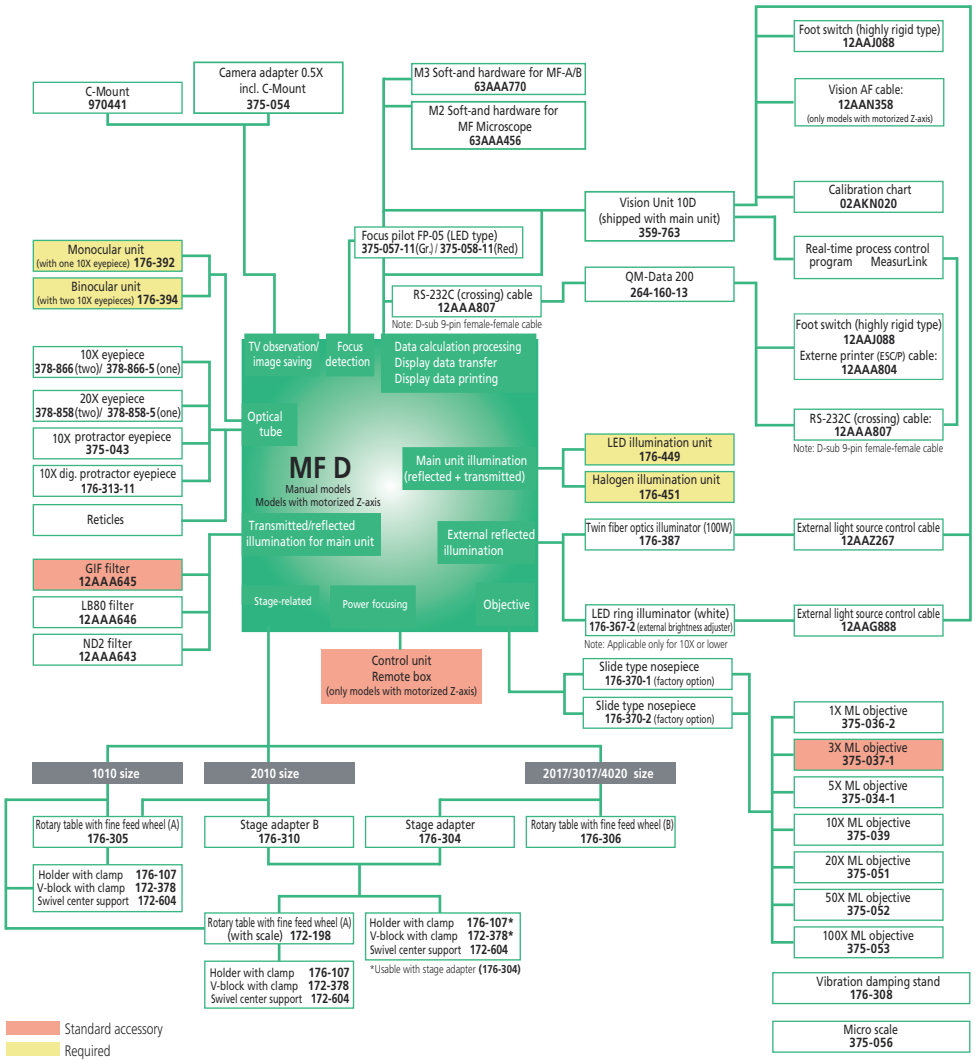



Optional slide type nosepiece with 2-lens mount (factory-set option)



QM-Data 200



ML-series objectives



Focus pilot



359-763
Vision Unit 10D

Optional accessories

No.	Description
1. Eyepieces	
378-866-5	WF 10X/24 Eyepiece single, Wide field of view eyepiece (1 pcs.)
378-866	WF 10X/24 Eyepiece pair, Wide field of view eyepiece (2 pcs.)
378-858-5	WF 20X/12 Eyepiece single, Wide field of view eyepiece (1 pcs.)
378-858	WF 20X/12 Eyepiece pair, Wide field of view eyepiece (2 pcs.)
2. Lenses	
375-036-2	ML Objective Lens 1x
375-034-1	ML Objective Lens 5x
375-039	ML Objective Lens 10x
375-051	ML Objective Lens 20x
375-052	ML Objective Lens 50x
375-053	ML Objective Lens 100x
3. Oculars including eyepiece: At least one of the options is necessary for operation.	
176-392	Monocular Tube, for MF
176-394	Binocular Tube, for MF
176-313-11	Digital Protractor Eyepiece, for MF
375-043	Protractor Eyepiece 10X, for MF
4. Objective changer (factory set option)	
176-370-1	Slide Type Nosepiece , Parfocal (for MF factory installed option)
176-370-2	Slide Type Nosepiece , w. Magnification Guaranteed (for MF factory installed option)
5. Focus pilot	
375-057-11	Focus pilot FP-05 Green, For MF
375-058-11	Focus pilot FP-05 Red, For MF
6. Optical filters	
12AAA643	Illumination Filter ND2
12AAA646	Illumination Filter, LB80
7a. Illumination units: At least one of the options is necessary for operation.	
176-449	LED illumination unit MF, Transmitted/ Reflected illumination set
176-451	Halogen illumination unit MF, Transmitted/Reflected illumination set
7b. Additional illumination units	
176-387	Twin fibre LED illumination unit, w/o power cord
176-367-2D	Ringlight LED, Illumination unit
63AAA001	Ringlight LED, Illumination unit
8. Digital evaluation units	
63AAA770	M3 Soft-and hardware for MF-A/B Microscope, Metlogix M3 software, camera, interface box, 2x LED lighting modules
63AAA456	M2 – Soft-and hardware for MF Microscope, Data processing software
264-160-13	QM-DATA200 (Stand type), 2D Data processor w/o power cord
359-763	Vision Unit 10D
9. Camera adapters	
970441	Camera Adaptor, C-Mount
375-054	Camera Adaptor, 0.5X incl. C-Mount

Please contact your Mitutoyo representatives for further fixture and camera solutions.

Refer to the MF / MF-U microscopes brochure
Refer to the M3 software for the MF microscopes brochure
Refer to the M2 software for the profile projectors and microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Measuring Microscope MF-U Generation D (Manual, 3-axis)

Specifications

Observation image	Erect
Optical tube	Siedentoph type (pupil distance adjustment: 51 - 76 mm), 1X tube lens, Binocular tube (depression: 30°), Reticle projection method, with TV mount, Optical path ratio (eyepiece/TV mount: 50/50)
Indication accuracy (at 20°C)	XY-axis: (2,2+0,02L) µm Z-axis: (5+0,04L) µm L: Measuring length (mm) when not loaded, JIS B 7153
Floating function	X and Y axes with Quick-release mechanism

Standard accessories

No.	Description
378-866	WF 10X/24 Eyepiece pair, Wide field of view eyepiece (2 pcs.)
12AAA645	Illumination Filter GIF

Optional accessories

No.	Description
1. Objective lens turret*	
378-018	Turret for MF-U, Manual (BF), 4 Pos.
378-216-11	Turret for MF-U, Motorized (BF), 5 Pos.
176-211	Turret for MF-U, Manual (BD), 4 Pos.
176-212-11	Turret for MF-U and FS-70, Motorized (BD), 4 Pos.
2. Illumination units*	
176-450	LED illumination unit MF-U, Transmitted/Reflected illumination set
176-452	Halogen illumination unit MF-U, Transmitted illumination set
176-316D	Halogen illumination unit MF-U, reflected illumination set 150W

***Note:** At least one of the options is necessary for operation for 1. Objective lens turret, 2. Illumination units.

MF-U Generation D Manual Models

Its infinite corrected optical system allows a wide range of applications (e.g. dark-field-, polarized- and DIC-microscopy) and the use of a turret.

The MF-U offers you the following benefits:

- Measuring accuracy that is one of the highest in its class.
- Proven high-NA objectives from the FS optical system (long working distance type).
- Integration of metallurgical and measurement microscope functions enabling you to make high-resolution observations and high-accuracy measurements.
- Illumination unit (reflected/transmitted) gives you the option of a high-intensity LED or halogen bulb.
- The variable aperture diaphragm (reflected/ transmitted) allows observation measurement while suppressing light diffraction.
- Variety of standardized stages in sizes up to 400 × 200 mm.
- Quick-release mechanism enabling you to move the stage quickly when measuring large or numerous workpieces.
- High-magnification eyepiece observation up to 2000X.
- A good choice of optional accessories, including a Vision Unit, various digital cameras or data management on a PC, promises a wide field of application and excellent measuring efficiency.



MF-UD 2017D
(turret, objectives and illumination are optional)

Bright/Dark Field (BF/DF)

No.	Model	XY stage travel range	Z-axis travel range	XY stage top size	Stage glass size [[mm]]	Max. workpiece height	Swiveling function (left)	Mass [kg]
176-986-13	MF-UD1010D	100 x 100 mm	150 mm	280 x 280 mm	180 x 180 mm	150 mm		67
176-987-13	MF-UD2010D	200 x 100 mm	150 mm	350 x 280 mm	250 x 150 mm	150 mm		71
176-888-10	MF-UD2017D	200 x 170 mm	220 mm	410 x 342 mm	270 x 240 mm	220 mm	±5°	148
176-989-13	MF-UD3017D	300 x 170 mm	220 mm	510 x 342 mm	370 x 240 mm	220 mm	±5°	156
176-890-10	MF-UD4020D	400 x 200 mm	220 mm	610 x 342 mm	440 x 240 mm	220 mm	±3°	162


Bright Field (BF)

No.	Model	XY stage travel range	Z-axis travel range	XY stage top size	Stage glass size [[mm]]	Max. workpiece height	Swiveling function (left)	Mass [kg]
176-976-13	MF-UB1010D	100 x 100 mm	150 mm	280 x 280 mm	180 x 180 mm	150 mm		67
176-977-13	MF-UB2010D	200 x 100 mm	150 mm	350 x 280 mm	250 x 150 mm	150 mm		71
176-978-13	MF-UB2017D	200 x 170 mm	220 mm	410 x 342 mm	270 x 240 mm	220 mm	±5°	148
176-979-13	MF-UB3017D	300 x 170 mm	220 mm	510 x 342 mm	370 x 240 mm	220 mm	±5°	156
176-980-13	MF-UB4020D	400 x 200 mm	220 mm	610 x 342 mm	440 x 240 mm	220 mm	±3°	162


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Measuring Microscope MF-U Generation D(Manual, 3-axis) (Manual, 3-axis)

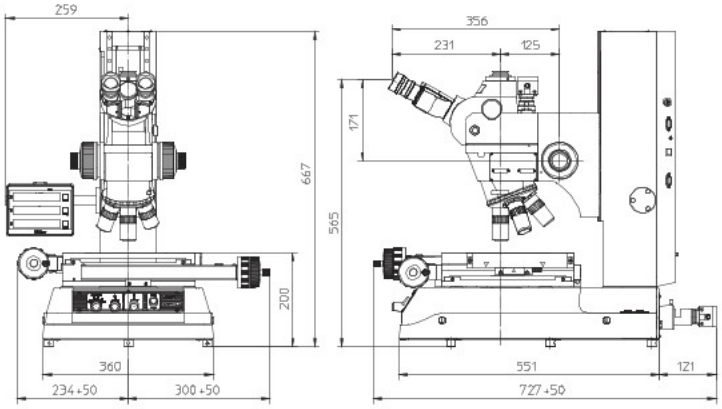


1010D

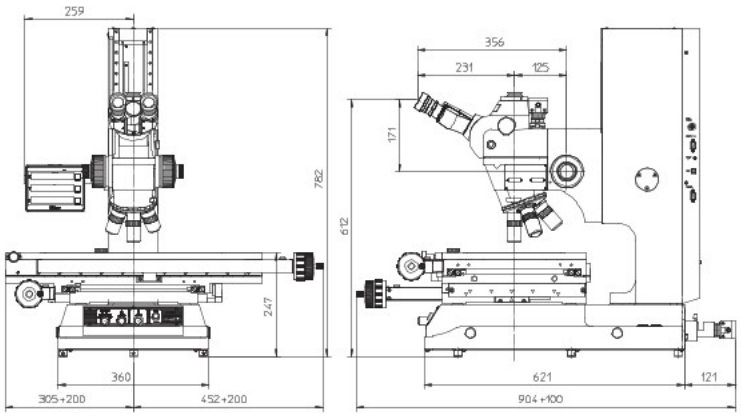


4020D



Polarized light



Bright field



Dark field



Differential interference contrast



176-450LED
LED transmitted/reflected Illumination set



176-452Halogen transmitted illumination set
Halogen transmitted illumination set



176-316DHalogen
Halogen reflected illumination set 150W



176-211 Manual turret (BD), 4 Pos.
378-018 Manual turret (BF), 4 Pos.



176-212-11
Motorized turret (BD), 4 Pos.



378-216-11
Optional 5 positions motorized turret

Refer to the MF / MF-U microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Measuring Microscope MF-U Generation D (Z-axis Motor Drive)

Specifications

Observation image	Erect
Optical tube	Siedentoph type (pupil distance adjustment: 51 - 76 mm), 1X tube lens, Binocular tube (depression: 30°), Reticle projection method, with TV mount, Optical path ratio (eyepiece/TV mount: 50/50)
Eyepiece	10X (field No.: 24 mm) Optional: 15X, 20X
Focusing method	Manual (coarse focusing: 10 mm/rev., fine focusing: 0,1 mm/rev.)
Indication accuracy (at 20°C)	XY-axis: (2,2+0,02L) µm Z-axis: (5+0,04L) µm L: Measuring length (mm) when not loaded, JIS B 7153
Floating function	X and Y axes with Quick-release mechanism
Power supply	220/240V AC, 50/60Hz
Turret (optional)	Manual or motorized
Objective lens (optional)	BF / BD Plan Apo objective from 1X to 100X
Transmitted illumination optional but required	Light source: Halogen bulb (12V, 50W) or LED illumination Optical system: Telecentric illumination with adjustable aperture diaphragms Functions: Light intensity adjustable, Non-stepped brightness adjustment
Surface illumination optional but required	Light source: Optional halogen illumination unit (fiber-optic cold light illumination) or LED illumination Optical system: Koehler illumination with adjustable aperture diaphragms Functions: Light intensity adjustable, Non-stepped brightness adjustment
Display unit	Resolution: 0,001mm / 5E-4mm / 1E-4mm No. of axis: 2 axis or 3 axis Functions: Zero-setting, Direction switching, Data output (USB and RS-232C interface)
Remote Box	- Speed adjustment - Coarse/Fine Speed switching - Jog shuttle - Emergency stop switch - AF button - Counter reset button - Data output button - Power switch - Limit setting (Z-axis) Remote Box



Refer to the MF / MF-U microscopes brochure
Note: Standard and optional accessories for MF-U (Z-axis Motor Drive) microscopes: see accessories at MF-U (Manual, 3-axis).

Motor-Driven Z-axis MF-U Models

Motor-driven models allows in combination with optional Vision Unit ultra-high speed auto focus function

The ultra-high speed AF function has been installed to allow focusing on a surface to be measured at a speed of about one second. Freedom from burdensome focus adjustment even on a work-piece with many asperities allows the operator to perform stress-free measurement, drastically reducing operator's fatigue.

MF-U-J models are for bright field observations.
MF-U-K models are for bright field/dark field observations.



MF-UJ2017D
(turret, objectives and illumination are optional)


No.	Model	XY stage travel range	XY stage top size	Stage glass size [[mm]]	Max. stage loading	Swiveling function (left)	Mass [kg]
176-894-13	MF-UJ2017D	200 x 170 mm	410 x 342 mm	270 x 240 mm	20 kg	±5°	150
176-895-13	MF-UJ3017D	300 x 170 mm	510 x 342 mm	370 x 240 mm	20 kg	±5°	158
176-896-13	MF-UJ4020D	400 x 200 mm	610 x 342 mm	440 x 240 mm	15 kg	±3°	164
176-897-13	MF-UK2017D	200 x 170 mm	410 x 342 mm	270 x 240 mm	20 kg	±5° (left)	150
176-898-13	MF-UK3017D	300 x 170 mm	510 x 342 mm	370 x 240 mm	20 kg	±5° (left)	158
176-899-13	MF-UK4020D	400 x 200 mm	610 x 342 mm	440 x 240 mm	15 kg	±3° (left)	164

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Accessories for Measuring Microscope MF-U Generation D

Accessories for MF-U Manual and Motorized Z-axis Models

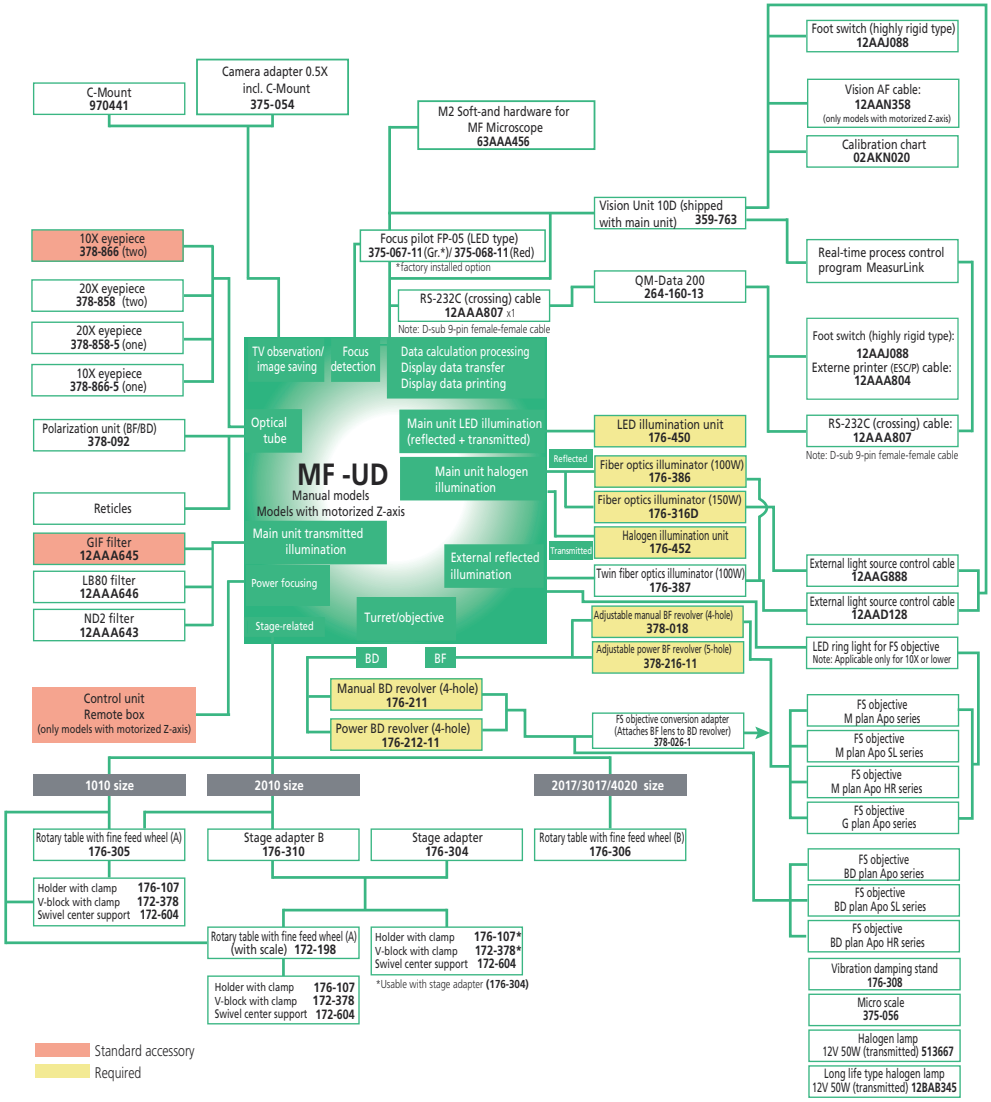

Optional accessories

No.	Description
1. Eyepieces	
378-858	WF 20X/12 Eyepiece pair, Wide field of view eyepiece (2 pcs.)
378-858-5	WF 20X/12 Eyepiece single, Wide field of view eyepiece (1 pcs.)
378-866-5	WF 10X/24 Eyepiece single, Wide field of view eyepiece (1 pcs.)
2. Objective lens turret	
378-018	Turret for MF-U, Manual (BF), 4 Pos.
378-216-11	Turret for MF-U, Motorized (BF), 5 Pos.
176-212-11	Turret for MF-U and FS-70, Motorized (BD), 4 Pos.
176-211	Turret for MF-U, Manual (BD), 4 Pos.
3. Focus pilot FP-05 LED type (factory set option)	
375-067-11	Focus pilot FP-05U Green LED, For MF-U (factory installed option)
375-068-11	Focus pilot FP-05U Red LED, For MF-U (factory installed option)
4. Optical filters	
12AAA643	Illumination Filter ND2
12AAA646	Illumination Filter, LB80
5a. Illumination units	
176-450	LED illumination unit MF-U, Transmitted/Reflected illumination set
176-452	Halogen illumination unit MF-U, Transmitted illumination set
176-316D	Halogen illumination unit MF-U, reflected illumination set 150W
5b. Additional illumination units	
176-387	Twin fibre LED illumination unit, w/o power cord
176-386	Single fibre LED illumination unit
6. Reticles	
12AAG876	Reticle for MF-U Gen. B, Broken Cross-hair (3 µm line width)
12AAG877	Reticle for MF-U Gen. B, Broken Cross-hair (5 µm line width)
12AAG878	Reticle for MF-U Gen. B, Broken Cross-hair (7 µm line width)
12AAG879	Reticle for MF-U Gen. B, Cross-hair and 45° Broken Lines
12AAG880	Reticle for MF-U Gen. B, Cross-hair and 60° Broken Lines
7. Digital evaluation units	
63AAA456	M2 – Soft-and hardware for MF Microscope, Data processing software
359-763	Vision Unit 10D
264-160-13	QM-DATA200 (Stand type), 2D Data processor w/o power cord
8. Camera adaptors	
375-054	Camera Adaptor, 0.5X incl. C-Mount
970441	Camera Adaptor, C-Mount

***Note:** At least one of the options is necessary for operation for 2. Objective lens turret, 5a. Illumination units and Objective lenses.
All the Objective lenses are available at "Long Working Distance Objectives --> Objectives for Brightfield and for Brightfield/Darkfield Observation"

Please contact your Mitutoyo representatives for further fixture and camera solutions.

Refer to the MF / MF-U microscopes brochure
Refer to the M2 software for the profile projectors and microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Accessories for Measuring Microscope MF/MF-U Generation D


Illumination Units for Measuring Microscope




Dual Swan-neck Light-pipe




Twin Fiber LED Illumination

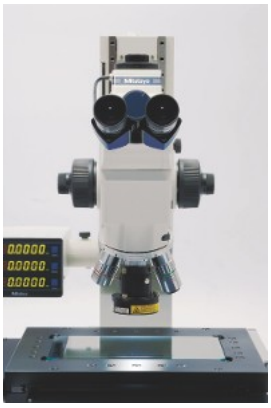

LED Ring Light (for M Plan objectives)

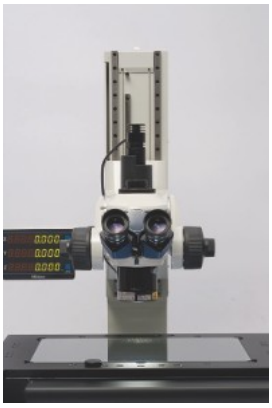

LED Ring Light (for ML objectives)



LED Ring Light

No.	Model	Applicable Microscope	Length of fibre cable	Light source	Mass [kg]
176-367-2D	LED Ring Light	MF models with 1X, 3X, 5X, 10X objective	1500 mm	White LED	1
176-387	Twin fibre LED illumination unit	MF/MF-U models	700 mm	LED (20 W/400 lx) (Colour: White, Lifetime: 30000H Colour Temperature: 6500K)	2,6

Refer to the MF / MF-U microscopes brochure

Optional accessories

No.	Description
516576	Reticle, Broken Cross hair and 60° Angle
516577	Reticle, Cross hair with 20 mm Scale
516578	Reticle, Concentric Circles
516848	Reticle, Cross hair
516849	Reticle, 10 mm Scale (0,01 mm reading)
516850	Reticle, 5 mm Scale (0,005 mm reading)

Eyepieces for Measuring Microscopes

- Extra-wide field of view type.
- Optional reticles are available.
- Applicable microscope models: MF, MF-U, FS70.



378-866-5



378-858-5

No.	Model	Remarks
378-858-5	WF20X/12	Single
378-858	WF20X/12	Set of pair
378-866-5	WF10X/24	Single
378-866	WF10X/24	Set of pair

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Vision Unit

Vision Unit


This vision system retrofit for microscopes allows you to complete your measurement in one easy step with its automatic edge-detection tools and various macro functions.
The Vision Unit offers you the following benefits:

- Easy operation due to the graphics and measurement navigation functions.
- Image data input/storage function.
- Measurement results are output to Microsoft® Excel®; this lets you generate an inspection table on the same computer.
- The unit allows you to verify that measurement results are within the tolerance zones and to carry out various types of statistical processing for each item.
- Combined use with the focus pilot gives you high accuracy in height measurements (patent pending).
- You can perform a series of measuring operations using just one screen display.
- The auto-brightness control function reproduces type and degree of illumination used.



MF microscope with Vision Unit camera and QSPAK-VUE software

No.	Model	Description
359-763	Vision Unit 10D	For MF / MF-U generation D manual and motorized models
359-727	Vision Unt 9D	For MF generation C
359-729	Vision Unit 9UD	For MF-U generation C
359-779	Vision Unit 7D	For Hyper MF / Hyper MF-U generation B

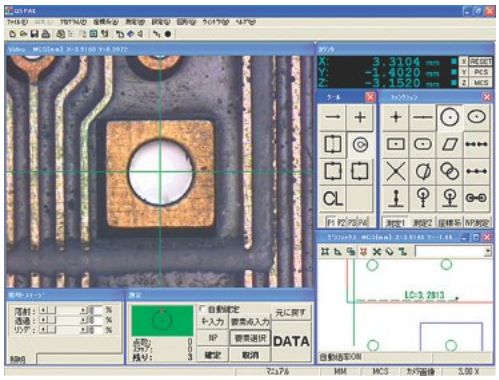

QSPAK VUE Measurement Window


Refer to the QM-Data200 and vision unit brochure

Specifications


Projected image	Inverted
Camera unit	Image sensor: 1/2" / **12,7 mm** colour CMOS camera Dimensions: 100 x 58 x 89 mm (W x D x H) Mass: 0,4 kg
Adapter unit	Dimensions: 45 x 123 mm Magnification: 0,5X Mass: 0,3 kg
Magnification	19X - 1900X on 22" / **56 cm** monitor (image resizable)
QSPAK VUE, optional software	**For observation/comparison of form** - Template matching function - Manual pattern matching function **For simple measurement** - One-click edge detection tool function - Smart tool function - User macro function **Functions for repeated measurement / auto-measurement** - Quick navigation - Playback - Graphic - External data output - Statistical calculation **Operating software:** QSPAK VUE (optional)

Standard accessories

No.	Description
12AAJ088	Footswitch



One-click Edge Detection
Just by clicking the mouse near the edge of a workpiece, QSPAK automatically scans the edge and detects it, showing its coordinates. This function also works with the point tool, box tool, circle tool and auto-focus tool.



Graphic Window
The measurement results and measured elements are plotted in the graphic window in real-time. By using this function the user can check the current measuring position at a glance. The graphic window can be used for geometrical calculations.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

M3 Software for MF Microscopes

- Pattern based playback and alignment
- DXF Overlays and profiling
- Multi-Touch software control
- Advanced video probe toolbox
- Programable light control
- Graphical-based constructions
- Stored measurement routines and playback
- Flexible report and content formatting
- Stitching function from multiple field of views

The package consists of:

- M3 software with XYZ counter support, DXF overlay and Profiling s/w modules
- Colour camera, USB3, 2 MP, 80fps
- USB3 cable (3m) with screw connection for USB3 camera
- MNC114 controller for Mitutoyo MF microscopes
- Interface for support of XYZ zero-set buttons
- LED light units for transmitted and coaxial illumination



M3 optional module: Gear measuring



M3 optional module: Thread measuring

Refer to the M3 software for the MF microscopes brochure


M3 Soft-and Hardware for MF-A/B Microscope

Speed up your 2D measurements with MF microscopes and the innovative M3 software

Spend more time measuring and less time reading manuals thanks to the M3 software's straightforward and easy-to-use interface. Thanks to the familiar use of a touch screen, the M3 software can be quickly integrated into your Mitutoyo MF measuring microscope and drastically improve work efficiency.
An intuitive and thoughtful icon driven user interface, flexible edge detection tools, and powerful tolerancing and programming functionality, make the M3 the perfect solution for the MF microscopes.


- Combine the excellent optical performance of the MF microscope with the versatile M3 software and turn it into a powerful vision measuring system.
- Gain access to many powerful features and an intuitive measuring interface. Precise video edge detection tools provide accurate results, as well as access to powerful, industrial grade, measurement functionality.

No.	Model
63AAA770	M3 Soft-and hardware for MF-A/B





MF microscope with M3 image processing software



M3 measurement image



M3 measurement results image



M3 graphical form deviation image

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Microscope Cameras

Microscope Cameras, Sets and Accessories



TM-1005B with 2x digimatic micrometer heads and 63AAA353 camera set

1) Camera sets

No.	Model	Set configuration
63AAA353	FHD HDMI USB camera set for TM microscopes	**Set includes:** 63AAA059 - FHD camera, including HDMI cable, mouse and simple calculation and reporting software on SD card 63AAA060 - 0.37X C-Mount to eyepiece adapter for TM microscopes 63AAA155 - Mechanical adapter for mounting the HDMI camera on the ocular tube
63AAA694	4K HDMI microscope camera set for MF	**Set includes:** 63AAA796 - 4K HDMI camera body with build-in basic software, flat enclosure C-Mount camera 63AAA067 - 0.5x camera adapter with C-mount for MF/MF-U microscope
63AAA695	4K HDMI microscope camera set for TM	**Set includes:** 63AAA796 - 4K HDMI camera body with build-in basic software, flat enclosure C-Mount camera 63AAA517 - 0.5X eyepiece adapter 63AAA155 - Mechanical adapter for mounting the HDMI camera on the ocular tube

2) Cameras

No.	Model
63AAA059	FHD camera, including HDMI cable, mouse and simple calculation and reporting software on SD card
63AAA796	4K HDMI camera body with build-in basic software, flat enclosure C-Mount camera

3) Accessories

No.	Model
63AAA060	0,37x Eyepiece adapter
63AAA517	0,5X Eyepiece adapter
63AAA155	Mechanical adapter for mounting the HDMI camera on the ocular tube
63AAA067	0,5x camera adapter with C-Mount for MF/MF-U microscope



Full HD-HDMI camera and accessories package for TM-microscope (63AAA353)



4K-HDMI camera and accessories package for MF-microscopes (63AAA694)



4K-HDMI camera and accessories package for TM-microscopes (63AAA695)



Full HD-HDMI microscope camera (63AAA059)



4K-HDMI microscope camera (63AAA796)

Refer to the digital camera upgrade for TM microscopes brochure
Refer to the digital camera upgrade for MF / MF-U microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Video Microscope Unit VMU Series

Specifications

Magnification of tube	1X
Reflected illumination	- Telecentric system with aperture stop system - Fibre-optic illuminator (optional) is required
Light source	Halogen bulb (21V, 150W) (optional)
Objective lenses for bright field observation (Optional accessory)	M Plan Apo, M Plan Apo SL, G Plan Apo
Objective lenses for laser cutting (Optional accessory)	M plan Apo NIR, LCD Plan Apo NIR, M Plan Apo NUV and LCD Plan Apo NUV
Objective lenses for laser machining (Optional accessory)	M Plan UV **(for 378-514 only)**

Refer to the microscope units and objective lenses brochure

VMU

The VMU is a compact, lightweight and easy-to-install microscope unit for CCD camera monitoring in semiconductor fabrication facilities.
The VMU offers the following benefits:

- The optical system features ultra-long working distance objectives and correction for the wide range of radiation wavelengths in use.
- Reflected illumination keeps your workpiece free from thermal expansion (the fibreoptic illuminator is required.)
- Also available with a laser mount or turret (objective mount).
- The objective is optional.



VMU-S
378-404



VMU-V
378-505



VMU-H
378-506



VMU-LB
378-513



VMU-L4B
378-514

Selection Guide to System Configuration
(Depends on each system configuration)

No.	Camera mount	Applicable Wavelength	Vertical camera C-mount	Horizontal camera C-mount	YAG laser mount	Fibre optic illumination unit mount	Mass [g]
378-404	C mount (parfocal and axial alignment, independent adjustment mechanism)	Visible radiation	Yes				400
378-505		Near-infrared and visible radiation	Yes			Yes	570
378-506		Near-infrared and visible radiation		Yes		Yes	590
378-513		Near-infrared, visible, near-ultraviolet radiation	Yes		Yes	Yes	1300
378-514		Near infrared, visible, near ultraviolet and ultraviolet radiation	Yes		Yes	Yes	1300

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Video Microscope Unit VMU Series

WIDE VMU

The WIDE VMU series takes video microscopy to the next level with a 7 times bigger field of view than conventional models. It supports both bright field and dark field observation.
The WIDE VMU offers the following benefits:

- Supported sensor size of 2-inch-equivalent, APS-C format
- Image field of ø30 mm with 1X tube lens
- Both F-mount and C-mount cameras can be mounted
- Bright field (BF) observations are supported by the WIDE VMU-V and -H models ,
- Bright field/Dark field (BD) observations are supported by the WIDE VMU-BDV and -BDH models
- With the flexible orientation for camera and illumination mounting very compact arrangements can be configured.
- The objective is optional.



WIDE VMU-BDV



WIDE VMU-BDH




WIDE VMU-HR

No.	Model	Camera mount	Observation type	Illumination mount	Suitable objectives	Mass [g]
378-517	WIDE VMU-BDV	Vertical	Bright field / Dark field (BD)	Dual port	BD Plan Apo, BD Plan Apo HR, BD Plan Apo SL	2000
378-518	WIDE VMU-BDH	Horizontal	Bright field / Dark field (BD)	Dual port	BD Plan Apo, BD Plan Apo HR, BD Plan Apo SL	2150
378-519	WIDE VMU-HR	Vertical	Bright field (BF)	Single port	M Plan Apo, M Plan Apo HR, M Plan Apo SL, G Plan Apo	1400


Optional accessories: Motorized turret, focusing unit, polarizer




Highly compact configuration of 4 WIDE VMU units

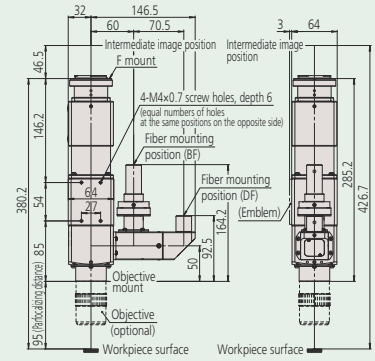

WIDE VMU-BDV

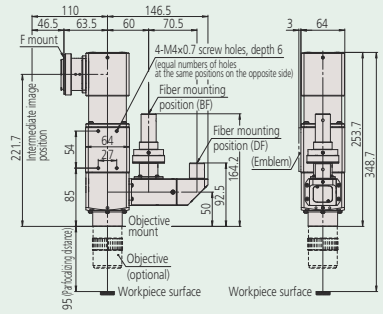

WIDE VMU-BDH

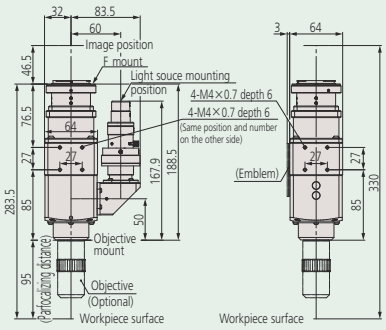

WIDE VMU-HR

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


TAGLENS and Software

Specifications


Resonance frequency	70 kHz
Effective aperture	ø11 mm
Transmittance	90% or more (400 nm to 700 nm)
Refractivity range	0,7 D to 1 D
Mountable posture	All directionsAccuracy guaranteed tem-
Accuracy guaranteed tem-perature range	5°C to 30°C
Operating Environment / Humidity	0°C to 40°C / 40% to 70% RH or less (non-con-
Humidity	70% RH or less (non-con-densing)
	densing)

Optional accessories

No.	Description
379-110	VMU-T1 for TAGLENS-T1
379-200A	Pulsed Light Source (PLS), for TAGLENS-T1 T1
02NEA067B	Software for TAGLENS-T1, TAGPAK-E V1.1 V1.1

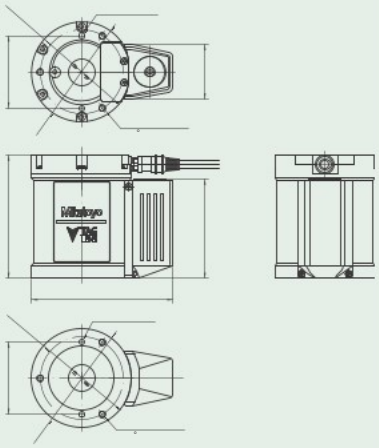

TAGLENS-T1 Dimensions

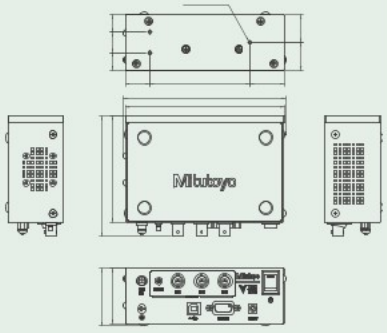

Controller Dimensions

Refer to the TAGLENS concept book brochure
Refer to the TAGLENS brochure
Refer to the OEM brochure

TAGLENS

The Mitutoyo TAGLENSUltra-deep-focus eliminates the most important conventional lens limitation. In o
Ultra-deep-focus eliminates the most important conventional lens limitation. In optical inspection of thre
of three-dimensional targets the complicating factors of variable distance, inclination and move-ment in
ment inevitably result in some surfaces being out of focus in every image captured, which has al-ways be
ways been the major issue with conventional lenses.Ultra-high speed, varifocal lens.
Ultra-high speed, varifocal lens.
A dedicated controller and the software TAGPAK-C V1.2 is equipped as standard.

No.	Delivered	Mass [g]
379-010-1A	TAGLENS -T1 includes software TAGPAK-C	1500
379-011-1A	TAGLENS-T1 E-Set includes software TAGPAK-C and –E (2NEA67B)	1500



TAGLENS-T1



Controller
The controller supplies power to the TAGLENS main unit and controls the lens main unit via TAGPAK-C. Other than the connector to the main unit, output connectors for synchronization with external devices are equipped. The AC adapter supplied should be used to supply power to the controller.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-
itly agreed upon.


Mitutoyo

TAGLENS and Software


TAGPAK-E (Optional Software)

TAGPAK-E software converts images captured by the optical system using TAGLENS for extended depth of field (EDOF) images.
The software provides functions relating to EDOF images such as parameter setting, image ON/OFF and saving and loading the images.
An included SDK (Software Development Kit) enables the integration of TAGLENS functions into customers' software.


No.	Description	Remarks
02NEA067B	Software for TAGLENS-T1, TAGPAK-E V 1	Software version V1.1 or higher is required for use in combination with the Pulsed Light Source (PLS) for TAGLENS.

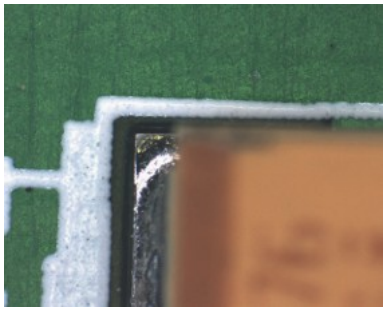


Normal microscope observation (lower)
With a height difference, only the upper or lower plane can be focused.

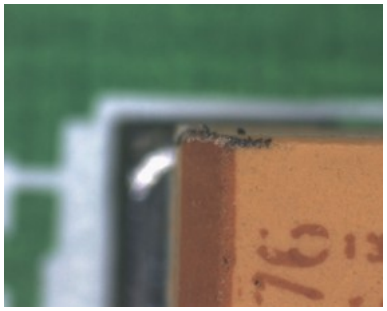

Normal microscope observation (upper)
With a height difference, only the upper or lower plane can be focused.

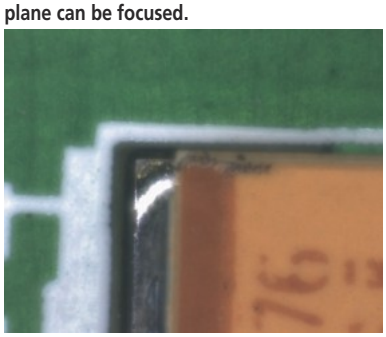


When using TAGLENS (TAGLENS ON)
TAGLENS changes the focus point at high speed. However, because the capturing time per frame is longer than the focusing time, the images will have optically mixed focus points from different heights,and the image will be blurred.

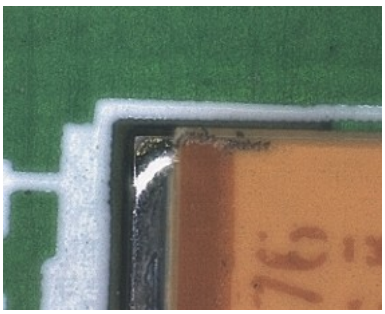

When using TAGLENS (EDOF ON)
Eliminate the blurriness caused by a change in the optical system or focus position, and you obtain an entirely sharper image. This is called the EDOF image.

Specifications

Software	Optional Software for TAGLENS-T1 (Required for EDOF and checking inspection images)
OS compatibility	Windows10 Pro 64 bit
TAGLENS control software	TAGPAK-C Ver.1.2
CPU	Clock frequency: 2 GHz or more Number of physical cores: 4 cores or more (Recommendation: 8 cores or more)
Memory	8 GB or more
Hard disk	25 GB or more
Optical Drive	DVD-ROM Drive for installation software
Communication port	TAGLENS control: USB 2 x 1 port and RS-232C x 1 port GigE Vision control: 1000BASE-T x 1 port USB3 Vision control: USB 3 x 1 port Dongle: USB 2 x 1 port Pulsed Light Source control: USB 2 x 1 port
Monitor	SXGA (1280x1024 Pixel) or more

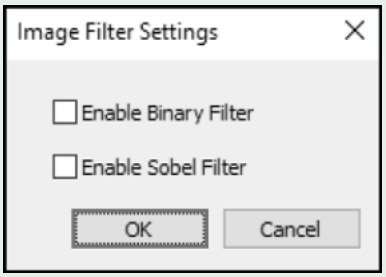

Two filters, the binarization filter and the Sobel* filter, are available for the image displayed on the viewer.

*** A filter function to emphasize a contour.**

Refer to the TAGLENS concept book brochure
Refer to the TAGLENS brochure
Refer to the OEM brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Accessories for TAGLENS

Specifications

Compatible TAGLENS	TAGLENS-T1
Imaging lens magnification	1x
Imaging area	ø11 mm
Applicable objective lenses	M Plan Apo Series

Standard accessories

No.	Description
379-010-1A	TAGLENS-T1, with TAGPAK-C

Optional accessories

No.	Description
378-800-12	M Plan APO 1x, Objective for bright-field observation in visible range
378-801-12	M Plan APO 2x, Objective for bright-field observation in visible range
378-802-6	M Plan APO 5x, Objective for bright-field observation in visible range
378-807-3	M Plan APO 7.5x, Objective for bright-field observation in visible range
378-803-3	M Plan APO 10x, Objective for bright-field observation in visible range
378-804-3	M Plan APO 20x, Objective for bright-field observation in visible range
378-805-3	M Plan APO 50x, Objective for bright-field observation in visible range
379-011-1A	TAGLENS-T1 E-Set, with TAGPAK-C and -E
379-200A	Pulsed Light Source (PLS), for TAGLENS-T1

Specifications

Luminous colour	White
Frequency	75 kHz or less
Maximum light output	30 lm
Input pulse width	10 ns to 85 ns
Optical pulse width	50 ns to 100 ns
Operating temperature range	5 to 40°C, 80% RH max.


Refer to the TAGLENS concept book brochure
Refer to the TAGLENS brochure
Refer to the OEM brochure

Video Microscope Unit

By integrating the TAGLENS-T1 and incorporating the objective lens with the camera enables configuring a varifocal optical system.

No.	Description	Mass [g]
379-110	VMU-T1 for TAGLENS-T1	1000



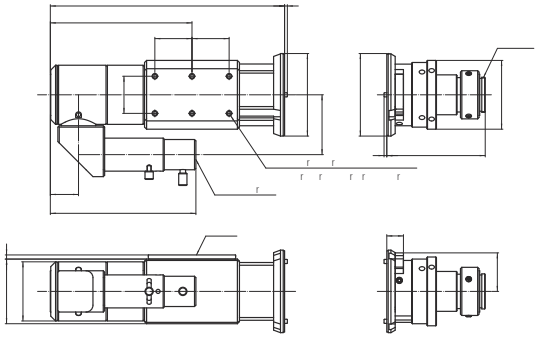


Dimensions VMU-T1

Pulsed Light Source for TAGLENS

The new Pulsed Light Source (PLS) is an ultrafast LED pulse illuminator that combines with TAGLENS-T1 to achieve focused image acquisition and two-dimensional image synthesis at a desired position.
Using the PLS and TAGLENS software (TAGPAK-C), the brightness and focus position can be adjusted.

No.	Lighting system	Mass [g]
379-200A	Pulse lighting	2700





Dimensions Pulsed Light Source

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Interferometer Units

Interferometer Units

- Non-contact high-accuracy fine surface texture measurement is possible through white light interference: 3D shape measurement, 3D roughness measurement
- Measurement enabled with high Z-resolution even with low-magnification lens
- Supports high aspect ratio shape measurement through detection not dependent on optical-based NA
- High robustness with regard to disturbance vibration
- Compact and lightweight




WLI-Unit Sensor Head



WLI -Unit Controller



No.	Cable length [m]	Mass
554-001	3	Sensor Head 1.7 kg / Controller 2.3 kg
554-002	5	Sensor Head 1.7 kg / Controller 2.3 kg
554-003	10	Sensor Head 1.7 kg / Controller 2.3 kg

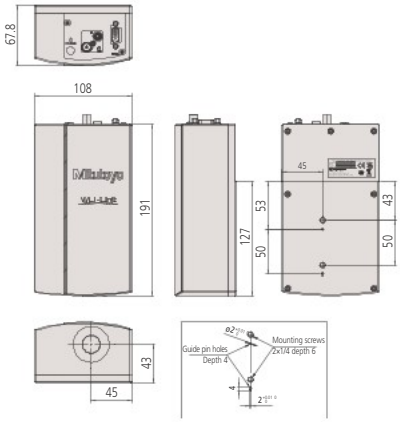

WLI-Unit Sensor Head

Specifications

Power consumption	Max. 20 WApplicable objective len
Applicable objective len-ses ses	WLI Plan Apo series
Focal range f	100 mm
I/F	WLI-Unit sensor head ter-minal/stop connector/GigaBit Ethe GigaBit Ethernet: 2 ch
Rated voltage	AC100～240 V / 50, 60 Hz
Scanning mechanism	Mitutoyo Objective Lens Scanner
Tube lens magnification	1X
Software	**WLIPAK** WLI-Unit control li-control li-brary brary (SDK), sam-(SDK), sam-ple code, ple code, WLIPAK Sample GUI Sample GUI **WLI-Unit Calibra-tion SW** Calibration SW **Analysis software (recom-mended mended option) option)** MCubeMap

	High Throughput	Standard	High Defintion
Z Motion Range	8,000 µm		
WLI measurement Z range	2,100 µm	1,900 µm	1,700 µm
Throughput @20 µm range	3 s	4 s	6 s
Z resolution	-	4 nm	
Z repeatability (σ)	-	40 nm	

554-001/554-002/554-003



WLI -Unit Controller



Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Finity Corrected Objectives for ML-Series

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance R: Resolving power D.F.: Depth of field



Refer to the microscope units and objective lenses brochure

Finity Corrected Objectives for ML series

The Mitutoyo 375 Series finity corrected objective lenses realize clear images and long working distance.



375-036-2



375-037-1



375-034-1



375-039



375-051



375-052



375-053

No.	Model	Magnification	N.A.	W.D. [mm]	R [µm]	D.F. [µm]	Mass [g]
375-036-2	ML 1x	1x	0,03	61	9,2	306	80
375-037-1	ML 3x	3x	0,09	77	3,06	34	55
375-034-1	ML 5x	5x	0,13	61	2,12	23	75
375-039	ML 10x	10x	0,21	51	1,31	6,2	125
375-051	ML 20x	20x	0,42	20	0,65	1,6	310
375-052	ML 50x	50x	0,55	13	0,5	0,9	350
375-053	ML 100x	100x	0,7	6	0,4	0,6	380

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Objectives for M Plan Series

The Mitutoyo 378 Series objectives have one of the world's longest working distances and an infinitycorrection optical system. These objectives allow flexible observation at high magnifications and independent correction of chromatic aberration.



M Plan Apo and M Plan Apo SL
Objectives for bright field observation



BD Plan Apo and BD Plan Apo SL
Objectives for bright/dark field observation



Near-ultraviolet wavelength corrected M Plan Apo NUV objectives



Ultraviolet wavelength corrected M Plan UV objectives



Near-infrared wavelength corrected M Plan Apo NIR objectives

Specifications

Features

- The long working distance type objective lenses provide excellent clearance between the lens surface and the workpiece surface in focus, making it possible to observe workpieces which are usually hard-to-focus because of awkward projections.

- The metallurgical plan apochromatic (M Plan Apo) objective lens is an excellent optical system. This objective provides a flat, chromatic aberration-free image throughout the field of view, making it is suitable for any type of microscope.

- Specially designed objective lenses are also available with correction for the near-infrared, near-ultraviolet and ultraviolet regions of the spectrum, or various thicknesses of LCD screen glass.

- The mounting screw threads of objective lenses are designed to conform to JIS B-7141-1994.



Refer to the microscope units and objective lenses brochure


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Objectives for Brightfield Observation

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size

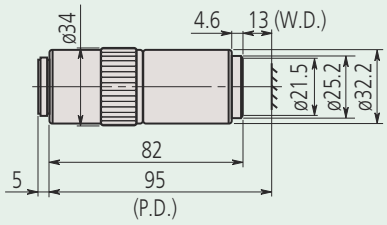

M Plan Apo 50X

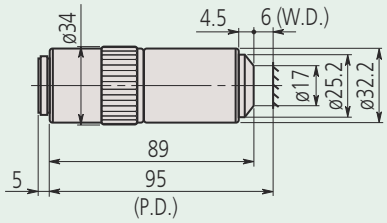

M Plan Apo 100X

Refer to the microscope units and objective lenses brochure


M Plan Apo

Features:


- Long Working Distances
- Infinity Corrected
- Bright Field Inspection
- High Quality Plan Apochromat Design
- Flat Image Surface over Entire Field of View




No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-800-12	M Plan Apo 1X	1x	0,025	11	95	200	11	440	ø24	4,8 x 6,4	300
378-801-12	M Plan Apo 2X	2x	0,055	34	95	100	5	91	ø12	2,4 x 3,2	220
378-802-12	M Plan Apo 5X	5x	0,14	34	95	40	2	14	ø4,8	0,96 x 1,28	262
378-807-3	M Plan Apo 7,5X	7,5x	0,21	35	95	26,67	1,3	6,2	ø3,2	0,64 x 0,85	240
378-803-3	M Plan Apo 10X	10x	0,28	34	95	20	1	3,5	ø2,4	0,48 x 0,64	240
378-804-3	M Plan Apo 20X	20x	0,42	20	95	10	0,7	1,6	ø1,2	0,24 x 0,32	270
378-805-3	M Plan Apo 50X	50x	0,55	13	95	4	0,5	0,9	ø0,48	0,1 x 0,13	290
378-806-3	M Plan Apo 100X	100x	0,7	6	95	2	0,4	0,6	ø0,24	0,05 x 0,06	320

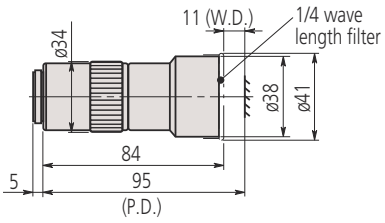


M Plan Apo 1X

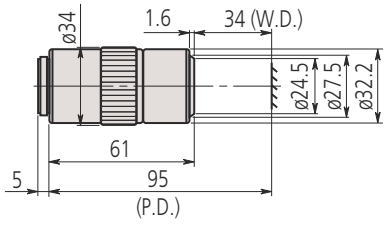


M Plan Apo 2X

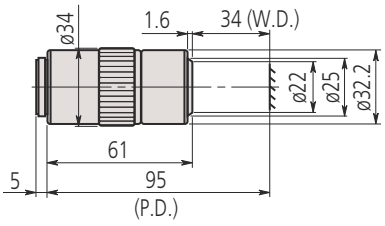


M Plan Apo 5X

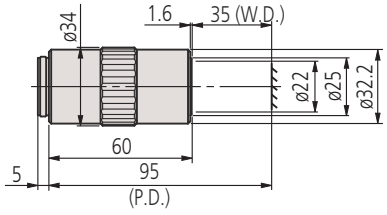

M Plan Apo 7,5X

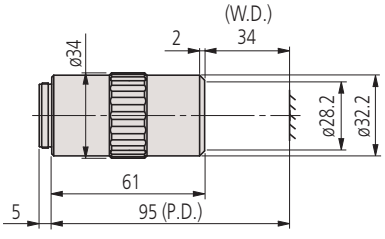

M Plan Apo 10X

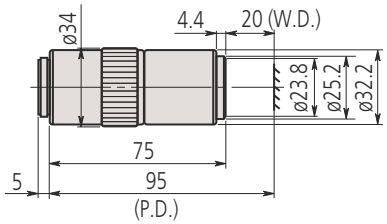

M Plan Apo 20X

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo


Objectives for Brightfield Observation

M Plan Apo HR


Features:
- High Resolution
- Infinity Corrected
- Breight Field Inspection
- High Quality Plan Apochromat
- Flat Image Surface over Entire Field of View




No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-787-16	M Plan Apo HR 5X	5x	0,21	27	95	40	1,3	6,2	ø4,8	0,96 x 1,28	285
378-788-15	M Plan Apo HR 10X	10x	0,42	15	95	20	0,7	1,6	ø2,4	0,48 x 0,64	455
378-814-4	M Plan Apo HR 50X	50x	0,75	5,2	95	4	0,4	0,49	ø0,48	0,1 x 0,13	400
378-815-4	M Plan Apo HR 100X	100x	0,9	1,3	95	2	0,3	0,34	ø0,24	0,05 x 0,06	410

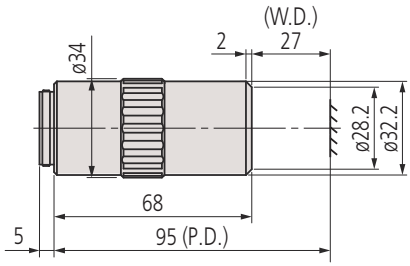


M Plan Apo HR 5X

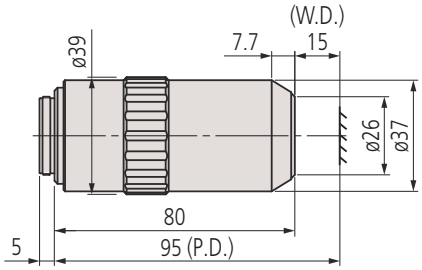

M Plan Apo HR 10X

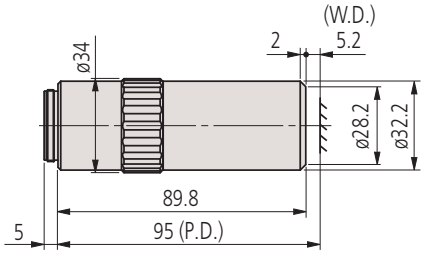

M Plan Apo HR 50X

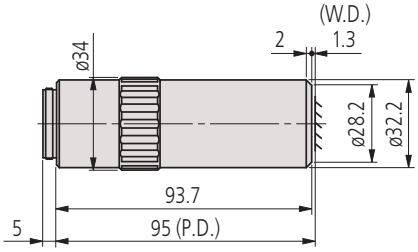

M Plan Apo HR 100X

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital cam-era with 1/2" chip size

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-itly agreed upon.

Objectives for Brightfield Observation

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size



Refer to the microscope units and objective lenses brochure


M Plan Apo SL

Features:


- Super Long Working Distances
- Infintiy Corrected
- Bright Field Inspection
- High Qualtiy Plan Apochromat Design
- Flat Image Surface over Entire Field of View




No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-810-3	M Plan Apo SL 20X	20x	0,28	30,5	95	10	1	3,5	ø1,2	0,24 x 0,32	240
378-811-15	M Plan Apo SL 50X	50x	0,42	20,5	95	4	0,7	1,6	ø0,48	0,1 x 0,13	280
378-813-3	M Plan Apo SL 100X	100x	0,55	13	95	2	0,5	0,9	ø0,24	0,05 x 0,06	290

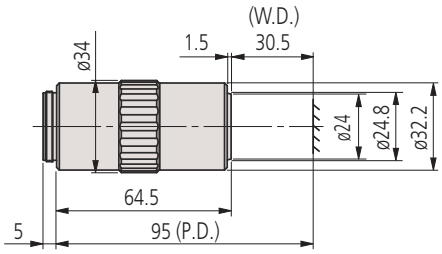

M Plan Apo SL 20X

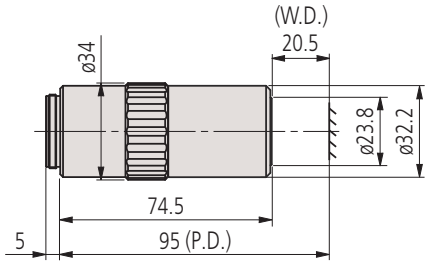

M Plan Apo SL 50X

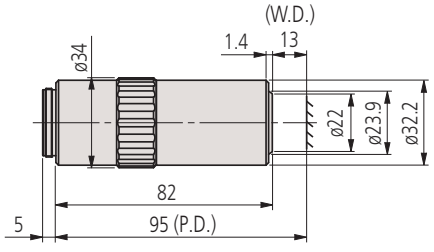

M Plan Apo SL 100X

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Objectives for Brightfield Observation


G Plan Apo

Features:
- Infinity Corrected
- Bright Field Inspection
- High Qualtiy Plan Apochromat Design
- Designed to observe Objects through 3.5 mm thick Cover Glass


Note: Contact Mitutoyo to custom order a specific cover glass correction to suit your application if required. Thickness, material and refractive index are all specifiable within usual limits.



No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-847	G Plan Apo 20X	20x	0,28	29,42	96,19	10	1	3,5	ø1,2	0,24 x 0,32	270
378-848-3	G Plan Apo 50X	50x	0,5	13,89	96,19	4	0,6	1,1	ø0,48	0,1 x 0,13	320

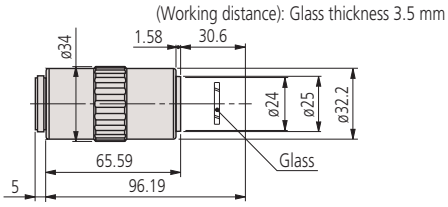

G Plan Apo 20X/t3,5

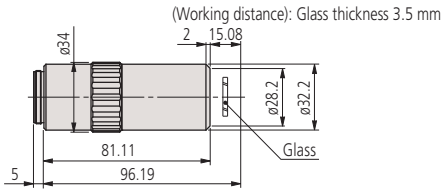

G Plan Apo 50X/t3,5

Specifications

Abbreviations in product table	Mag.: Magnification N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital cam-era with 1/2" chip size

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-itly agreed upon.

Objectives for Brightfield/Darkfield Observation

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size




Refer to the microscope units and objective lenses brochure

BD Plan Apo


Features:

- Bright/Dark Field Inspection
- Infinity corrected
- Long Working Distance
- High Qualtiy Plan Apochromat Design
- Suited for inspection of scratches, concavity and convexity on surfaces


No.	Model	Magnification	N.A.	W.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-831-12	BD Plan Apo 2x	2x	0,055	34	100	5	91	ø1,2	2,4 x 3,2	340
378-832-12	BD Plan Apo 5X	5x	0,14	34	40	2	14	ø4,8	0,96 x 1,28	350
378-830-7	BD Plan Apo 7,5X	7,5x	0,21	34	26,67	1,3	6,2	ø3,6	0,64 x 0,85	350
378-833-7	BD Plan Apo 10X	10x	0,28	34	20	1	3,5	ø2,4	0,48 x 0,64	350
378-834-7	BD Plan Apo 20X	20x	0,42	20	10	0,7	1,6	ø1,2	0,24 x 0,32	400
378-835-7	BD Plan Apo 50X	50x	0,55	13	4	0,5	0,9	ø0,48	0,1 x 0,13	440
378-836-7	BD Plan Apo 100X	100x	0,7	6	2	0,4	0,6	ø0,24	0,05 x 0,06	460

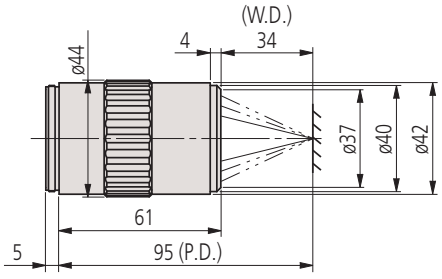


BD Plan Apo 2X

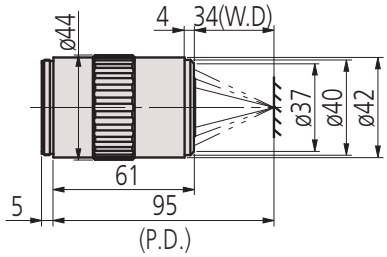


BD Plan Apo 5X

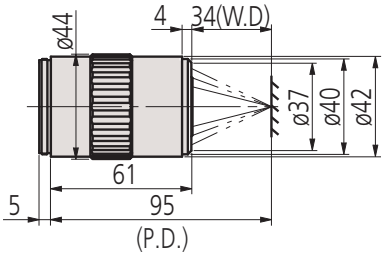


BD Plan Apo 7,5X

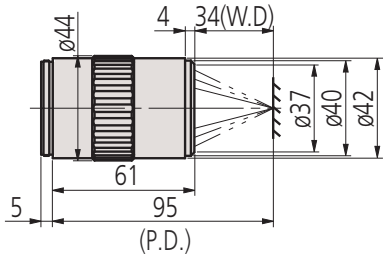


BD Plan Apo 10X

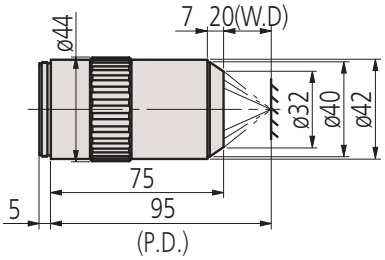

BD Plan Apo 20X

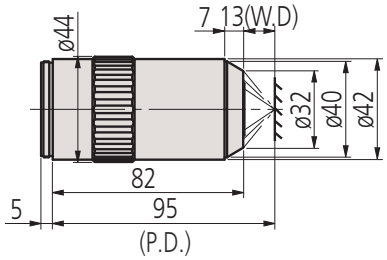

BD Plan Apo 50X

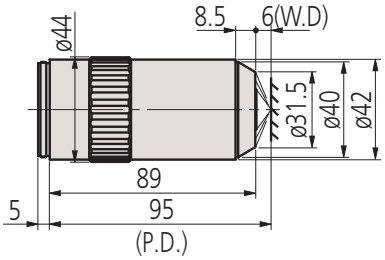

BD Plan Apo 100X

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo


Objectives for NIR

M Plan Apo NIR / M Plan Apo NIR HR


Features:

- Infinity Corrected
- Suitable for Bright Field Inspection and Laser Applications
- Long Working Distance
- High Quality Plan Apochromat Design
- Wavelength Correction from Visible to Near Infrared (480-1800 nm)
- High-Resolving Power Type available (M Plan Apo NIR HR)


No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-822-5	M Plan Apo NIR 5X	5x	0,14	37,5	95	40	2	14	ø4,8	0,96 x 1,28	220
378-823-15	M Plan Apo NIR 10X	10x	0,26	31	95	20	1,1	4,1	ø2,4	0,48 x 0,64	250
378-824-16	M Plan Apo NIR 20X	20x	0,4	20	95	10	0,7	1,7	ø1,2	0,24 x 0,32	300
378-825-17	M Plan Apo NIR 50X	50x	0,42	17	95	4	0,7	1,6	ø0,48	0,1 x 0,13	350
378-826-15	M Plan Apo NIR 100X	100x	0,5	12	95	2	0,6	1,1	ø0,24	0,05 x 0,06	335
378-854	M Plan APO NIR HR 20x	20x	0,6	12	95	10	0,46	0,8	ø1,2	0,33 x 0,44	470
378-863-5	M Plan Apo NIR HR 50X	50x	0,65	10	95	4	0,4	0,7	ø0,48	0,1 x 0,13	450
378-864-15	M Plan Apo NIR HR 100X	100x	0,7	10	95	2	0,4	0,6	ø0,24	0,05 x 0,06	490

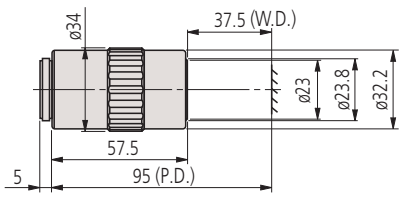


M Plan Apo NIR 5X

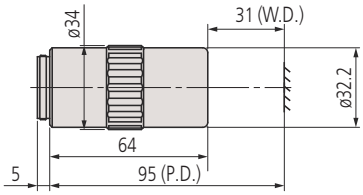


M Plan Apo NIR 10X

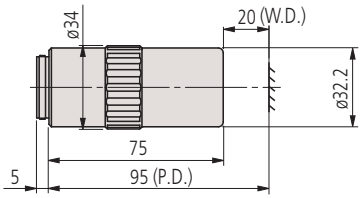


M Plan Apo NIR 20X

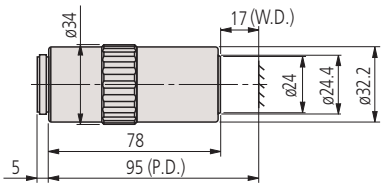


M Plan Apo NIR 50X



M Plan Apo NIR 100X

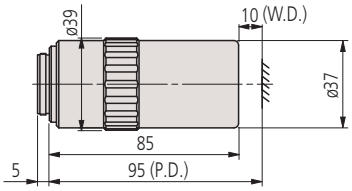

M Plan Apo NIR HR 50X



M Plan Apo NIR HR 100X

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eyepiece FOV 2: Field of view when using a digital camera with 1/2" chip size
M Plan Apo NIR	Note: These objective lenses are designed so that the image of a workpiece remains focused within the focal depth even when the wavelength used is changed from within the visible range up to the near-infrared (480 to 1800 nm). Therefore the M Plan NIR Series are suitable for laser repair. However, when the wavelength used exceeds 1100 nm, the focussing position may deviate slightly from that in the visible range due to changes in glass dispersion and refractive index.



Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Objectives for NIR


M Plan Apo NIR B

Features:


- Infinity Corrected
- Suitable for Bright Field Inspection and Laser Applications
- Long Working Distance 25.5 mm
- High Quality Plan Apochromat Design
- Wavelength Correction from Visible to Near Infrared (420-1064 nm)



No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-867-5	M Plan Apo NIR B 20X	20x	0,4	25,5	95	10	0,7	1,7	ø1,2	0,24 x 0,32	350
378-868-5	M Plan Apo NIR B 50X	50x	0,42	25,5	95	4	0,7	1,6	ø0,48	0,24 x 0,13	375

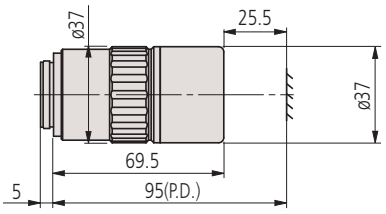

M Plan Apo NIR B 20X

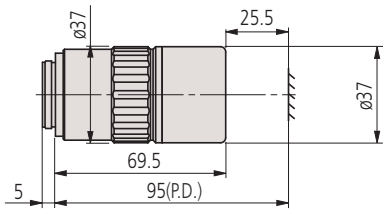

M Plan Apo NIR B 50X

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of field FOV 1: Field of view when using ø24 mm eyepiece FOV 2: Field of view when using a digital camera with 1/2" chip size
M Plan Apo NIR B	Note: This series of objective has greatly improved in operability thanks to the achievement of an ultra-long working distance of 25,5 mm while maintaining the NA of the NIR series 20X/50X.
M Plan Apo NIR	Note: These objective lenses are designed so that the image of a workpiece remains focused within the focal depth even when the wavelength used is changed from within the visible range up to the near-infrared (480 to 1800 nm). Therefore the M Plan NIR Series are suitable for laser repair. However, when the wavelength used exceeds 1100 nm, the focussing position may deviate slightly from that in the visible range due to changes in glass dispersion and refractive index.

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Objectives for NIR LCD

LCD Plan Apo NIR/LCD Plan Apo NIR HR


Features:

- Suitabel for Bright Field Inspection and Laser-based repair Applications through 0.7 or 1.1 mm LCD cover-glass
- Long Working Distance
- High Quality Plan Apoochromat Design
- Wavelength correction from Visible to Near Infrared (1800 nm)


No.	Model	Magnification	N.A.	W.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-827-16	LCD Plan Apo NIR 20X (t1,1)	20x	0,4	19,98	10	0,7	1,7	ø1,2	0,24 x 0,32	305
378-821-16	LCD Plan Apo NIR 20X(t0,7)	20x	0,4	20	10	0,7	1,7	ø1,2	0,24 x 0,32	305
378-828-16	LCD Plan Apo NIR 50X (t1,1)	50x	0,42	17,13	4	0,7	1,6	ø0,47	0,1 x 0,13	320
378-829-16	LCD Plan Apo NIR 50X (t0,7)	50x	0,42	17,26	4	0,7	1,6	ø0,48	0,1 x 0,13	320
378-754-15	LCD Plan Apo NIR 100X (t0,7)	100x	0,5	12,06	2	0,6	1,1	ø0,24	0,05 x 0,06	335
378-869-5	LCD Plan Apo NIR HR 50X (t 0,7)	50x	0,65	9,6	4	0,4	0,7	ø0,48	0,1 x 0,13	450
378-870-15	LCD Plan Apo NIR HR 100X (t 0,7)	100x	0,7	9,87	2	0,4	0,6	ø0,24	0,05 x 0,06	490

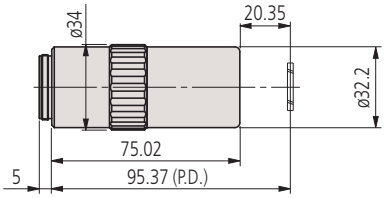


LCD Plan Apo NIR 20X (t1,1)

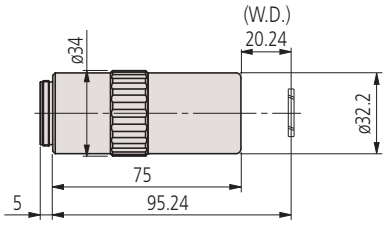


LCD Plan Apo NIR 20X (t0,7)

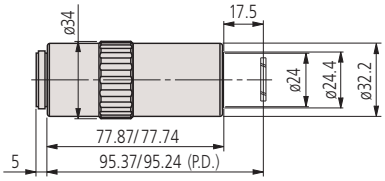


LCD Plan Apo NIR 50X (t1,1)/(t0,7)

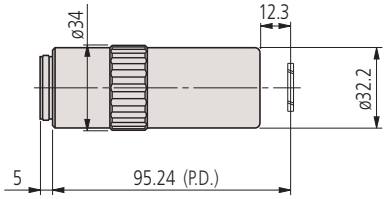

LCD Plan Apo NIR 100X (t0,7)

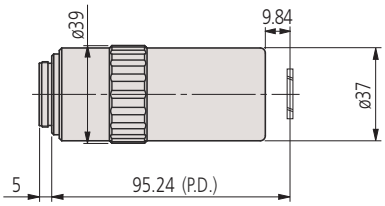

LCD Plan Apo NIR HR 50X (t0,7)

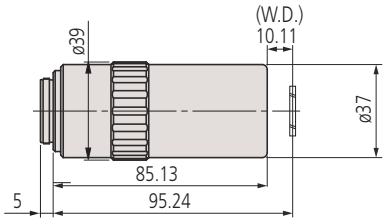

LCD Plan Apo NIR HR 100X(t0,7)

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of focus FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size



Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Objectives for NUV

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of focus FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size




Refer to the microscope units and objective lenses brochure

M Plan Apo NUV/M Plan Apo NUV HR


Features:

- Suitable for Bright Field Inspection and Laser Applications
- Long Working Distance
- High Quality Plan Apochromat Design
- Wavelength correction from Visible to Near Ultraviolett (355 nm)
- High Power Type available (M Plan Apo NUV HR)


No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-809-5	M Plan Apo NUV 10X	10x	0,28	30,5	95	20	1	3,5	ø2,4	0,48 x 0,64	255
378-817-8	M Plan Apo NUV 20X	20x	0,42	17	95	10	0,7	1,7	ø1,2	0,24 x 0,32	350
378-818-8	M Plan Apo NUV 50X	50x	0,44	15	95	4	0,6	1,4	ø0,48	0,1 x 0,13	390
378-819-15	M Plan Apo NUV 100X	100x	0,5	11	95	2	0,6	1,1	ø0,24	0,05 x 0,06	380
378-888-6	M Plan Apo NUV HR 50X	50x	0,65	10	95	4	0,42	0,65	ø0,48	0,1 x 0,13	550

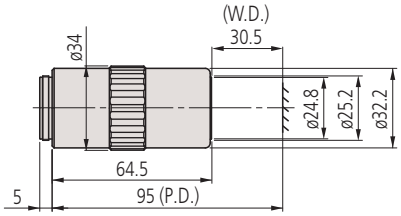


M Plan Apo NUV 10X

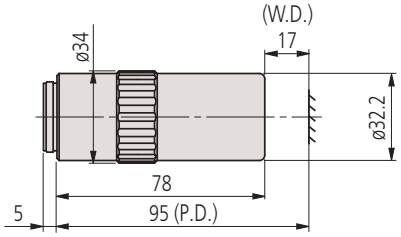


M Plan Apo NUV 20X

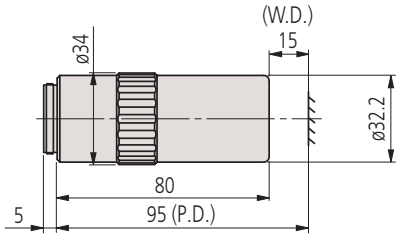

M Plan Apo NUV 50X

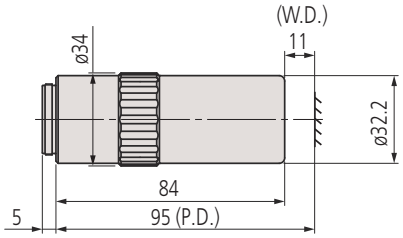

M Plan Apo NUV 100X

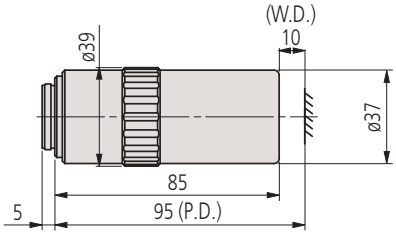

M Plan Apo NUV HR 50X

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Objectives for NUV LCD


M Plan Apo NUV LCD

Features:


- Suitable for Bright Field Inspection and Laser Applications through 0,7 or 1,1 mm LCD conver-glass
- Long Working Distance
- High Quality Plan Apochromat Design
- Wavelength correction from Visible to Near Ultraviolett (355 nm)
- High Resolution Type available (LCD Plan Apo NUV HR)




No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-890-8	LCD plan Apo NUV 20X (t0,7)	20x	0,42	16,96	95	10	0,7	1,6	ø1,2	0,24 x 0,32	340
378-820-8	LCD Plan Apo NUV 50X (t0,7)	50x	0,44	14,76	95	4	0,6	1,4	ø0,48	0,1 x 0,13	350
378-891-6	LCD plan Apo NUV HR 50X (t0,7)	50x	0,65	9,76	95	4	0,4	0,7	ø0,48	0,1 x 0,13	500

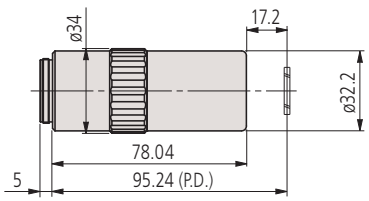

LCD Plan Apo NUV 20X (t0,7)

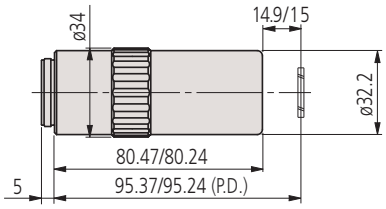

LCD Plan Apo NUV 50X (t0,7)

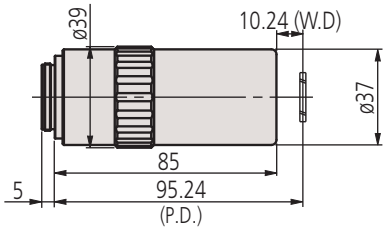

LCD Plan Apo NUV HR 50X (t0,7)

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of focus FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital cam-era with 1/2" chip size

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explic-itly agreed upon.

Objectives for UV

M Plan UV

Features:

- Suitable for Bright Field Inspection and Laser Applications
- Long Working Distance
- High Quality Plan Design
- Wavelength optimized for Visible and Ultraviolett (266 nm) Wavelength
- High Transmission in Ultraviolett Range


Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of focus FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size


Refer to the microscope units and objective lenses brochure




No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-844-15	M Plan UV 10X	10x	0,25	20	95	20	1,1	4,4	ø2,4	0,48 x 0,64	310
378-837-7	M Plan UV 20X	20x	0,36	15	95	10	0,8	2,1	ø1,2	0,24 x 0,32	330
378-838-8	M Plan UV 50X	50x	0,41	12	95	4	0,7	1,6	ø0,48	0,1 x 0,13	400
378-839-5	M Plan UV 80X	80x	0,55	10	95	2,6	0,5	0,9	ø0,3	0,06 x 0,08	380

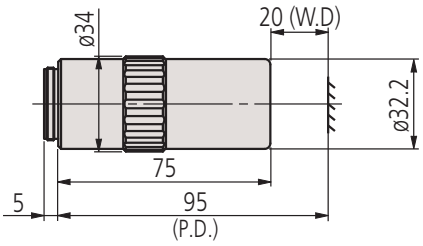


M Plan UV 10X

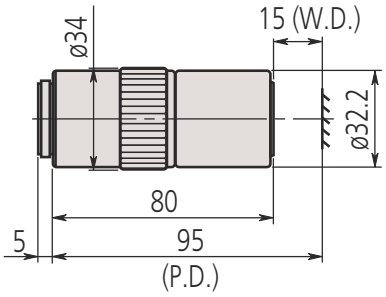

M Plan UV 20X

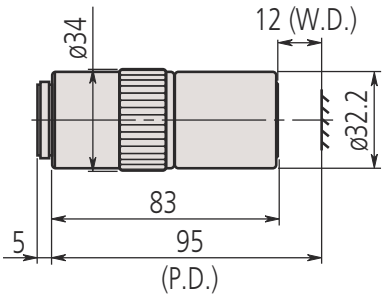

M Plan UV 50X

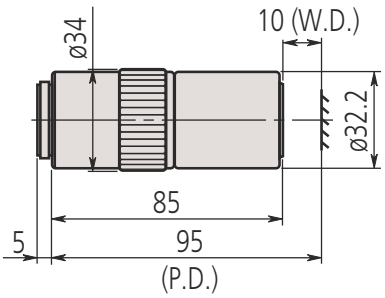

M Plan UV 80X

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Objectives for UV LCD

M Plan Apo UV LCD


Features:

- Suitable for Bright Field Inspection and Laser Applications through 0,7 mm LCD cover-glass
- Long Working Distance
- High Quality Plan Design
- Wavelength optimized for Visible and Ultraviolett (266 nm)




Refer to the microscope units and objective lenses brochure

No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	D.F. [µm]	FOV 1 [mm]	FOV 2 [mm]	Mass [g]
378-892-8	LCD Plan UV 20X (t0,7)	20x	0,37	15	95	10	0,8	2,1	ø1,2	0,24 x 0,32	370
378-893-8	LCD Plan UV 50X (t0,7)	50x	0,41	12,4	95	4	0,7	1,6	ø0,48	0,1 x 0,13	400

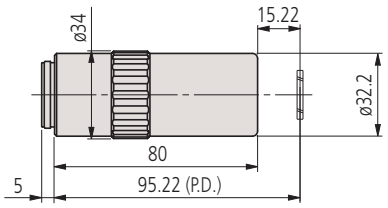

LCD Plan UV 20X (t0,7)

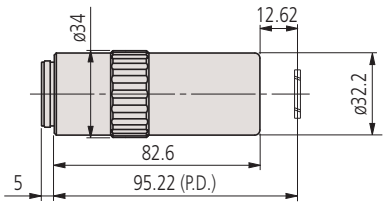

LCD Plan UV 50X (t0,7)

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power D.F.: Depth of focus FOV 1: Field of view when using ø24 mm eye-piece FOV 2: Field of view when using a digital camera with 1/2" chip size

Refer to the microscope units and objective lenses brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Objectives for Interferometer

Specifications

Abbreviations in product table	N.A.: Numerical aperture W.D.: Working distance P.D.: Parfocal distance f: Focal distance R: Resolving power
Applicable tube lens f	100 mm
Mounting screws	RMS / 20,32 mm ×36 TP

Refer to the microscope units and objective lenses brochure


Interferometer Objectives

- New design matching the WLI-Unit
- Ensures long working distance while more compact and lighter-weight (parfocal 60 mm)
- High NA, high resolution
- Plan Apochromat
- Beam splitter and reference mirror mounted inside objective lens
- Interference fringe adjustment mechanism equipped as standard




No.	Model	Magnification	N.A.	W.D. [mm]	P.D. [mm]	f [mm]	R [µm]	FOV 2/3 inch camera [mm]
378-400	WLI Plan Apo 2,5x	2,5x	0,14	13	60	40	2	2,64×3,52
378-005	WLI Plan Apo 5x	5x	0,28	8	60	20	0,98	1,32×1,76
378-401	WLI Plan Apo 10x	10x	0,38	6	60	10	0,72	0,66×0,88
378-402	WLI Plan Apo 25x	25x	0,5	3,6	60	4	0,55	0,26×0,35
378-403	WLI Plan Apo 50x	50x	0,7	2	60	2	0,39	0,13×0,18

No.	FOV WLI-Unit [mm]	Mirror tube length (excl. mounting screws)	Outermost diameter	Mass [g]
378-400	2,94×2,25	47	36,4 (excluding interference unit) 58,5 (Max)	320
378-005	1,46×1,12	52	40	210
378-401	0,73×0,56	54	40	220
378-402	0,29×0,22	57	40	290
378-403	0,14×0,11	58	40	300

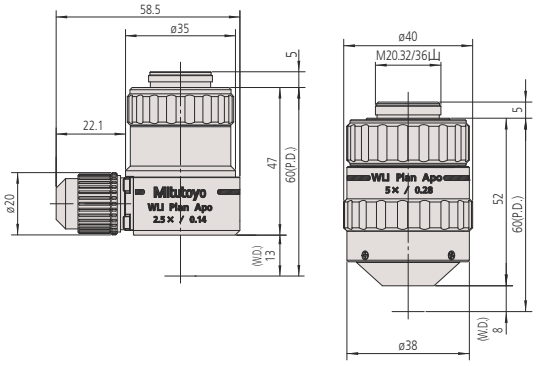

WLI Plan Apo 2,5X **WLI Plan Apo 5X**

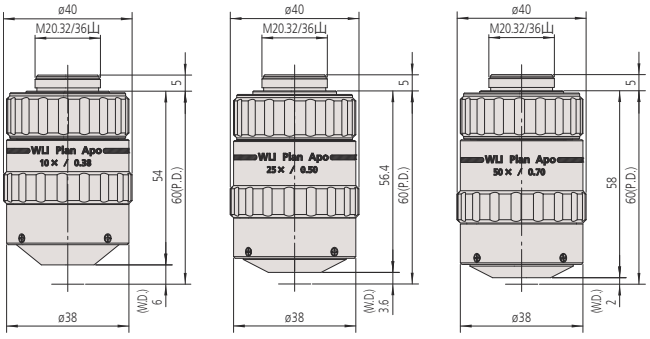

WLI Plan Apo 10X **WLI Plan Apo 25X** **WLI Plan Apo 50X**

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Measuring Projector PJ-PLUS Series

PJ-PLUS


The measuring projector that “can be operated intuitively” even by inexperienced people and also has excellent durability and energy-saving performance thanks to the adoption of an “LED illumination source” and “fanless cooling system”.
It provides stable dimension and angle measurements in harsher environments, such as manufacturing and processing lines, than can be handled by conventional models.



PJ-P1010A

No.	Model	Quick-release mechanism	XY stage table top size [mm]	XY stage effective area [mm]	Stage glass No.	Max stage loading [kg]	Mass [kg]
302-801-10	PJ-P1010A	X and Y axes	250 x 250	142 x 142	12BAE041	10	114
302-802-10	PJ-P2010A	X and Y axes	350 x 280	240 x 140	12BAD760	8	118

System Diagram

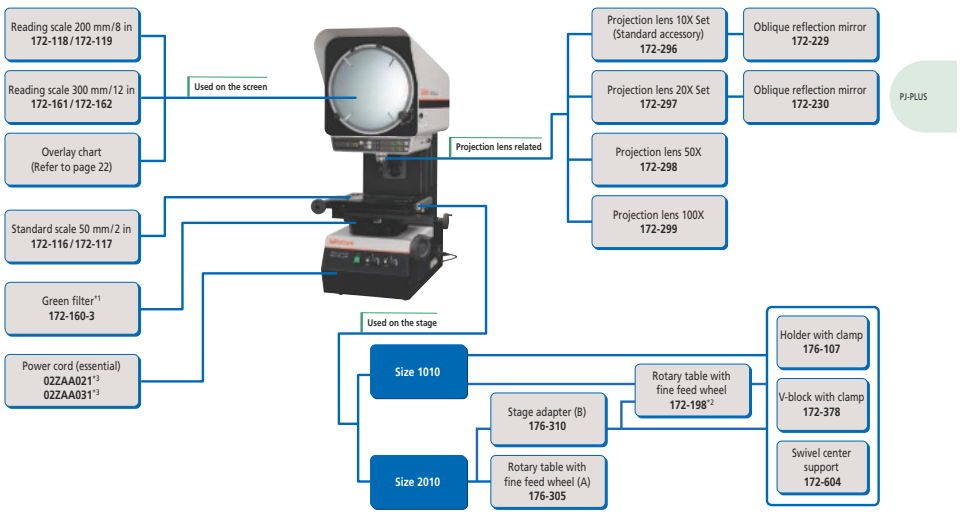

Optional accessories


No.	Description
172-116	Inspection tool, Standard scale 50 mm/0,1 mm
172-118	Inspection tool, Reading scale 200 mm/0,5 mm
172-119	Inspection tool, Reading scale 8"/0.02"
172-161	Inspection tool, Reading Scale 300 mm/0,5 mm
172-162	Inspection tool, Reading Scale 12"/0.02"
172-160-3	Green Filter, Colour filter
172-604	Swivel center support, Fixture/clamping material
172-229	Lens accessory, Oblique reflecting mirror for 10X lens
172-230	Lens accessory, Oblique reflecting mirror for 20X lens
172-378	V-BLOCK, with clamp
176-107	Fixture/clamping material, Holder with clamp
12AAE671	Attachment, OPTOEYE-200 Attachment A, 250-350 mm
332-161	OPTOEYE200, Edge detection sensor for QMData200
176-106	Rotary table
172-196	Rotary table, 100 mm for TM-1005B
172-198	Rotary table, 100 mm with fine feed knob for TM-1005B
264-160-13	QM-DATA200 (Stand type), 2D Data processor w/o power cord
264-161-13	QM-DATA200 (Arm type), 2D Data processor w/o power cord
172-502	LED Circular Illuminator (PJ-PLUS), for 10x and 20x + adapter 12AAX044, w/o power cord
12AAX044	DAMPING RING A (FOR PJ 20X), to connect LED illumination 172-502 on 20x lens
172-296	Projection lens set, 10X magnification
172-297	Projection lens set, 20X magnification
172-298	Projection lens set, 50X magnification
172-299	Projection lens set, 100X magnification
63AAA406	M2-2D software for PJ and PH series, Non-Edge detection unit incl. PC mounting kit
63AAA407	M2-2D software for PJ and PH series, Edge detection unit incl. PC mounting kit
63AAA795	ASUS AiO PC for M2 system, Intel Celeron N4500/8GB/256GB SSD M.2/ W11Pro/15.6" FHD Touch Screen



172-116
Inspection tool



172-229
Lens accessory



172-160-3
Green filter



172-502
LED Circular Illuminator

Refer to the PJ / PV / PH profile projectors brochure
Refer to the M2 software for the profile projectors and microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Measuring Projector PJ-H30

Specifications

Projected image	Erect
Projector screen	Effective diameter: 306 mm Screen material: Fine-ground glass Screen rotation: ±360°, fine adjustment and clamp Angle display: Digital counter (LED) Resolution: 1' or 0,01° (switchable) Range: ±370°ABS/INC mode switching, Zero Set Reference lines: Cross-hairs
Projection lens	10X **(172-472)** Optional: 5X, 20X, 50X, 100X
Magnification accuracy	Contour illumination: ±0,1% or better Surface illumination: ±0,15% or better
Contor Illumination	Light source: Halogen bulb (24V, 150W) Optical system: Telecentric zoom Functions: Continuously variable brightness adjustment, Heat-absorbing filter, Cooling fan
Surface illumination	Light source: Halogen bulb (24V, 150W) Optical system: Vertical/ Oblique illumination with an adjustable condenser lens Functions: Continuously variable brightness adjustment, Heat-absorbing filter, Cooling fan
Focussing	Manual focus
Power supply	220V AC, 50/60Hz
Resolution	0,001 mm

PJ-H30 Measuring Projector

This measuring projector has adjustable incident illumination.
The PJ-H30 offers you the following benefits:


- By rotating the condenser lens and changing the angle of the mirror in the objective, you can represent even poorly reflecting surfaces optimally.
- Improved light intensity of a projected subject thanks to the new optical contour illumination system.
- High measuring accuracy (above JIS standard).
- Measuring stage with rapid single-handed adjustment on both axes enabling you to switch smoothly between quick positioning and fine adjustment.
- Constant current power supply unit with acceleration control to maximize the service life of the halogen lamp.
- Easily read digital counter with large digit display.
- RS-232C output.



3017B model








No.	Model	XY stage table top size [mm]	XY stage effective area [mm]	Stage glass No.	Table swiveling function	Max stage loading [kg]	Mass [kg]
303-716-13	PJ-H30A 1010B	300 x 240	180 x 150	**380412**	±3°	10	176
303-717-13	PJ-H30A 2010B	350 x 280	250 x 150	**382762**	±3°	10	178
303-718-13	PJ-H30A 2017B	410 x 342	270 x 240	**12BAD363**	±5°	20	205
303-719-13	PJ-H30A 3017B	510 x 342	370 x 240	**12BAD330**	±5°	20	212

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Measuring Projector PJ-H30

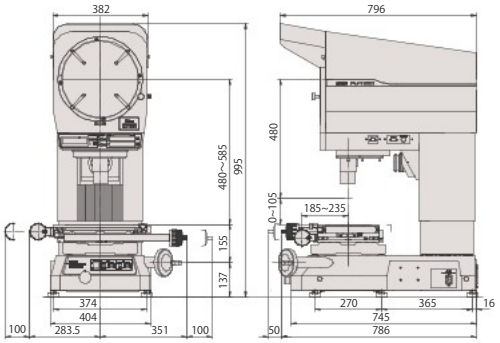

PJ-H30A2010B Model

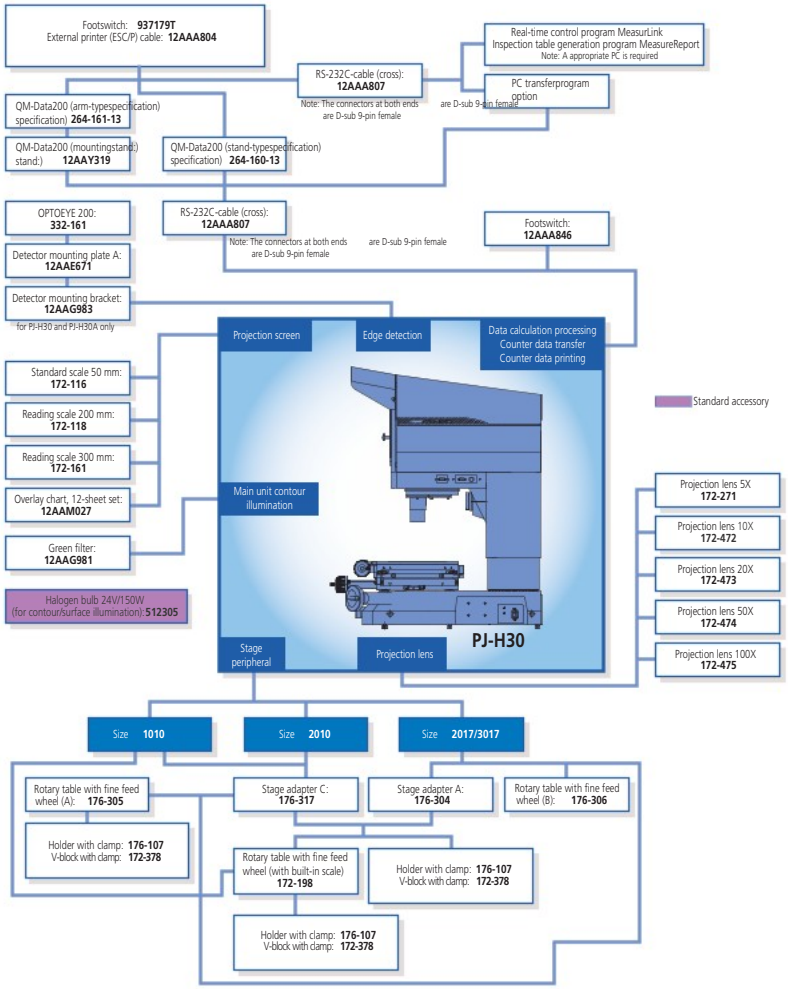

Optional accessories


No.	Description
12AAG983	Attachment, Optoeye-200 Attachment for PJ-H3 for PJ-H30 Series
12AAG981	Filter, Green filter for PJ-H30 Series pro-jector
176-306	Rotary table with fine feed wheel, Type B, glass diameter = 238 mm
172-271	Projection lens, 5X magnification for PJ-311
172-473	Projection lens, 20X magnification for PJ-H30 Series
172-474	Projection lens, 50X magnification for PJ-H30 Series
172-475	Projection lens, 100X magnification for PJ-H30 Series
172-378	V-BLOCK, with clamp
12AAY319	QMDATA200 Attachment stand, for QMDATA on PJ-H30
264-160-13	QM-DATA200 (Stand type), 2D Data pro-cessor w cessor w/o power cord
264-161-13	QM-DATA200 (Arm type), 2D Data pro-cessor w/o cessor w/o power cord
011534	MC Special Cleaner
332-161	OPTOEYE200, Edge detection sensor for QMData200
172-116	Inspection tool, Standard scale 50 mm/0,1 mm 0,1 mm
172-118	Inspection tool, Reading scale 200 mm/0,5 mm 0,5 mm
172-161	Inspection tool, Reading Scale 300 mm/0,5 mm 0,5 mm
12AAE671	Attachment, OPTOEYE-200 Attachment A, 250-3 A, 250-350 mm
63AAA406	M2-2D software for PJ and PH series, Non-Edge Non-Edge detection unit incl. PC mount-ing ki ing kit
63AAA407	M2-2D software for PJ and PH series, Edge de Edge detection unit incl. PC mounting kit kit
63AAA795	ASUS AiO PC for M2 system, Intel Cele-ron N ron N4500/8GB/256GB SSD M.2/ W11Pro/ 15.6" FHD Touch Screen
Printer and interface	
12AAA807	Cable RS-232C, 2m for LH-600 B, C, D, E
Tables	
176-305	Rotary Table, Type A, D=240 mm
172-604	Swivel center support, Fixture/clamping material material
172-198	Rotary table, 100 mm with fine feed knob for TM-1005B



Vertical/obliqueswitchable surface illumina-switchable surface illumina-tion tion



Vertical illumination



Oblique illumination



264-160-13QM-Data 200
QM-Data 200



Refer to the PJ / PV / PH profile projectors brochure
Refer to the M2 software for the profile projectors and microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | +40077291134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Measuring Projector PV-5110

PV-5110 Measuring Projector

- This measuring projector is a robust stand-alone device.
- The large rotatable screen guarantees you good observation and easy measuring.

Specifications

Projected image	Inverted
Projector screen	Effective diameter: 508 mm Screen material: Fine-ground glass Screen rotation: ±360°, fine adjustment and clamp Angle reading: Digital counter (LED) Resolution: 1' or 0,01° (switchable) Range: ±370°ABS/INC mode switching, Zero Set Reference lines : Cross-hairs
Projection lens	10X **(172-402)** Optional: 5X, 20X, 50X, 100X
Magnification accuracy	Contour illumination: ±0,1% or better Surface illumination: ±0,15% or better
Contor Illumination	Light source: Halogen bulb (24V, 150W) Optical system: Telecentric zoom Functions: 2-step (High/Low) brightness switch, Heat-absorbing filter, Cooling fan
Surface illumination	Light source: Halogen bulb (24V, 150W) Optical system: Vertical illumination Functions: Adjustable condenser lens, Oblique illumination (for 5X, 10X and 20X), Heat-absorbing filter, Cooling fan
Focussing	Manual
Resolution	0,001 mm
Power supply	220 - 240V AC, 50/60Hz
Mass	210 kg

Standard accessories

No.	Description
512305	Halogen Lamp for Measuring Projector, 24V/150W
382762	Stage glass, 280 x 180 mm, for projector



304-919-12
Counter is optional



KA Counter



QM-Data 200



OPTOEYE 200


No.	Model	XY stage [mm]	Measuring method	Quick-release mechanism	XY stage table top size [mm]	XY stage effective area [mm]	Stage glass No.	Table swiveling function	Max stage loading [kg]	Mass [kg]
304-919-12	PV-5110	200 x 100	Linear encoder	X and Y axes	380 x 250	266 x 170	**382762**	±3°	5	210

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Measuring Projector PV-5110

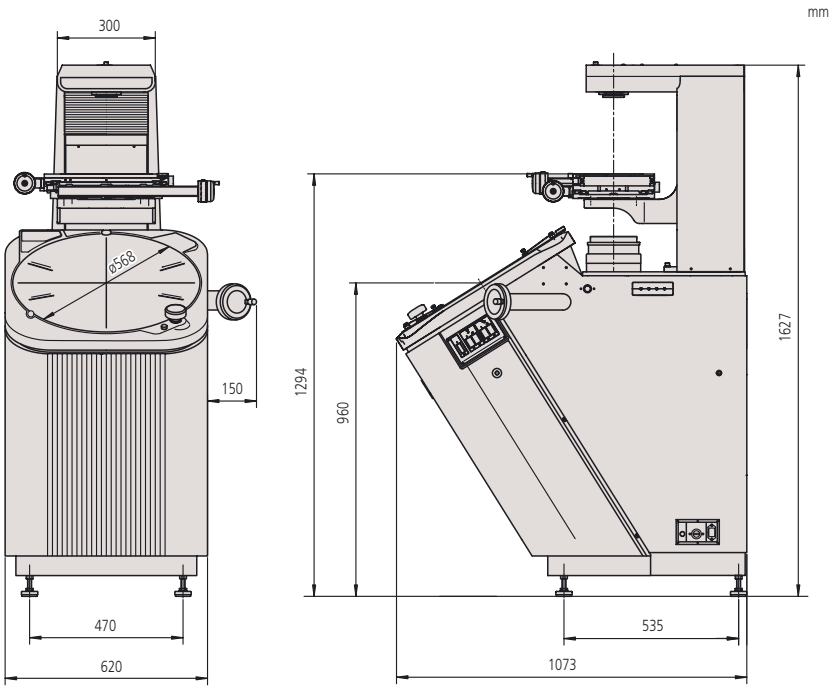

System Diagram

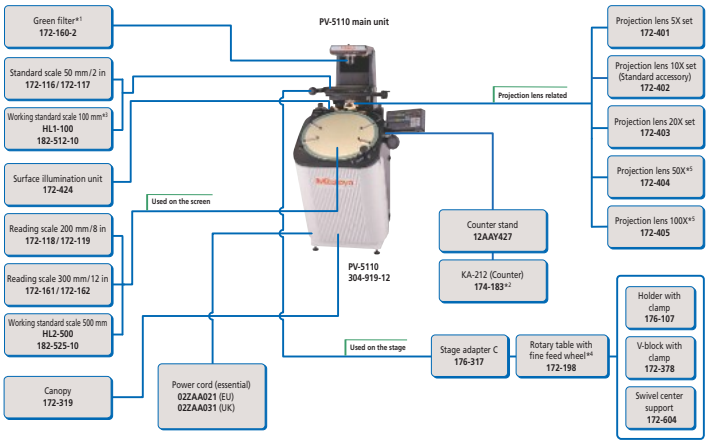

*1 This is inserted in the contour light source section during use.
*2 To denote your AC power cable add the following suffixes to the code No.: A for UL/CSA, D for CEE, DC for CCC, E for BS, K for KC, C and No suffix are required for PSE.
*3 Used on the stage. It is projected onto the screen to check the magnification accuracy with a reading scale or working standard scale.
*4 Since the rotary stage section is small, if it is used for a large stage, some restrictions may be imposed on the measuring range.
*5 When using a 50X or a 100X projection lens, you need to remove the stage glass in order to prevent a collision between the stage glass for the X/Y stage and the projection lens.
*6 Not provided with the product. Please order it separately.
Note: If an optional unit is installed on the stage, the H (Max. workpiece height) length is reduced by the optional unit height.

Optional accessories

No.	Description
172-198	Rotary table, 100 mm with fine feed knob for TM-1005B
172-161	Inspection tool, Reading Scale 300 mm/ 0,5 mm
172-116	Inspection tool, Standard scale 50 mm/ 0,1 mm
172-330	Inspection tool, Standard scale 80 mm/ 0,1 mm
172-329	Inspection tool, Reading scale 600 mm/ 0,5 mm
011534	MC Special Cleaner
264-161-13	QM-DATA200 (Arm type), 2D Data processor w/o power cord
332-161	OPTOEYE200, Edge detection sensor for QMData200
172-160-2	Green filter
172-319	Canopy
12AAY427	Counter Stand, For PV-5110 projector
174-183D	Linear Scale Counter KA-212
12AAE672	Attachment, OPTOEYE-200 Attachment B, 500-600 mm
172-604	Swivel center support, Fixture/clamping material
172-378	V-BLOCK, with clamp
176-107	Fixture/clamping material, Holder with clamp
63AAA795	ASUS AiO PC for M2 system, Intel Celeron N4500/8GB/256GB SSD M.2/ W11Pro/ 15.6" FHD Touch Screen
63AAA462	M2-2D soft and hardware for PV5110, incl.edge detection unit and tablet mount

mm

	Magnification				
	5X	10X	20X	50X	100X
View field	ø101.6	ø50.8	ø25.4	ø10.16	ø5.08
H	125	181	206	87	87
W	60 (27)	60	60	32.4	22.5
D	120	120	120	64.8	45

( ) When using surface illumination



172-319

Refer to the PJ / PV / PH profile projectors brochure
Refer to the M2 software for the profile projectors and microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Measuring Projector PH-3515F

PH-3515F Measuring Projector

- Due to the PH-3515F's horizontal-beam illumination, you can easily measure larger and heavier workpieces including toothed racks and punching tools.
- You can use the projector for a wide range of applications due to its generous 254 x 152 mm stage travel and 45 kg allowable stage loading.



172-868-12

Specifications

Projected image	Erect
Projector screen	Effective diameter: 353 mm Screen material: Fine-ground glass Screen rotation: ±360°, fine feed and clamp Angle display: Digital counter (LED) Resolution: 1' or 0,01° (switchable) Range: ±370°ABS/INC mode switching, Zero Set Reference lines : Cross-hairs
Projection lens	10X **(172-482)** Optional: 5X, 20X, 50X, 100X
Magnification accuracy	Contour illumination: ±0,1% or better Surface illumination: ±0,15% or better
Contor Illumination	Light source: Halogen bulb (24V, 150W) Optical system: Telecentric system Functions: 2-step (High/Low) brightness adjustment, Heat-absorbing filter, Cooling fan
Surface illumination	Light source: Halogen bulb (24V, 150W) Optical system: Vertical illumination Functions: Adjustable condenser lens, 2-step (High/Low) brightness adjustment, Heat-absorbing filter, Cooling fan
Focussing	Manual
Resolution	0,001 mm
Power supply	220 - 240V AC, 50/60Hz
Mass	150 kg

Standard accessories

No.	Description
512305	Halogen Lamp for Measuring Projector, 24V/150W
12BAA637	Bulb, Halogen 24V/200W for PH-3515F twin fiber


No.	Model	XY stage [mm]	Measuring method	Quick-release mechanism	XY stage table top size [mm]	Table swiveling function	Max stage loading [kg]	Mass [kg]
172-868-12	PH-3515F	254 x 152	Linear encoder	X axis	450 x 146	±10°	45	150

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Measuring Projector PH-3515F

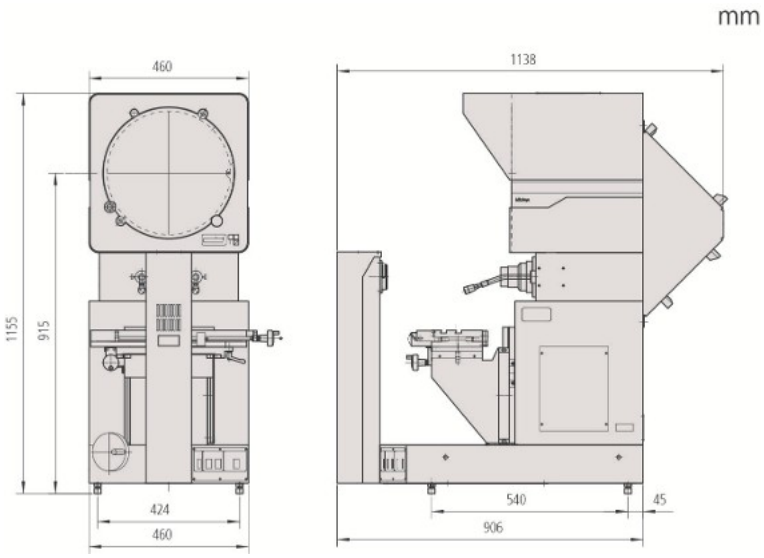


System Diagram

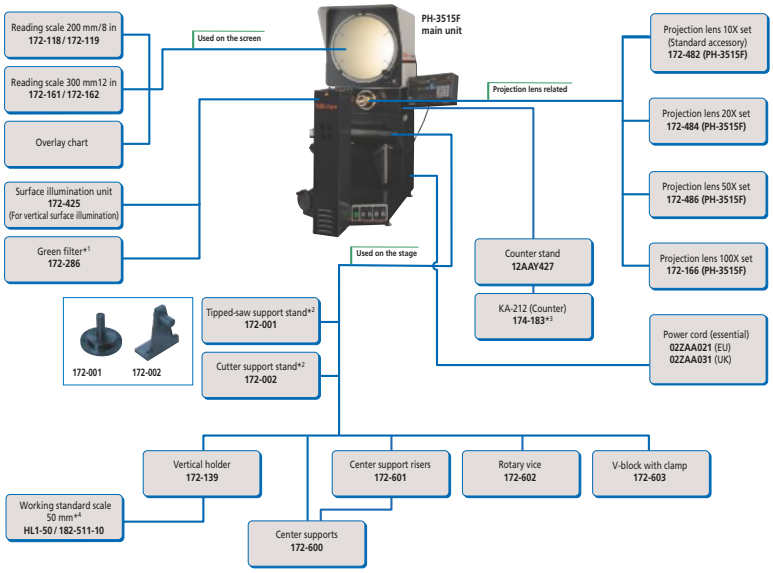

*1 This is inserted in the contour light source section during use.
*2 The tipped-saw and cutter support stands support a center hole diameter of 25.4 mm.
*3 The AC cord is not provided with the product. Please order it separately **02ZAA021** (EU), **02ZAA031** (UK).
*4 This scale for checking the magnification accuracy. It is fixed on the stage with a vertical holder and projected on the screen to check the magnification with reading scale.
*5 Not provided with the product. Please order it separately.

Optional accessories

No.	Description
332-161	OPTOEYE200, Edge detection sensor for QMData200
12AAE671	Attachment, OPTOEYE-200 Attachment A, 250-350 mm
172-116	Inspection tool, Standard scale 50 mm/ 0,1 mm
172-161	Inspection tool, Reading Scale 300 mm/ 0,5 mm
27AAA057	Overlay chart set for Profile Projectors, Set consists of charts No. 11-22
172-118	Inspection tool, Reading scale 200 mm/ 0,5 mm
174-183D	Linear Scale Counter KA-212
172-425	Surface Illumination Unit (PH-3515F), Illumination
172-286	Filter, Colour filter
172-600	Center support, Fixture/clamping material
172-601	Center support riser set, Fixture/clamping material
172-602	Rotary vise, Fixture/clamping material
172-603	V-block with clamp, Fixture/clamping material
172-139	Vertical workpiece holder, Fixture/ clamping material
12AAY427	Counter Stand, For PV-5110 projector
011534	MC Special Cleaner
63AAA795	ASUS AiO PC for M2 system, Intel Celeron N4500/8GB/256GB SSD M.2/ W11Pro/ 15.6" FHD Touch Screen
63AAA406	M2-2D software for PJ and PH series, Non-Edge detection unit incl. PC mounting kit
63AAA407	M2-2D software for PJ and PH series, Edge detection unit incl. PC mounting kit
264-161-13	QM-DATA200 (Arm type), 2D Data processor w/o power cord



L : Max. workpiece width
W : Working distance
D : Max. workpiece diameter

PH-3515F mm

	Magnification				
	5X	10X	20X	50X	100X
View field	70.6	35.3	17.65	7.06	3.5
L	175	235	235	80	109
W	160 (64)	93 (35)	40	14.6	9.5
D	152.4	152.4	116	30.4	19

( ) When using surface illumination



QM-Data 200

Refer to the PJ / PV / PH profile projectors brochure
Refer to the M2 software for the profile projectors and microscopes brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Data Processing Unit QM-Data 200

QM-Data 200

The Data Processing Unit QM-Data 200 has been especially designed to process measurement data generated by a profile projector or measuring microscope.
The QM-Data 200 offers you the following benefits:

- Measuring instructions, measuring values and calculation results for various operations are shown on the back-lit LCD in a clear, easy to understand style.
- You can also print measuring results, either on a small and convenient thermal printer (available as a special option) or on an ESC/P printer and continuous paper.

Specifications

Dimensions [mm]	260 x 242 x 310: Stand-mount type 318 x 153 x 275: Arm-mount type
Screen	Colour graphics TFT LCD (320 x 240 dots, with background lighting)
Program functions	Part program creation, execution, editing
Statisical processing	Number of data, maximum value, minimum value, mean value, standard deviation, range, histogram
Display language	Japanese/English/German/French/Italian/Spanish/Portuguese/Chech/Traditional Chinese/Simplified Chinese/Korean/Turkish/Swedish/Polish/Dutch/Hungarian
Measuring of Geometric Elements	Maximum of 1000 elements, point, line, circle, distance, ellipse, rectangular hole, slotted hole, intersection and intersecting angle and point & angle, plus a number of functions for evaluation, e.g. perpendicularity and parallelism are provided.
Measurement result file output	CSV format; MUX-10F format
Functions	**Mitutoyo's AI Function:** The AI function (AI=Artificial Intelligence) renders choosing the element type before measuring obsolete. Point measurements are analyzed by the QM-Data and the results for basic elements calculated, thus accelerating the measuring procedure. **Customized Operation:** Macro functions and the creation of part programs speed up single and repetitive measurements. Additionally macro commands and part programs as well as frequently used standard operations can be stored as user settings.



Stand-mount type



Arm-mount type




Intuitive panel design


No.	Resolution	Power supply	Data output	Data input	Description	Mass [kg]
264-160-13	1 / 0,1 µm	100/240V AC, 50/60 Hz	USB, RS-232C, Printer	USB, RS-232C, X/Y/Z-axis signal, Footswitch	Stand-mount type	2,9
264-161-13	1 / 0,1 µm	100/240V AC, 50/60 Hz	USB, RS-232C, Printer	USB, RS-232C, X/Y/Z-axis signal, Footswitch	Arm-mount type	2,8

Optional accessories


No.	Description
12AAA807	Cable RS-232C, 2m for LH-600 B, C, D, E
63AAA108	RS-232C Signal Cable, D-Sub-25-D-Sub-9, 2m
332-161	OPTOEYE200, Edge detection sensor for QMData200



Clear function icons



Coloured LCD display with backlight



Guided measurements

Refer to the QM-Data200 and vision unit brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Data Processing Unit QM-Data 200

Edge Detection Sensor OPTOEYE 200


This edge sensor allows you to make accurate measurements independant of your skill level by automatically detecting edges used in measurements.
The Optoeye 200 offers you the following benefits:

- OPTOEYE 200 reduces the effect of operator skill level on accuracy by automatically detecting edges used in measurements.
- PJ-H30: You can use the OPTOEYE edge detector on models PJ-H30A (requires adapter plate 12AAG983).
- PV-5110 and PJ-3515F: You can use the OPTOEYE edge detector in combination with the QM-Data 200.
- PJ-PLUS: You can use the OPTOEYE edge detector on models 302-801-10/302-802-10 in combination with the QM-Data 200.
- When you are using the OPTOEYE all projector scales must be connected to QM-Data 200 directly and built-in counters can no longer be used (except PJ-H30D type).



No.	Function	Description
332-161	Automatic edge detection	Edge detection sensor OPTOEYE 200

mm

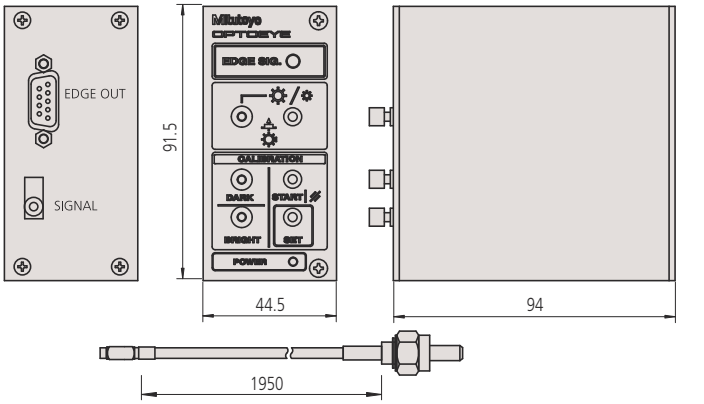

Specifications

Min. diameter	2 mm on the screen
Min. width	1 mm on the screen

Optional accessories

No.	Description
12AAE671	Attachment, OPTOEYE-200 Attachment A, 250-350 mm
12AAE672	Attachment, OPTOEYE-200 Attachment B, 500-600 mm



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


Refer to the QM-Data200 and vision unit brochure

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Accessories for Measuring Projectors

Specifications

Grid divisions	10X: 0,1 mm 20X: 0,05 mm 50X: 0,02 mm 100X: 0,01 mm



Grid/protractor chart



Radius/protractor chart



Radius chart



Protractor chart



Refer to the PJ / PV / PH profile projectors brochure

Overlays for Measuring Projectors

These standard overlay charts increase the range of application and the efficiency of Mitutoyo measuring projectors.

This chart set offers you the following benefits:

- The charts are supplied in sizes ø250, 300, 340, 500 to suit the screens of Mitutoyo projectors.
- A large range of scales and profiles is provided that enables you to test workpiece features quickly and easily. You can test length, height, parallelism, angle, radius, taper, bore position, diameter, as well as all standardized thread and tooth profiles.
- All charts are made of a distortion-free special plastics compound and are provided with a protective coating.

Grid/protractor chart
Angle: 15° increments
Features: Ideal for checking diameters, concentricity of diameters, radii, angles and cams.

No.	Diameter [mm]	Mass [g]
201380	250	100
63AAA536	300	100
63AAA538	500	100

Protractor chart
Angle: Divisions at 1° and 30'
Features: Ideal for checking diameters, concentricity of diameters, radii, angles, radii and cams.

No.	Diameter [mm]	Mass [g]
63AAA545	250	100
63AAA551	300	100
63AAA553	500	100

Radius and Protractor chart
Angle : Divisions at 1° and 30'
Features: Dedicated chart especially designed for checking angles with exceptional clarity. Suitable for use at any magnification.

No.	Diameter [mm]	Mass [g]
63AAA530	250	100
63AAA579	300	100
201393	340	100

Radius chart
Features: Dedicated chart especially designed for checking radii, diameters and concentricity with exceptional clarity.

No.	Diameter [mm]	Mass [g]
63AAA531	250	100
63AAA546	300	100
63AAA547	340	100
63AAA548	500	100

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Accessories for Measuring Projectors


Group 2 - Makes inspection of projected images an easy process.

Metric


No.	Diameter [mm]	Model	Mass [g]
27AAA044	300	No. 11 Circle/protractor chart metric	8
27AAA045	300	No. 12 Circle chart 5 mm pitch metric	8
27AAA046	300	No. 13 Circle chart 1 mm pitch metric	8
27AAA047	300	No. 14 Grid chart 20X-50X, 1mm pitch	8
27AAA048	300	No.15 Grid chart 10 mm pitch metric	8
27AAA049	300	No. 16 Crossed lines chart metric	8
27AAA050	300	No. 17 Grid chart 1 mm pitch metric	8
27AAA051	300	No. 18 Protractor chart 1° pitch metric	8
27AAA052	300	No. 19 Hor.lines chart 1 mm pitch	8
27AAA053	300	No. 20 Circle/protractor chart metric	8
27AAA054	300	No. 21 Thread chart Metric, Unified, Whitworth	8
27AAA055	300	No. 22 Thread/gear chart metric	8
27AAA056	300	Staggered cross hairline	8
27AAA057	300	Overlay chart set, consists of charts No. 11-22	




27AAA044




27AAA045



27AAA046




27AAA047




27AAA048




27AAA049




27AAA050




27AAA051



27AAA052



27AAA053



27AAA054



27AAA055



Refer to the PJ / PV / PH profile projectors brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Accessories for Measuring Projectors

Workpiece Fixtures for Measuring Projectors and Microscopes



172-600

Centre Support

No.	Max. workpiece height	Mass [kg]
172-600	120 mm	3,3



172-601

Centre Support Riser


No.	Max. workpiece height	Mass [kg]
172-601	240 mm	3,3



176-107

Holder with Clamp


No.	Max. workpiece height	Mass [kg]
176-107	35 mm	0,42



172-198

Rotary Tables

No.	Effective glass dia. [mm]	Angular resolution °	Fine feed	Mass [kg]
176-106	66	6		1,7
172-196	100	1		2,5
172-198	96	1	Available	2,4
176-305	182		Available	5,5
176-306	238		Available	6,5



172-602

Rotary Vice

No.	Rotary range	Angle graduations °	Max. workpiece height	Mass [kg]
172-602	360°	5°	60 mm	2,8



172-604

Swivel Centre Support

No.	Max workpiece dia. [mm]	Swivel range	Max. workpiece length [mm]	Mass [kg]
172-604	80 (65) when swiveled 10°	±10°	140	2,5



172-603

V-Block with Clamp

No.	Max workpiece dia. [mm]	Width of block [mm]	Mass [kg]
172-603	50	60	1,24
172-378	25	41	0,8

Vertical Holder

No.	Mass [kg]
172-139	1,3



Refer to the PJ / PV / PH profile projectors brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Accessories for Measuring Projectors

Optional Illumination Units

LED illumination light can emphasize the contrast of projected workpiece images, providing stereoscopic and sharp observation. Projected image can be observed with high colour reproducibility, which is never realized by the existing halogen-type surface illumination.





LED Illuminator

No.	Model	Compatible models	Illumination source	Illumination angle	Power consumption	LED life (reference)	Mass [g]
172-501	LED Circular Illuminator for Measuring Projectors (PJ-H30)	PJ-H30 (10x Projection Lens with C mount, Projection lens 10x and 20x)	Bullet type white LED	52°	LED ring 22 V /14,4 W LED box 12 V /17,4 W (power cord has to be ordered seperatly)	30000 h	Approx. 640g + AC adapter: approx. 250g
172-502	LED Circular Illuminator for Measuring Projectors (PJ-PLUS). Damping ring 12AAX44 is necessary for the connection to PJ-PLUS 20x.	PJ-PLUS (Projection lens 10x and 20x).	Bullet type white LED	52°	LED ring 22 V /14,4 W LED box 12 V /17,4 W (power cord has to be ordered seperatly)	30000 h	Approx. 640g + AC adapter: approx. 250g

Vertical Illuminator

No.	Model	Compatible models	Mass [kg]
172-424	Vertical Surface Illuminator for Measuring Projectors (PV-5110)	PV-5110	5,5
172-425	Vertical Surface Illuminator for Measuring Projectors (PH-3515F)	PH-3515F (Condenser lens 10-50x)	5

Consumables for Measuring Projectors



932987

Half Mirror


No.	Model
932987	Half Mirror 10x For Projector PJ-300, PJ-3000, PJ-A3000
932988	Half Mirror 20x For Projector PJ-300, PJ-3000, PJ-A3000

Refer to the PJ / PV / PH profile projectors brochure


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

M2 Software for Measuring Microscopes and Projectors

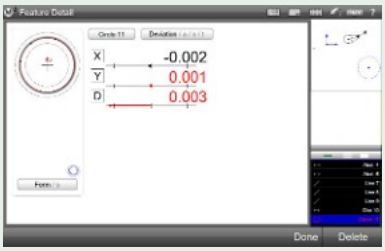

Geometric tolerancing
With only a few taps of the screen, you can measure features, apply tolerances, set nominals and view deviation results.

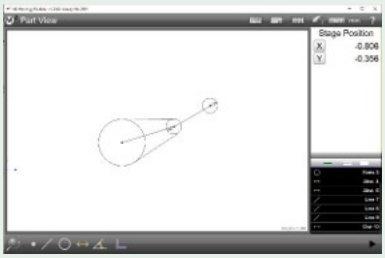

Graphics-based constructions
Construction types such as intersections and endpoints can be created from within the graphical part view.



M2 system for TM, 63AAA455



M2 system for MF/MF-U, 63AAA456



ASUS AiO PC, 63AAA795



Refer to the M2 software for the profile projectors and microscopes brochure

M2 Software for Measuring Microscopes and Projectors

Quick and easy measuring, with the innovative M2 software

Spend more time measuring and less time reading manuals thanks to the M2 software's straightforward and easy to operate user interface. Thanks to the familiar use of a touch screen, the M2 software can be quickly integrated into your process and drastically improve work efficiency.

- The M2 software interface is available for use in both portrait and landscape mode, providing maximum flexibility for the display or mounting device of your choosing.
- Gain access to many powerful features and an intuitive measuring interface whether you are using an optical edge equipped system or an externally generated crosshair device. Precise optical edge detection mechanisms provide accurate results as well as access to powerful, industrial grade, measurement functionality.



Microscope MF Series



Microscope TM Series



PJ-PLUS Measuring Projector



PV-5110



PJ-H30

M2 Software for Measuring Microscopes

No.	Applicable models	System consist of	Function	Optional but necessary accessory
63AAA455	TM-Microscopes	M2 Metrology software on USB stick, 2 axis interface box for Digimatic, Power supply and USB cable	Without edge detection	**2x 164-164 or 164-163** Digimatic Micrometer Head, **2x 905338** Digimatic cable, **63AAA795** All-in-One-PC with touch screen
63AAA456	MF/MF-U microscopes with XY or XYZ counter	M2 Metrology software on USB stick, 3(2) axis interface box, 3 connecting cables (XYZ) for scales, Power supply and USB cable	Without edge detection	**63AAA795** All-in-One-PC with touch screen

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

M2 Software for Measuring Microscopes and Projectors

M2 Software for Measuring Projectors

No.	Applicable models	System consist of	Function	Optional but necessary accessory
63AAA406	PJ-PLUS, PJ-H30, PV5110, PH-3515F	M2 Metrology software, 2 axis interface box and 15 pin connecting cables, Power supply and USB cable, Machine bracket, RAM Ball, RAM arm, VESA mount (75 x 75 mm) for mounting the optional tablet PC to the projector body	Without edge detection	**63AAA795** All-in-One-PC with touch screen
63AAA407	PJ-PLUS, PH-3515F	M2 Metrology software, 2 axis interface box and 15 pin connecting cables, Optical fibre and magnetic holder for sensor, Power supply and USB cable Machine bracket, RAM Ball, RAM arm, VESA mount (75 x 75 mm) for mounting the optional tablet PC to the projector body	With edge detection	**63AAA795** All-in-One-PC with touch screen
63AAA462	PV5110	M2 Metrology software, 2 axis interface box and 15 pin connecting cables, Optical fibre and magnetic holder for sensor, Power supply and USB cable Machine bracket, RAM Ball, RAM arm, VESA mount (75 x 75 mm) for mounting the optional tablet PC to the projector body	With edge detection	**63AAA795** All-in-One-PC with touch screen

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Form Measurement



Surface Roughness Measuring Instruments
Page 450




Contour Measuring Instruments
Page 466



Surface Roughness and Contour Measuring Instruments Formtracer
Page 471



Form Measuring Instruments Roundtest + Roundtracer
Page 480



Styli & Arms Form Measurement
Page 494

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Surftest SJ-220

Series 178 SURFTEST SJ-220 - Portable Surface Roughness Measuring Instrument

This is a portable measuring instrument that allows you to easily and accurately measure surface roughness. The Surftest SJ-220 offers you the following benefits:

- Robust design, yet comfortable handling
- Skid system gives you user friendly and intuitive menu navigation via touchscreen.
- It works independently of mains power, allowing you to make on-site measurements.
- The 2.8" high resolution LCD touchscreen gives you excellent readability.
- It performs roughness analyses conform to various international standards (EN ISO 21920, EN ISO 4287, ISO 13565, ISO 12085, VDA, ASME, JIS).
- Different drive units expanding the range of applications.
- Calculation results, assessed profiles and curves can be displayed.
- Support of 25 languages.
- Optional Bluetooth connectivity to PC and Smartphone.
- Free software SJ Communication Tool per download.




SJ-220

Metric

Switchable between 25 languages: Japanese, English, German, French, Italian, Spanish, Portuguese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch, Korean, Traditional Chinese, Simplified Chinese, Slovenian, Russian, Romanian, Bulgarian, Finnish, Thai, Vietnamese, Indonesian, Malaysian

No.	Description	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]	Mass
178-741-11	SJ-220 model	0,75	60°	2	510 g
178-743-11	SJ-220R model	0,75	60°	2	510 g
178-745-11	SJ-220S model	0,75	60°	2	510 g




Standard



R-type



S-type



SJ-COMMUNICATION TOOL
free download on www.mitutoyo.eu registration required (Refer to page https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments)

Specifications

Drive unit	
Measuring range	16 mm; 4,8 mm (S-type)
Traverse	17,5 mm, 5,6 mm [S-type]
Measuring speed	0,25 mm/s; 0,5 mm/s; 0,75 mm/s; 1 mm/s
Detector	
Measuring method	Differential inductance
Range	360 µm
Stylus	Diamond Tip
Skid radius	40 mm
Display unit	
Profiles	Primary Profile (P), Roughness Profile (R), R-Motif, DF-Profile
Roughness standard	EN ISO, VDA, JIS, ANSI and customize settings
Digital filter	Gauss, 2CR75, PC75
Cut-off length	Standard and R type: λc : 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm λs : 2,5 µm; 8 µm; 25 µm S type: λc : 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm λs : 2,5 µm; 8 µm
Tolerance	Coloured upper / lower limit
Interface	USB, Digimatic, RS-232C, Foot switch, BLE
Power supply	AC adapter or rechargeable battery

Optional accessories

No.	Description
264-628	U-WAVE-TIB, Wireless Unit for Measuring Instrument
178-029	Granite stand, for Surftest SJ-220 / SJ-310 / SJ-210
12AAA221	Adapter for magnetic stand; ∅ 8 mm, for Surftest SJ-220 / SJ-310 / SJ-210
178-747	Standard drive unit, for SJ-220 / SJ-310 / SJ-210
178-748	R-type drive unit, for SJ-220 / SJ-310 / SJ-210
178-749	S-type drive unit, for SJ-220 / SJ-310 / SJ-210
178-750	S-type drive unit set, for SJ-220 / SJ-310 / SJ-210
178-182	Digital three-axis adjustment table
178-183	XY travel + leveling table [mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-185	Digimatic XY travel + leveling table[mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-195	Leveling Table, Leveling range +/- 1,5°



Refer to Surftest SJ-220 brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surftest SJ-220

Series 178 SURFTEST SJ-220 - Portable Surface Roughness Measuring Instrument

Optional accessories

No.	Description
12AAA210	Extension rod length 50mm, for Surft-est SJ-220 / SJ-310 / SJ-210 est SJ-220 / SJ-310 / SJ-210
178-296	Standard detector 2µm; 60°; 0,75mN, for Surftest SJ-220 / SJ-310 / SJ-210 for Surftest SJ-220 / SJ-310 / SJ-210
178-383	Detector for small holes D4,5; 2µm; 60°; 0,75mN, for Surftest SJ-220 / SJ-310 / 0,75mN, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-210
178-384	Detector for small holes D2,8; 2µm; 60°; 0,75mN, for Surftest SJ-220 / SJ-310 / 0,75mN, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-210
178-385	Deep groove detector 2µm; 60°; 0,75mN, for Surftest SJ-220 / SJ-210 0,75mN, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-210
178-388	Detector for gear tooth surface 2µm; 60°; 0,75mN, for Surftest SJ-220 / 60°; 0,75mN, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-310 / SJ-210
178-390	Standard detector 5µm; 90°; 4mN, for Surftest SJ-220 / SJ-310 / SJ-210 Surftest SJ-220 / SJ-310 / SJ-210
178-392	Detector for small holes D4,5; 5µm; 90°; 4mN, for Surftest SJ-220 / SJ-310 / SJ-210 4mN, for Surftest SJ-220 / SJ-310 / SJ-210
178-393	Detector for small holes D2.8; 5µm; 90°; 4mN, for Surftest SJ-220 / SJ-310 / SJ-210 4mN, for Surftest SJ-220 / SJ-310 / SJ-210
178-394	Deep groove detector 5µm; 90°; 4mN, for Surftest SJ-220 / SJ-310 / SJ-210 for Surftest SJ-220 / SJ-310 / SJ-210
178-398	Detector for geartooth surface 5µm; 60°; 4mN, for Surftest SJ-220 / SJ-310 / 60°; 4mN, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-210
12BAA303	Connection cable for extension 1 m, for Surftest SJ-220 / SJ-310 / SJ-210 Surftest SJ-220 / SJ-310 / SJ-210
12AAY688	RS-232C cable, for Surftest SJ-220
12AAA216	Height adjustment feet, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-220 / SJ-310 / SJ-210
12AAA217	Nosepiece for flat surfaces, for Surftest SJ-220 / SJ-310 / SJ-210
12AAA218	Nosepiece for cylinder, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-220 / SJ-310 / SJ-210
12AAA219	Adapter for vertical position, for Surft-est SJ-220 / SJ-310 / SJ-210 est SJ-220 / SJ-310 / SJ-210
12AAA220	Magnetic Stand Adaptor, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-220 / SJ-310 / SJ-210
12AAA222	Height gauge adaptor [9x9mm shank], for Surftest SJ-220 / SJ-310 / SJ-210 for Surftest SJ-220 / SJ-310 / SJ-210
12AAA222B	Adapter for 178-029
12AAA233	Height gauge adaptor [¼ x ½" shank], for Surftest SJ-220 / SJ-310 / SJ-210 for Surftest SJ-220 / SJ-310 / SJ-210
12AAJ088	Footswitch
12AAY917	Memory card, for Surftest SJ-220
178-601	Roughness specimen Ra 3µm [mm], Ra 3µm 3µm
178-604	Roughness specimen Ra 0,4 / Ra 3µm [mm], Ra 3µm and 0.4µm [mm], Ra 3µm and 0.4µm
178-607	Roughness specimen Ra 0,4/Ra3µm[inch/mm] Ra3µm[inch/mm]
12BAS451	USB 2.0 cable, for Surftest SJ-220
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
12BAS476	Tool for operating the battery switch, for Surftest SJ-220 for Surftest SJ-220
178-029	Granite stand, for Surftest SJ-220 / SJ-310 / SJ-210 SJ-310 / SJ-210
178-033	Device for cylindrical workpieces, for Surftest SJ-220 / SJ-310 / SJ-210 Surftest SJ-220 / SJ-310 / SJ-210
178-034	Device as universal fixture, for Surftest SJ-220 / SJ-310 / SJ-210
178-035	Device for measuring inside diameter, for Surftest SJ-220 / SJ-310 / SJ-210 for Surftest SJ-220 / SJ-310 / SJ-210




Back view




Opt. Bluetooth connectivity to PC or Smartphone.





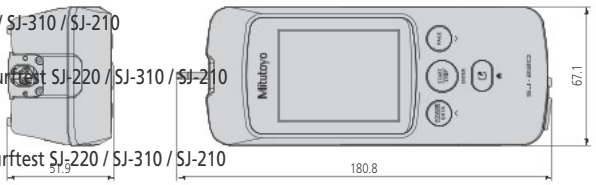



Dimensions

Scan QR Codes with your mobile device and watch our product videos on YouTube

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Surftest SJ-310

Series 178 - Portable Surface Roughness Measuring Instrument

This is a portable measuring instrument that allows you to easily and accurately measure surface roughness.


The Surftest SJ-310 offers you the following benefits:

- Skid system with touch-screen functionality and built-in printer.
- It works independently of mains power, allowing you to make on-site measurements.
- Easy and intuitive menu navigation.
- The large **14.5 cm** [5.7"] colour LCD gives you high visibility.
- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS) and customized settings.
- You can store up to 10 different measuring conditions inside the SJ-310, and up to 500 with an optional SD card.
- Statistical analysis and coloured tolerance judgement.
- 2 different evaluation conditions within 1 measurement adjustable.
- You can separately password protect many functions.
- It comes with support for 16 languages.




Metric


No.	Description	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]	Mass
178-570-21D	SJ-310 model	0,75	60°	2	1.7 kg
178-572-11D	SJ-310R model	0,75	60°	2	1.7 kg
178-574-21D	SJ-310S model	0,75	60°	2	1.7 kg



Standard




R-type



S-type

Specifications

Drive unit	
Measuring range	16 mm [S-type] 4,8
Traverse	17,5 mm [S-type] 5,6 mm
Measuring speed	0,25 mm/s; 0,5 mm/s; 0,75 mm/s
Detector	
Measuring method	Differential inductance
Range	360 µm
Stylus	Diamond Tip
Skid radius	40 mm
Display unit	
Profiles	Roughness Profile (R), R-Motif, DF-Profile and more
Roughness standard	EN ISO, VDA, JIS, ANSI and customize settings
Digital filter	Gauss, 2CR75, PC75
Cut-off length	λc : 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm λs : 2,5 µm; 8 µm
Printer	Thermal Printer
Tolerance	Coloured upper / lower limit
Interface	USB, Digimatic, RS-232C, Foot switch
Mass	1,7 kg
Power supply	AC adapter or rechargeable battery



USB COMMUNICATION TOOL
free download on www.mitutoyo.eu registration required (refer to page https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments)

Refer to Surftest SJ-310 brochure

Scan QR Code with your mobile device and watch our product videos on YouTube


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surftest SJ-220 and SJ-310 - S-Type

Specifications

Traverse	5,6 mm
Measuring speed	0,25 mm/s; 0,5 mm/s; 0,75 mm/s

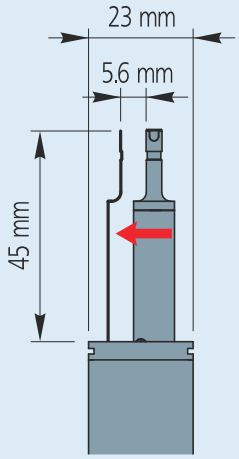


Linear movement of S-Type

Series 178 – Portable Transverse Measurement with S-Type Drive Unit

This is an S-Type drive unit for the Surftest SJ-220 and SJ-310 that provides portable transverse measurement.

It offers you the following benefits:


- It is compatible with the conventional drive units of the Surftest SJ-220 and SJ-310.
- You can simply connected it to the display unit.
- A typical application would be to position the S-Type unit on a crankshaft journal bearing, as shown in the photograph below. Once started the S-Type drive will track the stylus across the surface transversely to its own axis and reliably measure surface roughness in the direction of the crankshaft axis. Transverse tracking simplifies the measurement of surface roughness even in very confined situations, which has long been a problem with conventional instruments which allow only longitudinal measurement.

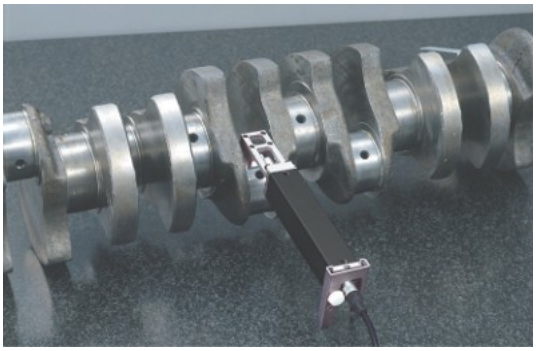




No.	Description	Traverse	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-749	S-Type Drive Unit	5,6 mm	0,75	60°	2
178-750	S-Type Drive Unit Set*	5,6 mm	0,75	60°	2


* 178-750 - S-Type Drive Unit Set incl.178-749 – 12AAE644 – 12AAE643]

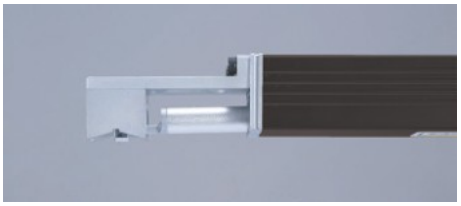


12AAE644
V-type adapter

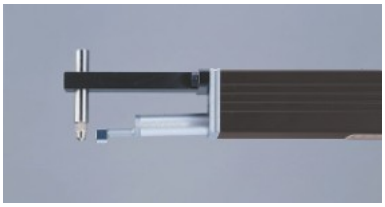

12AAE643
Point - contact adapter

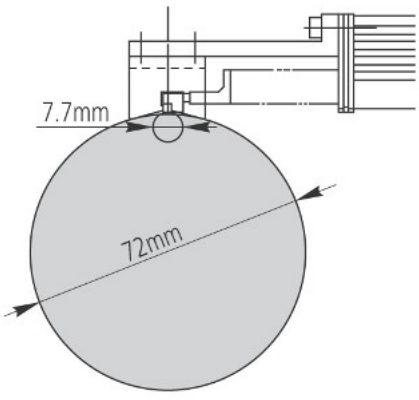

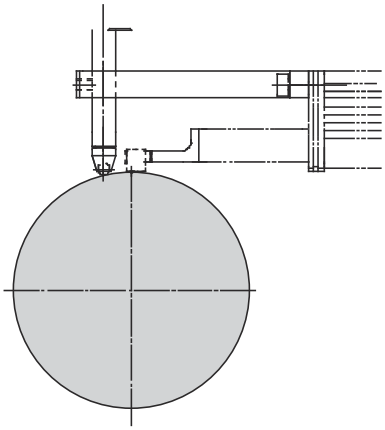

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Accessories for SJ-220 and SJ-310

Series 178 - Standard and Optional Accessories for Surftest SJ-220 / SJ-310

Model		Surftest SJ-220		Surftest SJ-220R		Surftest SJ-220S		Surftest SJ-310		Surftest SJ-310R		Surftest SJ-310S	
No.	Description	Std	Opt	Std	Opt	Std	Opt	Std	Opt	Std	Opt	Std	Opt
12AAA210	Extension rod length 50 mm		●		●				●		●		
12AAA216	Height adjustment feet		●		●			●					
12AAA217	Nosepiece (flat)		●		●			●		●			
12AAA218	Nosepiece (cylindrical)		●		●			●		●			
12AAA219	Adapter for vertical position		●		●				●		●		
12AAA221	Adapter for magnetic stand		●		●		●		●		●		●
12AAA222	Height gauge adapter		●		●		●		●		●		●
12AAA882D	RS-232C connection cable								●		●		●
12AAD510	USB cable for SJ-310 / SJ-410								●		●		●
12AAE643	Point - contact adapter					●						●	
12AAE644	V-type adapter					●						●	
12AAJ088	Footswitch		●		●		●		●		●		●
12AAN040	Protective film								●		●		●
12AAN046	Battery							●		●		●	
12AAW452	Memory card 2GB								●		●		●
12AAY688	RS-232C cable		●		●		●						
12AAY917	Memory card		●		●		●						
12AAZ222	Replacement Battery		●		●		●						
12BAA303	Connecting cable for extension 1 m	●		●		●			●		●		●
12BAG834	Touch pen							●		●		●	
12BAK700	Calibration table	●		●		●		●		●		●	
12BAL402	Touch Panel Protection							●		●		●	
12BAS451	USB 2.0 cable	●		●		●							
12BAS476	Tool for operating the battery switch	●		●		●							
178-029*	Granite stand (*12AAA221 is needed)		●		●		●		●		●		●
178-296	Standard detector 2 µm; 60°; 0,75 mN	●		●				●		●			
178-383	Detector for small holes Ø4,5 mm; 2 µm; 60°; 0,75 mN		●		●		●		●		●		●
178-384	Detector for small holes Ø2,8 mm; 2 µm; 60°; 0,75 mN		●		●				●		●		●
178-385	Deep groove detector 2 µm; 60°; 0,75 mN		●		●				●		●		
178-386	Detector for S-drive 5 µm; 90°; 4 mN		●		●	●			●		●	●	
178-387	Detector for S-drive 2 µm; 60°; 0,75 mN		●		●	●			●		●	●	
178-388	Detector for gear tooth surface 2 µm; 60°; 0,75 mN		●		●		●		●		●		●
178-390	Detector 5 µm; 90°; 4 mN		●		●				●		●		
178-391	Detector for soft materials 10 µm; 90°; 4 mN		●		●				●		●		●
178-392	Detector for small holes Ø4,5 mm; 5 µm; 90°; 4 mN		●		●		●		●		●		●
178-393	Detector for small holes Ø2,8 mm; 5 µm; 90°; 4 mN		●		●		●		●		●		●
178-394	Deep groove detector 5 µm; 90°; 4 mN		●		●				●		●		
178-398	Detector for geartooth surface 5 µm; 60°; 4 mN		●		●		●		●		●		●
178-601-1	Roughness specimen Ra 3 µm	●		●			●	●		●		●	
178-604	Roughness specimen Ra 0,4 µm /3 µm		●		●		●		●		●		●
178-605	Roughness specimen Ra 1 µm		●		●	●			●		●	●	
178-747	Standard drive unit 17,5 mm	●			●		●	●			●		●
178-748	R-type drive unit 17,5 mm		●	●			●		●	●			●
178-749.	S-type drive unit		●		●	●			●		●	●	
270732	Printer papers (5 rolls)							●		●		●	
357651	AC Adapter 12V							●		●		●	

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Accessories for SJ-220 and SJ-310


Series 178

Optional accessories


No.	Description
178-033	Device for cylindrical workpieces, for Surftest SJ-220 / SJ-310 / SJ-210
178-034	Device as universal fixture, for Surftest SJ-220 / SJ-310 / SJ-210
178-035	Device for measuring inside diameter, for Surftest SJ-220 / SJ-310 / SJ-210



178-029




178-033




178-034




178-035

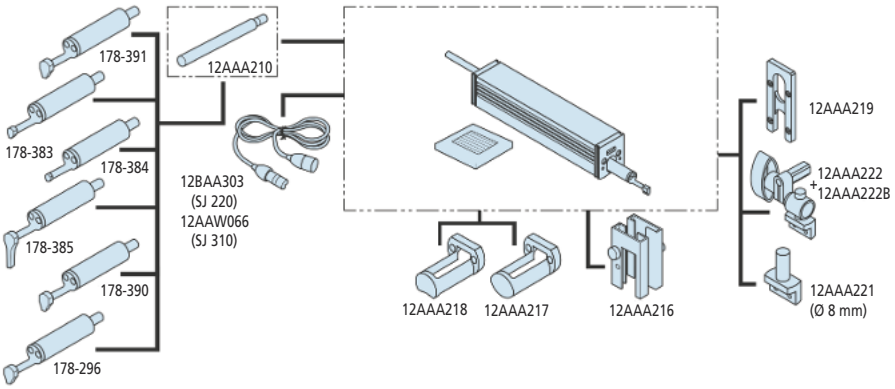


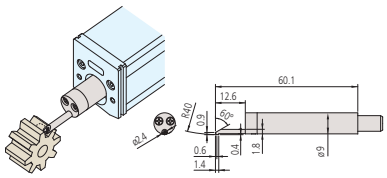


178-388/178-398

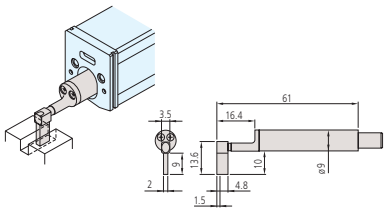


178-385/178-394

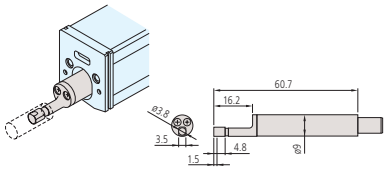


178-383/178-392

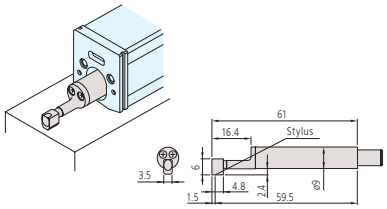


178-390/178-387
178-296/178-386

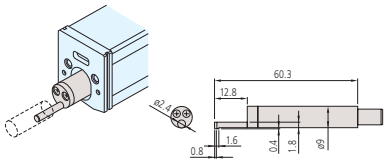


178-384/178-393




12AAA210




12AAA221




12AAA219



12AAA216



12AAA217



12AAA218

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Surftest SJ-410

Series 178 - Portable Surface Roughness Measuring Instrument

This is a portable measuring instrument that allows you to easily and accurately measure surface roughness.

The Surftest SJ-410 offers you the following benefits:

- Skidless system with touch-screen functionality and built-in printer.
- It works independently of mains power, allowing you to make on-site measurements.
- Easy and intuitive menu navigation.
- The large **14.5 cm** [5.7"] colour LCD gives you high visibility.
- The skidless detector allows you to measure the primary profile (P), roughness profile (R), waviness profile (W) and more.
- Surface compensation of curved, radial and tilted surfaces.
- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS) and customized settings.
- You can store up to 10 different measuring conditions inside the SJ-410, and up to 500 with an optional SD card.
- It allows two different evaluation conditions within one measurement adjustable.
- You can separately password protect many functions.
- It comes with support for 16 languages.
- Available options include an auto-set unit, X-axis fine adjustment and digital levelling unit.



SJ-410

Metric

Surftest SJ-411
Traverse : 25 mm
Traverse straightness : 0,3 µm / 25 mm

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]	Mass [kg]
178-580-31D	0,75	60°	2	2,8
178-580-32D	4	90°	5	2,8


Metric

Surftest SJ-412
Traverse : 50 mm
Traverse straightness : 0,5 µm / 50 mm

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]	Mass [kg]
178-582-31D	0,75	60°	2	2,9
178-582-32D	4	90°	5	2,9

Specifications

Drive unit	
Traverse	SJ-411: 25 mm SJ-412: 50 mm
Measuring speed	0,05 mm/s; 0,1 mm/s; 0,2 mm/s; 0,5 mm/s; 1 mm/s
Detector	
Measuring method	Skidless - Differential inductance
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Positioning	±1,5° (tilting), 10 mm (up/down)
Display unit	
Profiles	Primary Profile (P), Roughness Profile (R), Waviness (W), MOTIF (R, W) and more
Standard	EN ISO, VDA, JIS, ANSI and customize settings
Analysis graphs	BAC, ADC
Digital filter	Gauss, 2CR75, PC75
Cut-off length	λc : 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm λs : 2,5 µm; 8 µm; 25 µm
Printer	Thermal Printer
Tolerance	Coloured upper / lower limit
Interface	USB, Digimatic, RS-232C, Foot switch
Power supply	AC adapter or rechargeable battery



USB COMMUNICATION TOOL
free download on www.mitutoyo.eu registration required (refer to page https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments)



Refer to Surftest SJ-410 brochure

Scan QR Code with your mobile device and watch our product videos on YouTube

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surftest SJ-410

Series 178 - Portable Surface Roughness Measuring Instrument

Optional accessories | Other optional and standard accessories are listed later in different sections for accessories and styli.

Optional accessories


No.	Description
02AZD790D	Connection Cable D for U-WAVE, Flat 10-Pin Type
12AAB358	Cylinder attachment Ø 15-60 mm
12AAD510	USB cable for SJ-310 / SJ-410 series
178-019	Precision vise
178-182	Digital three-axis adjustment table
178-183	XY travel + leveling table [mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-185	Digimatic XY travel + leveling table[mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-195	Leveling Table, Leveling range +/- 1,5°
178-196	Digital leveling table [mm], Leveling range +/- 1,5°
178-198	Digital XY travel table [mm], Travel +/-12,5 mm
178-396-2	Detector 0,75mN, for Surftest; Formtracer SV-C
178-397-2	Detector, 4 mN
178-605	Roughness specimen Ra 1 µm [mm], Ra 1 µm
178-610	Reference step gauge (1, 2, 5, 10) µm, (1, 2, 5, 10) µm
178-611	Reference step specimen (2, 10) µm, [mm] - type
936937	Digimatic Cable, Flat 10-Pin Type, 1 m
965014	Digimatic Cable, Flat 10-Pin Type, 2 m
12AAW452	Memory card 2GB, for SJ-210 / SJ-310 / SJ-410 series

Consumable spares

No.	Description
12AAN046	Replacement battery, for Surftest SJ-310 / SJ-410
12BAL402	Touch Panel Protecting Sheet
270732	Printer paper, 5 rolls SJ series / SV-2100



R-surface measurement



SJ-411: 207,5 mm / SJ-412: 234 mm
Drive unit



Optional:
- Autoset unit 178-010
- X-axis adjustment unit 178-020
- Digital leveling unit 178-030



Scope of delivery



178-039
(displayed with SJ-411)



178-182
Digital three-axis adjustment table



178-183
XY travel + leveling table [mm]



178-196
Digital leveling table

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Surftest SJ-500

Series 178 - Surface Roughness Measuring Instrument

This is a measuring instrument that allows you to easily and accurately measure surface roughness.

The Surftest SJ-500 offers you the following benefits:


- The skidless detector allows you to measure the primary profile (P), roughness profile (R), waviness profile (W) and more.
- User friendly control unit for high precision surface roughness measurement.
- The large **19 cm** [7.5"] colour TFT LCD with touch-screen functionality gives you high visibility and ease of use.
- The display menu is easy to read and simple to operate.
- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS) and customized settings.
- The built-in joystick on the control unit enables quick and easy positioning. The manual adjustment knob allows you to finely position a small stylus to measure the inside surface of small holes.
- The detector unit allows a 90° displacement of the stylus, which is ideal for crankshaft and narrow space measurement.
- You can use the instrument stand-alone or mounted on a stand.




SJ-500

Metric


No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-532-01D	0,75	60°	2



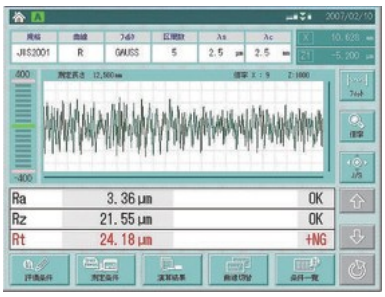


Preview

USB COMMUNICATION TOOL
free download on www.mitutoyo.eu
registration required (refer to page https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments)

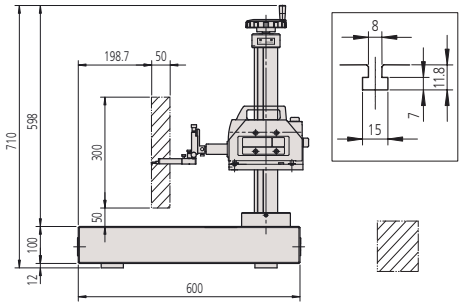

178-085
600x450x710 mm

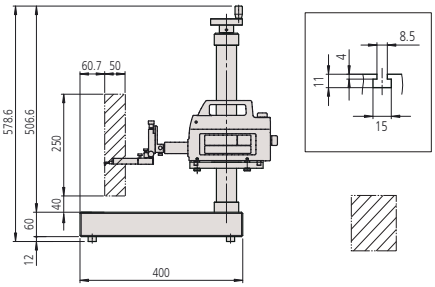


178-089
400x250x578 mm

Specifications

Drive unit	
Traverse	50 mm
Measuring speed	0,02 - 5 mm/s
Drive speed	0 - 20 mm/s or joystick operation
Traverse straightness	0,2 µm / 50 mm
Detector	
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Positioning	±1,5° (tilting) 30 mm (up/down)
Measuring method	Skidless - Differential inductance
Display unit	
Profiles	Primary Profile (P), Roughness Profile (R), Waviness (W), MOTIF (R, W) and more
Standard	EN ISO, VDA, JIS, ANSI and customize setting
Analysis graphs	BAC, ADC
Digital filter	Gauss, 2CR75, PC75, Robust Spline
Cut-off length	λc : 0,025 mm; 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm; 25 mm λs : 0,25 µm; 0,8 µm; 2,5 µm; 8 µm; 25 µm; 80 µm; 250 µm; None λf : 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8mm; 25mm; None
Printer	Thermal printer

Optional accessories

No.	Description
12AAG202	Extension rod 50mm, for Surftest; Formtracer SV-C
12AAG203	Extension rod 100mm, for Surftest; Formtracer SV-C
178-085	Granite stand 600 x 450 x 710 mm
178-089	Granite stand 400 x 250 x 578 mm
178-093-1	Desktop vibration isolator pump type, with max loading mass 120 kg
178-182	Digital three-axis adjustment table
178-183	XY travel + leveling table [mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-185	Digimatic XY travel + leveling table[mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-196	Digital leveling table [mm], Leveling range +/- 1,5°
178-396-2	Detector 0,75mN, for Surftest; Formtracer SV-C
178-397-2	Detector, 4 mN



SJ-500 with optional manual granite stand

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Surftest SV-2100

Series 178 - Surface Roughness Measuring Instrument

This is a stationary measuring instrument that allows you to easily and accurately measure surface roughness.

The Surftest SV-2100 offers you the following benefits:

- It is mounted on a granite base with a manual or power column.
- The large **19 cm** [7.5"] colour TFT LCD gives you high visibility and touch-screen functionality.
- It has a user friendly display unit for high precision surface roughness measurement.
- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS) and customized settings.
- Designed for usage in workshop areas.

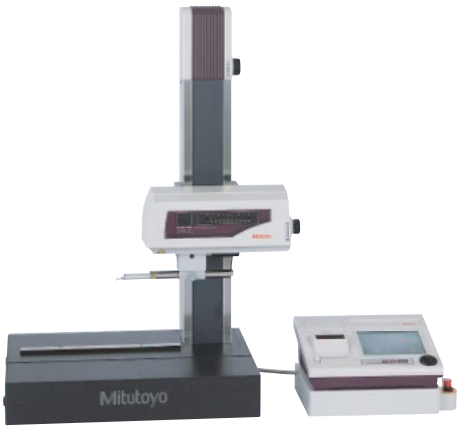

SV-2100S4



SV-2100M4

Specifications


Drive unit	
Traverse	100 mm
Measuring speed	0,02 - 5 mm/s
Drive speed	X = 0-40 mm/s Z2 = 0-20 mm/s [S4, H4, W4] or joystick operation
Traverse straightness	0,15 µm / 100 mm
Detector	
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Measuring method	Skidless - Differential inductance
Display unit	
Profiles	Primary Profile (P), Roughness Profile (R), Waviness (W), MOTIF (R, W) and more
Standard	EN ISO, VDA, JIS, ANSI and customize settings
Analysis graphs	BAC, ADC
Digital filter	Gauss, 2CR75, PC75, Robust Spline
Cut-off length	λc : 0,025 mm; 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm; 25 mm; 80 mm λs : 0,25 µm; 0,8 µm; 2,5 µm; 8 µm; 25 µm; 80 µm; 250 µm; none λf : 0,08 mm; 0,25 mm; 0,8 mm; 2,5 mm; 8 mm; 25 mm; 80 mm; none
Printer	Thermal printer

Optional accessories

No.	Description
12AAG202	Extension rod 50mm, for Surftest; Formtracer SV-C
12AAG203	Extension rod 100mm, for Surftest; Formtracer SV-C
218-171	Cross-travel table [mm], 100 x 50 mm XY travel
218-173	Rotary vice



Preview



Software

USB COMMUNICATION TOOL

free download on www.mitutoyo.eu registration required (refer to page https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments)

Metric

SV-2100H4 model

Vertical travel : 550 mm power column

Granite base size (WxD) : 600 x 450 mm

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-682-01D	0,75	60°	2

Metric

SV-2100M4 model

Vertical travel : 350 mm manual column

Granite base size (WxD) : 600 x 450 mm

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-636-11	0,75	60°	2

Metric

SV-2100S4 model

Vertical travel : 350 mm power column

Granite base size (WxD) : 600 x 450 mm

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-680-01D	0,75	60°	2

Metric

SV-2100W4 model

Vertical travel : 550 mm power column

Granite base size (WxD) : 1000 x 450 mm

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-684-01D	0,75	60°	2

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Surftest SJ-500P

Series 178 - Surface Roughness Measuring Instruments with Software FORMTRACEPAK

This is a surface roughness measuring instrument with software FORMTRACEPAK.

Software FORMTRACEPAK offers you the following benefits:

- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS) and customized settings.
- It can be used for several contour calculations within the measuring range.
- It offers total support for measurement system control, analysis and inspection report.
- All advantages of the SJ-500 also apply to the P Type.





SJ-500P

Metric

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-534-21	0,75	60°	2




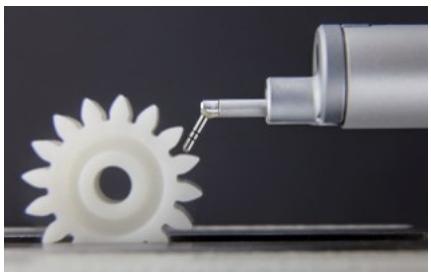


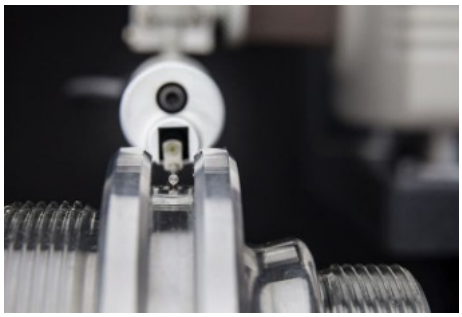

Specifications

Drive unit	
Traverse	50 mm
Drive speed	0-20 mm/s
Measuring speed	0,02 - 5 mm/s
Traverse straightness	0,2 µm / 50 mm
Detector	
Measuring method	Skidless - Differential inductance
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Positioning	±1,5° (tilting) 30 mm (up/down)
Software	**FORMTRACEPAK**

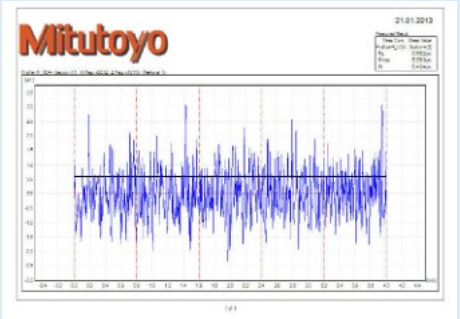

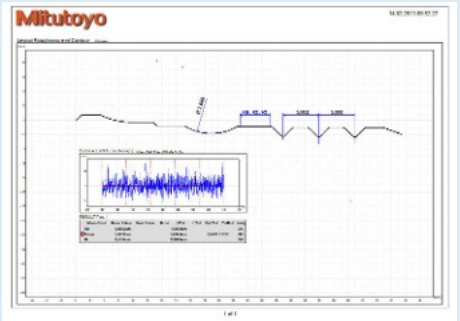

Formtracepak layout

Scan QR Code with your mobile device and watch our product videos on YouTube


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surftest SV-2100P

Specifications

Drive unit	
Traverse	100 mm
Drive speed	X = 0-40 mm/s
Measuring speed	0,02 - 5 mm/s
Traverse straightness	0,15 µm / 100 mm
Detector	
Measuring method	Skidless - Differential inductance
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Software	**FORMTRACEPAK**

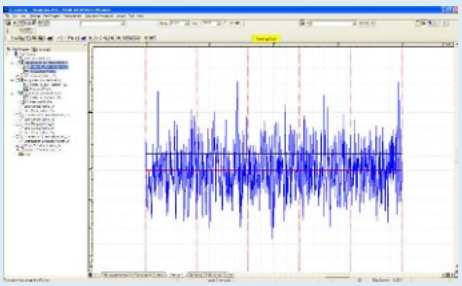

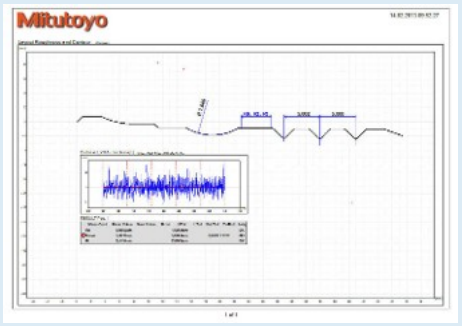

Formtracepak layout

Series 178 - Surface Roughness Measuring Instruments with Software FORMTRACEPAK

This is a surface roughness measuring instrument with software FORMTRACEPAK.

Software FORMTRACEPAK offers you the following benefits:

- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS) and customized settings.
- It can be used for several contour calculations within the measuring range.
- It offers total support for measurement system control, analysis and inspection report.
- All advantages of the SV-2100 also apply to the P Type.



SV-2100P

Metric

No.	Detector measuring force [mN]	Stylus tip angle	Stylus tip radius [µm]
178-638-21	0,75	60°	2

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Avant FTA-S3000

Serie 178 - Surface Roughness Measuring Instrument with Software FORMTRACEPAK

The Formtracer Avant FTA-S3000 is a surface roughness measuring machine that boasts outstanding operability and a wide variety of measurement functions because of the further expansion of the optional equipment range.

The Formtracer Avant FTA-S3000 offers you the following benefits:

- Easy to operate
- High-accuracy surface roughness testers
- A large range of optional styli ensure access to restricted features
- Remote control box for quick and accurate machine positioning
- The detector holders (optional) enables both crank and /or upward measurement
- 3D/Y-axis table (optional) with a travel range of 100 mm enables 3D surface roughness measurement
- DAT unit (optional) can tilt the X-axis drive unit to allow a workpiece to be levelled easily
- Retrofit options for contour measurement
- X-axis tilting



FTA-S3000

Specifications

Traverse	100 mm / 200 mm
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Measuring speed	0,02-30 mm/s
Drive speed	X = 0-80 mm/s Z2 = 0-40 mm/s
Inclining range	±45°
Vertical travel	Z2 = 300 / 500 / 700 mm
Standard	EN ISO, VDA, JIS, ANSI and customize setting
Profiles	Primary Profile (P), Roughness Profile (R), Waviness (W), MOTIF (R, W) and more
Software	**FORMTRACEPAK** • Enables control of all axes and rotary table for realizing efficient measurement automation. • Perform surface roughness evaluation. • Able to create an original inspection certificate by setting the print format to suit particular requirements.



Detector Holder S-3000C



Detector holder S-3000CR



Detector holder S-3000MR



Refer to FORMTRACER AVANT brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Formtracer Avant FTA-S3000


Serie 178 - Surface Roughness Measuring Instrument with Software FORMTRACEPAK

Optional accessories

No.	Description
12AAD975	Theta-1 axis, Rotary Axis
12AAG202	Extension rod 50mm, for Surftest; Formtracer SV-C
12AAG203	Extension rod 100mm, for Surftest; Formtracer SV-C
12AAV701	Detector stand for retrofit, for Formtracer Avant series
178-050	DAT unit, for Formtracer Avant FTA - S3000 series
178-077	3D leveling table, for CNC Surftest and Formtracer
178-078	Theta-2 axis, Rotary Axis
178-096	3 D/Y-axis table
178-097	Y-axis table, for Surftest SV, Contracer, Formtracer
178-141	Detector holder S3000C-D, for Formtracer Avant series
178-142	Detector holder S3000CR-D set, for Formtracer Avant series
178-143	Detector holder S3000MR-D set
178-181	Side table
178-182	Digital three-axis adjustment table
178-183	XY travel + leveling table [mm], Travel +/-12,5 mm; Leveling range +/-1,5°
178-188	Vibration isolator standard base
178-189	Vibration isolator wide base
178-195	Leveling Table, Leveling range +/- 1,5°
178-198	Digital XY travel table [mm], Travel +/-12,5 mm
218-171	Cross-travel table [mm], 100 x 50 mm XY travel
218-173	Rotary vice
178-397-2	Detector, 4 mN
178-611	Reference step specimen (2, 10) µm, [mm] - type
218-261-11	C3200 retrofit kit [mm], for Formtracer Avant series

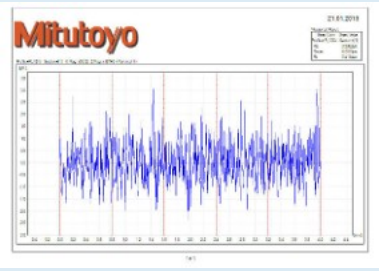

Formtracepak Layout

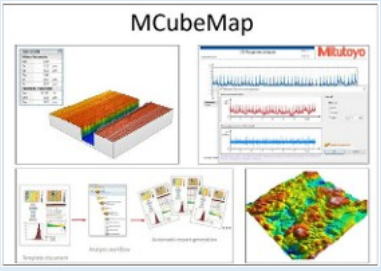

Optional MCubeMap
(in combination with 3D Y-axis 178-096)

Metric Traverse: 100 mm

Model	FTA - S4 S3000	FTA - H4 S3000	FTA - W4 S3000	FTA - L4 S3000
No.	**178-151-11**	**178-152-11**	**178-153-11**	**178-154-11**
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Range	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)
Detector measuring force mN	0,75	0,75	0,75	0,75
Mass kg	140	150	220	270

Metric Traverse: 200 mm

Model	FTA - S8 S3000	FTA - H8 S3000	FTA - W8 S3000	FTA - L8 S3000
No.	**178-156-11**	**178-157-11**	**178-158-11**	**178-159-11**
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Range	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)	800 µm; 80 µm; 8 µm (up to 2.4 mm with an optional stylus)
Detector measuring force mN	0,75	0,75	0,75	0,75
Mass kg	140	150	220	270



Formtracer Avant FTA-S3000
with vibration isolator and side table

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Surftest Extreme SV-3000CNC

Series 178 – CNC Surface Roughness Measuring Instrument

These is a fully CNC surface roughness measuring instrument with powerful software FORMTRACEPAK.

The Surftest Extreme SV-3000CNC offers you the following benefits:

- It is perfectly made for increased throughput of multiple profile and workpiece measurement tasks.
- Each axis has a drive speed of up to 200 mm/s.
- You can take continuous measurement over horizontal and inclined surfaces by power-tilting the drive unit.
- Within the measuring range of the styli software FORMTRACEPAK supports contour calculation features.
- 3D topography measurement as option available.
- Inclined plane measurement is possible through 2-axis simultaneous control in the X and Y directions.
- The detector unit incorporates an anti-collision safety device, causing it to automatically stop if its main body collides with a workpiece or jig.
- All models equipped with Y-axis.
- Z-axis tracking measurement for models without α-axis.



SV-3000CNC

Specifications

Traverse	X = 200 mm Y = 200 mm
Measuring speed	0,02 - 2 mm/s
Drive speed	CNC mode: max. 200 mm/s Joystick mode: 0 - 50 mm/s
Traverse straightness	0,5 µm / 200 mm
Inclining range	-45° (CCW) to +10° (CW)
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Standard	EN ISO, VDA, JIS, ANSI and customize setting
Profiles	Primary Profile (P), Roughness Profile (R), Waviness (W), MOTIF (R, W) and more
Software	**FORMTRACEPAK** • Allows control of all axis, motor-driven Y-axis table and optional rotary table for efficient automated measurement. • Surface roughness analysis • An inspection certificate can be created by setting the print format as required.
Optional accessories	Other optional and standard accessories are listed later in different sections for accessories and styli.

Optional accessories

No.	Description
12AAD975	Theta-1 axis, Rotary Axis
12AAE032	Special anti-vibration table
178-037	2D auto-leveling table, for CNC Surftest and Formtracer
178-077	3D leveling table, for CNC Surftest and Formtracer
178-078	Theta-2 axis, Rotary Axis



Automatic measurement

Metric

Model	SV-3000CNC-S	SV-3000CNC-H	SV-3000CNC-S.	SV-3000CNC-H.
No.	**178-508-12**	**178-509-12**	**178-528-12**	**178-529-12**
Z2-axis range [mm]	300	300	500	500
Y-axis table unit	Installed	Installed	Installed	Installed
α-axis unit	-	Installed	-	Installed

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Surftest Extreme SV-M3000CNC

Series 178 - CNC Surface Roughness Measuring Instrument

This is a top performance CNC surface roughness measuring instrument with powerful software FORMTRACEPAK.


The Surftest Extreme SV-M3000CNC offers you the following benefits:

- You can measure large and heavy workpieces such as engine blocks and crankshafts.
- It has an 800 mm moving column configuration to largely eliminate workpiece size restrictions.
- Each axis has a drive speed of up to 200 mm/s.
- When combined with the optional detector swivelling unit, continuous measurement over the bottom, top and side surface of a workpiece is possible.
- The huge load table has a self-contained structure ensuring that you can easily accommodate various size workpieces, standard and custom jigs, and auto-feed devices.



Specifications

Traverse	X = 200 mm Y = 800 mm Z2 = 500 mm
Measuring speed	0,02 - 2 mm/s
Drive speed	CNC mode: max. 200 mm/s Joystick mode: 0 - 50 mm/s
Traverse straightness	X = 0,5 µm / 200 mm (standard) X = 0,7 µm / 200 mm (long-type detector) X = 0,5 µm / 200 mm (rotary-type detector) Y = 0,5 µm / 50 mm; 2 µm / 800 mm (standard) Y = 0,7 µm / 50 mm; 3 µm / 800 mm (long-type detector) Y = 0,7 µm / 50 mm; 3 µm / 800 mm (rotary-type detector)
Inclining range	-45° (CCW) to +10° (CW)
Range	800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Standard	EN ISO, VDA, JIS, ANSI and customize setting
Profiles	Primary Profile (P), Roughness Profile (R), Waviness (W), MOTIF (R, W) and more
Loading weight	300 kg
Software	**FORMTRACEPAK** • Enables control of all axes for realizing efficient measurement automation. • Perform roughness evaluation. • Able to create an original inspection certificate by setting the print format to suit particular requirements.

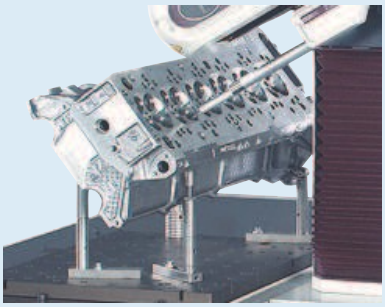

Typical measurement task

Metric

No.	Model	Detector hold type (Essential option)
178-549-2	178-071 178-072 178-073	Standard Long type Rotary type

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Contracer CV-2100

Series 218 - Contour Measuring Instruments

This contour measuring instrument is designed to support "easy to use" and "speedy" measurements.

The Contracer CV-2100N4 and CV-2100M4 offer you the following benefits:

- Extensive contour measurement quick and easy.
- Quick movement in Z2 because of an easy to use quick grip. [M4 type]
- Auto execution and multi point measurement with the new stylus up-and down function.
- X-axis drive up to 20 mm/s by jog shuttle.
- Easy part programming as well as single measurement with software FORMTRACEPAK.
- Automatic evaluation, best fit of contours, CAD comparison and many more features as standard.
- CV-2100 M4 mounted with quick grip stand on a granite base.
- CV-2100 N4 can be mounted on an optional granite base with a manual column.
- Centralized front control panel.



CV-2100M4



CV-2100N4

Specifications

Measuring range	Z1 = 50 mm X = 100
Measuring speed	0,02 - 5 mm/s
Drive speed	X = 0 - 20 mm/s
Accuracy	X = (2,5 + 0,02L) µm [L: drive length (mm)] Z1 = (2,5 + l0,1Hl) µm [H: Measurement height from the horizontal position (mm)]
Traverse straightness	2,5 µm / 100 mm
Column type	M4: 350 mm
Software	**FORMTRACEPAK** • Allows control of measuring conditions for efficient automated measurement. • Contour evaluation can be performed using analysis of level differences, angle, pitch, area and contour tolerancing as standard. • An inspection certificate can be created by setting the print format as required.
Optional accessories	Other optional and standard accessories are listed later in different sections for accessories and styli.

Optional accessories

No.	Description
218-171	Cross-travel table [mm], 100 x 50 mm XY travel
218-173	Rotary vice


Metric

Model	CV-2100N4	CV-2100M4
No.	**218-613-11**	**218-633-11**
Z2-axis range [mm]	-	350
Z1-axis range [mm]	50	50
Z2-axis column type	Optional: Manual	Manual: Quick up and down motion, fine feed
X1-axis range [mm]	100	100

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Contracer CV-2100

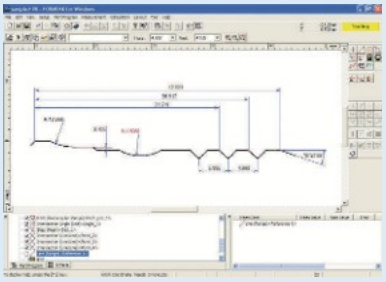


FORMTRACEPAK



Optional column stand 218-042

Refer to CV-2100 brochure

Scan QR Code with your mobile device and watch our product videos on YouTube

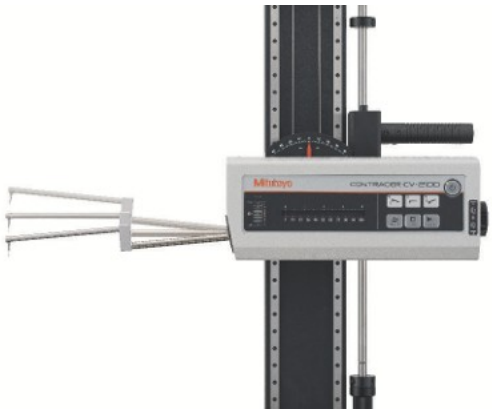

CV-2100 stylus up-and-down function



CV-2100M4 with centralized front control panel

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Avant FTA-C3000 and FTA-C4000

Formtracer Avant FTA-C3000 and FTA-C4000

Serie 218 – Contour Measuring Instruments

These are high-accuracy 2D contour measuring instruments as single or dual stylus system. The Avant FTA-C3000 and FTA-C4000 series are benchtop machines and come with a motorised granite column and stand.

The Formtracer Avant FTA-C3000 and FTA-C4000 offers you the following benefits:

- Easy to operate
- Accurate measurement of small features
- Large vertical range and very high resolution
- A large range of optional arms and styli ensures access to restricted features
- Remote control box for quick and accurate machine positioning
- Magnetic joint for a quick change of arms - quick and simple calibration
- Simplified CNC operation
- Optional motorised accessories
- Retrofit options for surface roughness measurement



Formtracer Avant FTA-C4000
with vibration isolator and side table

Specifications

Vertical travel	Z2 = 300 / 500 / 700 mm
Traverse	100 mm / 200 mm
Measuring range	Z1 = 60 mm
Measuring speed	0,02 - 30 mm/s
Drive speed	X = 0 - 80 mm/s Z2 = 0 - 30 mm/s
Inclining range	±45°
Accuracy	X = (0,8+0,01L) µm (S4, H4, W4, L4 model) X = (0,8+0,015L) µm (S8, H8, W8, L8 model) [L : Drive length (mm)] **FTA-C3000 :** Z1 = (1,2+2H/100) µm **FTA-C4000 :** Z1 = (0,8+2H/100) µm [H : Measurement height from the horizontal position (mm)]
Software	**FORMTRACEPAK** • Allows control of all axis, optional motor-driven Y-axis table and rotary table for efficient automated measurement. • Contour evaluation can be performed using analysis of level differences, angle, pitch, area and contour tolerancing as standard. • An inspection certificate can be created by setting the print format as required.

Optional accessories


No.	Description
12AAD975	Theta-1 axis, Rotary Axis
178-077	3D leveling table, for CNC Surftest and Formtracer
178-078	Theta-2 axis, Rotary Axis
178-097	Y-axis table, for Surftest SV, Contracer, Formtracer
178-181	Side table
178-188	Vibration isolator standard base
178-189	Vibration isolator wide base
218-171	Cross-travel table [mm], 100 x 50 mm XY travel
218-173	Rotary vice

Refer to FORMTRACER AVANT brochure


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Formtracer Avant FTA-C3000 and FTA-C4000




Optional Rotary table θ1 - 12AAD975




Optional Rotary table θ2 - 178-078




Optional Y-axis - 178-097



Measurement control screen



Contour analysis screen



Contour comparison FORMTRACEPAK

Formtracer Avant FTA-C3000 series

A high-accuracy 2D contour measuring instrument; the Avant C3000 is a benchtop machine and comes with a motorised granite column and stand.

The Formtracer Avant FTA-C3000 offers you the following benefits:

- Easy to operate
- Accurate measurement of small features
- Large vertical range and very high resolution
- A large range of optional arms and styli ensures access to restricted features
- Remote control box for quick and accurate machine positioning
- Magnetic joint for a quick change of arms - quick and simple calibration
- Simplified CNC operation
- Optional motorised accessories
- Retrofit options for surface roughness measurement

Metric Traverse: 100 mm

Model	FTA-S4 C3000	FTA-H4 C3000	FTA-W4 C3000	FTA-L4 C3000
No.	**218-361-11**	**218-362-11**	**218-363-11**	**218-364-11**
Z1-axis range [mm]	60	60	60	60
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Vertical travel [mm]	300	500	500	700

Metric Traverse: 200 mm

Model	FTA-S8 C3000	FTA-H8 C3000	FTA-W8 C3000	FTA-L8 C3000
No.	**218-366-11**	**218-367-11**	**218-368-11**	**218-369-11**
Z1-axis range [mm]	60	60	60	60
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Vertical travel [mm]	300	500	500	700



FTA-C3000

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Avant FTA-C3000 and FTA-C4000

Formtracer Avant FTA-C4000 series

A high-accuracy 2D contour measuring instrument with dual stylus system; the Avant FTA-C4000 is a benchtop machine and comes with a motorised granite column and stand.

The Formtracer FTA-C4000 offers you the following benefits:

- Easy to operate upward/downward measurements at double sided contours
- Variable measuring force controlled by software FORMTRACEPAK
- Large vertical range and very high resolution
- A large range of optional arms and styli ensures access to restricted features
- Remote control box for quick and accurate machine positioning
- Magnetic joint for a quick change of arms - quick and simple calibration
- Simplified CNC operation
- Optional motorised accessories
- Retrofit options for surface roughness measurement

Metric Traverse: 100 mm


Model	FTA-S4 C4000	FTA-H4 C4000	FTA-W4 C4000	FTA-L4 C4000
No.	**218-371-11**	**218-372-11**	**218-373-11**	**218-374-11**
Z1-axis range [mm]	60	60	60	60
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Vertical travel [mm]	300	500	500	700

Metric Traverse: 200 mm


Model	FTA-S8 C4000	FTA-H8 C4000	FTA-W8 C4000	FTA-L8 C4000
No.	**218-376-11**	**218-377-11**	**218-378-11**	**218-379-11**
Z1-axis range [mm]	60	60	60	60
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Vertical travel [mm]	300	500	500	700




FTA-C4000




Optional Rotary table θ1 - 12AAD975




Optional Rotary table θ2 - 178-078




Optional Y-axis - 178-097



Measurement control screen



Double sided contour



Contour comparison FORMTRACEPAK

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Formtracer Avant
FTA-D3000 / FTA-D4000 Series

Specifications

Vertical travel	Z2 = 300 / 500 / 700 mm
Traverse	X = 100 mm / 200 mm
Measuring range	Contour Z1 = 60 mm Roughness Z1 = 800 µm / 80 µm / 8 µm
Measuring speed	0,02 - 30 mm/s
Drive speed	X = 0 - 80 mm/s Z2 = 0 - 30 mm/s
Software	**FORMTRACEPAK** • Allows control of all axis, optional motor-driven Y-axis table and rotary table for efficient automated measurement. • Contour evaluation can be performed using analysis of level differences, angle, pitch, area and contour tolerancing as well as surface roughness evaluation as standard. • An inspection certificate can be created by setting the print format as required.

Optional accessories

No.	Description
12AAD975	Theta-1 axis, Rotary Axis
178-077	3D leveling table, for CNC Surftest and Formtracer
178-078	Theta-2 axis, Rotary Axis
178-096	3 D/Y-axis table
178-097	Y-axis table, for Surftest SV, Contracer, Formtracer
178-181	Side table
178-188	Vibration isolator standard base
178-189	Vibration isolator wide base
218-171	Cross-travel table [mm], 100 x 50 mm XY travel
218-173	Rotary vice



Refer to FORMTRACER AVANT brochure

Formtracer Avant FTA-D3000 and FTA-D4000

A high-accuracy 2D surface roughness and contour measuring instrument; the Avant D type is a benchtop machine and comes with a motorised granite column and stand.

The Formtracer Avant FTA-D3000 and FTA-D4000 offer you the following benefits:

- "Hot plug" exchange of drive units
- Easy to operate
- Dual stylus system for upward and downward contour measurements with D4000 type
- Variable contour measuring force set with Formtracepak software with D4000 type
- High accurate surface roughness and contour measurements
- A large range of optional arms and styli ensures access to restricted features
- Remote control box for quick and accurate machine positioning
- Simplified CNC operation
- Optional motorised accessories



Formtracer Avant FTA-D4000
with monitor arm, vibration isolator and side table

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Avant
FTA-D3000 / FTA-D4000 Series

Formtracer Avant FTA-D3000 series

A high-accuracy 2D surface roughness and contour measuring instrument; the Avant FTA-D3000 is a benchtop machine and comes with a motorised granite column and stand.

The Formtracer Avant FTA-D3000 offers you the following benefits:


- "Hot plug" exchange of drive units
- Easy to operate
- High accurate surface roughness and contour measurements
- Large vertical range and very high resolution
- A large range of optional arms and styli ensures access to restricted features
- Remote control box for quick and accurate machine positioning
- Simplified CNC operation
- Optional motorised accessories




FTA-D3000

Metric


No.	Model	Detector 0,75 mN	X-axis 100 mm	X-axis 200 mm	Z2-axis 300 mm	Z2-axis 500 mm	Z2-axis 700 mm	Granite size (WxD) [mm]
525-311-11	FTA-S4 D3000	●	●		●			600 x 450
525-312-11	FTA-H4 D3000	●	●			●		600 x 450
525-313-11	FTA-W4 D3000	●	●			●		1000 x 450
525-314-11	FTA-L4 D3000	●	●				●	1000 x 450
525-316-11	FTA-S8 D3000	●		●	●			600 x 450
525-317-11	FTA-H8 D3000	●		●		●		600 x 450
525-318-11	FTA-W8 D3000	●		●		●		1000 x 450
525-319-11	FTA-L8 D3000	●		●			●	1000 x 450




Optional Rotary table θ1 - 12AAD975




Optional Rotary table θ2 - 178-078




Optional Y-axis - 178-097



Formtracepak Layout



Contour analysis screen




Optional MCubeMap
(in combination with 3D Y-axis 178-096)


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Formtracer Avant
FTA-D3000 / FTA-D4000 Series




Optional Rotary table θ1 - 12AAD975



Optional Rotary table θ2 - 178-078




Optional Y-axis - 178-097



Formtracepak Layout



Double sided contour



Optional MCubeMap
(in combination with 3D Y-axis 178-096)

Formtracer Avant FTA-D4000 series

A high-accuracy 2D surface roughness and contour measuring instrument; the Avant FTA-D4000 is a benchtop machine and comes with a motorised granite column and stand.

The Formtracer Avant FTA-D4000 offers you the following benefits:

- "Hot plug" exchange of drive units
- Easy to operate
- Dual stylus system for upward and downward contour measurements
- Variable contour measuring force set with Formtracepak software
- High accurate surface roughness and contour measurements
- A large range of optional arms and styli ensures access to restricted features
- Remote control box for quick and accurate machine positioning
- Simplified CNC operation
- Optional motorised accessories



FTA-D4000

Metric

No.	Model	Detector 0,75 mN	X-axis 100 mm	X-axis 200 mm	Z2-axis 300 mm	Z2-axis 500 mm	Z2-axis 700 mm	Granite size (WxD) [mm]
525-321-11	FTA-S4 D4000	●	●		●			600 x 450
525-322-11	FTA-H4 D4000	●	●			●		600 x 450
525-323-11	FTA-W4 D4000	●	●			●		1000 x 450
525-324-11	FTA-L4 D4000	●	●				●	1000 x 450
525-326-11	FTA-S8 D4000	●		●	●			600 x 450
525-327-11	FTA-H8 D4000	●		●		●		600 x 450
525-328-11	FTA-W8 D4000	●		●		●		1000 x 450
525-329-11	FTA-L8 D4000	●		●			●	1000 x 450

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Avant FTA-H3000

Series 525 - Surface and Contour Measuring System

This provides all-in-one surface roughness and contour measurement within one drive unit.

The Formtracer Avant FTA-H3000 offers you the following benefits:

- You can carry out simultaneous analysis of roughness and contour with one measurement.
- The measuring range is enormous with Z1 = 16 mm
- High accurate measurement
- It performs roughness analyses conform to various international standards (EN ISO, VDA, ANSI, JIS and customized settings).
- The high drive speed reduces the total measurement time.
- Optional retrofit kits for pure surface roughness or dual contour measurement, detector change using the "hot swap method"



Specifications

Traverse	X = 100 mm / 200 mm
Measuring range	Z1 = 16 mm
Measuring speed	Roughness up to 0,5 mm/s, contour up to 30 mm/s
Drive speed	X = 0 - 80 mm/s Z2 = 0 - 30 mm/s
Traverse straightness	Pt: 0,2 µm /100 mm Pt: 0,6 µm /200 mm
Inclining range	±45°
Accuracy	X = (0,8+0,01L) µm (S4, H4, W4, L4 model) X = (0,8+0,015L) µm (S8, H8, W8, L8 model) [L: Drive length (mm)] Z1 = (0,5+2H/100) µm H: Measurment height from the horizontal position (mm)
Software	**FORMTRACEPAK** • Allows control of all axes, optional motor-driven Y-axis table and rotary table for efficient automated measurements. • Contour and roughness evaluation can be performed in one measurement. Software with very useful features such as real-time data, CAD comparison, contour connection, multi-language support, report generation and much more as standard.

Optional accessories

No.	Description
12AAD975	Theta-1 axis, Rotary Axis
178-077	3D leveling table, for CNC Surftest and Formtracer
178-078	Theta-2 axis, Rotary Axis
178-097	Y-axis table, for Surftest SV, Contracer, Formtracer
178-181	Side table
178-188	Vibration isolator standard base
178-189	Vibration isolator wide base
218-171	Cross-travel table [mm], 100 x 50 mm XY travel
218-173	Rotary vice

Metric Traverse: 100 mm

Model	FTA - S4 H3000	FTA - H4 H3000	FTA - W4 H3000	FTA - L4 H3000
No.	**525-241-11**	**525-242-11**	**525-243-11**	**525-244-11**
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Vertical travel [mm]	300	500	500	700
Mass kg	140	150	220	270

Metric Traverse: 200 mm

Model	FTA - S8 H3000	FTA - H8 H3000	FTA - W8 H3000	FTA - L8 H3000
No.	**525-246-11**	**525-247-11**	**525-248-11**	**525-249-11**
Granite base size (WxD) [mm]	600 x 450	600 x 450	1000 x 450	1000 x 450
Vertical travel [mm]	300	500	500	700
Mass kg	140	150	220	270

Refer to CONTOUR AND SURFACE MEASUREMENT brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Formtracer Extreme SV-C4500CNC

Series 525 - Surface and Contour Measuring Instrument

High accurate fully CNC surface and contour measuring instrument.

The Formtracer Extreme SV-C4500CNC offers you the following benefits:

- Powerful as two separate, fully CNC instruments.
- Measurement of long distances in Z2-axis for models without α- axis.
- Each axis has a drive speed up to 200 mm/s.
- Dual stylus system for upward and downward contour measurement at doubled sided contours.
- It´s variable contour measuring force is controlled by software FORMTRACEPAK.
- The contour drive unit is equipped with an arc encoder detector giving excellent accuracy and resolution in Z1-axis.
- Perfectly made for increased throughput of multiple profile and workpiece measurement tasks.
- The detector unit incorporates an anti-collision safety device, causing it to stop automatically if its main body collides with a workpiece or jig.

Specifications

Measuring range	Z2= [S] 300 mm / [H] 500
Measuring speed	0,02 - 2 mm/s
Drive speed	CNC mode: max. 200 mm/s Joystick mode: 0-50 mm/s
Accuracy	Contour detector: X= (0,8 +4L/2000) µm [L: Drive length (mm)] Contour Z1= (0,8 + 12H/1000) µm [H: Measurement height from the horizontal position (mm)] Z2=(3,5 + 15H/1000) µm
Inclining range	-45° (CCW) to +10° (CW) (for models equipped with with α - axis)
Measuring force	0,75 mN
Software	**FORMTRACEPAK** • Allows control of all axis, motor-driven Y-axis table and rotary table for efficient automated measurement. • Contour evaluation can be performed using analysis of level differences, angle, pitch, area and contour tolerancing as standard. • An inspection certificate can be created by setting the print format as required.
Optional accessories	Other optional and standard accessories are listed later in different sections for accessories and styli.

Optional accessories

No.	Description
12AAD975	Theta-1 axis, Rotary Axis
178-037	2D auto-leveling table, for CNC Surftest and Formtracer
178-077	3D leveling table, for CNC Surftest and Formtracer
178-078	Theta-2 axis, Rotary Axis
178-397-2	Detector, 4 mN



SV-C4500CNC equipped with two powerful exchangeable drive units



Surface Roughness drive unit



Contour drive unit

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Extreme SV-C4500CNC

Metric


No.	Z2-axis range [mm]	Y-axis table unit	α-axis unit
525-701-12	300	Installed	-
525-702-12	300	Installed	Installed
525-703-12	500	Installed	-
525-704-12	500	Installed	Installed







Multiple measurements

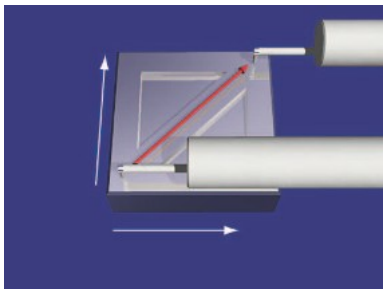

Through 2-axis simultaneous control in the X and Y directions



Y-axis



α-axis

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Formtracer Extreme SV-C4500CNC HYBRID Type 1

Series 525 - Surface and Contour Measuring Instrument


This measuring system is equipped with a surface roughness detector, a contour detector and a confocal chromatic point sensor (CPS) employing axial chromatic aberration.

The Formtracer Extreme SV-C4500CNC Hybrid Type 1 offers you the following benefits:


- Powerful as three separate fully CNC instruments.
- High accurate fully CNC surface and contour measuring instrument.
- Non-contact and contact measurement combined in one instrument.
- Two machine types with different CPS sensors available, depending on measuring range and resolution.
- Drive speed of up to 200 mm/s in all axes.
- Vibration isolator as standard.

Specifications

Vertical travel	Z2 = 500 mm
Measuring range	X= 200 mm Y= 200 mm **Contour:** Z1= 60 mm **Roughness:** Z1= 800 µm; 80 µm; 8 µm (up to 2,4 mm with an optional stylus)
Measuring speed	0,02 - 2 mm/s
Accuracy	Contour detector: X= (0,8 +4L/2000) µm [L: Drive length (mm)] Contour Z1= (0,8 + [2H]/1000) µm [H: Measurement height from the horizontal position (mm)] Z2=(3,5 + 15H/1000) µm
Software	**FORMTRACEPAK** • Allows control of all axis, motor-driven Y-axis table and rotary table for efficient automated measurement. • Contour evaluation can be performed using analysis of level differences, angle, pitch, area and contour toleranCing as standard. • An inspection certificate can be created by setting the print format as required.
Non-contact detector	
Measuring range	CPS0517 = 100 µm CPS2525 = 1200 µm
Working distance	CPS0517 = 12 mm CPS2525 = 21 mm
Resolution	CPS0517 = 5 nm CPS2525 = 25 nm

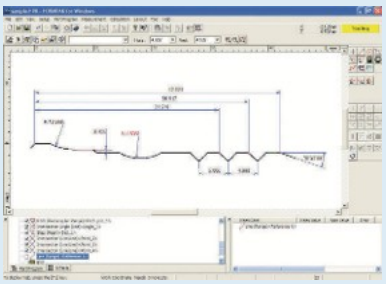

Contour analysis

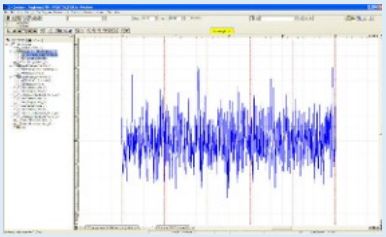

Multiple measurements



SV-4500CNC Hybrid Type



Surface roughness drive unit



Contour drive unit



CPS sensor drive unit

Metric

No.	Roughness	Contour	Non-contact
525-676-12	0,75 mN	Dual contour stylus	CPS2525
525-677-12	0,75 mN	Dual contour stylus	CPS0517

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Formtracer Extreme CS-5000CNC and CS-H5000CNC

Series 525 - CNC Surface and Contour Measuring Instruments

This is the highest-accuracy stylus type CNC surface roughness and contour measuring instrument.


The Formtracer Extreme CS-5000CNC / CS-H5000CNC offers you the following benefits:

- It meets the highest demands of accuracy and repeatability.
- You can carry out simultaneous analysis of roughness and contour within one measurement.
- It includes a cabin and a vibration stand as standard to avoid external influences.
- High resolution in X1-axis: 5 nm and Z1-axis: 0.8 nm/1.6 nm.



CS-H5000CNC



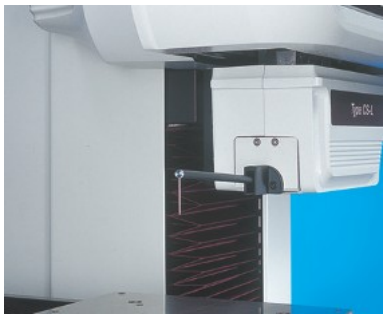

Specifications

Vertical travel	Z2 = 300 / 500 mm
Traverse	200 mm
Measuring range	Z1 = 12 mm
Measuring speed	Roughness measurement: 0,02 - 0,2 mm/s Contour measurement: 0,02 - 2 mm/s
Drive speed	CNC mode: max. 40 mm/s Joystick mode 0 - 40 mm/s
Accuracy	**CS-5000CNC:** X = (0.3+0.002L) µm Z1 = (0.3+[0.02H]) µm **CS-H5000CNC:** X = (0.16+0.001L) µm Z1 = (0.07+[0.02H]) µm [L : Drive length (mm)] [H : Measurement height from the horizontal position (mm)]
Traverse straightness	**CS-5000CNC:** X = (0.1+0.0015L) µm [standard stylus] X = (0.2+0.0015L) µm [double length stylus] **CS-H5000CNC:** X = (0.05+0.0003L) µm [standard stylus] X = (0.1+0.0015L) µm [double length stylus]
Resolution	X = 0.005 µm Z1 = 0.0008 µm [standard stylus] Z1 = 0.0016 µm [double length stylus]
Software	**FORMTRACEPAK** • Allows control of all axis, optional motor-driven Y-axis table and rotary table for efficient automated measurement. • Contour evaluation can be performed using analysis of level differences, angle, pitch, area and contour tolerancing as well as surface roughness evaluation as standard. • An inspection certificate can be created by setting the print format as required.

Metric


CS-5000CNC

Model	CS-5000CNC S	CS-5000CNC S + Y-axis	CS-5000CNC H	CS-5000CNC H + Y-axis
No.	**525-727-12**	**525-729-12**	**525-747-12**	**525-749-12**
Z2-axis range [mm]	300	300	500	500
Y-axis table unit	-	Installed	-	Installed
α-axis unit	Installed	Installed	Installed	Installed


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Formtracer Extreme CS-5000CNC and CS-H5000CNC

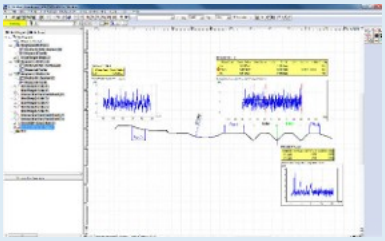

Contour and roughness analysis




Optional:
Aspherical lens analysis program
ASLPAK

Metric


CS-H5000CNC

Model	CS-H5000CNC S	CS-H5000CNC S + Y-axis	CS-H5000CNC H	CS-H5000CNC H + Y-axis
No.	**525-776-12**	**525-777-12**	**525-706-12**	**525-707-12**
Z2-axis range [mm]	300	300	500	500
Y-axis table unit	-	Installed	-	Installed
α-axis unit	-	-	-	-


Standard

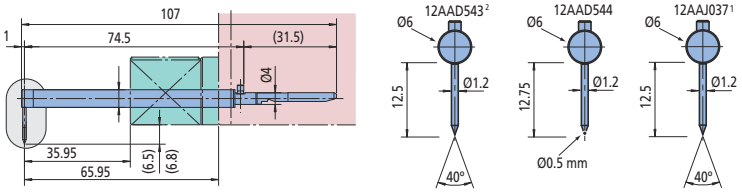


Double length

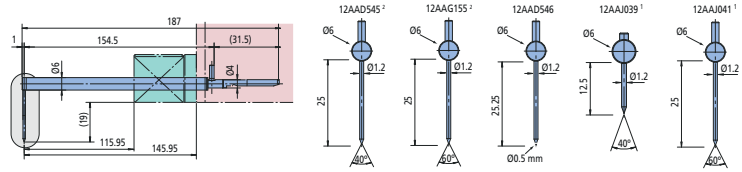

For small holes

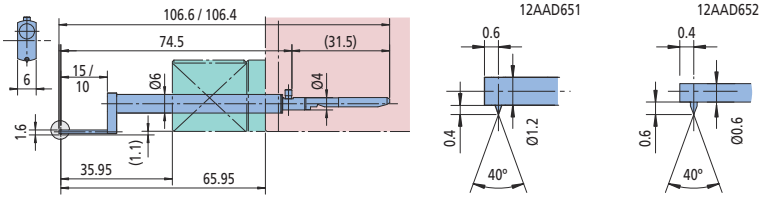

Eccentric

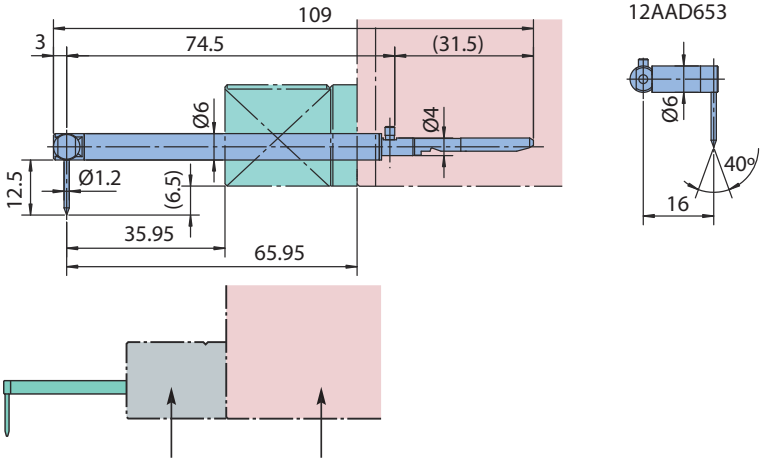

1 = only for CS-H5000CNC
2 = only for CS-5000CNC

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Roundtest RA-10

Series 211 - Form Measuring Instrument

This is a compact and affordable form measuring instrument.

The Roundtest RA-10 offers you the following benefits:

- It combines outstanding cost and performance with full measurement capabilities.
- The machine has a compact body with integrated electronics and printer, making it ideal for installation in space-restricted locations.
- You can easily view measurement results and recorded profiles on the large coloured LCD panel display.
- Despite being a low-priced model, the turntable with air bearings gives you rotational accuracy as high as (0.04+0.0006H) µm, assuring a precision that compares well with that of higher priced models.
- The control panel has large keys and an intuitive layout for easy operation.
- One-key calling function.
- One-key zero-set function.
- Support of 16 languages.
- It complies with EN ISO standard like 12181-1, 12181-2, 12781-1 and 12781-2.
- USB Communication Program – Microsoft® Excel ® based – to import results and create, save and print out inspection certificates on PC.



RA-10



Z-axis scale unit

Inch/Metric

No.	Model	Max. probing Ø [mm]	Max. turntable loading [kg]
211-541-13	RA-10	100	10

Specifications

Range	±1000 µm
Turntable	
Rotational accuracy	**Radial:** (0.04+0.0006H) µm H: Measuring height from turntable surface (mm) **Axial:** (0.04+0.0006X) µm X: Radial distance from center (mm)
Max. probing Ø	100 mm
Max. turntable loading	10 kg
Vertical column	
Vertical travel [mm]	117 mm
Max. probing height	152 mm
Display unit	
Data analysis items	Roundness, Coaxiality, Concentricity, Flatness, Runout radial
Printer	Built-in thermal line printer

Optional accessories

No.	Description
12AAH318	Z-axis scale unit
12AAH320	X-axis stopper
12AAH402	Collet (Ø 0.5-1 mm)*
12AAH403	Collet (Ø 1-1.5 mm)*
12AAH404	Collet (Ø1.5-2 mm)*
12AAH405	Collet (Ø 2-2.5 mm)*
12AAH406	Collet (Ø2.5-3 mm)*
12AAH407	Collet (Ø3,0-3,5 mm)*
12AAH408	Collet (Ø3.5-4 mm)*
12AAH409	Collet (Ø4.5-5 mm)*
12AAH410	Collet (Ø5,0-6,0 mm)*
12AAH411	Collet (Ø6-7 mm)*
12AAH412	Collet (Ø 7-8 mm)*
12AAH413	Collet (Ø8-9 mm)*
12AAH414	Collet (Ø 9-10 mm)*
12AAH420	Spacer for reference hemisphere
12AAX616	Alignment table with D.A.T [mm], for Roundtest RA-10
12AAX617	Alignment table with D.A.T [mm/inch], for Roundtest RA-10
211-013	Micro vibration isolator
211-016	Reference hemisphere
211-031	Micro chuck, OD: 0,1-1,5 mm
211-032	Quick chuck, OD: 1-79 mm, ID: 16-69 mm
211-045	Magnification calibration gauge, for Roundtest
211-051	Collet chuck holder (OD: 0,5-10 mm)*
211-052	Quick chuck
211-053	V-block A (Screw clamp)
211-054	V-block B (spring clamp)
211-055	Spigot / Socket fixture
356038	Auxiliary stage for low height workpiece, for Roundtest
997090	Gauge block set for calibration, for Roundtest
K551133	eco-fix kit Form S, 53 pcs., CMM fixtures, eco-fix series

*Individual collet for collet chuck holder should be ordered seperately.


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtest RA-10


Consumable spares

No.	Description
12AAH181	Printer paper (10 rolls)

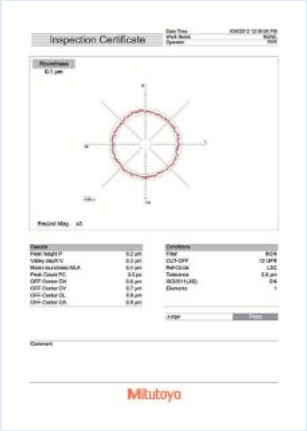

Software USB Communication Program as a free download on https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments (registration required)

Refer to ROUNDTEST RA-10 brochure

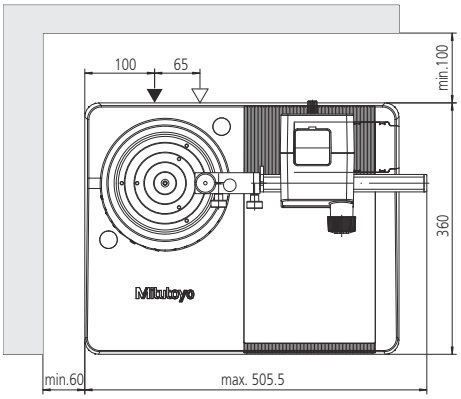


211-031


211-032


211-051


211-052


211-053


211-054


211-055


12AAH425


211-013

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtest RA-120 and RA-120P

Series 211 - Form Measuring Instrument

These are compact, affordable and simple-to-use instruments for measuring roundform geometry.

The Roundtest RA-120 and RA-120P offer you the following benefits:

- The turntable accuracy of (0.04+0.0006H) µm provides high level form analysis.

RA-120

- The RA-120 has a compact body with integrated electronics and printer, making it ideal for installation in space-restricted locations.
- You can easily view measurement results and recorded profiles on the large coloured LCD panel display.
- One-key operations.
- Support of 16 languages.
- It complies with EN ISO standard like 12181-1, 12181-2, 12781-1 and 12781-2
- USB Communication Program – Microsoft® Excel ® based – to import results and create, save and print out inspection certificates on PC.

RA-120P

- The RA-120P is a PC based model with all operations controlled via powerful ROUNDPAK software.
- Software ROUNDPAK gives you excellent possibilities for single measurement and part programming.




RA-120



RA-120P

Specifications

Turntable	
Rotational accuracy	**Radial:** (0,04+0,0006H) µm H: Measuring height from turntable surface (mm) **Axial:** (0,04+0,0006X) µm X: Radial distance from center (mm)
Max. probing Ø	280 mm 380 mm in reverse position mm
Max. workpiece ø	440 mm
Max. turntable loading	25 kg
Centering range	±3 mm
Leveling range	±1°
Vertical column	
Vertical travel	280 mm
Max. probing height	280 mm above turntable surface 480 mm in reverse position
Max. probing depth	100 mm (minimum ID: 30 mm)
Display unit	
Data analysis items	Roundness, Coaxiality, Flatness, Runout (radial), Runout (axial), Thickness deviation, Parallelism, Perpendicularity
Printer	Built-in thermal line printer (RA-120)
Software	**ROUNDPAK** (only RA-120P)



Software USB Communication Program as a free download on https://mitutoyo.eu/downloads/free-software-and-updates-and-free-trials/free-software-form-measuring-instruments (registration required) (only RA-120)

Refer to ROUNDTEST RA-120 brochure

Scan QR Code with your mobile device and watch our product videos on YouTube

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtest RA-120 and RA-120P

Optional accessories

Other optional and standard accessories are listed later in this section for accessories and styli.

later in this section for ac-
cessories and styli.

Series 211 - Form Measuring Instrument


This is a compact roundness tester with mechanical table or D.A.T. (Digital Adjustment Table).


The D.A.T. gives you the following benefits:

- The turntable displays centering and leveling adjustments digitally, making this challenging task easy enough for even an untrained operator to perform, through these four simple steps:

1. Preliminary measurement of two cross sections on the workpiece.2. The centering and leveling adjustr
2. The centering and leveling adjustment values are displayed.3. The digital micrometer heads on the ro
3. The digital micrometer heads on the rotary table are adjusted to match the values displayed.4. Center
4. Centering and leveling is complete.[Centering range : ±3 mm - Leveling range : ±1°]

[Centering range : ±3 mm - Leveling range : ±1°]

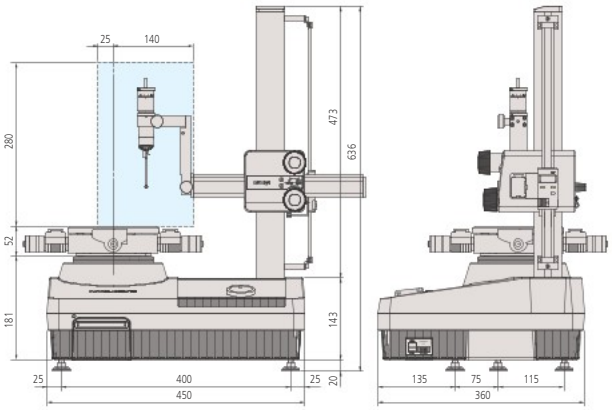

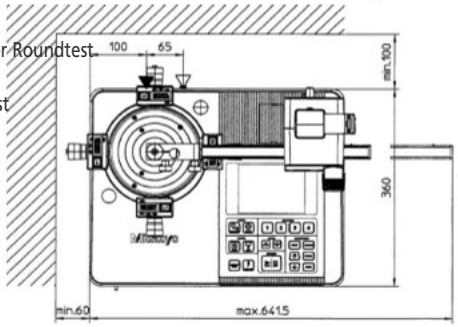


Optional accessories

No.	Description
12AAH320	X-axis stopper
12AAH402	Collet (Ø 0.5-1 mm)*
12AAH403	Collet (Ø 1-1.5 mm)*
12AAH404	Collet (Ø1.5-2 mm)*
12AAH405	Collet (Ø 2-2.5 mm)*
12AAH406	Collet (Ø2.5-3 mm)*
12AAH407	Collet (Ø3,0-3,5 mm)*
12AAH408	Collet (Ø3.5-4 mm)*
12AAH409	Collet (Ø4.5-5 mm)*
12AAH410	Collet (Ø5,0-6,0 mm)*
12AAH411	Collet (Ø6-7 mm)*
12AAH412	Collet (Ø 7-8 mm)*
12AAH413	Collet (Ø8-9 mm)*
12AAH414	Collet (Ø 9-10 mm)*
211-013	Micro vibration isolator
211-014	Three-jaw chuck, OD: 2-78 mm, ID: 25-68 mm 25-68 mm
211-016	Reference hemisphere
211-031	Micro chuck, OD: 0,1-1,5 mm
211-032	Quick chuck, OD: 1-79 mm, ID: 16-69 mm mm
211-045	Magnification calibration gauge, for Roundtest
211-061	Collect chuck holder
356038	Auxiliary stage for low height work-piece, for Roundtest. piece, for Roundtest
997090	Gauge block set for calibration, for Roundtest Roundtest
K551133	eco-fix kit Form S, 53 pcs., CMM fixtures, eco-fix series



211-016



211-013



Z-axis scale unit (optional)



X-axis stop

https://www.youtube.com/watch?v=V8c7QDPrIGU

Inch/Metric

No.	Model	Max. probing diameter [mm]	Max. workpiece ø [mm]	Max. turntable loading [kg]
211-543-13	RA-120 with D.A.T. function	280	440	25
211-544-13	RA-120 with mechanical turntable	280	440	25
211-546-13	RA-120P with D.A.T. function	280	440	25
211-547-11	RA-120P with mechanical turntable	280	440	25

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Roundtest RA-1600

Series 211 - Form Measuring System

This is a PC-compliant form measuring system which allows you to measure roundform geometry like cylindricity.

The Roundtest RA-1600 offers the following benefits:

- It is equipped with a high accurate turntable accuracy of (0.02+0.0006H) µm.
- You can carry out simple & accurate centering and leveling of the workpiece with D.A.T. (Digital Adjustment Table).
- The user friendly software, ROUNDPAK, gives you easy drag and drop usage.
- ROUNDPAK also has easy-to-use part programming and single measurement functions.
- A remote control box is including allowing you easy operation.
- There is also an auto follow function for easy and quick pre-centering of the workpiece.



RA-1600

Inch/Metric

No.	Model	Max. probing Ø [mm]	Max. turntable loading [kg]
211-733-13	RA-1600	280	25

Specifications

Rotational accuracy	**Radial:** (0,02+0,0006H) µm H: Measuring height from turntable surface (mm) **Axial:** (0,02+0,0006X) µm X: Radial distance from center (mm)
Rotational speed	4, 6, 10 rpm
Max. probing Ø	280 mm
Centering range	±3 mm
Leveling range	±1°
Max. probing height	300 mm above turntable surface
Max. probing depth	91 mm (minimum ID : ø32 mm) 50 mm (minimum ID : ø7 mm)
Straightness	0,2 µm / 100 mm 0,3 µm / 300 mm
Parallelism with turntable axis	1,5 µm / 300 mm
Software	**ROUNDPAK**
Optional accessories	Other optional and standard accessories are listed later in this section for accessories and styli.

Optional accessories

No.	Description
178-188	Vibration isolator standard base
178-181	Side table
12AAK120	Monitor arm, for 12AAK110 /178-188 / 178-189
12AAF203	Double length detector holder
12AAF204	Large diameter detector holder
12AAH402	Collet (Ø 0.5-1 mm)*
12AAH403	Collet (Ø 1-1.5 mm)*
12AAH404	Collet (Ø1.5-2 mm)*
12AAH405	Collet (Ø 2-2.5 mm)*
12AAH406	Collet (Ø2.5-3 mm)*
12AAH407	Collet (Ø3,0-3,5 mm)*
12AAH408	Collet (Ø3.5-4 mm)*
12AAH409	Collet (Ø4.5-5 mm)*
12AAH410	Collet (Ø5,0-6,0 mm)*
12AAH411	Collet (Ø6-7 mm)*
12AAH412	Collet (Ø 7-8 mm)*
12AAH413	Collet (Ø8-9 mm)*
12AAH414	Collet (Ø 9-10 mm)*
211-014	Three-jaw chuck, OD: 2-78 mm, ID: 25-68 mm
211-031	Micro chuck, OD: 0,1-1,5 mm
211-032	Quick chuck, OD: 1-79 mm, ID: 16-69 mm
211-045	Magnification calibration gauge, for Roundtest
211-061	Collect chuck holder
356038	Auxiliary stage for low height workpiece, for Roundtest
997090	Gauge block set for calibration, for Roundtest
K551133	eco-fix kit Form S, 53 pcs., CMM fixtures, eco-fix series


*Individual collet for collet chuck holder should be ordered seperately.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Roundtest RA-1600







ROUNDPAK
Simple to operate even with a full set of parameters and analysis functions.


Refer to ROUNDTEST RA-1600 brochure

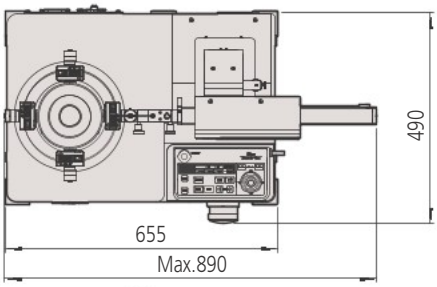




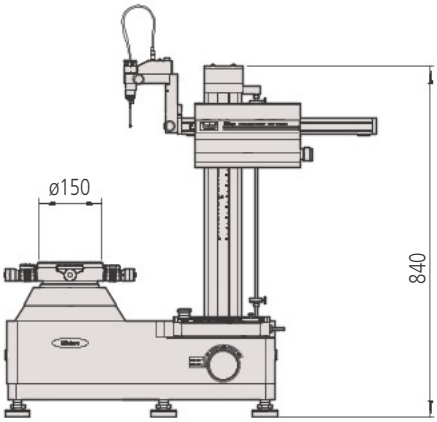


12AAF204



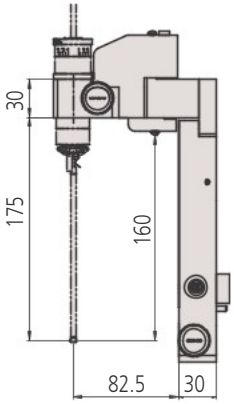

12AAF203

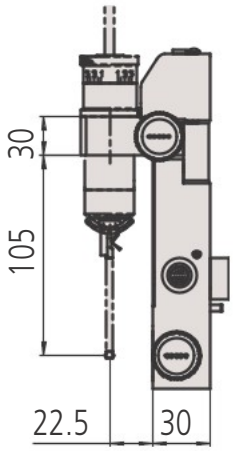

12AAF204

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Roundtest RA-2200

Series 211 - Form Measuring Instrument

This is a highly accurate form measuring system which allows you to measure roundform geometry like cylindricity.

The Roundtest RA-2200 offers the following benefits:

- It has fully motorised axes movement.
- Its extremely high turntable accuracy of (0.02+0.00035H) µm gives you excellent form analysis.
- The user friendly software, ROUNDPAK, gives you easy drag and drop usage and a wide range of parameters.
- ROUNDPAK also has easy-to-use part programming and single measurement functions.
- A huge number of styli provides you with maximum flexibility.
- There is an auto follow function for easy and quick pre-centering of the workpiece.

There is a wide variety of models available to suit any application.
RA-2200DS/DH: These models have a navigation function supplied as standard, to quickly and simply guides you through the centering and leveling task. The models are equipped with the D.A.T. (Digital Adjustment Table).

RA-2200AS/AH: The models have an automatic centering and leveling turntable supplied as standard, freeing you from the centering and leveling task. The models are equipped with the A.A.T. (Automatic Adjustment Table).



RA-2200AS

Metric

No.	Model	Centering/leveling adjustment	Vertical travel	Max. probing Ø [mm]	Max. workpiece Ø [mm]	Max. turntable loading [kg]
211-511-11	RA-2200AS	AAT	300 mm	300	580	30
211-512-11	RA-2200AH	AAT	500 mm	300	580	30
211-514-13	RA-2200DS	DAT	300 mm	300	580	30
211-516-13	RA-2200DH	DAT	500 mm	300	580	30

Specifications

Turntable	
Rotational accuracy	**Radial:** (0,02+0,00035H) µm H: Measuring height from turntable surface (mm) **Axial:** (0,02+0,00035X) µm X: Radial distance from center (mm)
Rotational speed	2, 4, 6, 10 rpm
Max. probing Ø	300 mm
Max. workpiece Ø	580 mm
Centering range	**DS / DH:** ±5 mm **AS / AH:** ±3 mm
Leveling range	±1°
Vertical column	
Max. probing height	**AS / DS :** 300 mm **AH / DH:** 500 mm above turntable surface
Max. probing depth	85 mm (minimum ID : ø32 mm) 50 mm (minimum ID : ø7 mm)
Straightness	0,1 µm / 100 mm **AS / DS :** 0,15 µm / 300 mm **AH / DH:** 0,25 µm / 500 mm
Parallelism with rotation center	**AS / DS :** 0,7 µm / 300 mm **AH / DH:** 1,2 µm / 500 mm
Horizontal axis	
Straightness	0,7 µm / 150 mm
Perpendicularity to rotation center	1 µm / 150 mm
Software	**ROUNDPAK** FORMTRACEPAK-AP (optional for roughness detection unit)

Optional accessories


No.	Description
12AAF203	Double length detector holder
12AAF204	Large diameter detector holder
12AAK120	Monitor arm, for 12AAK110 /178-188 / 178-189
12AAL019	Side table
12AAY644	Roughness detection unit, for Roundtest RA-2200/H5200 AS/AH/DS/DH
211-014	Three-jaw chuck, OD: 2-78 mm, ID: 25-68 mm
211-031	Micro chuck, OD: 0,1-1,5 mm
211-032	Quick chuck, OD: 1-79 mm, ID: 16-69 mm
211-045	Magnification calibration gauge, for Roundtest
356038	Auxiliary stage for low height workpiece, for Roundtest
K551134	eco-fix kit Form L, 82 pcs., CMM fixtures, eco-fix series

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtest RA-2200




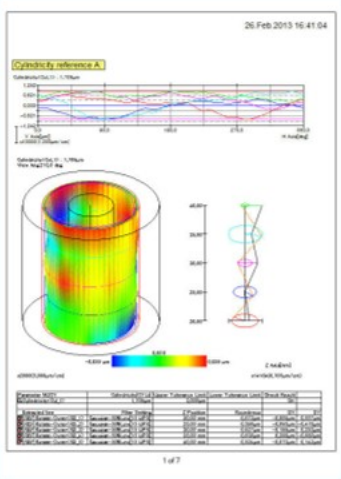

ROUNDPAK
Simple to operate even with a full set of parameters and analysis functions.

Refer to ROUNDTEST RA-2200 brochure

Scan QR Code with your mobile device and watch our product videos on YouTube

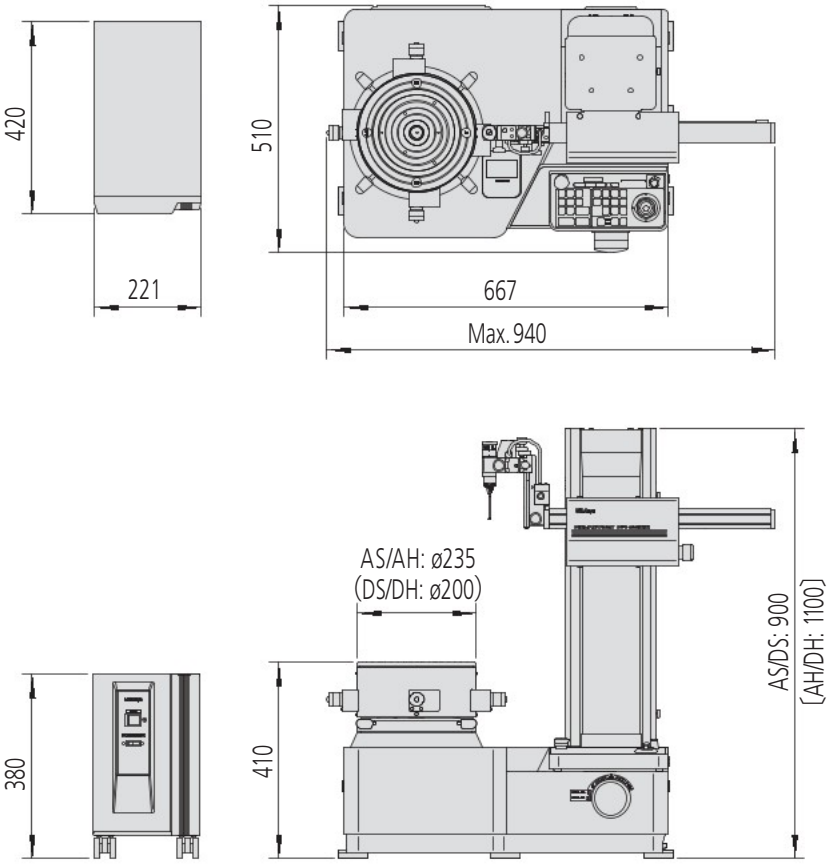

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Roundtest RA-H5200

Series 211 - High-precision Form Measuring Instrument

This is a highly accurate, precision form measuring system developed to give you the highest accuracy as well as high flexibility and analytical capability.

The Roundtest RA-H5200 offers the following benefits:

- Its integrated vibration isolator helps you to measure within the best conditions.
- It has a high measuring range and loading mass.
- The user friendly software, ROUNDPAK, gives you easy drag and drop usage and a wide range of parameters.
- ROUNDPAK also has easy-to-use part programming and single measurement functions.
- A.A.T. (Automatic Adjustment Table) gives you fully automatic centering and leveling.
- There is an auto follow function for easy and quick pre-centering of the workpiece.



RA-H5200



Highly accurate, automatic centering/leveling turntable

The performance of this turntable has been achieved through exceptional manufacturing accuracy of the critical components, in addition to a high-accuracy air-bearing that provides superior rigidity. The resulting rotational accuracy, the heart of a Roundtest measuring system, is at 0.02+0.00035H µm.

No.	Model	Centering/leveling adjustment	Max. workpiece Ø [mm]
211-531-11	RA-H5200AS	AAT	680
211-532-11	RA-H5200AH	AAT	680

AAT: Automatic adjustment table

Specifications

Turntable	
Rotational accuracy	**Radial:** (0,02+0,00035H) µm H: Measuring height from turntable surface (mm) **Axial:** (0,02+0,00035X) µm X: Radial distance from center (mm)
Rotational speed	2, 4, 6, 10 rpm Auto centering: 20 rpm
Max. probing Ø	400 mm
Max. workpiece Ø	680 mm
Max. turntable loading	80 kg w/o auto centering 65 kg
Centering range	±5 mm
Leveling range	±1°
Vertical column	
Max. probing height	**AS :** 350 mm **AH:** 550 mm above turntable surface
Max. probing depth	85 mm (minimum ID : ø32 mm) 50 mm (minimum ID : ø7 mm)
Straightness	**AS / AH :** 0,05 µm / 100 mm **AS :** 0,14 µm / 350 mm **AH :** 0,2 µm / 550 mm
Parallelism with rotation center	**AS :** 0,2 µm / 350 mm **AH :** 0,32 µm / 550 mm
Horizontal axis	
Straightness	0,4 µm / 200 mm
Perpendicularity to rotation center	0,5 µm / 200 mm
Software	**ROUNDPAK** FORMTRACEPAK-AP (optional for roughness detection unit)
Optional accessories	Other optional and standard accessories are listed later in this section for accessories and styli.

Optional accessories


No.	Description
12AAF203	Double length detector holder
12AAF204	Large diameter detector holder
12AAF205	Triple length holder for exta-deep holes
12AAL019	Side table
12AAY644	Roughness detection unit, for Roundtest RA-2200/H5200 AS/AH/DS/DH
211-014	Three-jaw chuck, OD: 2-78 mm, ID: 25-68 mm
211-031	Micro chuck, OD: 0,1-1,5 mm
211-032	Quick chuck, OD: 1-79 mm, ID: 16-69 mm
211-045	Magnification calibration gauge, for Roundtest
K551134	eco-fix kit Form L, 82 pcs., CMM fixtures, eco-fix series

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtest RA-H5200



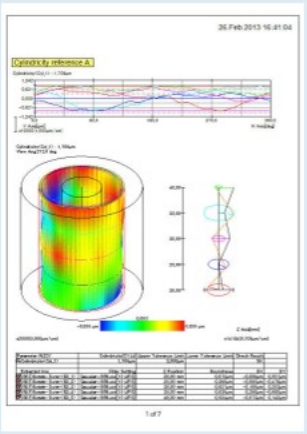

ROUNDPAK
Simple to operate even with a full set of parameters and analysis functions.



211-014




211-032




211-031




211-045




Sliding detector-unit holder provided as a standard feature
The detector-unit holder is equipped with a sliding mechanism, enabling one-touch measurement of a workpiece with a d with a deep hole having a thick wall, which has been difficult with the conventional standard arm. Sliding distance : 112 mm.

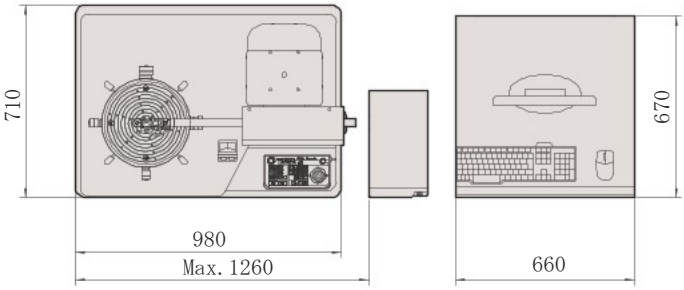

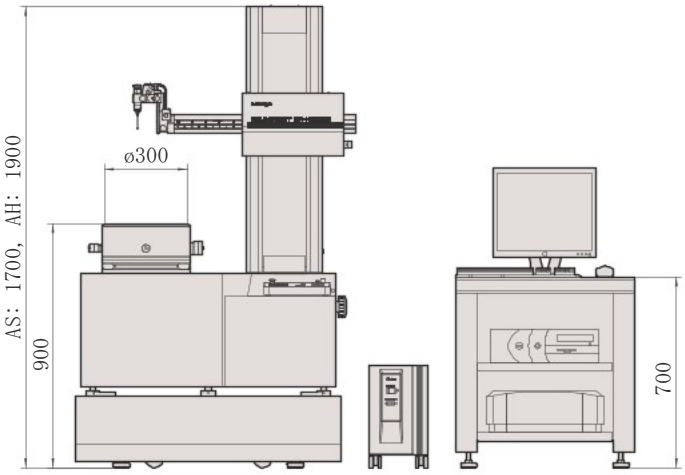


Dimensions


mm

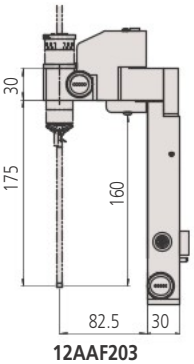

12AAF203



12AAF204



12AAF205

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Roundtest Extreme RA-2200 PLUS

Series 211 - High-precision Form Measuring Instrument

This is a fully automatic CNC form measuring instrument that gives highly accurate results.

The Roundtest Extreme RA-2200 PLUS offers you the following benefits:

- It has a CNC controlled measuring system with orientation steps of 1°.
- The extremely high turntable accuracy of (0.02+0.00035H) µm gives you highly accurate form analysis.
- The user friendly software, ROUNDPAK, gives you easy drag and drop usage and a wide range of parameters.
- ROUNDPAK also has easy-to-use part programming and single measurement functions.
- An automatic centering and leveling turntable A.A.T. (Automatic Adjustment Table) is supplied as standard, freeing you from the centering and leveling task.



RA-2200 PLUS

Metric


No.	Model	Centering/leveling adjustment	Vertical travel	Max. probing Ø [mm]	Max. workpiece Ø [mm]
211-517-11	RA-2200AS PLUS	AAT	300 mm	256	580
211-518-11	RA-2200AH PLUS	AAT	500 mm	256	580

Specifications

Turntable	
Rotational accuracy	**Radial:** (0,02+0,00035H) µm H: Measuring height from turntable surface (mm) **Axial:** (0,02+0,00035X) µm X: Radial distance from center (mm)
Rotational speed	2, 4, 6, 10 rpm
Max. probing Ø	256 mm
Max. workpiece Ø	580 mm
Max. turntable loading	30 kg
Centering range	±3 mm
Leveling range	±1°
Vertical column	
Max. probing height	**AS :** 300 mm **AH:** 500 mm above turntable surface
Max. probing depth	104 mm (minimum ID : ø32 mm) 26 mm (minimum ID : ø12,7 mm)
Straightness	**AS / AH :** 0,1 µm / 100 mm **AS :** 0,15 µm / 300 mm **AH :** 0,25 µm / 500 mm
Parallelism with rotation center	**AS :** 0,7 µm / 300 mm **AH :** 1,2 µm / 500 mm
Horizontal axis	
Straightness	0,7 µm / 150 mm
Perpendicularity to rotation center	1 µm / 150 mm
Software	**ROUNDPAK** FORMTRACEPAK-AP (optional for roughness detection unit)

Optional accessories

No.	Description
178-188	Vibration isolator standard base
12AAK120	Monitor arm, for 12AAK110 /178-188 / 178-189
178-181	Side table
12AAX859	Roughness detection unit; 0,75 mN, for Roundtest RA PLUS series
12AAX861	Roughness detector 4 mN, for Roundtest RA PLUS series
K551134	eco-fix kit Form L, 82 pcs., CMM fixtures, eco-fix series



ROUNDPAK
Simple to operate even with a full set of parameters and analysis functions.

Refer to ROUNDTEST RA-2200 brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtest Extreme RA-H5200 PLUS

Series 211 - High-precision Roundness/Cylindricity Measuring System

This is a CNC form measuring instrument that combines high accuracy with automatic CNC measurements.

The Roundtest Extreme RA-H5200 PLUS offers you the following benefits:


- An integrated vibration isolator helps you to measure within best conditions.
- It will greatly improve your productivity and efficiency.
- You can take highly accurate, fast and operator-free measurements.
- The user friendly software, ROUNDPAK, gives you easy drag and drop usage and a wide range of parameters.
- ROUNDPAK also has easy-to-use part programming and single measurement functions.
- An automatic centering and leveling turntable A.A.T. (Automatic Adjustment Table) is supplied as standard, freeing you from the centering and leveling task.

Specifications

Turntable	
Rotational accuracy	**Radial:** (0,02+0,00035H) µm H: Measuring height from turntable surface (mm) **Axial:** (0,02+0,00035X) µm X: Radial distance from center (mm)
Rotational speed	2, 4, 6, 10 rpm Auto centering: 20 rpm
Max. probing Ø	356 mm
Max. workpiece Ø	680 mm
Max. turntable loading	80 kg w/o auto centering 65 kg
Centering range	±5 mm
Leveling range	±1°
Vertical column	
Max. probing height	**AS :** 350 mm **AH:** 550 mm above turntable surface
Max. probing depth	104 mm (minimum ID : ø32 mm) 26 mm (minimum ID : ø12,7 mm)
Parallelism with rotation center	**AS :** 0,2 µm / 350 mm **AH :** 0,32 µm / 550 mm
Horizontal axis	
Straightness	0,4 µm / 200 mm
Perpendicularity to rotation center	0,5 µm / 200 mm
Software	**ROUNDPAK** FORMTRACEPAK-AP (optional for roughness detection unit)
Optional accessories	Other optional and standard accessories are listed later in this section for accessories and styli.

Optional accessories

No.	Description
178-181	Side table
12AAX859	Roughness detection unit; 0,75 mN, for Roundtest RA PLUS series
12AAX861	Roughness detector 4 mN, for Roundtest RA PLUS series
K551134	eco-fix kit Form L, 82 pcs., CMM fixtures, eco-fix series
211-014	Three-jaw chuck, OD: 2-78 mm, ID: 25-68 mm
211-031	Micro chuck, OD: 0,1-1,5 mm
211-032	Quick chuck, OD: 1-79 mm, ID: 16-69 mm
211-045	Magnification calibration gauge, for Roundtest



ROUNDPAK
Simple to operate even with a full set of parameters



RA-H5200 PLUS

Metric

No.	Model	Centering/leveling adjustment	Vertical travel	Max. probing Ø [mm]	Max. workpiece Ø [mm]
211-533-11	RA-H5200AS PLUS	AAT	350 mm	356	680
211-534-11	RA-H5200AH PLUS	AAT	550 mm	356	680

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Roundtracer Flash

Serie 211 - Form Measuring Instrument

The Roundtracer Flash is a flexible optical measuring system, fast and precise. The instrument is a good solution for accurate quality control in a laboratory as well as in the production environment.

The Roundtracer Flash offers you following benefits:

- Dimensional, position, form analysis in static or dynamic mode.
- Image sensors integrated in a fixed position across the product structure to cover the entire measurement range.
- Less mechanical stress
- Side-by-side 2D image architecture
- Short cycle time
- One-click measuring cycle activation
- Graphical user interface via touchscreen monitor
- Easy part loading
- IO Communication via Profinet, Profibus, Ethernet IP
- Machine tool feedback compensation

Extensive toolkits to measure:

- Thread for fastener and medical industry
- Camshafts
- Impellers including blade-by-blade analysis



Roundtracer Flash with optional pivot arm


No.	Model	Range Z-axis [mm]	Measuring range Ø [mm]
211-581-01MEU	Roundtracer Flash S100	100	60
211-583-01MEU	Roundtracer Flash S300	300	60

Specifications


Range Z-axis	100 / 300 mm
Measuring range Ø [mm]	60
Max. turntable loading	6 kg

Optional accessories


No.	Description
12AAX422MEU	3-jaw chuck incl. shank set
12AAX423MEU	Face plate incl. shank set
12AAX424MEU	6-jaw chuck incl. shank set, for Roundtracer Flash
12AAX425MEU	Pivoting Arm for the Display, for Roundtracer Flash
12AAX426MEU	Industrial Keyboard, for Roundtracer Flash
12AAX427MEU	Verification Master for S100, for Roundtracer Flash
12AAX429MEU	Verification Master for S300, for Roundtracer Flash
63AAA984	Fastener measurement kit for Roundtracer Flash, for Roundtracer Flash
63AAA988	Easybox 8I/O Kit for Roundtracer Flash, for Roundtracer Flash
63AAA989	Gagepod Profinet/Profibus Kit for Roundtracer Flash, for Roundtracer Flash
63AAA991	Instant manual thermal probe kit for Roundtracer Flash, for Roundtracer Flash
63AAA990	Kit Datamatrix reader, for Roundtracer Flash

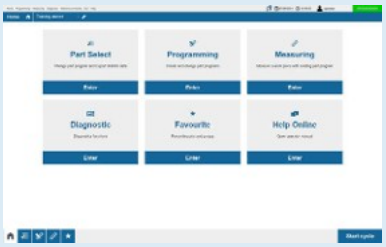

Home screen

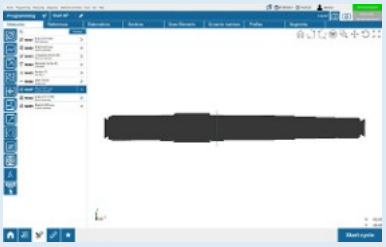

Programming screen

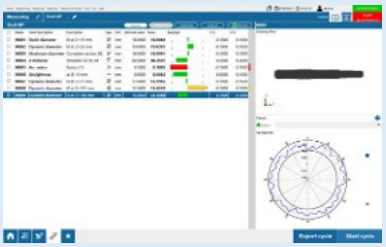

Result screen

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Roundtracer Extreme RTX-0605-A

Serie 211 - Form Measuring Instrument

Full-fledged CNC roundness measuring system with dramatically-enhanced measurement flexibility, measurement throughput, and measurement result reproducibility.
A complete new system which can combine form, contour and surface roughness measurement into one device.

The Roundtracer Extreme offers you following benefits:

- 3 in 1
- Motorized detector slider
- Stylus positioning
- High measurement throughput
- High reproducibility & repeatability
- Enhanced optional measurement functions like contour & surface roughness and twist measurement

Specifications

Turntable	
Rotational accuracy	**Radial**: (0,02+0,00035H) µm H: Measuring height (mm) **Axial**: (0,02+0,00035R) µm R: Measuring radius (mm)
Vertical column	
Max. measurement height	500 mm



Form measurement



Contour measurement



Surface roughness measurement



Refer to ROUNDTRACER RTX brochure

Scan QR Code with your mobile device and watch our product videos on YouTube



Metric

No.	Model	Centering/leveling adjustment	Vertical travel	Max. workpiece Ø [mm]	Max. probing Ø [mm]	Max. turntable loading [kg]
211-552-12	RTX-605-A	AAT	550 mm	680	328	60

AAT Automatic adjustment table


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Optional Styli for Roundtest


Interchangeable styli for RA-10, RA-120, RA-120P, RA-1600, RA-2200, RA-H5200




12AAL021 - Standard
ø 1,6 mm tungsten carbide




12AAL022 - Notch
ø 3 mm tungsten carbide




12AAL023 - Deep groove
R 0,25 mm sapphire




12AAL024 - Corner
R 0,25 mm sapphire




12AAL025 - Cutter mark
R 15 mm tungsten carbide




12AAL026 - Small hole
ø 0,8 mm tungsten carbide




12AAL027- Small hole
ø 1 mm tungsten carbide




12AAL028 - Small hole
ø 1,6 mm tungsten carbide




12AAL029- Extra small hole
ø 0,5 mm tungsten carbide




12AAL030- ø 1,6 mm ball
ø 1,6 mm tungsten carbide




12AAL031- Disc
ø 12 mm




12AAL032- Crank
ø 0,5 mm tungsten carbide




12AAL033- Crank
ø 1 mm tungsten carbide




12AAL034- Flat surface
Tungsten carbide




12AAL035- 2X-long standard
ø 1,6 mm tungsten carbide




12AAL036- 2X-long notch
ø 3 mm tungsten carbide




12AAL037- 2X-long deep groove
R 0,25 mm sapphire




12AAL038- 2X-long corner
R 0,25 mm sapphire




12AAL039- 2X-long type cutter mark
R 15 mm tungsten carbide




12AAL040- 2X-long small hole
ø 1 mm tungsten carbide




12AAL041- 3X-long standard
ø 1,6 mm tungsten carbide




12AAL042- 3X-long deep groove
R 0,25 mm sapphire



12AAL043- Stylus shank
for mounting M2 - CMM stylus



12AAL044- Stylus shank groove
for mounting M2 - CMM stylus



12AAL045- Stylus shank 2X groove
for mounting M2 - CMM stylus

Standard accessories

No.	Description
12AAL021	Standard stylus

Optional accessories

No.	Description
12AAL022	Stylus for notches, Ø3 mm, tungsten carbide
12AAL023	Stylus for deep groove, R 0,25 mm, Sapphire
12AAL024	Stylus for corner, R 0,25 mm, Sapphire
12AAL025	Stylus for cutter marks, R 15 mm, tungsten carbide
12AAL026	Stylus for small holes, Ø0,8 mm, tungsten carbide
12AAL027	Stylus for small holes, Ø1 mm, tungsten carbide
12AAL028	Stylus for small holes, Ø1,6 mm, tungsten carbide
12AAL029	Stylus for extra small hole, Ø0,5 mm, tungsten carbide
12AAL030	Stylus ball type, Ø1,6 mm, tungsten carbide
12AAL031	Stylus disc type, Ø12 mm
12AAL032	Stylus for cranks, Ø0,5 mm, tungsten carbide
12AAL033	Stylus for cranks, Ø1 mm, tungsten carbide
12AAL034	Stylus for flat surface, tungsten carbide
12AAL035	Stylus 2X-long standard type, Ø1,6 mm, tungsten carbide*1
12AAL036	Stylus 2X-long type for notches, Ø3 mm, tungsten carbide*1
12AAL037	Stylus 2X-long type for deep grooves, R 0,25 mm, Sapphire*1
12AAL038	Stylus 2X-long type for corners, R 0,25 mm, Sapphire*1
12AAL039	Stylus 2X-long type for cutter marks, R 15 mm, tungsten carbide*1
12AAL040	Stylus 2X-long type for small hole, Ø1 mm, tungsten carbide*1
12AAL041	Stylus 3X-long standard type, Ø1,6 mm, tungsten carbide*1
12AAL042	Stylus 3X-long type for deep grooves, R 0,25 mm, Sapphire*1
12AAL043	Stylus shank, for mounting M2-CMM stylus
12AAL044	Stylus shank for grooves, for mounting M2-CMM stylus
12AAL045	Stylus shank 2X-long type for grooves, for mounting M2-CMM stylus*1

*1 Not available for RA-10, RA-120, RA-120P
*2 Measuring is only possible in the vertical direction


Notches


Flat surface


Cutter marks


Corner


Small hole

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Styli for Roundtest


Interchangeable styli for RA-2200 PLUS, RA-H5200 PLUS

Standard accessories


No.	Description
12AAE301	Stylus standard type for CNC, Ø1,6 mm, tungsten carbide
12AAE302	Stylus for flat surfaces for CNC, Ø1,6 mm, tungsten carbide

Optional accessories


No.	Description
12AAE303	Ball stylus for CNC, Ø1,6 mm, tungsten carbide
12AAE304	Ball stylus for CNC, Ø0,8 mm, tungsten carbide
12AAE305	Ball stylus for CNC, Ø0,5 mm, tungsten carbide
12AAE306	Stylus for deep holes, Ø1,6 mm, tungsten carbide
12AAE307	Stylus for deep holes, Ø1,6 mm, tungsten carbide
12AAE308	Stylus for deep grooves, Ø1,6 mm, tungsten carbide
12AAE309	Stylus for notches, Ø3 mm, tungsten carbide
12AAE310	Stylus for grooves, Ø1,6 mm, tungsten carbide




12AAE301 - Standard
ø 1,6 mm tungsten carbide




12AAE302 - Flat surface
ø 1,6 mm tungsten carbide




12AAE303 - ø 1,6 mm ball
ø 1,6 mm tungsten carbide




12AAE304 - ø 0,8 mm ball
ø 0,8 mm tungsten carbide




12AAE305 - ø 0,5 mm ball
ø 0,5 mm tungsten carbide




12AAE306 - Deep hole
ø 1,6 mm tungsten carbide




12AAE307 - Deep hole
ø 1,6 mm tungsten carbide



12AAE308 - Deep groove
ø 1,6 mm tungsten carbide



12AAE309 - Notch
ø 3 mm tungsten carbide



12AAE310 - Groove
ø 1,6 mm tungsten carbide

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Optional Accessories for Roundtest

Optional accessories for Roundtest and Roundtest Extreme

No.	Description
211-061	Available collets see RA-10

Auxiliary stage for a low-height workpiece

No.	Description
356038	Used for measuring a workpiece whose diameter is 40 mm or less and whose height is 20 mm or less



356038

Chuck - Quick chuck

This chuck is useful when measuring small workpieces. You can easily clamp them with its knurled ring.

No.	Holding capacity [mm]	External dimensions [mm]
211-032.	Internal jaw: ID = ø 16 - 69 External jaw: OD = ø 1 - 79	ø118 x 41
211-031.	Internal jaw: ø 0,1 - 1,5	ø 118 x 48,5



211-032



211-031

Chuck - Three jaw chuck (key operated)

No.	Holding capacity [mm]	External dimensions [mm]
211-014	Internal jaw: ID = ø 25 - 68 Internal jaw: OD = ø 2 - 35 External jaw: OD = ø 35 - 78	ø157 x 70,6



211-014

Cylindric square


No.	Cylindricity [µm]	Perpendicularity [µm]	Straightness [µm]
350850	2	3	1



350850

Gauge block set for calibration

No.	Description
997090	Standard accessory for RA-2200, RA-2200 PLUS Standard accessory for RA-H5200 and RA-H5200 PLUS



997090

Magnification checking gauge

No.	Graduation [µm]
211-045	0,2



211-045

Origin point gauge


No.	Description
998382	Standard accessory for RA-1600, RA-2200 and RA-H5200



998382

Vibrator isolator and accessories (WxDxH)

No.	External dimensions [mm]	Description
12AAL019	660 x 670 x 700	Side table
178-023-1	765 x 565 x 48	Manually charged vibration isolator
178-025	750 x 550 x 59	Automatically charged vibration isolator



178-025


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Software
USB & SJ Communication Tool & SJ-220 APP

Optional accessories

No.	Description
12AAD510	USB cable for SJ-310 / SJ-410 series
12AAH490	USB Cable for SJ-500 / SV-2100
63AAA211	USB communication cable for SJ-210, Length 1,8 m
264-628	U-WAVE-TIB, Wireless Unit for Measuring Instrument
12BAS451	USB 2.0 cable, for Surftest SJ-220

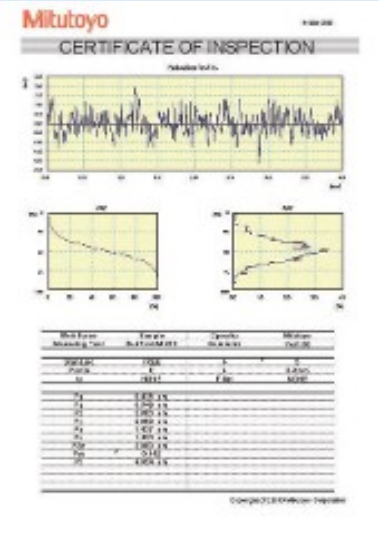

Output record from Microsoft® Excel®

Scan QR Code with your mobile device and watch our product videos on YouTube

Series 178 - Control Software for SJ series, SV-2100


USB Communication Tool is a control software for Surftest SJ-210 / SJ-310 / SJ-410 / SJ-500 and SV-2100.
SJ Communication Tool is a control software for Surftest SJ-220.
The SJ-220 APP communicates with the Surftest SJ-220 via Bluetooth and U-WAVE TIB .

The tools offer you the following benefits:

- It is available for free download at www.mitutoyo.eu (registration is required).
- Output software is based on Microsoft® Excel® and is used for device control and the creation of measurement data reports
- All offer the definition of measurement variables and graphical display of the measurement profile.
- A USB cable is required for connection to the USB Communication Tool.
- The SJ-220 connection to the SJ Communication Tool can be established via Bluetooth adapter U-Wave TIB or a USB cable.



Input mask SJ-Communication Tool for Surftest SJ-220

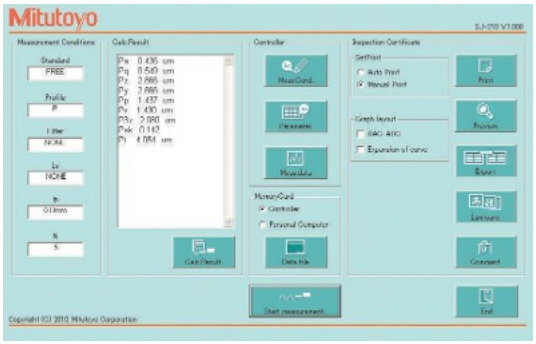

Input mask USB Communication Tool



Surftest SJ-220 APP


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Optional Styli
for Surftest, Formtracer Avant and SV-C series

Detectors

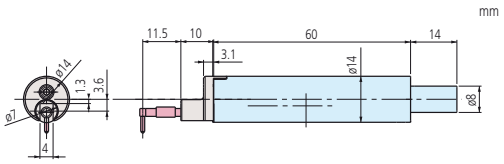


Order No	Measuring Force	Angle/Radius	Inclusive Stylus
178-396-2	0,75 mN	R2 µm, 60°	12AAC731
178-397-2	4 mN	R5 µm, 90°	12AAB403

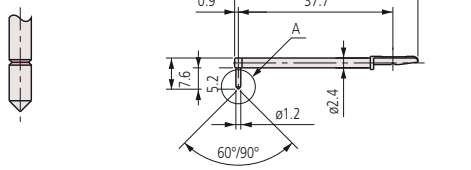


No.	Angle	Radius
12AAE882	60°	1 µm
12AAE924	90°	1 µm
12AAC731	60°	2 µm
12AAB403	90°	5 µm
12AAB415	90°	10 µm
12AAE883	60°	250 µm

Standard

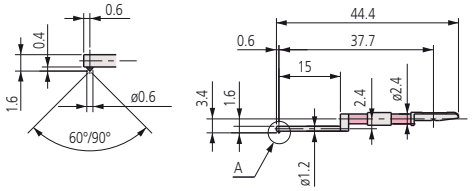


No.	Angle	Radius
12AAC732	60°	2 µm
12AAB404	90°	5 µm
12AAB416	90°	10 µm

For small hole

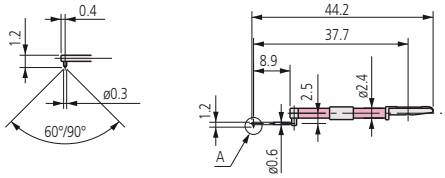

No.	Angle	Radius
12AAC733	60°	2 µm
12AAB405	90°	5 µm
12AAB417	90°	10 µm

For extra-small hole

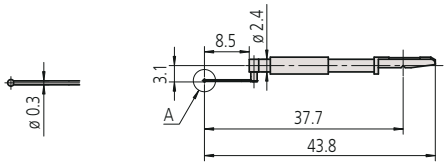

No.	Angle	Radius
12AAJ662	-	250 µm

For ultra-small hole



12AAG202 Extension rod 50 mm
(*not suitable for SJ-220/SJ-310/SJ-410)



12AAG203 Extension rod 100 mm
(*not suitable for SJ-220/SJ-310/SJ-410)


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Styli
for Surftest, Formtracer Avant and SV-C series

No.	Angle	Radius
12AAC734	60°	2 µm
12AAB406	90°	5 µm
12AAB418	90°	10 µm


mm

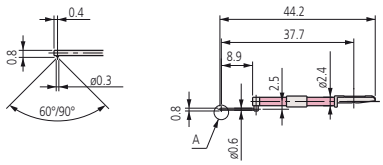

For ultra-small hole

No.	Angle	Radius
12AAC740	60°	2 µm
12AAB413	90°	5 µm
12AAB425	90°	10 µm


mm



For deep hole [double-length]

No.	Angle	Radius
12AAE886	60°	250 µm


mm

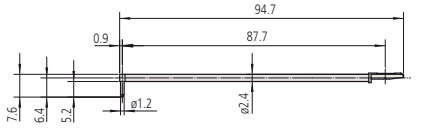

For rolling circle waviness [double-length]

No.	Angle	Radius
12AAE892	60°	2 µm
12AAE908	90°	5 µm


mm

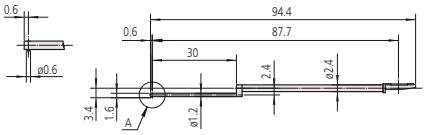

For small deep hole [double-length]

No.	Angle	Radius
12AAE898	60°	2 µm
12AAE914	90°	5 µm


mm

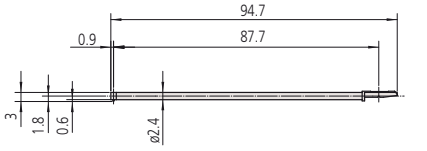

For deep hole [double-length]

No.	Angle	Radius
12AAE938	60°	2 µm
12AAE940	90°	5 µm

mm

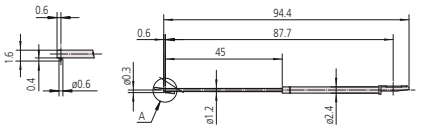


For small slotted hole [double-length]

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Optional Styli
for Surftest, Formtracer Avant and SV-C series

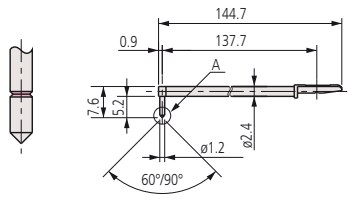

mm

No.	Angle	Radius
12AAC741	60°	2 µm
12AAB414	90°	5 µm
12AAB426	90°	10 µm


For deep hole [triple-length]

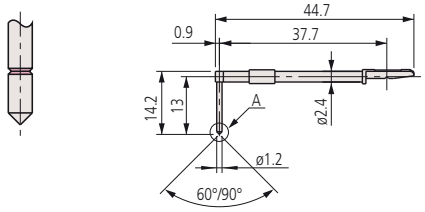

mm

No.	Angle	Radius
12AAC735	60°	2 µm
12AAB409	90°	5 µm
12AAB421	90°	10 µm


For deep groove 10 mm

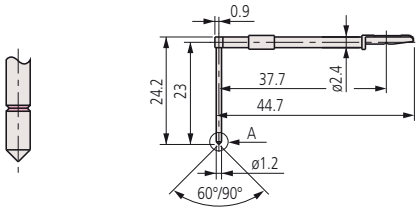

mm

No.	Angle	Radius
12AAC736	60°	2 µm
12AAB408	90°	5 µm
12AAB420	90°	10 µm


For deep groove 20 mm

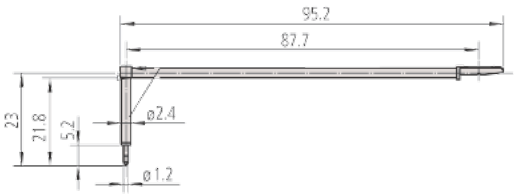

mm

No.	Angle	Radius
12AAE893	60°	2 µm
12AAE909	90°	5 µm

For deep groove 20 mm [double-length]

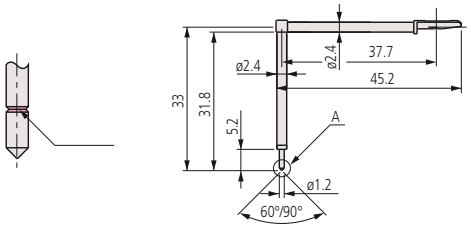

mm

No.	Angle	Radius
12AAC737	60°	2 µm
12AAB407	90°	5 µm
12AAB419	90°	10 µm

For deep groove 30 mm


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Styli
for Surftest, Formtracer Avant and SV-C series

No.	Angle	Radius
12AAE894	60°	2 µm
12AAE910	90°	5 µm


mm

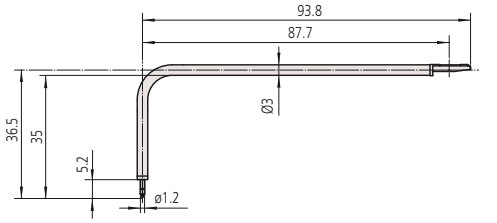

For deep groove 30 mm [double-length]

No.	Angle	Radius
12AAE895	60°	2 µm
12AAE911	90°	5 µm


mm

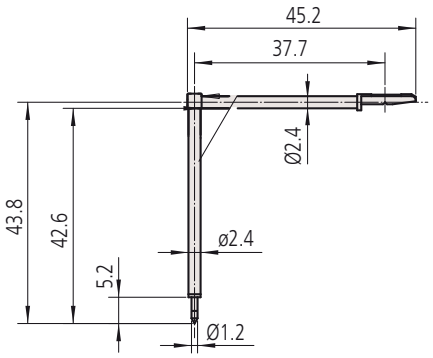

For deep groove 40 mm

No.	Radius
12AAB338	0,8 mm


mm

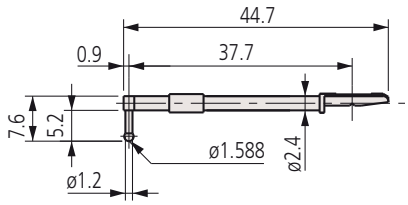

For rolling circle waviness surface roughness (Roughness specimen 178-611 required)

No.	Radius
12AAE884	0,8 mm

mm

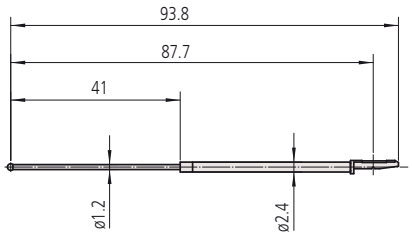

For rolling circle waviness surface roughness [double-length] (178-611 required)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Optional Styli
for Surftest, Formtracer Avant and SV-C series

mm


No.	Angle	Radius
12AAE899	60°	2 µm
12AAE915	90°	5 µm

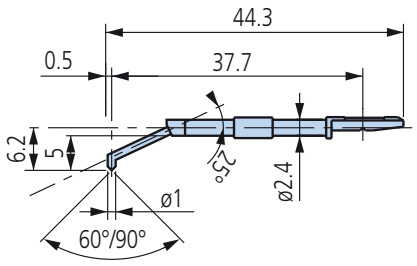

For hole bottom

mm


No.	Angle	Radius
12AAC739	60°	2 µm
12AAB412	90°	5 µm
12AAB424	90°	10 µm

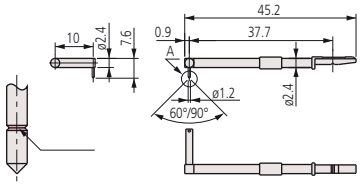

For eccentric arm

mm


No.	Angle	Radius
12AAM601	60°	2 µm
12AAM603	60°	5 µm

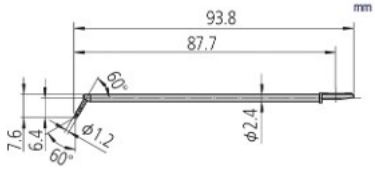

For corner

mm


No.	Angle	Radius
12AAB339	60°	2 µm
12AAB410	60°	5 µm
12AAB422	60°	10 µm

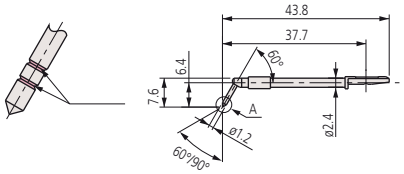

For gear tooth

mm


No.	Angle	Radius
12AAE896	60°	2 µm
12AAE912	60°	5 µm

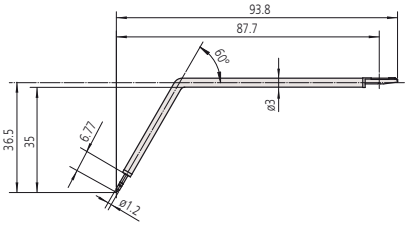

For gear tooth [double-length]

mm

No.	Angle	Radius
12AAC738	60°	2 µm
12AAB411	90°	5 µm
12AAB423	90°	10 µm

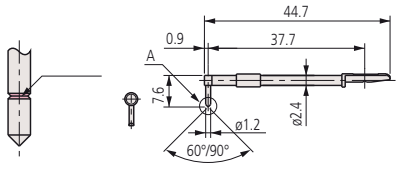


For knife-edge


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Optional Styli and Arms for Contracer, Formtracer Avant and SV-C Series




Small hole: 932693 / 12AAE873
Tip shape: Single bevel / Cone
Tip angle: 20° / 30°
Tip radius: 25 µm / 25 µm
Tip material: Carbide / Carbide




Small hole: 932694 / 12AAE874
Tip shape: Single bevel / Cone
Tip angle: 20° / 30°
Tip radius: 25 µm / 25 µm
Tip material: Carbide / Carbide




Small hole: 932695 / 12AAE875
Tip shape: Single bevel / Cone
Tip angle: 20° / 30°
Tip radius: 25 µm / 25 µm
Tip material: Carbide / Carbide




Small hole: 12AAM104
Tip shape: One-sided cut
Tip angle: 20°
Tip radius: 25 µm
Tip material: Carbide




Small hole: 12AAM105
Tip shape: One-sided cut
Tip angle: 20°
Tip radius: 25 µm
Tip material: Carbide




Small hole: 12AAM106
Tip shape: One-sided cut
Tip angle: 20°
Tip radius: 25 µm
Tip material: Carbide




Arm straight type
CV-2100



Arm eccentric type
CV-2100



Arm for small-hole stylus
CV-2100



Arm for small-hole
stylus CV-2100

Applicable arms for CV-2100

No.	Arm	Arm No.	Compatible stylus height (H) [mm]
935110	Small hole	AB-11	0,4 / 1 / 2,5
935111	Straight type	AB-51	6
935112	Straight type	AB-61	12
935113	Straight type	AB-71	20
935114	Straight type	AB-81	30
935115	Straight type	AB-91	42
935116	Eccentric type	AB-52	6
935117	Eccentric type	AB-62	12
935118	Eccentric type	AB-72	20
935119	Eccentric type	AB-82	30
935120	Eccentric type	AB-92	42

Applicable arms for FTA-C3000 / FTA-C4000 / FTA-D3000 / FTA-D4000 / SV-C4500CNC

No.	Arm	Arm No.	Compatible stylus height (H) [mm]
12AAQ762	Eccentric arm	AB-37	SPH-5*, 6*, 7*, 8*, 9*
12AAM101	Straight type	AB-31	SPH-5*, 6*, 7*,8*,9*, SPHW-56, 66, 76
12AAM103	Small hole	AB-33	SPH-41, SPH-42, SPH-43

Applicable styli for CV-2100


No.	Stylus	Stylus No.	Stylus height (H) [mm]
932693	Small hole, carbide-tipped one-sided cut	SP-11	2
932694	Small hole, carbide-tipped one-sided cut	SP-12	4
932695	Small hole, carbide-tipped one-sided cut	SP-13	6,5
12AAE873	Small hole, carbide-tipped cone	SP-31	2
12AAE874	Small hole, carbide-tipped cone	SP-32	4
12AAE875	Small hole, carbide-tipped cone	SP-33	6,5

Applicable styli for FTA-C3000 / FTA-C4000 / FTA-D3000 / FTA-D4000 / SV-C4500CNC


No.	Stylus	Stylus No.	Stylus height (H) [mm]
12AAM104	Small hole, carbide tipped one sided cut	SPH-41	2
12AAM105	Small hole, carbide tipped one sided cut	SPH-42	4
12AAM106	Small hole, carbide tipped one sided cut	SPH-43	6,5

Arm and stylus set


No.	Included arms	Included styli	Included arm stylus	Applicable models
12AAR587	AB-33, AB-37	SPH-41, -43, -51, -72, -76		FTA-C3000, FTA-C4000, FTA-D3000, FTA-D4000, SV-C4500CNC
12AAR588	AB-33, AB-37	SPH-41, -43, -51, -72, -76, SPHW-66, -76	SPHW-32	FTA-C4000, FTA-D4000, SV-C4500CNC



Arm straight type
FTA-C3000 / FTA-C4000
FTA-D3000 / FTA-D4000
SV-C4500CNC



Arm eccentric type
FTA-C3000 / FTA-C4000
FTA-D3000 / FTA-D4000
SV-C4500CNC



Arm for small-hole stylus
CV-2100 / FTA-C3000
FTA-C4000 / FTA-D3000
FTA-D4000 / SV-C4500CNC

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Styli and Arms for Contracer, Formtracer Avant and SV-C Series


Styli

Applicable styli for
CV-2100 / FTA-C3000 / FTA-C4000 / FTA-D3000 / FTA-D4000 / SV-C4500CNC


No.	Stylus	Stylus No.	Stylus height (H) [mm]
354882	Single bevel, carbide tipped	SPH-51	6
354883	Single bevel, carbide tipped	SPH-61	12
354884	Single bevel, carbide tipped	SPH-71	20
354885	Single bevel, carbide tipped	SPH-81	30
354886	Single bevel, carbide tipped	SPH-91	42
354887	Cross ground, carbide tipped	SPH-52	6
354888	Cross ground, carbide tipped	SPH-62	12
354889	Cross ground, carbide tipped	SPH-72	20
354890	Cross ground, carbide tipped	SPH-82	30
354891	Cross ground, carbide tipped	SPH-92	42
12AAE865	Cone, carbide-tipped angle 20°	SPH-57	6
12AAE866	Cone, carbide-tipped angle 20°	SPH-67	12
12AAE867	Cone, carbide-tipped angle 20°	SPH-77	20
12AAE868	Cone, carbide-tipped angle 20°	SPH-87	30
12AAE869	Cone, carbide-tipped angle 20°	SPH-97	42
354892	Cone, sapphire-tipped angle 30°	SPH-53	6
354893	Cone, sapphire-tipped angle 30°	SPH-63	12
354894	Cone, sapphire-tipped angle 30°	SPH-73	20
355129	Cone, diamond-tipped angle 50°	SPH-79	20
354895	Cone, sapphire-tipped angle 30°	SPH-83	30
354896	Cone, sapphire-tipped angle 30°	SPH-93	42
12AAA566	Cone, carbide-tipped angle 30°	SPH-56	6
12AAA567	Cone, carbide-tipped angle 30°	SPH-66	12
12AAA568	Cone, carbide-tipped angle 30°	SPH-76	20
12AAA569	Cone, carbide-tipped angle 30°	SPH-86	30
12AAA570	Cone, carbide-tipped angle 30°	SPH-96	42
354897	Knife edge, carbide tipped	SPH-54	6
354898	Knife edge, carbide tipped	SPH-64	12
354899	Knife edge, carbide tipped	SPH-74	20
354900	Knife edge, carbide tipped	SPH-84	30
354901	Knife edge, carbide tipped	SPH-94	42
354902	Ball, carbide tipped	SPH-55	6
354903	Ball, carbide tipped	SPH-65	12
354904	Ball, carbide tipped	SPH-75	20
354905	Ball, carbide tipped	SPH-85	30
354906	Ball, carbide tipped	SPH-95	42

Applicable styli for only FTA-C4000 / FTA-D4000 / SV-C4500CNC


No.	Stylus	Stylus No.	Stylus height (H) [mm]
12AAT469	Both sides small hole arm stylus 20°	SPHW-21	2,4
12AAT470	Both sides small hole arm stylus 20°	SPHW-22	5
12AAM095	Both sides conical stylus	SPHW-56	20
12AAM096	Both sides conical stylus	SPHW-66	32
12AAM097	Both sides conical stylus	SPHW-76	48
12AAM108	Both sides small hole arm stylus	SPHW-31	2,4
12AAM109	Both sides small hole arm stylus	SPHW-32	5
12AAM110	Both sides small hole arm stylus	SPHW-33	9




SPHW-31
SPHW-21




SPHW-32
SPHW-22




SPHW-33




Single bevel
Tip angle: 12°
Tip radius: 25 µm
Tip material: Carbide




Cross ground
Tip angle: 20°
Tip radius: 25 µm
Tip material: Carbide




Cone
Tip angle: 30°/50°
Tip radius: 25 µm
Tip material: Carbide / Sapphire / Diamond
(355129: 50°, Diamond)




Cone
Tip angle: 20°
Tip radius: 25 µm
Tip material: Carbide



Knife edge
Tip angle: 20°
Edge width: 3 mm
Tip radius: 25 µm
Tip material: Carbide



Ball
Ball: ø1 mm
Tip material: Carbide



Both sides conical stylus
Tip angle: 30°
Tip radius: 25 µm
Tip material: Carbide

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Optional Accessories for Surftest, Contracer and Formtracer

For SV series, Avant series, SV-C series, CS series and CNC models



178-087



Using 178-087

Automatic-leveling table : 178-037 (for CNC models)
Automatic-leveling table : 178-087 (for SV, Avant, SV-C, CS)
This is a stage that performs fully automatic leveling as measurement starts, freeing the user from this troublesome operation. Fully automatic leveling can be done quickly by anyone. In addition, the operation is easy and reliable.

No.	Inclination adjustment angle	Maximum load [kg]	Effective table dimensions [mm]	Mass [kg]
178-037	± 2°	7	130 x 112	4
178-087	± 2°	7	130 x 112	3,5



211-031

Micro-chuck
This chuck is suitable for clamping extra-small diameter workpieces (ø1.5 mm or less), which cannot be retained with the centering chuck.


No.	Dimensions [mm]	Retention range [mm]	Mass [kg]
211-031	ø118 x 48,5	OD: Ø 0,1 - Ø 1,5	0,62



211-032

Quick chuck
This chuck is useful when measuring small workpieces. You can easily clamp them with its knurled ring.


No.	Dimensions [mm]	Retention range [mm]	Mass [kg]
211-032	ø118 x 41	Inner latch : OD ø1 - ø36 Inner latch : ID ø16 - ø69 Outer latch : OD ø25 - ø79	1,1



178-097

Y-axis table for Avant (not CNC models)
Enables efficient, automatic measurement of multiple aligned workpieces and multiple points on a single measurement surface. It allows semi-automatic measurement with non CNC models by using these items.


No.	Resolution	Travel range [mm]	Positioning accuracy [µm]	Maximum load [kg]	Drive speed	Mass [kg]
178-097	0,05	200	±3	50	Max. 80 mm/s	28



12AAD975

θ1-axis:*1
For efficient measurement in the axial / transverse directions. When measuring a cylindrical workpiece, automatic alignment can be performed in combination with the Y-axis table.
*1 = **12AAE630** mounting plate is required when directly installing on the base of the machine.


No.	Resolution	Rotational speed	Displacement	Maximum load [kg]	Mass [kg]
12AAD975	0,004°	Max. 10°/s	360°	12	7



178-078

θ2-axis:*1
For efficent measurement of multiple points on a cylindrical workpiece and automate front/rear-side measurement.
*1 = **12AAE718** mounting plate is required when directly installing on the base of the machine.
*1 = **12AAE705** attachment plate is required when installing on θ1-axis table.
*1 = **12AAE707** mounting plate is required when directly installing on Y-axis table with automatic leveling table.


No.	Resolution	Rotational speed	Displacement	Maximum load [kg]	Mass [kg]
178-078	0,0072°	Max. 18°/s	360°	4	5



178-097
using Y-axis



12AAD975
using θ1-axis



178-078
using θ2-axis

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Optional Accessories for Surftest, Contracer and Formtracer

Calibration stage

No.	Description	Mass [kg]
12AAG175	For mounting a roughness specimen or step gauge during calibration	1,6



12AAG175

Cross-travel table

No.	Description	XY travel [mm]
218-171	The cross-travel table [mm] enables the fine adjustment (X and Y direction) of measurement positions.	100 x 50




218-171

Digimatic XY leveling table

No.	Leveling range	Table top [mm]	XY travel [mm]	Mass [kg]
178-185	±1,5°	130 x 100	±12,5	6,3

Digital three-axis adjustment table

No.	Description
178-182	The digital three-axis adjustment table helps to make the alignment adjustments required when measuring cylindrical surfaces. The corrections for the pitch angle and the swivel angle are determined from a preliminary measurement and the Digimatic micrometers are adjusted accordingly. A flat-surfaced workpiece can also be leveled with this table.




178-185



178-182

Precision V-Block

No.	Description	Mass [kg]
998291	Workpiece diameter : 1 mm to 160 mm Can be mounted on a leveling table	1,2



998291

Precision vise

No.	Description	Mass [kg]
178-019	Max. workpiece size : 36 mm Can be mounted on a leveling table	1,2



178-019

Rotary vise

No.	Description	Mass [kg]
218-173	Two-slide jaw type Max. workpiece size : ø60 mm Minimum reading : 1°	9




218-173

Vibration isolator


No.	Description	Mass [kg]
178-188	Standard base	155
178-189	Large type base	239

XY leveling table

No.	Leveling range	Table top [mm]	XY travel [mm]
178-195	±1,5°	130 x100	
178-183	±1,5°	130 x100	± 12,5



178-195



178-183

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Hardness Testing Machines



Rockwell hardness testing machines
Page 508



Rockwell, Rockwell Superficial, Brinell
Page 510



Vickers Hardness HV-Series
Page 514



Micro-Vickers Hardness HM-Series
Page 521



Portable Hardness Testers
Page 526

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Rockwell HR-200/300/400

Series 963

These are four economical Rockwell hardness testing machines to suit practically every application you need.
The Rockwell HR-200/300/400 offers you the following benefits:

- The newly designed frame provides maximum clearance for positioning the work piece, all you need is a flat table for mounting these testing machines.
- They are very simple to operate: the analogue type HR-210 uses an automatic presetting dial gauge.
- Digital models HR-430MR/MS use automatic steering wheel braking and load sequencing for easy handling.
- Digital models HR-320MS and HR-430MR/MS can use our Digimatic Mini-processor (DP-1VR) for printing results, and you can use an input tool (USB-ITN-E) to connect to a PC for data transfer, analysis and storage.
- You can perform Brinell hardness tests by using the following optional accessories: a Brinell indenter, a weight set and a measurement microscope.



HR-210MR
Rockwell hardness testing machine

Manual weight changing (with total test force selected) and handling of preload force. Motor drive controls loading sequence.



HR-320MS

Dual type (Rockwell / Rockwell Superficial) hardness testing machine:

Manually handles test force and preload force selection. Motor drive controls loading sequence.



HR-430MR

Rockwell hardness testing machine:

Economy type, but supports dial switching, power steering and support of all test standards and is equipped with automatic brake handle auto start feature. Motor drive controls loading sequence.




HR-430MS

Dual type (Rockwell / Rockwell Superficial) hardness testing machine:

Economy type, but supports dial switching, power steering and support of all test standards and is equipped with automatic brake handle auto start feature. Motor drive controls loading sequence.

Specifications

Height	Max. 180 mm (100 if cover is attached) mm
Measuring depth	Max. 165 mm (from the center of the endenter axis)
Functions	HR-320MS, HR-430MR, HR-430MS : GO/NG, Compensation fubction, Hardness conversion



K543817
Workpiece clamping device for:

- **HR-210MR**
- **HR-430MR**



HR-300-400 digital display



HR-400 Automatic preliminary test force brake



SPC Digimatic and RS-232C interface

Scan QR Code with your mobile device and watch our product videos on YouTube
All main units are supplied without power cord, indenters and hardness reference materials.
Please choose the required accessories separately.

Please choose for example:

63DIA023 diamond indenter ISO 6508 and ASTM E18
63ETB040DG 60HRC hardness reference material ISO 6508 and ASTM E18

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Manual Rockwell hardness testing machines

All main units are supplied without power cord, indenters and hardness reference materials.
Please choose the required accessories separately.

Please choose for example:

63DIA023 diamond indenter ISO 6508 and ASTM E18
63ETB040DG 60HRC hardness reference material ISO 6508 and ASTM E18

Manual Rockwell hardness testing machines

Model	HR-210MR	HR-320MS	HR-430MR	HR-430MS
No.	**810-191-21**	**810-192-31**	**810-193-31**	**810-194-31**
Rockwell (EN ISO 6508, ASTM E-18, JIS B7726)	ISO 6508	●	●	●
Brinell, Indentation only (non standard due to application of preliminary load)	Optional	Optional	Optional	Optional
Analog type	●	-	-	-
Digital type LCD matrix with backlight	-	●	●	●
HR unit resolution	0,5 HR	0,1 HR	0,1 HR	0,1 HR
Test force range 60-150KG, 588- 1471N Rockwell	●	-	●	-
Test force range 62,5-187,5KG, 612,9-1839N Brinell**	Optional	-	Optional	-
Test force range 3-150KG, 29,42- 1471N Rockwell, Rockwell Superficial	-	●	-	●
Test force range 30-187,5KG, 29,42- 1839N Brinell**	-	Optional	-	Optional
Test force switching	Manual	Manual	By dial	By dial
Test force duration	Fixed 3-5.5s or manual	1-99s setting or manual operation	1-99s setting or manual operation	1-99s setting or manual operation
Preliminary test force 10kg/98.07N	-	-	●	-
Preliminary test force 3kg and 10kg/29.42 N and 98.07N	-	●	-	●
Preliminary test force (handling support)	-	Loading navigator indication	Automatic elevation unit brake	Automatic elevation unit brake
Preliminary test force switching - by dial	-	-	●	●
Total test force load operation Manual/lever operation	-	Motor drive, Button start	Motor drive, Automatic start	Motor drive, Automatic start
LED workroom illumination	●	●	●	●
RS-232C, Digimatic interface	-	●	●	●
Compensation	-	●	●	●
Cylindrical compensation	-	●	●	●
Acoustic signal for end of test, error	-	●	●	●
Conversion	-	●	●	●
Limit indication	-	●	●	●
Jominy-test capability	Additional accessories required	Additional accessories required	Additional accessories required	Additional accessories required
Workpiece clamping device K543817 capability	●	-	●	-
Basic test surface Ø 64mm	●	●	●	●
Anvil adaption	Ø 19 mm	Ø 19 mm	Ø 19 mm	Ø 19 mm
Max. specimen height	180 mm	180 mm	180 mm	180 mm
Throat depth	165 mm	165 mm	165 mm	165 mm
Max. specimen weight	20 kg	20 kg	20 kg	20 kg
External dimensions 235(W) x 512(D) x 780(H)mm	●	●	●	●
Approx. mass main unit	47 kg	46,3 kg	49,3 kg	49,9 kg
Power supply 100-240V AC 1.2A (AC adapter DC12V 3.5A)	●	●	●	●

** requires optional Brinell weight set
*** can be enhanced with additional accesories
** requires optional Brinell weight set

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Rockwell, Rockwell Superficial, Brinell Hardness Tester HR-530

Series 810

The HR-530 series offers five different hardness testing methods: Rockwell, Rockwell Superficial, Brinell, Brinell Depth Measurement and Plastic Testing in a single unit.

This makes it a versatile tool ready to tackle tasks in production, goods inwards inspection and quality control in general.

- A real time electronic test force control system is built into the compact body along with an electronic force gage. The test force control prevents the system from applying too much test force at the point of reaching total testforce.
- Real time force control provides accurate test force generation and stable time cycle sequences conform to ISO standards.
- The serial measurement mode enables fast execution of a high numbers of tests on identical workpieces.
- A magnet brake system stops the spindle movement immediately at sensing of workpiece contact. This enables the HR-530 to perform semi automatic test sequences, eliminating the user influence.
- The lever indenter arm design enables not only interior and exterior measurements but also an excellent specimen surface overview. The functionality is furthermore enhanced by an LED workroom illumination.
- The intelligent lever arm design allows testing at inside positions without cutting the specimen. The minimum diameter that can be entered by the lever arm with the standard size diamond indenter is 35 mm.
- The optional short type diamond indenter (Part No. 63DIA007) additionally enables inside testing from Ø22 mm.
- HR-530L long type with an optional max. specimen height of 395 mm.
- Indenters and testblocks are not included in the scope of delivery.




HR-530 (810-233-33)

Maximum workpiece size:
- Height 250mm
- Depth 150 mm



HR-530L (810-333-33)

Maximum workpiece size:
- Height 395 mm
- Depth 150 mm

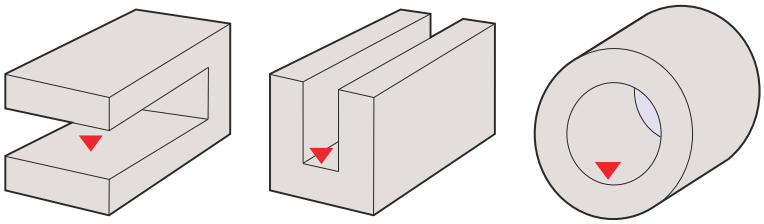

Specifications

Functions	• Conversion function [HV, HK, HR (Rockwell hardness A, B, C, D, F, G / Rockwell Superficial 15T, 30T, 45T, 15N, 30N, 45N), HS, HB, tensile strength] • GO/NG judgment function Serial test function (for specimens of the same thickness) • Cylindrical correction, spherical correction, offset correction, multi-point correction functions • Statistical calculation function • Graph generation function (X-R control charts)
Power supply	AC100V, 120V, 220V, 240V Auto-selection
Preleminary test force	29,42; 98,07 N
Statistic function	Maximum value, minimum value, mean value, standard deviation, upper limit, lower limit, GO count, range, NG count
Test force setting	By software setting
Table lifting	Manual (automatic breaking and load sequencing)
Standard	ISO 6508; JIS 7726; ISO 6506, JIS 7726; ISO 2039-2, ASTM D785, JIS K 7202; VDI/VDE 2616-1
Load control	Automatic (load/hold/unload)
Max. specimen depth	150 mm
Brinell Scale [N]	61,29; 98,07; 153,2; 245,2; 294,2; 306,5; 612,9; 980,7; 1226; 1839 N
Data output	RS-232C Digimatic, USB2
Force dwell time	1-120s (Selectable in units of 1s)

All main units are supplied without power cord, indenters and hardness reference materials.
Please choose the required accessories separately.

Please choose for example:

63DIA023 diamond indenter ISO 6508 and ASTM E18
63ETB040DG 60HRC hardness reference material ISO 6508 and ASTM E18

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Rockwell, Rockwell Superficial, Brinell Hardness Tester HR-530

Metric

No.	Model	Rockwell Scale Diamond	Rockwell Scale Ball 1,5875 mm	Rockwell Scale Ball 3,175 mm	Rockwell Scale Ball 6,35 mm	Rockwell Scale Ball 12,7 mm	Rockwell Superficial Scale Diamond
810-233-33/810-333-33/810-512-23	HR-530 HR-530L HR-610A	HRA HRD HRC	HRF HRB HRG	HRH HRE HRK	HRL HRM HRP	HRR HRS HRV	HR15N HR39N HR45N
810-522-23/810-527-21	HR-620A HR-620B	HRA HRD HRC	HRF HRB HRG	HRH HRE HRK	HRL HRM HRP	HRR HRS HRV	HR15N HR39N HR45N

No.	Rockwell Superficial Scale Ball 1,5875 mm	Rockwell Superficial Scale Ball 3,175 mm	Rockwell Superficial Scale Ball 6,35 mm	Rockwell Superficial Scale Ball 12,7 mm	Ball Indentation plastic test	Rockwell Plastic Test Scales Ball 3,175 mm	Rockwell Plastic Test Scales Ball 6,35 mm	Rockwell Plastic Test Scales Ball 12,7 mm
810-233-33/810-333-33/810-512-23	HR15TW HR20TW HR45TW	HR15WW HR30WW HR45WW	HR15XW HR30XW HR54XW	HR15YW HR30YW HR45YW		HRE HRK	HRL HRM	HRR
810-522-23/810-527-21	HR15TW HR20TW HR45TW	HR15WW HR30WW HR45WW	HR15XW HR30XW HR54XW	HR15YW HR30YW HR45YW	HB 49N HB 132N HB 358N HB 961N	HRE HRK	HRL HRM	HRR

No.	Rockwell α Test Ball 12,7 mm	Vickers Depth Measurement	Brinell Scales indentation only Ball 1,0 mm	Brinell Scales indentation only Ball 2,5 mm	Brinell Scales indentation only Ball 5,0 mm	Brinell Scales indentation only Ball 10,0 mm	Brinell depth measurement Ball 2,5 mm
810-233-33/810-333-33/810-512-23	(HRR)		HBW 1/10 HBW 1/30	HBW 2,5/6,25 HBW 2,5/15625 HBW2,5/31,25 HBW 2,5/62,5 HBW 2,5/187,5	HBW 5/25 HBW 5/62,5 HBW 5/125	HBW 10/100	HBD 2,5/62,5 HBD 2,5/187,5
810-522-23/810-527-21	(HRR)	HVD 30 HVD 50	HBW 1/1 HBW 1/2,5 HBW 1/5 HBW 1/10 HBW 1/30	HBW 2,5/6,25 HBW 2,5/15625 HBW2,5/31,25 HBW 2,5/62,5 HBW 2,5/187,5	HBW 5/25 HBW 5/62,5 HBW 5/125 HBW5/250	HBW 10/100 HBW 10/250	HBD 2,5/62,5 HBD 2,5/187,5 HBD 5/250

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Rockwell Automatic Hardness Testing HR-600

Series 810 - HR-600 Series

With innovative design and functionality that enables a wide variety of measurements, the HR-600 Series delivers hardness testing that defies conventional thinking.

Go above and beyond

High-End CNC Rockwell Hardness Testing Machine, providing a fully automatic Rockwell hardness test sequence. It is operated either with the provided display unit or by the use of AVPAK 3.1 hardness testing software (11AAE525-DEE AVPAK for HR-600A).
When run with AVPAK 3.1, it can easily be integrated in an automation cell via the programmable Mitutoyo Form EIO automation interface.

The HR-600 Series combines the functionality of several test methods:

- Rockwell hardness testing
- Brinell hardness testing (indentation only)
- Brinell depth measurement hardness testing
- Vickers depth measurement hardness testing
- Hardness testing of plastic materials

Supporting all test methods in a single machine, this new series expands the range of available measurements.

With its high-resolution scale load cell developed uniquely by Mitutoyo that allows for high-precision test load feedback control and state-of-the-art design that delivers both aesthetics and usability on the ground, the new HR-600 Series enables hardness testing that defies conventional thinking.

New design with functional beauty.

With a table for mounting workpieces and head with vertical mobility, the HR-600 Series is built for operability and usability. Its new design is highly focused on end-user usability, and the entire product structure has been inventively modified for functional beauty — a true embodiment of Mitutoyo's pioneering spirit. Indenters and test blocks are not part of the scope of delivery.

Attention:


* requires optional accessories



810-512-23
Model HR-610A



810-527-21
Model HR-620B with Display

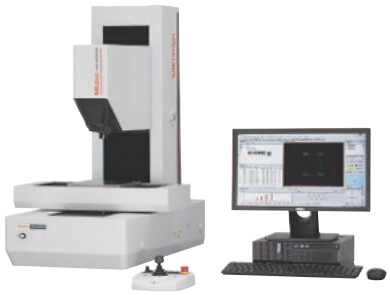

810-527-21
Model HR-620B with PC

810-512-23

No.	Hardness testing methods*	Initial test force N (kgf)	Test force N (kgf)
Model HR-610A	Rockwell: JIS B 7726:2017, ISO 6508-2:2015, ASTM E18-20 Brinell (indentation only): JIS B 7724:2017, ISO 6506-2:2017, ASTM E10-18 Plastic: JIS K 7202-2:2001, ISO 2039-2:1987, ASTM D785-08 [A&B] Brinell Depth Measurement HBT HBD: VDI/VDE 2616	Rockwell: 29.42 (3) 98.07 (10) Plastic: 98.07 (10) Brinell Depth Measurement HBT HBD: 98.07 (10) 490.3 (50)	Rockwell: 147.1 (15) 294.2 (30) 441.3 (45) 588.4 (60) 980.7 (100) 1471 (150) Brinell (indentation only): 49.03 (5) to 1839 (187.5) Plastic: 588.4 (60) 980.7 (100) 1471 (150) Brinell Depth Measurement HBT HBD: 612.9 (62.5) 1839 (187.5)

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Rockwell Automatic Hardness Testing HR-600

810-522-23

No.	Hardness testing methods*	Initial test force N (kgf)	Test force N (kgf)
Model HR-620A	Rockwell: JIS B 7726:2017, ISO 6508-2:2015, ASTM E18-20 Brinell (indentation only): JIS B 7724:2017, ISO 6506-2:2017, ASTM E10-18 Plastic: JIS K 7202-2:2001, ISO 2039-2:1987, ASTM D785-08 [A&B], ISO 2039-1:2001 Brinell Depth Measurement HBT HBD: VDI/VDE 2616 Vickers Depth Measurement HVT HVD: VDI/VDE 2616	Rockwell: 29.42 (3) 98.07 (10) Plastic: 9.807 (1), 98.07 (10) Brinell Depth Measurement HBT HBD: 98.07 (10) 490.3 (50) Vickers Depth Measurement HVT HVD: 9.807 (1)	Rockwell: 147.1 (15) 294.2 (30) 441.3 (45) 588.4 (60) 980.7 (100) 1471 (150) Brinell (indentation only): 9807 (1) to 2452 (250) Plastic: 588.4 (60) 980.7 (100) 1471 (150), 49.03 (5) 132.4 (13.5) 358 (36.5) 962.1 (98.1) Brinell Depth Measurement HBT HBD: 612.9 (62.5) 1839 (187.5) 2452 (250) Vickers Depth Measurement HVT HVD: 294.2 (30) 490.3 (50)

810-527-21

No.	Hardness testing methods*	Initial test force N (kgf)	Test force N (kgf)
Model HR-620B	Rockwell: JIS B 7726:2017, ISO 6508-2:2015, ASTM E18-20 Brinell (indentation only): JIS B 7724:2017, ISO 6506-2:2017, ASTM E10-18 Plastic: JIS K 7202-2:2001, ISO 2039-2:1987, ASTM D785-08 [A&B], ISO 2039-1:2001 Brinell Depth Measurement HBT HBD: VDI/VDE 2616 Vickers Depth Measurement HVT HVD: VDI/VDE 2616	Rockwell: 29.42 (3) 98.07 (10) Plastic: 9.807 (1), 98.07 (10) Brinell Depth Measurement HBT HBD: 98.07 (10) 490.3 (50) Vickers Depth Measurement HVT HVD: 9.807 (1)	Rockwell: 147.1 (15) 294.2 (30) 441.3 (45) 588.4 (60) 980.7 (100) 1471 (150) Brinell (indentation only): 9807 (1) to 2452 (250) Plastic: 588.4 (60) 980.7 (100) 1471 (150), 49.03 (5) 132.4 (13.5) 358 (36.5) 962.1 (98.1) Brinell Depth Measurement HBT HBD: 612.9 (62.5) 1839 (187.5) 2452 (250) Vickers Depth Measurement HVT HVD: 294.2 (30) 490.3 (50)

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vickers Hardness Testing Machine HV-110/120

Series 810

The manual line up of the HV-100 Series has the following benefits:

- 144 mm (5.7 inch) coloured touchsreen display (Type A) with higher visibility, easy to operate user interface
- Digimatic output for report creation.
- USB stick data export
- Electronic test force change.
- Max. specimen height up to 210mm
- LED illumination for best image.
- High number of accessories
- Vickers, Knoop, Brinell and KC fracture toughness measurement.
- Supports Brinelltest up to 62.5KG with an optional test force weight.



Manual type A



Software type D

HV-110 Testing force range

No.	Test force								
HV-110	V.S.*	HV1	HV2	HV3	HV5	HV10	HV20	HV30	HV50
	N	9807	19,61	29,42	49,03	98,07	196,1	294,2	490,3
	(kgf)	1	2	3	5	10	20	30	50
	*V.S. = Vickers Scale								

HV-120 Testing force range

No.	Test force								
HV-120	V.S.*	HV0,3	HV0,5	HV1	HV2,5	HV5	HV10	HV20	HV30
	N	2942	4903	9807	24,51	49,03	98,07	196,1	294,2
	(kgf)	0,3	0,5	1	2,5	5	10	20	30
	*V.S. = Vickers Scale								

Hardness Testing Machines brochure on request

Scan QR Code with your mobile device and watch our product videos on YouTube

Specifications

External dimensions [mm]	System A: 307(W)×696(D) ×786(H)mm System B/C/D: 307(W)×627(D) ×875(H)mm
Objective lens	Up to 3 pcs. mountable (one standard lens 10X mounted as standard)
Force dwell time	5-999 sec (selectable)
Load control	Automatic (load, dwell, unload)
Optical system	Infinity corrected optical system
Illumination unit	LED light
Standard	JIS B 7725, ISO 6507-2
Data output	RS-232C, Digimatic, USB 2. 0 interface
Working distance	50X = 2,5 mm (other objectives available)
Indenter approach speed	60 µm/s, 150 µm/s selectable
Mass	43 kg
Control panel	Built-in touch panel, 5,7" Colour LCD (HM-110A/ 120A for System A), Control software (PC for System B/C/D)
Functions	Calculation of Vickers / Knoop*2 / Brinell*3 hardness, and ceramic fracture toughness based on IF method (JIS R1697), 3 display format (standard, list, simple), GO/NG judgment, test condition guide, curve and user correction, hardness corresponding value, statistics calculation
Main unit mass	HV-110: Approx. 60kg, HV-120: Approx. 58kg
Output	Digimatic, serial, USB2 series A (for memory)*1, USB2 B Type (for system communication)
Resolution of diagonal length of an indentation	Objective lens less than 50X: 0,1µm (Objective lens more than 50X: 0,01µm)
Specimen dimensions	System A: height 210mm, depth 170mm (when using flat anvil) System B: height 181mm, depth 170mm (when using manual XY stage 50X50mm) System C: height 172mm, depth 170mm, System D: height 132mm, depth 170mm
Test force control	Lever method and automatic control (load, duration, unload)
Turret drive	Motor driven and manual operation

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vickers Hardness Testing Machine HV-110/120

Manual or complete automatic testing

Optional accessories

No.	Description
63ETB775	750HV1 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
63ETB749	500HV10 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
63ETB754	750HV10 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
63ETB875	500HV20 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
63ETB880	750HV20 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
63ETB897	500HV30 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
63ETB902	750HV30 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 60x60x16mm, steel
810-038	Round table, Ø250 mm
810-040	V-anvil, groove length 40 mm, Ø15 mm-Ø60 mm
810-041	V-anvil, groove length 40 mm, Ø3 mm-Ø9 mm



Vickers HDMI camera system

Code number	Description
63AAA765	HDMI camera
11AAC729	C-mount
NEC EA241WM	24" monitor



System A

HV-110A/HV-120A

Features:

- 144 mm (5.7 inch) colour LCD display
- 3 types of display styles settable
- Equipped measuring microscope allows diagonal length measurement by visual observation
- Positioning using a manual XY stage



System B

HV-110B/HV-120B

Features:

- Operation using highly functional AVPAK-20 software
- Light intensity of LED illumination adjusted with aperture or AVPAK
- Positioning using a manual XY stage



System C

HV-110C/HV-120C

Features:

- Operation using highly functional AVPAK-20 software
- Light intensity of the LED illumination adjusted with aperture diaphragm or through AVPAK.
- Automatic indentation reading.
- Automatic positioning using motorized XY stage.



System D

HV-110D/HV-120D

Features:

- Operation using highly functional AVPAK software
- Light intensity of the LED illumination adjusted with aperture diaphragm or through AVPAK
- Automatic positioning with motorized XY stage
- Auto focussing

M & B Calibr, s.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Vickers Hardness Testing Machine HV-110/120

Configuration

Two additional objective lenses can be selected

		Minimum system configuration		In addition selectable FACTORY OPTIONS		Remarks
TOUCH SCREEN MODELS	SYSTEM A	HV-110 SYSTEM A	Main unit standard test force 810-440-13	Video camera unit	810-454-20	
				Objective lens 2X	11AAE672	
				Objective lens 5X	11AAE673	
				Objective lens 20X	11AAE674	
				Objective lens 50X	11AAE675	
				Manual XY stage 50X50	810-423	
		HV-120 SYSTEM A	Main unit low test force 810-445-13	Video camera unit	810-454-20	
				Objective lens 2X	11AAE672	
				Objective lens 5X	11AAE673	
				Objective lens 20X	11AAE674	
				Objective lens 50X	11AAE675	
				Manual XY stage 50X50	810-423	

		Minimum system configuration		In addition selectable FACTORY OPTIONS		Remarks
SOFTWARE MODELS	SYSTEM B	HV-110 SYSTEM B	Main unit standard test force 810-443-11	Measuring microscope	11AAE678	Cannot be used simultaneously with vision unit
				Objective lens 2X	11AAE672	
				Objective lens 5X	11AAE673	
			AVPAK-20* 11AAE270-DEE	Objective lens 20X	11AAE674	
				Objective lens 50X	11AAE675	
				Manual XY stage 50X50	810-423	
		HV-120 SYSTEM B	Main unit low test force 810-448-11	Measuring microscope	11AAE678	Cannot be used simultaneously with vision unit
				Objective lens 2X	11AAE672	
				Objective lens 5X	11AAE673	
			AVPAK-20* 11AAE270-DEE	Objective lens 20X	11AAE674	
				Objective lens 50X	11AAE675	
				Manual XY stage 50 x 50	810-423	

		Minimum system configuration		In addition selectable FACTORY OPTIONS		Remarks
SOFTWARE MODELS	SYSTEM C	HV-110 SYSTEM C	Main unit standard test force 810-443-11	Measuring microscope	11AAE678	Cannot be used simultaneously with vision unit
			Motorized XY stage 50 x 50mm 810-461-10	Objective lens 2X	11AAE672	
			AVPAK-20* 11AAE270-DEE	Objective lens 5X	11AAE673	
				Objective lens 20X	11AAE674	
		HV-110 SYSTEM C	Main unit standard test force 810-443-11	Objective lens 50X	11AAE675	
			Motorized XY stage 100 x 100mm 810-462-10	Objective lens 100X	11AAE676	
			AVPAK-20* 11AAE270-DEE			
		HV-120 SYSTEM C	Main unit low test force 810-448-11	Measuring microscope	11AAE678	Cannot be used simultaneously with vision unit
			Motorized XY stage 50 x 50mm 810-461-10	Objective lens 2X	11AAE672	
			AVPAK-20* 11AAE270-DEE	Objective lens 5X	11AAE673	
				Objective lens 20X	11AAE674	
		HV-120 SYSTEM C	Main unit standard test force 810-448-11	Objective lens 50X	11AAE675	
			Motorized XY stage 100 x 100mm 810-462-10	Objective lens 100X	11AAE676	
			AVPAK-20* 11AAE270-DEE			

		Minimum system configuration		In addition selectable FACTORY OPTIONS		Remarks
SOFTWARE MODELS	SYSTEM D	HV-110 SYSTEM D	Main unit standard test force 810-443-11	Measuring microscope	11AAE678	Cannot be used simultaneously with vision unit
			Motorized XY stage 50 x 50mm 810-461-10	Objective lens 2X	11AAE672	
			Auto Focus stage unit 810-465	Objective lens 5X	11AAE673	
			AVPAK-20* 11AAE270-DEE	Objective lens 20X	11AAE674	
				Objective lens 50X	11AAE675	
		HV-110 SYSTEM D	Main unit standard test force 810-443-11	Objective lens 100X	11AAE676	
			Motorized XY stage 100 x 100mm 810-462-10			
			Auto Focus stage unit 810-465			
			AVPAK-20* 11AAE270-DEE			
		HV-120 SYSTEM D	Main unit low test force 810-448-11	Measuring microscope	11AAE678	Cannot be used simultaneously with vision unit
			Motorized XY stage 50 x 50mm 810-461-10	Objective lens 2X	11AAE672	
			Auto Focus stage unit 810-465	Objective lens 5X	11AAE673	
			AVPAK-20* 11AAE270-DEE	Objective lens 20X	11AAE674	
				Objective lens 50X	11AAE675	
		HV-120 SYSTEM D	Main unit low test force 810-448-11	Objective lens 100X	11AAE676	
			Motorized XY stage 100 x 100mm 810-462-10			
			Auto Focus stage unit 810-465			
			AVPAK-20* 11AAE270-DEE			

* The above configuration does not include PC.

For all systems: 10 x objective as standard.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micro-Vickers and Vickers Set

Configuration



A-Type



B-Type



C-Type



D-Type

Please order AVPAK-20 Software **11AAE270-DEE** and the PC additionally!

All items listed below the set code number are included in the scope of delivery.

A-Type set

No.	Code No.:	Description	Content of Set
HV-110 A-Type Set	810-440-13-ASET	Single indenter configuration	**810-440-13** - Manual main unit HV-110 **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens
HV-120 A-Type Set	810-445-13-ASET	Single indenter configuration	**810-445-13** - Manual main unit HV-120 **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens

B-Type set

No.	Code No.:	Description	Content of Set
HV-110 B-Type Set	810-443-11-BSET	Single indenter configuration	**810-443-11** - System main unit HV-110 **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens
HV-120 B-Type Set	810-448-11-BSET	Single indenter configuration	**810-448-11** - System main unit HV-120 **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens

C-Type set

No.	Code No.:	Description	Content of Set
HV-110 C-Type Set	810-443-11-CSET	Single indenter configuration	**810-443-11** - System main unit HV-110 **11AAE672** - 2x Objective lens **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens **810-462-10** - Motorized XY stage 100x100mm
HV-120 C-Type Set	810-448-11-CSET	Single indenter configuration	**810-448-11** - System main unit HV-120 **11AAE672** - 2x Objective lens **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens **810-462-10** - Motorized XY stage 100x100mm

D-Type set

No.	Code No.:	Description	Content of Set
HV-110 D-Type Set	810-443-11-DSET	Single indenter configuration	**810-443-11** - System main unit HV-110 **11AAE672** - 2x Objective lens **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens **810-462-10** - Motorized XY stage 100x100mm **810-465** - Autofocus unit
HV-120 D-Type Set	810-448-11-DSET	Single indenter configuration	**810-448-11** - System main unit HV-120 **11AAE672** - 2x Objective lens **02ALP300** - 10x Objective lens **11AAE674** - 20x Objective lens **810-462-10** - Motorized XY stage 100x100mm **810-465** - Autofocus unit

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Hardness Testing Software


Software AVPAK-20 for System B,C and D No. 11AAE270-DEE

Software to control test sequence, evaluate hardness and make report
Supports Windows® 10, 64 bit operating system


.

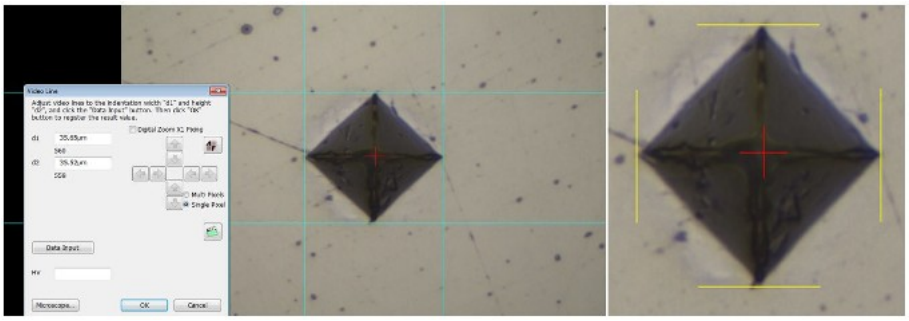

Automatic and manual video line measurement of indentation diagonals




Turret control function with colour indicator

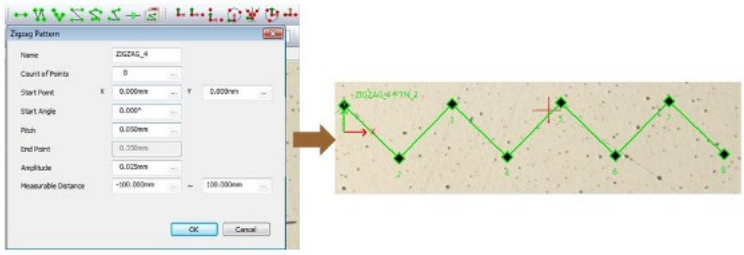

Test pattern function
Operator friendly presets of test patterns (line, zigzag, grid or circle/ arc) with adjustable indentation spacings. Additionally patterns can be combined or test points can be set freely as a teach in pattern.




Coordinate alignment function
Several test pattern alignment methods (1-point, 2-points, 3-points, arc, and centre of circle, bisector, midpoint) are available to place the pattern in the correct position. The automatic contour recognition allows to place indentations in accordance with the obtained contour or a specified excerpt from the contour. Therefore lines, patterns or a matrix of indentations can be placed accordingly.

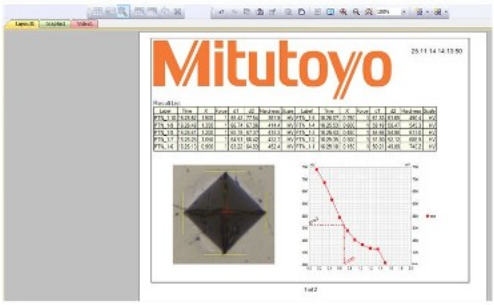

Analysis and report function
Provides to display several types of graph (carburize transition, carburize distribution, X-R control chart) and layouts. It is possible to edit these graphs on the report. Tracebility comments, indentation images and tables of test data can be inserted as well.



Overview image generation



Stage control function

Functions

Stitching
Generates specimen overview images by stitching several images together. Indentation patterns can be placed on the overview image precisely and easily. (motorized XY stage is required)

Automatic indentation measurement
Automatically measure the indentation's diagonal lengths according EN ISO 6507-1

Illumination control
Set the illumination level manually or automatically according to the specimen surface. Additionally display the saturation on the camera image

Stage control function
Control the motorized XY stage unit (for C- and D-Types) and the autofocus stage unit (type D) by the virtual joystick on the AVPAK-20 window. (Hardware joystick box is always included in the motorized XY stage's scope of delivery) Insert XY positioning steps in your part program and store 5 settable postions.

Turret control function
Choose and change the Objective lens on the turret panel. Green colour marks indicate the indenter and objective lenses that are set for measurement in the software. The objective lens set for overview image stitching is marked in yellow.


Automatic execution function
Record any kind of operation, store and rerun as part programs.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Hardness Testing Software

Software AVPAK-20 for System B, C and D

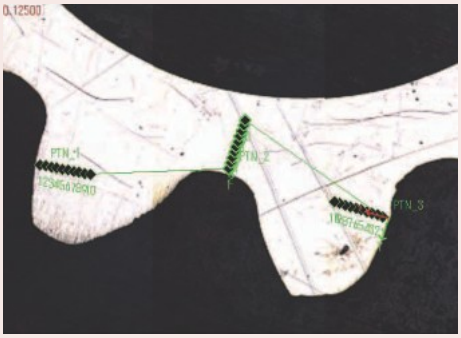

Graphic view (of stored images)
For displaying the specimen overview images and checking the pattern positioning The digital zoom function can be used to easily magnify and check the indentation site.


FUNCTIONS

Layout view
Indentation images, graphs, tables, etc., can be laid out freely to create the report in need.

Stitching
Takes images of an entire rectangular field from the moving stage then combines the images. Use stitching for a complete overview of sample.

Auto trace
Automatically traces the shape of the sample. Take images as the stage moves along the outer contours of the specimen, then combines the images.

Navigation function for the manual XY stage
(System B)
When the test position is to be moved during multi-point testing (CHD etc.), this function guides the positioning of the manual XY fine adjustment stage to the next position by pop up on screen menu. User positioning errors are reduced drastically

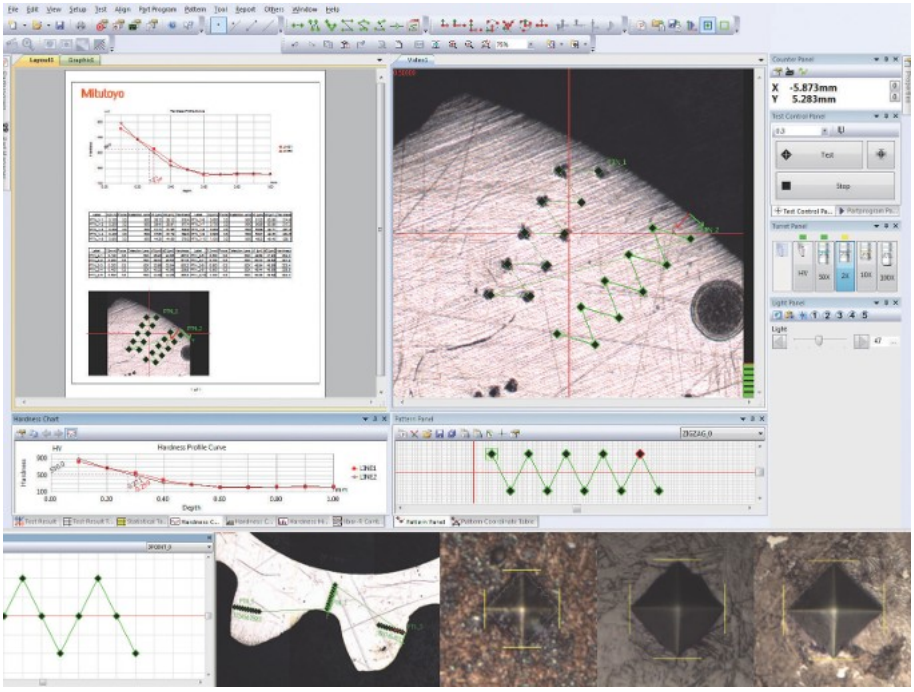

Screen layout for control, testing status, result display and reporting can be changed freely.



Handling of multiple specimens
Part program and Part Manager function support testing of multiple and irregular specimens.

Multi-specimen testing
Executes different part programs for each irregular specimen.

Parts Manager
Executes a common part program for specimens having the same shape. Parts can be arranged in grid positions.



Pattern creation:
This tool supports the creation of test patterns such as straight lines, zigzag lines and teaching patterns.



Pattern pasting :
This tool supports the pasting of created test patterns by applying a coordinate system. It adjusts the origin, direction, etc. of the before created pattern. Works coordinate systems for complex applications can be generated.

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Hardness Testing Software

Type	A	B	C	D
No.	**HR-610A HR-620A**	**HM-210B HM-220B HR-620B HV-110B HV-120B**	**HM-210C HM-220C HV-110C HV-120C**	**HM-210D HM-220D HV-110D HV-120D**
Indentation control function	●	●	●	●
Auto reading function	-	●	●	●
Focusing function (Contrast level indicator)	-	●	●	●
Focusing function (Auto Focus)	-	-	-	●
Illumination control function	-	●	●	●
Stage control function	-	●	●	●
Turret control function	-	●	●	●
Test pattern function	-	●	●	●
Coordinate alignment function	-	●	●	●
Wide area image synthesis function	-	-	●	●
Automatic execution function	●	●	●	●
Multiple specimens testing function	-	●	●	●
Wizard function for single test/pattern test/ standard test	●	●	●	●
Image analysis function	-	●	●	●
Report creation	-	●	●	●
Hardness scale conversion, spherical compensation, judgment, statistical factor	●	●	●	●
Extemal output function	●	●	●	●
Security level function	●	●	●	●
Simple dimension function	-	●	●	●
Edging surface reading function	-	●	●	●
Jominy test function	-	●	●	●
User layout save function for software window	●	●	●	●
FORMEio compatibility for automation	●	●	●	●
Status Monitor compatibility	●	●	●	●
Inch system (mm/inch main unit required)	●	●	●	●
Retrofittable to C-type	-	●	-	-
Retrofittable to D- type	-	●	●	-

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micro-Vickers Hardness Testing Machines HM-210/220

Specifications

Indenter / Objective turret	Motor driven and manual operation
Standard	ISO 6507-2, ISO 4545-2, JIS B 7725
Data output	RS-232C, Digimatic, USB 2 interface
XY stage [mm]	Travel range system A+B: 25 x 25 / 50 x 50 manual Travel range system C+D: 50 x 50 / 100 x 100 motorized
Arbitrary test force	1 type [Default: 245,2mN (25gf)]
Control panel	Built-in touch panel, 5,7" Colour LCD (HM-210A/220A for System A), Control software (PC for System B/C/D)
External dimensions Main unit mass	System A: 315(W)×671(D)×595(H)mm/38,5kg System B/C/D: 315(W)×586(D)×741(H)mm/37,4kg
Functions	Calculation of Vickers / Knoop*2 hardness, and ceramic fracture toughness based on IF method (JIS R1697), 3 display format (standard, list, simple), GO/NG judgment, test condition guide, curve and user correction, hardness corresponding value, statistics calculation
Objective lens unit	Up to 4 pcs. mountable (one mounted 50X as standard)
Output	Digimatic, serial, USB2 series A (for memory)*1, USB2 B Type (for system communication)
Resolution of diagonal length of an indentation	Objective lens less than 50X: 0,1µm (Objective lens more than 50X: 0,01µm)
Specimen dimensions	System A/B: height 133mm, depth 160mm (when using manual XY stage 25X25) System C: height 112mm, depth 160mm, System D: height 72mm, depth 160mm
Test force control	Electromagnetic generation of force (force motor) and automatic control (load, duration, unload)
Turret drive	Motor-driven and manual operation

Hardness Testing Machines brochure on request

Series 810

This is a high performance hardness testing machine that uses advanced technology and is ideal for quality control.
The manual line up of the HM-200 Series has the following benefits:

- 144 mm (5.7 inch) coloured touchsreen display (Type A) with higher visibility, easy to operate user interface
- Digimatic output for report creation.
- USB stick data export
- Electromagnetic test force generation system for higher accuracy.
- A high performance optical system provides a high quality image of the indentation load.
- A long working distance greatly reduces the possibility of collision.
- A range of six different objectives: 2x, 5x, 10X, 20X, 50X and 100X for measuring the indentation images.
- LED lighting gives you an observation image in natural colour, with better contrast, as well as longer operation.
- You can set different kinds of conditions on a touch panel, and display test results for easy operation.
- Vickers, Knoop and KC fracture toughness measurement.
- Test force ranges from 0.05g to 2kg.



Touchscreen type



Software type

V.S.*	HV0,01	HV0,02	HV0,03	HV0,05	HV0,1	HV0,2	HV0,3	HV0,5	HV1
mN	98,07	196,1	294,2	490,3	980,7	1.961,0	2.942,0	4.903,0	9.807,0
(gf)	10,0	20,0	30,0	50,0	100,0	200,0	300,0	500,0	1.000,0

HM-210 Testforce range

V.S.*	HV0,00005	HV0,0001	HV0,0002	HV0,0003	HV0,0005	HV0,001	HV0,002	HV0,003	HV0,005	HV0,01
mN	0,4903	0,9807	1,961	2,942	4,903	9,807	19,61	29,42	49,03	98,07
(gf)	0,05	0,1	0,2	0,3	0,5	1,0	2,0	3,0	5,0	10,0
V.S.*	HV0,01	HV0,02	HV0,03	HV0,05	HV0,1	HV0,2	HV0,3	HV0,5	HV1	
mN	196,1	294,2	490,3	980,7	1.961,0	2.942,0	4.903,0	9.807,0	19.610,0	
(gf)	20,0	30,0	50,0	100,0	200,0	300,0	500,0	1.000,0	2.000,0	

HM-220 Testforce range

***V.S. = Vickers scales**

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micro-Vickers Hardness Testing Machines HM-210/220

Manual or complete automatic testing



System A

HM-210A/HM-220A

Features:

- Touch-panel operation
- Measurement of indentation dimensions using a measuring microscope
- Positioning using a manual XY stage



System B

HM-210B/HM-220B
Automatic measurement by AVPAK-20 eliminates operator measurement errors.

Features:

- Operation using AVPAK-20
- Automatic measurement of indentations
- Positioning using a manual XY stage



System C

HM-210C/HM-220C

Features:

- Operated using AVPAK-20
- Automatic indentation reading
- Automatic positioning with motorized XY stage



System D

HM-210D/HM-220D
Top-end model with autofocus

Features:

- Operated using AVPAK-20
- Automatic identation reading
- Automatic positioning with motorized XY stage
- Autofocusing



Vickers HDMI camera system
(To be used with manual Vickers testing machines)
The 1/3" 1.2 Mpixel HDMI camera and a 24"standard monitor enables observation and measurement of indentations at high magnification, thereby reducing operator error. Additionally, images can be stored on the included 16GB SD card. No PC needed due to built in processor. Scope of delivery includes HDMI cable and wireless mouse. Please order 63AAA765, 11AAC729 and NEC EA21N for complete set.



AVPAK-20 software 11AAE270-DEE for automatic hardness testing systems.
Software that supports control, testing and report creation related to hardness testing. Supports parameter setting and automatic measurement.

High-functionality PC and TFT monitor
Compatible with Windows® 10 Professional. Supports a wide-screen TFT and provides improved operability.
*depending the version

Optional accessories

No.	Description
63ETB601	500HV0,1 Vickers Hardness Reference Material, with ASTM E92 DAkkS calibration certificate, 30x30x6mm, steel
63ETB606	750HV0,1 Vickers Hardness Reference Material, with ASTM E92 DAkkS calibration certificate, 30x30x6mm, steel
63ETB635	500HV0,3 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 30x30x6mm, steel
63ETB640	750HV0,3 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 30x30x6mm, steel
63ETB670	500HV1 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 30x30x6mm, steel
63ETB675	750HV1 Vickers Hardness Reference Material, with ISO 6507-3 DAkkS calibration certificate, 30x30x6mm, steel
810-017	Special vise, (opening width 100mm)
810-013	Sheet specimen table
810-014-1	Micro Vickers hardness testing machines, Wire specimen holder horizontal
810-015-1	Micro Vickers hardness testing machines, Wire specimen holder vertikal
810-019	Tilting specimen table
810-020	Adjustable specimen holder, Ø15-30mm
810-018	Rotary table, 360°
810-084	Rotatable adjustable specimen table, Ø15-30mm / 360°
810-085	Sheet specimen table
810-095	Rotary tilting specimen table, vise Ø15-50mm
810-650-1	Resin mold specimen table, Ø25.4 mm
810-650-2	Resin mold specimen table, Ø30 mm
810-650-3	Resin mold specimen table, Ø31.75 mm
810-650-4	Resin mold specimen table, Ø38.1 mm
810-650-5	Specimen holder f. resin molded specimen, 1 specimen Ø40 mm
810-641	Vibration Isolator, (for testing machine)

Code number	Description
63AAA765	HDMI camera
11AAC729	C-mount
NEC EA241WM	24" monitor

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micro-Vickers Hardness Testing Machines HM-210/220

Single indenter configuration for HM-200 Series



A-Type*



B-Type*



C-Type*



D-Type*

*Please order AVPAK-20 Software **11AAE270-DEE** and the PC additionally!

All items listed below the set code number are included in the scope of delivery.

A-Type set

No.	Code No.:	Description	Content of Set
HM-210 A-Type set	810-401-13-ASET1	Single indenter configuration	**810-401-13** - Manual main unit HM-210 **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-420** - Manual XY stage 25x25mm
HM-220 A-Type set	810-406-13-ASET1	Single indenter configuration	**810-406-13** - Manual main unit HM-210 **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens, Standard lens **11AAE669** - 100x Objective lens **810-420** - Manual XY stage 25x25mm

B-Type set

No.	Code No.:	Description	Content of Set
HM-210 B-Type set	810-404-11-BSET1	Single indenter configuration	**810-404-11** - System main unit HM-210 **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-420** - Manual XY stage 25x25mm
HM-220 B-Type set	810-409-11-BSET1	Single indenter configuration	**810-409-11** - System main unit HM-220 **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-420** - Manual XY stage 25x25mm

C-Type set

No.	Code No.:	Description	Content of Set
HM-210 C-Type set	810-404-11-CSET1	Single indenter configuration	**810-404-11** - Systemmain unit HM-210 **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-462-10** - Motorized XY stage 100x100mm
HM-220 C-Type set	810-409-13-CSET1	Single indenter configuration	**810-409-11** - System main unit HM-220 **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-462-10** - Motorized XY stage 100x100mm

D-Type set

No.	Code No.:	Description	Content of Set
HM-210 D-Type set	810-404-11-DSET1	Single indenter configuration	**810-404-11** - System main unit HM-210 **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-462-10** - Motorized XY stage 100x100mm **810-465** - Auto Focus unit
HM-220 D-Type set	810-409-13-DSET1	Single indenter configuration	**810-409-11** - System main unit HM-220 **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-462-10** - Motorized XY stage 100x100mm **810-465** - Auto Focus unit

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micro-Vickers Hardness Testing Machines HM-210/220

Double indenter configuration HM-200 Series

A-Type set

No.	Code No.:	Description	Content of Set
HM-210 A-Type set 2	810-401-13-ASET2	Double indenter configuration	**810-401-13** - Manual main unit HM-210 **11AAB997 -** Second indentershaft for Knoop test **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-420** - Manual XY stage 25x25mm
HM-220 A-Type set 2	810-406-13-ASET2	Double indenter configuration	**810-406-13** - Manual main unit HM-210 **11AAB998 -** Second indentershaft for Knoop test **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-420** - Manual XY stage 25x25mm

B-Type set

No.	Code No.:	Description	Content of Set
HM-210 B-Type set 2	810-404-11-BSET2	Double indenter configuration	**810-404-11** - System main unit HM-210 **11AAB997 -** Second indentershaft for Knoop test **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-420** - Manual XY stage 25x25mm
HM-220 B-Type set 2	810-409-11-BSET2	Double indenter configuration	**810-409-11** - System main unit HM-220 **11AAB998 -** Second indentershaft for Knoop test **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-420** - Manual XY stage 25x25mm

C-Type set

No.	Code No.:	Description	Content of Set
HM-210 C-Type set 2	810-404-11-CSET2	Double indenter configuration	**810-404-11** - System main unit HM-210 **11AAB997 -** Second indentershaft for Knoop test **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-462-10** - Motorized XY stage 100x100mm
HM-220 C-Type set 2	810-409-11-CSET2	Double indenter configuration	**810-409-11** - System main unit HM-220 **11AAB998 -** Second indentershaft for Knoop test **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-462-10** - Motorized XY stage 100x100mm

D-Type set

No.	Code No.:	Description	Content of Set
HM-210 D-Type set 2	810-404-11-DSET2	Double indenter configuration	**810-404-11** - System main unit HM-210 **11AAB997 -** Second indentershaft for Knoop test **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **810-462-10** - Motorized XY stage 100x100mm **810-465** - Autofocus unit
HM-220 D-Type set 2	810-409-11-DSET2	Double indenter configuration	**810-409-11** - System main unit HM-220 **11AAB998 -** Second indentershaft for Knoop test **11AAE665** - 2x Objective lens **2ALP300**- 10x Objective lens **2ALP500** - 50x Objective lens **11AAE669** - 100x Objective lens **810-462-10** - Motorized XY stage 100x100mm **810-465** - Autofocus unit



A-Type*



B-Type*



C-Type*



D-Type*


*Please order AVPAK-20 Software **11AAE270-DEE** and the PC additionally!


All items listed below the set code number are included in the scope of delivery.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Micro-Vickers Hardness Testing Machines HM-210/220

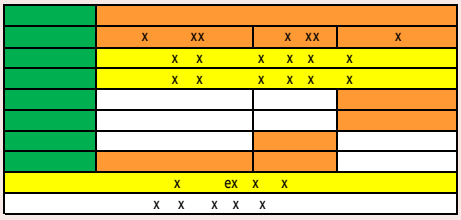

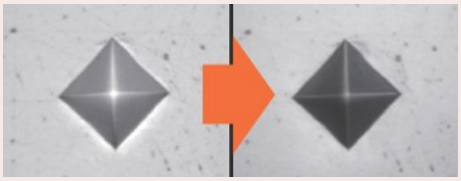

Observation image of the indentation (50X)
Stray light reduction around the indentation



Wide range of lenses available for different magnifications

Configuration

Up to three additional objective lenses can be added.

System A - Touch Screen Models

No.	Minimum system configuration	Selectable factory options
HM-210 SYSTEM A standard test force	Main unit: 810-401-13 Standard objective lens: 10x / 50x Selectable option manual XY stage: 810-420: 25x25 mm 810-423: 50x50 mm	Video camera unit: 810-454-20 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE670 with Knoop indenter
HM-220 SYSTEM A low test force	Main unit: 810-406-13 Standard objective lens: 10x / 50x Selectable option manual XY stage: 810-420: 25x25 mm 810-423: 50x50 mm	Video camera unit: 810-454-20 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE671 with Knoop indenter

System B Semi automatic - Software Models

No.	Minimum system configuration	Software	Selectable factory options
HM-210 SYSTEM B standard test force	Main unit: 810-404-11 Standard objective lens: 10x / 50x Selectable option manual XY stage: 810-420: 25x25 mm 810-423: 50x50 mm	11AAE270-DEE	Measuring microscope: 11AAE677 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE670 with Knoop indenter
HM-220 SYSTEM B low test force	Main unit: 810-409-11 Standard objective lens: 10x / 50x Selectable option manual XY stage: 810-420: 25x25 mm 810-423: 50x50 mm	11AAE270-DEE	Measuring microscope: 11AAE677 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE671 with Knoop indenter

System C Automatic - Software Models

No.	Minimum system configuration	Software	Selectable factory options
HM-210 SYSTEM C standard test force	Main unit: 810-404-11 Standard objective lens: 10x / 50x Selectable option motorized XY stage: 810-461-10: 50x50 mm 810-462-10: 100x100 mm	11AAE270-DEE	Measuring microscope: 11AAE677 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE670 with Knoop indenter
HM-220 SYSTEM C low test force	Main unit: 810-409-11 Standard objective lens: 10x / 50x Selectable option motorized XY stage: 810-461-10: 50x50 mm 810-462-10: 100x100 mm	11AAE270-DEE	Measuring microscope: 11AAE677 Objective lens 2X:11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE671 with Knoop indenter

System D Fully automatic - Software Models

No.	Minimum system configuration	Autofocus unit	Software	Selectable factory options
HM-210 SYSTEM D standard test force	Main unit: 810-404-11 Standard objective lens: 10x / 50x Selectable option motorized XY stage: 8810-461-10: 50x50 mm 810-462-10: 100x100 mm	810-465	11AAE270-DEE	Measuring microscope: 11AAE677 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE670 with Knoop indenter
HM-220 SYSTEM D low test force	Main unit: 810-409-11 Standard objective lens: 10x / 50x Selectable option motorized XY stage: 8810-461-10: 50x50 mm 810-462-10: 100x100 mm	810-465	11AAE270-DEE	Measuring microscope: 11AAE677 Objective lens 2X: 11AAE665 Objective lens 5X: 11AAE666 Objective lens 20X: 11AAE668 Objective lens 100X: 11AAE669 Indentershaft unit HM-210: 11AAE671 with Knoop indenter

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Impact Hardness Testing Device HH-V400

HH-V400

The HH-V400 is a modern light-weight portable hardness testing instrument for metal workpieces. It works on the Leeb rebound hardness principle.
The measurement is conducted with hardness value L (Leeb-value), however, conversion to any desired hardness scale can be performed.
For a reliable test procedure, an offset value is generated and stored each individual workpiece. Up to 100 set-ups can be stored in the device.
A total of 1800 measured values can be saved on the device memory.
For best ease of use, all impact devices are automatically recognized by the software without the need for compensational measurement.
So is the measuring direction angle. According to the recognized angle, the measurement value is automatically compensated.
The display provides an intuitive menu where important information like range and average are shown.
The durable menu buttons provide reliable use even in harsh environments.
An environment friendly rechargable battery pack supplies enough power for a working day on the go.
Wired (USB cable included) or wireless data transmission accessories from the Mitutoyo U-WAVE range and the Mitutoyo SPC software MeasurLink ensure the best data evaluation options.

Model	
No.	**810-306**
Accuracy	±12 HL (800 HL +/- 1.5%)
Display unit	7-segment LCD
Hardness Display range	Leeb hardness: 100.0 to 999.0 HL
	Conversion range / Increment
Vickers	43-950HV / 1 HV
Brinell	20-894 HB / 1 HB
Rockwell C	19.3-68.2 HRC / 0.1 HRC
Rockwell B	13.5-101.7 HRB / 0.1 HRB
Shore	13.2-99.3 HS / 0.1 HS
Tensile strength	499-1996 MPa / 1 MPa
Specimen Thickness Specimen Mass	Minimum Mass: No additional support 5 kg Rigid support 2-5 kg Coupled to rigid support 0,1 - 2 kg Minimum Thickness: Uncoupled 5 mm Coupled 3 mm
Specimen requirements	Testing point: 5 mm or more from edge of specimen 3 mm or more between testing points Specimen surface roughness: Ra of 2 µm or less
Mass	400 g
Connector cable for	HH-V400
PIN	-
USB-ITN	06AFM380E
DP-1VA (264-506D)	965013
USB Input Tool Interface Box (264-020)	937387



HH-V400 Impact device
HLDC scale
Use for inner walls of cylinders. The grip is short to allow positioning within a cylinder.



HH-V400 Impact device
HLD+15 scale
Use for concave workpieces such as gear teeth, grooves, etc.



HH-V400 impact device
HLDL scale
Use for gear teeth, welded corners, etc.

Specifications

Impact device	Impact hammer with integrated carbide-ball tip, D scale (ASTM A 956)
Functions	Auto angle compensation, Offset, OK/NG judgement, Hardness scale conversion, Data storage (1800 data entries), Statistical analysis (Average value, Max. value, Min. value, Dispersion), Auto sleep function, Impact counter display function
Power supply	Battery LR6 (2 pcs.) or AC adapter (optional)
Data output	RS-232C, SPC

Standard accessories

No.	Description
05CAA952	Screw Driver, 468-161,-162,-163
12BAS450	AC adapter 9V, for Surftest SJ-220
12BAS451	USB 2.0 cable, for Surftest SJ-220

Optional accessories

No.	Description
19BAA458	Replacement carbide ball on shaft, Leeb hardness testing HH-V400 Series DL
264-506D	Statistic Processing Printer DP-1VA, Data Printer and Logger CEE Type
Computer accessories	
937387	Digimatic Cable, Round 6-Pin Type, 1 m
Impact devices	
11AAE902	HH-V400 impact device HLD, Leeb hardness testing HH-V400 Series
11AAE903	HH-V400 impact device HLDC, Leeb hardness testing HH-V400 Series
11AAE904	HH-V400 impact device HLD+15, Leeb hardness testing HH-V400 Series
11AAE905	HH-V400 impact device HLDL, Leeb hardness testing HH-V400 Series
Support rings for D/DC type impact devices	
19BAA248	Support ring cylindrical specimen, R10-20 Leeb hardness testing HH-V400 Series D DC
19BAA249	Support ring hollow cylindrical specim., R14-20 Leeb hardness testing HH-V400 Series D DC
19BAA250	Support ring spherical specimen, R10-27.5 Leeb hardness testing HH-V400 Series D DC
19BAA251	Support ring hollow spherical specimen, R13.5-20 Leeb hardness testing HH-V400 Series D DC



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digital and Analogue Durometers HARDMATIC HH-300

Series 811 - Shore A

These compact digital/dial durometers in the Shore A scale can test a range of different materials and offer you the following benefits:

- You can use them for testing the hardness of the materials including soft rubber, elastomers, natural rubber, casting resin, neoprene, polyesters, soft PVC, leather, etc.

Model	HH-331	HH-332	HH-335	HH-336	HH-335-01	HH-336-01
No.	**811-331-10**	**811-332-10**	**811-335-10**	**811-336-10**	**811-335-11**	**811-336-11**
Shore Scale	Shore A	Shore A	Shore A	Shore A	Shore A	Shore A
Display	Analog Dial	Digital	Analog Dial	Digital	Analog Dial	Digital
Indenter b	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm
Indenter d	ø 0,79 mm	ø 0,79 mm	ø 0,79 mm	ø ,079 mm	ø 0,79 mm	ø 0,79 mm
θ	35°	35°	35°	35°	35°	35°
Pressure foot a	ø 3 mm	ø 3 mm	ø 3 mm	ø 3 mm	ø 3 mm	ø 3 mm
Pressure foot f	ø 18 mm	ø 18 mm	44 x 18 mm	44 x 18 mm	ø 18 mm	ø 18 mm
Indenter protrusion	2,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm
Spring force WE, WA, WD	WA=550+75 HA [mN]	WA=550+75 HA [mN]	WA=550+75 HA [mN]	WA=550+75 HA [mN]	WA=550+75 HA [mN]	WA=550+75 HA [mN]
Mass	0.32 kg	0.31 kg	0.3 kg	0.29 kg	0.27 kg	0.26 kg
Connector cable for	HH-300 Series	HH-300 Series	HH-300 Series	HH-300 Series	HH-300 Series	HH-300 Series
PIN	Flat	Flat	Flat	Flat	Flat	Flat
USB-ITN	06AFM380F	06AFM380F	06AFM380F	06AFM380F	06AFM380F	06AFM380F
DP-1VA (264-506D)	959149	959149	959149	959149	959149	959149
USB Input Tool Interface Box (264-020)	937387	937387	937387	937387	937387	937387



811-331-10



811-332-10




811-335-11



811-336-11

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
811-013	Testing stand, HH-300 Series Shore A compact types
218000MIT	35, 60, 90 Shore A Shore Hardness Reference Material Set
Testing stand	
811-019	Testing stand, HH-300 Series Shore A long types



Indenter geometry Shore A and D



Testing stand
- Workstage dimension: Ø90 mm
- Max. specimen height: 90mm



218000MIT Shore A

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Digital and Analogue Durometers HARDMATIC HH-300

Series 811 - Shore E

These compact digital/dial durometers in the Shore E scale can test a range of different materials and offer you the following benefits:

- You can use them for testing the hardness of the materials including soft rubber, elastomers, natural rubber, casting resin, neoprene, polyesters, soft PVC, leather, etc.

Model	HH-330	HH-329
No.	**811-330-10**	**811-329-10**
Shore Scale	Shore E	-
Display	Digital	Analog Dial
Indenter b	ø 5 mm	ø 1,25 mm
Indenter r	ø 2,5 mm	R 0,1 mm
θ	-	30°
Pressure foot a	ø 5,4 mm	ø 3 mm
Pressure foot f	44 x 18 mm	ø 18 mm
Indenter protrusion	2,5 mm	2,5 mm
Spring force WE, WA, WD	WE=550+75 HE [mN]	WD=444,5H D [mN]
Mass	0.29 kg	0.32 kg
Connector cable for	HH-300 Series	HH-300 Series
PIN	Flat	Flat
USB-ITN	06AFM380F	06AFM380F
DP-1VA (264-506D)	959149	959149
USB Input Tool Interface Box (264-020)	937387	937387



811-329-10




811-330-10

Optional accessories

No.	Description
218010AOMI	27, 62, 90 Shore AO Shore Hardness Reference Material Set
905338	Digimatic Cable, Flat Straight Type, 1 m
Testing stand	
811-013	Testing stand, HH-300 Series Shore A compact types

Type E



Indenter geometry Shore E



Testing stand
- Workstage dimension: Ø90 mm
- Max. specimen height: 90mm



218010AOMI

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Digital and Analogue Durometers HARDMATIC HH-300


Series 811 - Shore D

These compact digital/dial durometers in the Shore D scale can test a range of different materials and offer you the following benefits:

- You can use them for testing the hardness of the materials including hard rubber, hard plastics, acrylic glass, Polystyrene, rigid thermoplastics, vinyl, cellulose acetate, etc.

Optional accessories

No.	Description
905338	Digimatic Cable, Flat Straight Type, 1 m
811-012	Testing stand, HH-300 Series Shore D all types
218000DMIT	35, 60, 85 Shore D Shore Hardness Reference Material Set

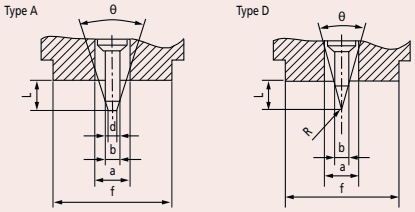

Indenter geometry Shore A and D



218000DMIT Shore D

Model	HH-333	HH-334	HH-337	HH-338	HH-337-01	HH-338-01
No.	**811-333-10**	**811-334-10**	**811-337-10**	**811-338-10**	**811-337-11**	**811-338-11**
Shore Scale	Shore D	Shore D	Shore D	Shore D	Shore D	Shore D
Display	Analog Dial	Digital	Analog Dial	Digital	Analog Dial	Digital
Indenter b	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm	ø 1,25 mm
Indenter r	R 0,1 mm	R 0,1 mm	R 0,1 mm	R 0,1 mm	R 0,1 mm	R 0,1 mm
θ	30°	30°	30°	30°	30°	30°
Pressure foot a	ø 3 mm	ø 3 mm	ø 3 mm	ø 3 mm	ø 3 mm	ø 3 mm
Pressure foot f	ø 18 mm	ø 18 mm	44 x 18 mm	44 x 18 mm	ø 18 mm	ø 18 mm
Indenter protrusion	2,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm
Spring force WE, WA, WD	WD=444,5H D [mN]	WD=444,5H D [mN]	WD=444,5H D [mN]	WD=444,5H D [mN]	WD=444,5H D [mN]	WD=444,5H D [mN]
Mass	0.32 kg	0.31 kg	0.3 kg	0.29 kg	0.27 kg	0.26 kg
Connector cable for	HH-300 Series	HH-300 Series	HH-300 Series	HH-300 Series	HH-300 Series	HH-300 Series
PIN	Flat	Flat	Flat	Flat	Flat	Flat
USB-ITN	06AFM380F	06AFM380F	06AFM380F	06AFM380F	06AFM380F	06AFM380F
DP-1VA (264-506D)	959149	959149	959149	959149	959149	959149
USB Input Tool Interface Box (264-020)	937387	937387	937387	937387	937387	937387



811-333-10



811-334-10



811-337-11



811-338-11

M & B Calibr, S.r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Coordinate Measuring Machines


Small- and Medium Size CMMs
Page 531



In-Line and Shopfloor CMMs
Page 539



Large Size CMMs
Page 543



CMM Rotary Tables
Page 545



CMM Probes
Page 546



CMM Software
Page 555



CMM Accessories
Page 560



SmartMeasure-AL
Page 567



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CRYSTA-Apex V PLUS 500, 700 & 900 Series

Specifications


Accuracy	E0, MPE from: (1,8+3L/1000) µm
Max. drive speed	519 mm/s (3-axis)
Digital step	0,1 µm

Accuracy is specified for the following environmental conditions for the CMM*:

Temperature range		18°C - 22°C	16°C - 26°C	15°C - 30°C
Temperature change	Per hour	2°C	2°C	2°C
	Per 24 hours	2°C	5°C	5°C
Temperature gradient	Vertical	1 °C/m	1 °C/m	1 °C/m
	Horizontal	1 °C/m	1 °C/m	1 °C/m



Mitutoyo eco-fix fixture kits:
- flexible & quick setup
- time & cost saving
- easy adaption of product changes



StyliCleaner always Reliable and Clean Stylus



Optional joystick-box M2 with speed adjustment knob

CRYSTA-Apex V PLUS brochure on request

Scan QR Code with your mobile device and watch our product videos on YouTube

CRYSTA-APEX V PLUS 500, 700 & 900 Series

CRYSTA-Apex V PLUS Multi-Wire
High-precision CNC coordinate measuring machine for versatile applications

The CRYSTA-Apex V PLUS Multi-Wire combines a compact design with excellent cost-efficiency and high performance. It is engineered to deliver precise measurement results even under varying environmental conditions. Prepared for both touch-trigger and scanning probes, it offers flexibility from single-point measurements to complex scanning applications.

Key benefits:

- Proven bridge-type construction with high-rigidity air bearings on all axes for long-term accuracy.
- High measurement accuracy for reliable quality control.
- Fast axis movements for reduced cycle times and increased productivity.
- Temperature compensation from 15°C to 30°C - including the workpiece - for stable results in production environments.
- ABS scales: no homing required, immediate operation, and high resistance to environmental influences.
- UC480 controller with service monitor function for simplified maintenance and system diagnostics.
- Air reduction feature: automatically reduces air supply during standby to lower power usage and environmental impact.

Extended operating range:

The V PLUS series expands the guaranteed accuracy temperature range to 15-30°C. This allows reliable use in warmer environments, for example at 28°C in summer, without requiring strict air-conditioning control at 20°C.
This contributes to reduced running costs for air conditioning and enables use outside traditional measurement rooms. In stable environments within the 15-30°C range, the machine can be placed near production lines, meeting the growing demand for near-line measurement.



CRYSTA-Apex V PLUS9106

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CRYSTA-Apex V PLUS 500, 700 & 900 Series

CRYSTA-Apex V PLUS Models:

No.	Model	Range [mm]	Comments
191-131	CRYSTA-Apex V PLUS544	500 x 400 x 400	Standard stand
191-132	CRYSTA-Apex V PLUS544	500 x 400 x 400	Anti vibration stand
191-133	CRYSTA-Apex V PLUS574	500 x 700 x 400	Standard stand
191-134	CRYSTA-Apex V PLUS574	500 x 700 x 400	Anti vibration stand
191-135	CRYSTA-Apex V PLUS776	700 x 700 x 600	Standard stand
191-136	CRYSTA-Apex V PLUS776	700 x 700 x 600	Anti vibration stand
191-137	CRYSTA-Apex V PLUS7106	700 x 1000 x 600	Standard stand
191-138	CRYSTA-Apex V PLUS7106	700 x 1000 x 600	Anti vibration stand
191-139	CRYSTA-Apex V PLUS9106	900 x 1000 x 600	Standard stand
191-140	CRYSTA-Apex V PLUS9106	900 x 1000 x 600	Anti vibration stand
191-141	CRYSTA-Apex V PLUS9166	900 x 1600 x 600	Standard stand
191-142	CRYSTA-Apex V PLUS9166	900 x 1600 x 600	Anti vibration stand
191-143	CRYSTA-Apex V PLUS9206	900 x 2000 x 600	Standard stand
191-144	CRYSTA-Apex V PLUS9206	900 x 2000 x 600	Anti vibration stand
191-145	CRYSTA-Apex V PLUS9108	900 x 1000 x 800	Standard stand
191-146	CRYSTA-Apex V PLUS9108	900 x 1000 x 800	Anti vibration stand
191-147	CRYSTA-Apex V PLUS9168	900 x 1600 x 800	Standard stand
191-148	CRYSTA-Apex V PLUS9168	900 x 1600 x 800	Anti vibration stand
191-149	CRYSTA-Apex V PLUS9208	900 x 2000 x 800	Standard stand
191-150	CRYSTA-Apex V PLUS9208	900 x 2000 x 800	Anti vibration stand



CRYSTA-Apex V PLUS9108

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CRYSTA-Apex V1200, 1600 & 2000 Series

Specifications


Accuracy	E0, MPE from: V1200 (2,3+3L/1000) µm E0, MPE from: V1600 & V2000 (3,3+4,5L/1000) µm
Max. drive speed	693 mm/s (3-axis)
Digital step	0,1 µm



Joystick-box V2 with speed adjustment knob, standard accessory.


Accuracy is specified for the following environmental conditions for the CMM:

Temperature range		18°C - 22°C	16°C - 26°C
Temperature change	Per hour	2°C	2°C
	Per 24 hours	2°C	5°C
Temperature gradient	Vertical	1°C/m	1°C/m
	Horizontal	1°C/m	1°C/m

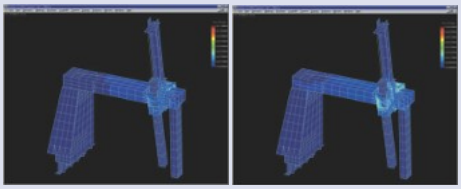

The machine structure has been optimized using FEM (Finite-element Method) and modal analysis

CRYSTA-Apex V brochure on request



StyliCleaner always Reliable and Clean Stylus

CRYSTA-Apex V1200, 1600 & 2000 Series

The CRYSTA-Apex V1200, 1600 & 2000 series offers you up to 12,8m³ measuring volume and still keeps an excellent 4,5 µm accuracy or better.

This series is developed for supporting quality evaluation of volumetric parts.
This high performance, cost effective coordinate measuring machine, designed and constructed according to Mitutoyo's extensive experience in CNC CMM technology.

Ready for touch trigger probe, scanning probe, optical probe and laser scanner probe.

Main benefits:

- Proven lightweight bridge-type construction with high rigidity air-bearings on every axis
- High accuracy, high speed and high acceleration
- Temperature sensors for compensation of machine and workpiece from 16° to 26°C and monitoring of the environmental temperature.
- ABS linear scales provide high environmental resistance and saves time at start-up as homing is not necessary
- UC480 controller supporting Multi-sensor and SMS functionality (Smart Measuring System)



CRYSTA-Apex V162012

CRYSTA-Apex V Models:

No.	Model	Range [mm]	Comments
191-481	CRYSTA-Apex V121210	1200 x 1200 x 1000	Standard stand
191-482	CRYSTA-Apex V121210	1200 x 1200 x 1000	Anti vibration stand
191-485	CRYSTA-Apex V122010	1200 x 2000 x 1000	Standard stand
191-486	CRYSTA-Apex V122010	1200 x 2000 x 1000	Anti vibration stand
191-489	CRYSTA-Apex V123010	1200 x 3000 x 1000	Standard stand
191-491	CRYSTA-Apex V123010	1200 x 3000 x 1000	Anti vibration stand
191-848	CRYSTA-Apex V 162012	1600 x 2000 x 1200	Standard stand
191-848H	CRYSTA-Apex V 162016	1600 x 2000 x 1600	Standard stand
191-849	CRYSTA-Apex V 162012	1600 x 2000 x 1200	Anti vibration stand
191-849H	CRYSTA-Apex V 162016	1600 x 2000 x 1600	Anti vibration stand
191-853	CRYSTA-Apex V 163012	1600 x 3000 x 1200	Standard stand
191-853H	CRYSTA-Apex V 163016	1600 x 3000 x 1600	Standard stand
191-854	CRYSTA-Apex V 163012	1600 x 3000 x 1200	Anti vibration stand
191-854H	CRYSTA-Apex V 163016	1600 x 3000 x 1600	Anti vibration stand
191-857	CRYSTA-Apex V 164012	1600 x 4000 x 1200	Standard stand
191-857H	CRYSTA-Apex V 164016	1600 x 4000 x 1600	Standard stand
191-858	CRYSTA-Apex V 164012	1600 x 4000 x 1200	Anti vibration stand
191-858H	CRYSTA-Apex V 164016	1600 x 4000 x 1600	Anti vibration stand
191-812H	CRYSTA-Apex V 203016	2000 x 3000 x 1600	Standard stand
191-813H	CRYSTA-Apex V203016	2000 x 3000 x 1600	Anti vibration stand
191-817H	CRYSTA-Apex V 204016	2000 x 4000 x 1600	Anti vibration stand

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CRYSTA-Apex EX1200R Series

REVO-2, 5-axis scanning operation

5-axis operation reduces the time required for probe repositioning movements and allows more flexible positioning. This also facilitates access to complex workpieces and saves time during both programming and measurement.

The CRYSTA-Apex EX1200R series are equipped with the REVO-2 probe head which allows ultra high-speed 5-axis scanning (max. 500 mm/s), far surpassing conventional -axis control.

Support for high-speed sampling of up to 4 points per second allows acquisition of densely spaced measurement points, even during fast scanning.

- Internal implementation of laser sensing technology ensures high-accuracy measurement, even with long styli (up to 500 mm*1).

*1 Distance from probe rotation center to stylus tip



No.	Model	Range [mm]	Comments
191-481V	CRYSTA-Apex EX121210R	1200 x 1200 x 1000	Standard stand
191-482V	CRYSTA-Apex EX 121210R	1200 x 1200 x 1000	Anti vibration stand
191-485V	CRYSTA-Apex EX 122010R	1200 x 2000 x 1000	Standard stand
191-486V	CRYSTA-Apex EX 122010R	1200 x 2000 x 1000	Anti vibration stand
191-489V	CRYSTA-Apex EX 123010R	1200 x 3000 x 1000	Standard stand
191-491V	CRYSTA-Apex EX 123010R	1200 x 3000 x 1000	Anti vibration stand


Specifications

Accuracy	E0, MPE from: (2,9+4L/1000) µm
Max. drive speed	300 mm/s (3-axis)
Digital step	0,1 µm





Refer to the CRYSTA-Apex V brochure



StyliCleaner always Reliable and Clean Stylus

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

STRATO-Active Series

Specifications

Accuracy	E0, MPE from: (1,2+3L/1000) µm
Max. drive speed	300 mm/s (each axis)

Accuracy is specified for the following environmental conditions for the CMM

Temperature range	18°C - 22°C	
Temperature change	Per hour	1°C
	Per 24 hours	2°C
Temperature gradient	Vertical	1°C/m
	Horizontal	1°C/m



STRATO-Active with rotary table MRT320



Surface Measure 201FS (02AQJ900)

Refer to the STRATO-Active brochure

STRATO-Active Series 700/900

High precision CNC CMM, designed to provide top scanning performance with high accuracy measuring, ready for touch trigger probe, scanning probe, optical probe including laser scanner probe.

Main benefits:

- Improve structural rigidity bridge type construction with new compensation technology.
- High accuracy
- High speed and acceleration
- Temperature compensation from 18° to 22°C, including the work piece (2 contact sensors).
- Adoption of ABS scale, saving time no homing necessary and high resistance of environmental conditions.
- Granite working table with M8 threads
- Optional Multi-Function Joystick Box including two levers and a speed adjustment knob.



STRATO-Active 776

No.	Model	Range [mm]	Comments
355-731	STRATO-Active 776	700 x 700 x 600	Standard stand
355-733	STRATO-Active 7106	700 x 1000 x 600	Standard stand
355-735	STRATO-Active 9106	900 x 1000 x 600	Standard stand
355-737	STRATO-Active 9166	900 x 1600 x 600	Standard stand

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

STRATO-Apex 500, 700 & 900 Series

STRATO-Apex 500, 700 & 900 Series

The challenges for measurement equipment are rising. Products are continuously improving as a result the lifetime of products is increasing while their energy consumption is reduced. Additionally, the throughput of production is driven up. All these facts must be taken into account for your measuring equipment.
With the STRATO-Apex CMM, Mitutoyo offers you the opportunity to match both: precision and velocity.

This high accuracy CNC coordinate measuring machine that allows you to get accurate results at lightning speed.

Main benefits:

- High measurement accuracy and high-speed motion
- High-performance scanning
- Ultra high precision scales on each axis, resolution 0,02 µm
- Temperature sensors for monitoring of the environmental temperature and compensation of machine and workpiece
- Anti-vibration system reduces the impact of nearby vibration sources (optional for 574)
- Multi-sensors capability
- UC480 controller supporting Multi-sensor and SMS functionality (Smart Measuring System)



STRATO-Apex 9166

STRATO-Apex Models:

No.	Model	Range [mm]	Comments
355-701	STRATO-Apex 574	500 x 700 x 400	Standard stand
355-702	STRATO-Apex 574	500 x 700 x 400	Anti vibration stand
355-705-10	STRATO-Apex 776	700 x 700 x 600	Anti vibration stand
355-707-10	STRATO-Apex 7106	700 x 1000 x 600	Anti vibration stand
355-709-10	STRATO-Apex 9106	900 x 1000 x 600	Anti vibration stand
355-712-10	STRATO-Apex 9166	900 x 1600 x 600	Anti vibration stand

Specifications


Accuracy	E0, MPE from: (0,7+2,5/1000) µm
Max. drive speed	519 mm/s (3-axis)
Digital step	500/700/900: 0,02 µm

Accuracy is specified for the following environmental conditions for the CMM:


Temperature range	Series 500: 18°C -22°C Series 700/900: 19°C -21°C	
Temperature change	Per hour	1°C
	Per 24 hours	2°C
Temperature gradient	Vertical	1°C/m
	Horizontal	1°C/m



Optional joystick-box M2 with speed adjustment knob



Mitutoyo eco-fix fixture kits:
- flexible & quick setup
- time & cost saving
- easy adaption of product changes



StyliCleaner always Reliable and Clean Stylus

Refer to the STRATO-Apex brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


LEGEX Series

Specifications

Accuracy	E0, MPE from: (0,23+0,7L/1000) µm
Max. drive speed	200 mm/s (3-axis)
Digital step	0,01 µm




Optional joystick-box M2 with speed adjustment knob



CMM calibration using a virtually zero thermal expansion glass gauge



Mitutoyo offers you over 1000 styli products plus highly specialised equipment for your measuring task.



StyliCleaner always Reliable and Clean Stylus

LEGEX [Takumi Model] Series

The LEGEX Series is an ultra-high precision CNC coordinate measuring machine.

A fixed bridge structure and precision air bearings running on highly rigged guideways, ensure superior motion stability and ultrahigh geometrical accuracy. Drive systems placed in the "Center of gravity" of the sliders, gives best possible dynamic performance. In addition, an active anti-vibration stand has have been utilized to provide ultra-high accuracy.

The construction is designed for thermal stability, low expansion crystallized glass scales and temperature compensation, results in guaranteed high accuracy within a temperature range of 19 °C to 21 °C.

Main benefits:

- Rigorous analysis of all possible error-producing factors, and elimination or minimization of their effects, delivers unsurpassed accuracy of 0.23µm
- Ultra-high accuracy crystallized-glass scale with the ultra-low expansion coefficient of 0.01x10-6/K is used on each axis
- The fixed bridge structure and precision air bearings, running on highly rigid guideways, give you superior motion stability and ultra-high geometrical accuracy
- UC480 controller supporting Multi-sensor and SMS functionality (Smart Measuring System)
- You can use several different types of optional probe systems, including Mitutoyo's high precision MPP310Q scanning probe



LEGEX Takumi

LEGEX Models:

No.	Model	Range [mm]	Comments
356-407-10	LEGEX 574	500 x 700 x 450	Anti vibration stand
356-417-10	LEGEX 774	700 x 700 x 450	Anti vibration stand
356-427-10	LEGEX 776	700 x 700 x 600	Anti vibration stand
356-437-10	LEGEX 9106	900 x 1000 x 600	Anti vibration stand

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CRYSTA-KM565

CRYSTA-KM565 Manual CMM Range 500x600x500

Economical high-performance CMM for high-precision inspection of small and medium-sized parts.

Main benefits:

- Advanced ultra-rigid alloy platform
- Rapid thermal diffusion through the frame when the temperature changes
- FEA design ensures optimal moment of inertia and stiffness, enabling strong acceleration
- Base composed of a single piece of granite with M8 threaded top inserts in a large checkerboard design
- Rigid air bearings
- Z-axis pneumatic counterbalance
- Measuring scales with 0.1 micron resolution with dynamic signal processing
- Passive vibration damping system that isolates from external vibrations
- Free access to the measurement area of the CMM



CRYSTA–KM565

No.	Model	Range [mm]
196-940MEU	CRYSTA-KM565	500 x 600 x 500

Specifications

Accuracy	With MH20i-TP20: E0, MPE = (3,2+5,0L/1000) µm



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MACH Ko-ga-me

Specifications

Accuracy	E0, MPE from: (2,4+5,7L/1000) µm
Max. drive speed	340 mm/s (3-axis)
Digital step	0,02 µm

MACH Ko-ga-me Series

Agile Measurement System

The MACH Ko-ga-me is a unique and compact CMM ideal for integration into in-line systems for automated measurements. Perfect for automated cells and stand-alone solutions, this compact metrology solution delivers reliability in a lightweight and easy to mount form factor. The CMM also provides flexible production performance for any manufacturing environment thanks to its guaranteed accuracy within a temperature range of 10 °C up to 35 °C.



Joystick-box M2 with speed adjustment knob, standard accessory.



Mitutoyo eco-fix fixture kits:
- flexible & quick setup
- time & cost saving
- easy adaption of product changes

Refer to the INLINE Measuring systems brochure

Scan QR Code with your mobile device and watch our product videos on YouTube

Main benefits:


- High measurement speed and acceleration
- Extremely small footprint saves valuable space for production
- Ideal for single feature inspection and usable with both scanning and touch-trigger probes
- Absolute measurements
- Maintenance-free linear-guidings (no air bearings)
- Multi-function joystick box-M2, including two levers and a speed adjustment knob
- Measuring range 120 x 120 x 80 mm
- High precision scales with 0.02 µm resolution
- UC400K controller supporting SMS functionality (Smart Measuring System)

MACH Ko-ga-me Models:

No.	Model	Range [mm]
357-172-10	MACH-Ko-ga-me 12128-C	120 x 120 x 80



MACH Ko-ga-me

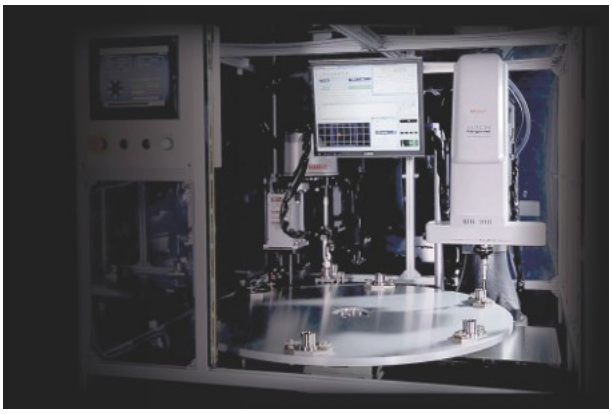

In-line Application example with MACH Ko-ga-me

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

MiSTAR

MiSTAR Series

Compact shop floor CNC CMM


The MiSTAR is a CNC coordinate measuring machine conceived to be the "measuring machine for any environment." It comes with a wide accuracy-guaranteed temperature range, environment-resistant absolute scale, and an all-in-one space-saving design. With performance that sets it apart from conventional coordinate measuring machines, the MiSTAR is guaranteed to boost your productivity. MiSTAR can be equipped with PH6M, PH10MQ and PH20 probe head.

Main benefits:

- High accuracy, high speed and high acceleration
- Temperature sensors for compensation of machine and workpiece from 10° to 40°C and monitoring of the environmental temperature.
- ABS linear scales provide high environmental resistance and saves time at start-up as homing is not necessary
- New UC480 controller supporting Multi-sensor and SMS functionality (Smart Measuring System)



MiSTAR 555

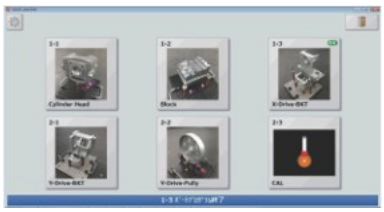

Quick launcher for easy part program execution



Equipped with the PH6M probe head



Equipped with the PH10MQ probe head


No.	Model	Range [mm]
357-305	MiSTAR 555	570 x 500 x 500
357-313	MiSTAR 575	570 x 700 x 500

Specifications

Accuracy	E0, MPE from: (2,2+3L/1000) µm
Max. drive speed	606 mm/s (3-axis)
Digital step	0,1 µm

Optional accessories

No.	Description
63AAA778	Anti-vibration system, for Mistar 555 & QV404
63AAA779	Anti-vibration system, for Mistar 555, Mistar 575 & QV404



Mitutoyo eco-fix fixture kits:
- flexible & quick setup
- time & cost saving
- easy adaption of product changes



K543667 Shop-floor CMM loading station eco-load duo for MiSTAR

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MACH-3A 653

MACH-3A 653 Series

High Speed In-Line CMM

The MACH-3A 653 is a horizontal spindle type with index table coordinate measuring machine and is designed for fast and precise inline measurement. It grants outstanding throughput will allow you to boost up your measuring process. His small foot print and protection against rough production environments makes him suitable for workshop and inline production measurements.

Main benefits:

- Super High speed and acceleration
- Drastic reduction of the measurement cycle compared with any conventional CMM
- All in One Compact design to minimize the foot print in the workshop and to improve the dust resistance
- Work piece handling and routing in the same posture as for other horizontal spindle machining centres
- Control unit and PC are installed in the dust-tight rack with heat exchanger
- Ease-of-maintenance construction and air-free operation using high accuracy linear ball bearing
- Temperature compensation from 5°C to 40°C
- Glass scale with high resolution 0,1 µm
- Safety joystick box with deadman switch and speed adjustment
- UC400K controller supporting SMS functionality (Smart Measuring System)
- Optional with index table for higher flexibility



MACH-3A 653

No.	Model	Range [mm]
360-417	MACH-3A 653	600 x 500 x 280


Specifications

Accuracy	E0, MPE from: (2,2+3,5L/1000) µm
Max. drive speed	1212 mm/s (3-axis)
Digital step	0,1 µm

Accuracy is specified for the following environmental conditions for the CMM

Temperature range		5°C - 40°C
Temperature change	per hour	2°C
	per 24 hours	10°C
Temperature gradient	Vertical	1°C/m
	Horizontal	1°C/m

Safety System
For this type series, Mitutoyo offers a customized safety system. Depending on the local situation in your facility, Mitutoyo will propose a tailor-made solution meeting the requirements of the Machinery Directive.

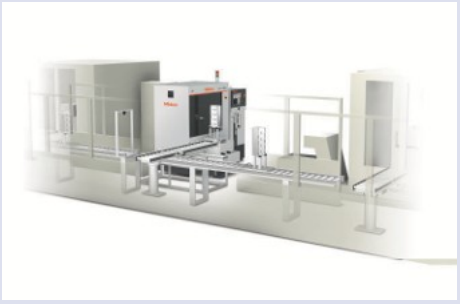

Refer to the INLINE Measuring systems brochure

Scan QR Code with your mobile device and watch our product videos on YouTube



StyliCleaner always Reliable and Clean Stylus

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

MACH-V9106

MACH-V 9106 Series

High Speed In-Line CMM

The MACH-V 9106 is a vertical spindle type coordinate measuring machine and is designed for fast and precise inline measurement. It grants outstanding throughput will allow you to boost up your measuring process.
His design is so chosen that work pieces can be conveyed through the CMM either in front/back or left/right. This makes it a very flexible system to integrate. Also it can provide pre/post machining feedback to your machine tools for process tuning.

Main benefits:

- Higher speed and accuracy with barycentric drive
- Improved dust resistance by installing all drive system and scale units in the dust-tight enclosure on the machine top
- Control unit and PC are installed in the dust-tight rack
- Space-saving design helps installation in a production line
- Flexible loading options due open access to the measuring area
- Ease-of-maintenance construction and air-free operation using high accuracy linear ball bearing
- Temperature compensation from 5° to 35°C
- Glass scale with high resolution 0,1 µm
- Safety joystick box with deadman switch and speed adjustment
- UC400K controller supporting SMS functionality (Smart Measuring System)



MACH-V9106

No.	Model	Range [mm]
360-228	MACH-V9106	900 x 1000 x 600

Scan QR Code with your mobile device and watch our product videos on YouTube


Specifications

Accuracy	E0, MPE from: (2,5+3,5L/1000) µm
Max. drive speed	866 mm/s (3-axis)
Digital step	0,1 µm

Accuracy is specified for the following environmental conditions for the CMM

Temperature range		5°C - 35°C
Temperature change	per hour	2°C
	per 24 hours	10°C
Temperature gradient	Vertical	1°C/m
	Horizontal	1°C/m






Safety System
For this type series, Mitutoyo offers a customized safety system. Depending on the local situation in your facility, Mitutoyo will propose a tailor-made solution meeting the requirements of the Machinery Directive.



Mitutoyo eco-fix fixture kits:
- flexible & quick setup
- time & cost saving
- easy adaption of product changes



StyliCleaner always Reliable and Clean Stylus

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

High-accuracy Separate Guide Type MICROCORD STRATO-Apex Series

Specifications

Accuracy	E0, MPE from: (3,5+4,5L/1000) µm
Max. drive speed	520 mm/s (3-axis)
Digital step	0,1 µm

Accuracy is specified for the following environmental conditions for the CMM:


Temperature range		18°C - 22°C
Temperature change	Per hour	1°C
	Per 24 hours	2°C
Temperature gradient	Vertical	1°C/m
	Horizontal	1°C/m



Scanning with probe SP80 and 100 mm styli.

Safety System
For this type series, Mitutoyo offers a customized safety system. Depending on the local situation in your facility, Mitutoyo will propose a tailor-made solution meeting the requirements of the Machinery Directive.

Foundation
This type series always requires a special foundation. Please contact your local Mitutoyo partner for further details.



StyliCleaner always Reliable and Clean Stylus



Joystick-box V2 with speed adjustment knob, standard accessory.

- The STRATO-Apex Series are CNC CMMs that use Mitutoyo's standard structure for large machines which are designed to be used for measuring large and heavx workpieces with high accuracy. The picture below gives a good idea of how large the machine is. The measuring accuracy and drive speed are the world's highest in the X-axis measuring range of 2000mm and 3000mm.
- High-accuracy linear encoders (manufactured in-house) are built into the length measuring units used for position detection. Their excellent position detection capability is what makes the control of the high-accuracy devices possible. The series also applies a multitude of technologies regarding structure, control, component processing, assembly, and other aspects that enable large CMMs to deliver high-accuracy measurements.
- These series are equipped with a system to automatically restore accuracy deterioration (MOVAC) caused by foundation deformation as a standard feature.
- Equipped with a temperature compensation system that guarantees the specified accuracy within the wide range of 18 to 22°C under certain environmental conditions, although high-accuracy CMMs should ideally be installed in a temperature controlled room.
- Safety devices such as a Z-axis beam sensor, tape switch, and area sensor are available as options.



STRATO-Apex 3000G Series

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

CARBstrato Series

CARBstrato Series

A large, horizontal-type arm CNC CMM for measuring car bodies or similar components. Single/dual-head types are available ; the dual-head type measures by controlling two heads simultaneously, one from each side.

MAIN FEATURES CARBstrato : large, high precision, dual-head type.

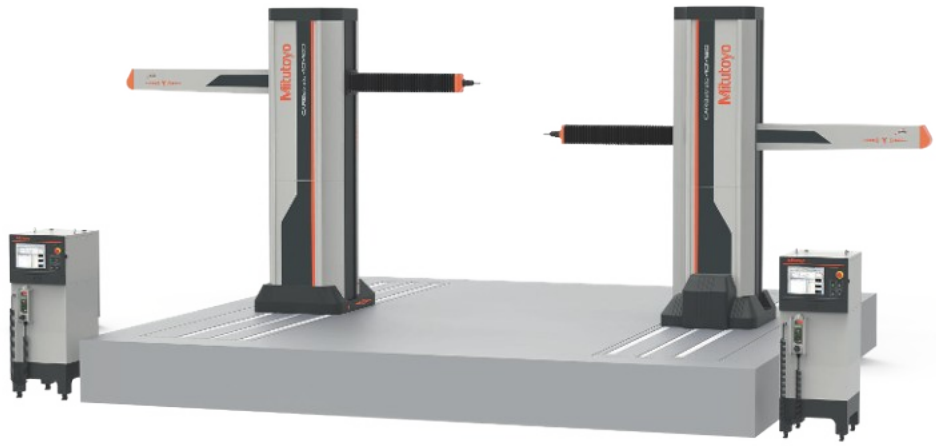

CARBstrato (Dual-arm type)

No.	Model	Accuracy[(1)] $E_{0,MPE}$
CARBstrato	CARBstrato	(18+20L/1000) µm

(1) According to ISO 10360-2:2010 when using probe SP25M, module SM25-1, stylus ø 4x50 mm. L= measured length (mm).

Specifications

Range X-axis	4000-8000 mm
Scale	High accuracy linear encoder
Guide system	X-axis : linear guide ; YZ-axis : air bearing
Max. drive speed	866 mm/s (CARBstrato)
3D Acceleration	0,2G (CARBstrato)
Digital step	0,1 µm

CARBstrato brochure on request

Safety System
For this type series, Mitutoyo offers a customized safety system. Depending on the local situation in your facility, Mitutoyo will propose a tailor-made solution meeting the requirements of the Machinery Directive.

Foundation
This type series always requires a special foundation. Please contact your local Mitutoyo partner for further details.



Mitutoyo offers you over 1000 styli products plus highly specialised equipment for your measuring task.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Rotary Tables





Application of MRT240.


Rotary Tables

Rotary tables expand the scope of applications, simplify the measurement procedure, and reduce measurement time via the scanning mode.

This additional axis allows the use of simple stylus combinations and extends the available measurement range. The programming of the parts to be measured is simplified since the paths of the CMM are shorter. Rotary tables are used for the measurement of various parts but their main use is to considerably simplify the measurement of parts of revolution presenting periodically repeating geometries, such as gears, rotors, turbines, etc.
All angles are immediately available and allow easy access to the measurement of elements inaccessible by an adjustable head or a fixed measuring head. The flexibility doesn't stop there. Mitutoyo measuring machines also allow an indexed swivel head to be coupled to Mitutoyo MRT240 / MRT320 rotary tables.




MRT240

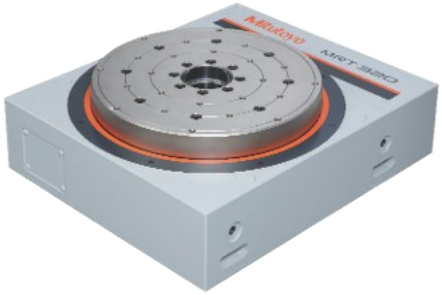


MRT320

Air bearing

No.	Model	Diameter	Range [mm]	Rotational speed [rpm]	Max. Load	Mass
06AGW305	MRT240	240 mm	327 x 250 x 105	6	40 Kg	20 Kg
06AGX660	MRT320	320 mm	470 x 400 x 150	9	100 Kg	120 Kg

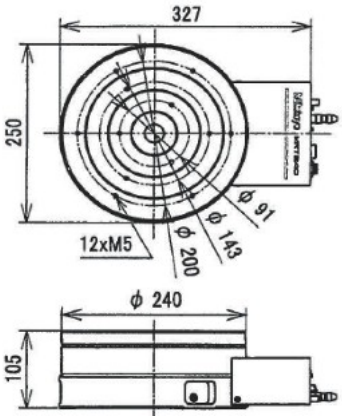

MRT240

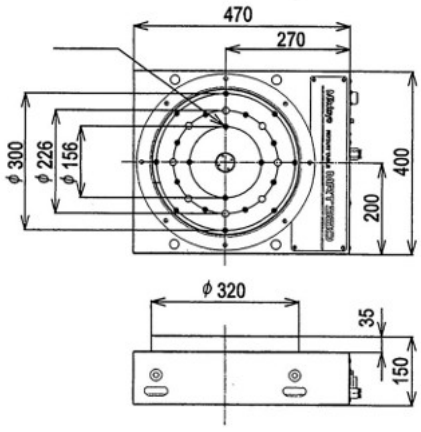

MRT320

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CMM Probes

SurfaceMeasure

Ultra-high speed data collection
SurfaceMeasure is a laser probe that collects coordinate values of the surface of the workpiece by moving and irradiating laser light over the workpiece.

Advantages of non-contact type
Non-contact measurement enables measurement of materials that can be easily-deformed by contact measurement, including resin or thin, elastic parts.

Powder-less measurement
Automatic configuration of the camera sensitivity and the laser intensity settings according to the environment and materials enable establishing a simple and comfortable laser-scanning environment since measurement is now powder and spray free.

Evaluation cases
The collected point cloud data can be used by various optional software in a wide range of applications, such as editing, plane creation, comparison using CAD data and



SM 1110




SM 201FS

No.	Model	Laser irradiation method	Max. scan width	Max. scan depth	Working distance [mm]	Scanning error (*1)	Max. Acquisition rate	Laser Class EN/IEC
02AQJ900	SM 201FS	Flying spot	23 mm	15 mm	57.5	1,8 µm	25000 points/sec	Class2 [EN/IEC 60825-1: 2014]
02AQK010	SM 1110	Line Laser	110 mm	100 mm	156.5	9 µm	300000 points/sec	Class2 [EN/IEC 60825-1: 2014]

(*1): Accuracy according to Mitutoyo Standard (1σ)

No.	Laser Class JIS	Laser Type	Line Laser Wavelength	Line Laser Output	Mass
02AQJ900	Class2 [JIS C 6802 : 2014]	Flying Spot method	670 nm	1 mW	500 g
02AQK010	Class2 [JIS C 6802 : 2014]	Red semiconductor	660 nm	2,5 mW	440 g



Measurement of glossy parts




The flying spot type is capable of scanning difficult parts, such as this impeller, precisely and achieves highest scanning accuracy in the class.


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Probes

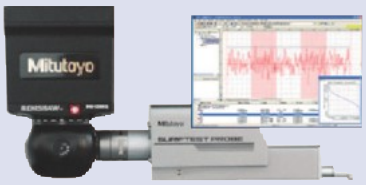

SURFTEST Probe



Optional detectors

SURFTEST Probe

Surface Roughness Measurement directly on the CMM!


This Mitutoyo sensor head closes the gap between typical dimensional CMM measurements and surface roughness inspection. Instead of having to take the workpiece to another measuring instrument or using additional portable systems, the SURFTEST Probe adds roughness measurement capability to your CMM and so avoids all the cost and inconvenience of additional systems. It brings the proven technology of the SJ-310 series to the CMM with all its highly capable range of detectors developed for handling specialist applications such as roughness measurement on gears, inside small holes or deep grooves, in addition to simple flat surface measuring tasks.

Main benefits:

- Proven technology from Mitutoyo's SJ-310 Surftest
- Chose from five types of detector for variant applications
- High accuracy – no CMM movement during measurement
- One CNC measurement cycle produces all results
- Graphical and numerical output
- One Measurement report for all GD&T requirements





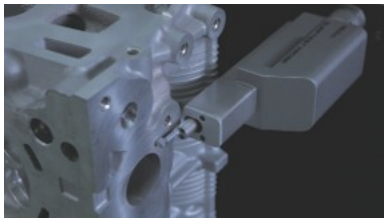

No.	Model	Comments
06AEN891	SURFTEST Probe kit	For PH10M/MQ mount
06AFE255	SURFPAK-SP software	Necessary option
178-270	Detector 0,75mN, 60° R2µm	Optional accessory*
178-280	Detector 4mN, 90° R5µm	Optional accessory*

* Chose at least one of these options

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CMM Probes

QVP Quick Vision Probe


Mitutoyo's Vision Probe System for CMMs

The Quick Vision Probe will make from your CMM an VMM (VisionMM). Put in an probe change rack you can use it together with other probes. Were traditional probes can not be used, very small holes and flexible parts, the QVP can do this Job.

- Fast optical measurements – the perfect choice for small features and soft materials
- Ideal in combination with tactile probes
- Prepared for automatic probe change
- Four objective lenses offer different optical magnification
- From 0.375 x to 3.75 x
- White LED ring light
- White LED coaxial light



QVP (Quick Vision Probe)







ML objective lenses



Calibration gauge



Pixel calibration chart

No.	Model	Comments
359-051-9	Vision probe incl. ML 3X objective lens	
375-036-2	ML 1X objective lens	Optional accessory
375-034-1	ML 5X objective lens	Optional accessory
375-039	ML 10X objective lens	Optional accessory
02AQC310	Calibration gauge	Necessary accessory
02AKN020	Pixel calibration chart	Necessary accessory
02NBA813-DEE	Visionpak-Pro software	Necessary option

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Probes




MPP-310Q

MPP-310Q

Ultra-High accuracy and low measuring force Scanning Probe

This ultra-high precision scanning probe incorporates built-in XYZ scales for highest accuracy performance.
The compact size of this probe is ideal for low measuring force and high speed scanning.
Data collection can be performed by scanning measurement, ultrahigh precision point measurement and center alignment measurement.
Special developed for our Ultra-High accuracy CMM

- High resolution of 0.01 µm
- Measuring range ±1 mm
- Extremely low measuring forces of 0.03 N
- Styli length up to 200 mm
- Air bearing for smooth measurements
- Axis clamping for scanning on slanted or arched surfaces

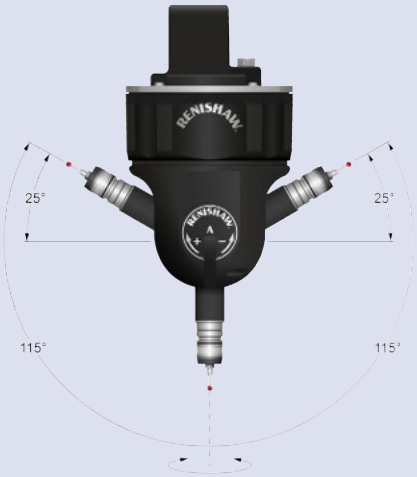

Infinite B-axis rotation

PH20

Rapid tactile measurements at any probe angle

- Head touch for improved repeatability
- Feature-based calibration for improved accuracy
- Automatic stylus change with TP20 modules and optional TCR20 change rack
- Allowing subsequent measurement at any head angle
- Full support in MCOSMOS and MiCAT Planner
- 5-axis control on CMM's with UC400 / 480 controller and PHC20 interface



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

CMM Probes

Revo

5-axis measurement technology

- Rapid scanning at any angle
- Dynamic 2-axis head provides most of the stylus motion
- High accuracy and repeatability
- Scanning with 5-axes of simultaneous motion allows unparalleled measurement flexibility
- 'Head-touches' take measurement points faster, with improved accuracy and repeatability
- 5-axis motion eliminates time spent indexing the head
- Supports stylus lengths up to 500 mm

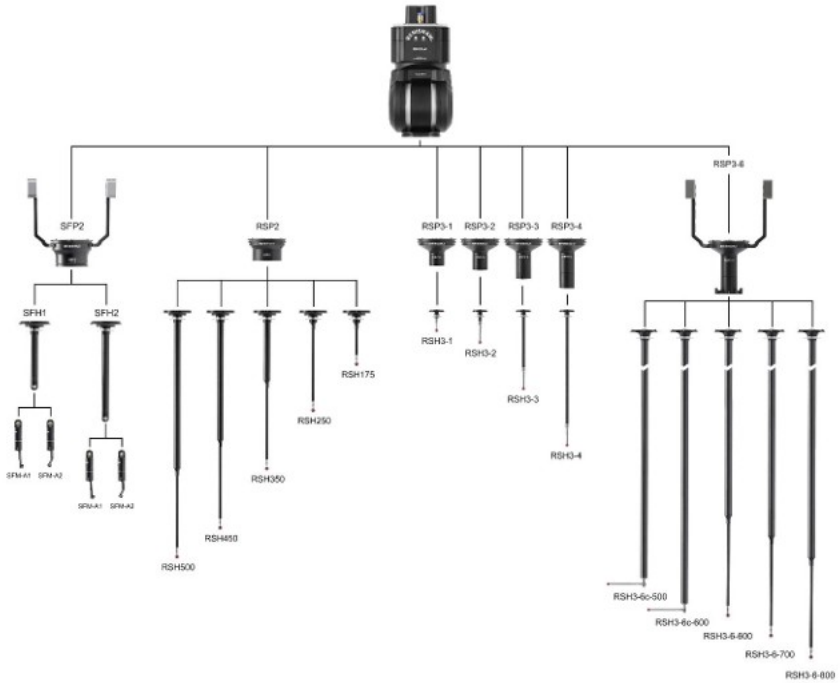



Revo

Refer to the Measuring Heads brochure

Scan QR Code with your mobile device and watch our product videos on YouTube

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


CMM Probes

Scanning probe systems

Scanning probes can acquire several hundred surface points each second, enabling measurement of form as well as size and position.
Scanning probes can also be used to acquire discrete points in a similar way to touch-trigger probes.
A range of solutions is available, suitable for all sizes and configurations of CMM.



SP80
is a quill-mounted scanning probe that uses digital scale and readhead technology, to provide exceptional scanning performance, even with long styli.

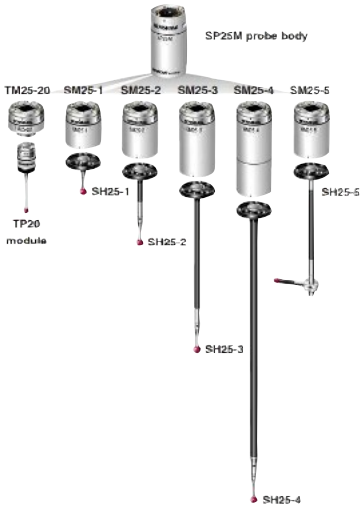

SP25M
At just 25 mm in diameter, the SP25M is small and light, making it ideally suited to mounting on articulating heads. It is also sufficiently compact to suit small CMM's



SP600
Renishaw's SP600 analogue scanning probe offers high-performance inspection, digitizing and profile scanning capability for a wide range of CMM's.

Touch-trigger probe systems



TP7M
High accuracy type



TP200
Compact and high accuracy (stylus change type)



TP20
Compact type

Probe heads with integrated Probe system.



MH20i
Manual Probe

Probe heads



PH10MQ
Motor drive index type



MIH
Manual index type



PH1
Simple manual type

CMM Probes brochure on demand

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CMM Probes

Change Racks



MCR20 rack for use with TP20 probe



SCR200 rack for use with TP200 probe



TCR20 rack for use with PH20 probe



SCR600 rack for use with SP600 probe



FCR25 rack for use with SP25M probe

Modular Rack Systems



MRS system with optional ACR3-4 and FCR stylus modules



MRS2 single system and with additional front and back Rail

Modules for Modular Rack System



ACR3-4 passive 4 port probe changer



FCR25 for SP25M



SCP600 for SP600



RCP2 for REVO



RCP TC2 for REVO

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Styli



Custom styli
If you cannot find what you are looking for in our standard range, please contact us at custom.styli@mitutoyo.eu and benefit from our longstanding experience.

CMM Styli

The stylus is the critical interface between the probe and the workpiece, directly influencing measurement accuracy. Mitutoyo styli are designed with optimized stiffness, low mass, controlled thermal behaviour, and high-precision Grade 5 (DIN 5401:2002) balls to ensure reliable, repeatable results. With decades of experience and a broad portfolio, Mitutoyo styli are **developed and manufactured in Germany**, reflecting the highest standards of precision engineering and quality.

Ball material properties

Ruby
- Standard all-round material for most applications
- Very hard and wear-resistant
- Low density → lightweight stylus, good dynamics
- Best for general touch-trigger and light scanning tasks

Silicon Nitride
- Extremely hard with the **smoothest surface**
- No adhesive wear with aluminum → ideal for scanning aluminum parts
- Very stable measurement results on soft metals

Zirconium Oxide (Ceramic)
- Excellent resistance to **abrasive wear**
- Best choice for scanning **cast iron surfaces**
- More robust than ruby in aggressive scanning applications

Diamond (Coated or Solid)
- **Highest hardness** and **wear resistance**
- Essential for very hard or coated surfaces (PVD, CVD, DLC, hardened steels)
- No material adhesion (e.g. aluminum, titanium)
- Longest service life → ideal for demanding, high-wear applications







Styli catalogue PRE 983017.

Mitutoyo Styli for measurably better results.

Discover the Mitutoyo online Styli catalogue or download the PDF.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Styli Kits


Styli Kits


Preconfigured styli kits are available for the initial equipment or to suit different application or probe requirements.

Please refer to our webshop and styli brochure for the best overview of available kits, single styli and accessories.

Our steadily increasing product range will provide the best styli for your application.



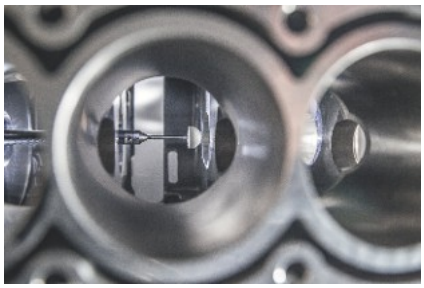

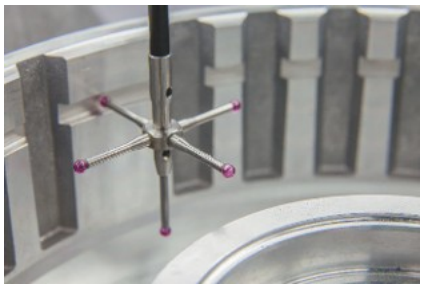








Mitutoyo Styli online catalogue


Scan QR-Code to see all Styli Kits.


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Software

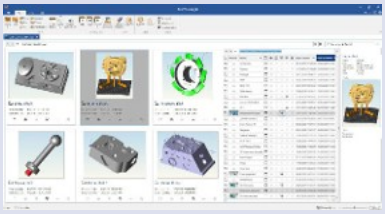

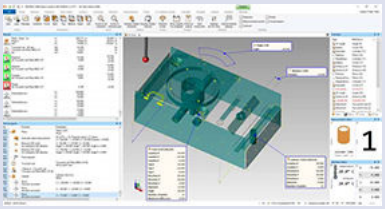

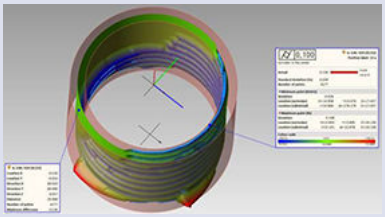



For details, please ask for the MCOSMOS brochure.

MCOSMOS - The Modular Software for all Kinds of Measurement

The heart of your CMM: to organize, execute, calculate and report.

- Organize your measurement programs on the network
- Add commands and instructions to guide the operator
- Create individual reports meeting your customer's needs
- Archive your results in formats like PDF, XLS, HTML and many other
- SPC with MeasurLink or export data to CAQ systems
- Export detected geometrical elements to CAD systems
- Revision Management for authorized usage of validated part programs as standard
- Meet the requirements of **FDA Title 21 CFR Part 11** without extra costs

The following packages are also available for Offline programming.
The so called "**Offline MCOSMOS**" packages allow you to create part programs whilst the CMM is proofing your product quality.

Software package	MCOSMOS-1 Basic package	MCOSMOS-2 CAD package	MCOSMOS-3 CNC V5
Model			
Part Manager			
• System configuration	●	●	●
• Part program handling			
• Data management			
• Create report templates			
GEOPAK			
• On/Off-line	●	●	●
• For prismatic elements			
• Operator guidance			
• Parametric programs			
CAT1000P			
• CAD programming		●	●
• For prismatic elements			
• Collision control			
• Incl. simulation			
CAT1000S			
• CAD programming		●	●
• Free-form inspection			
• Surface + edge points			
• Grahical Reports			
SCANPAK			
• For 2D contours			●
• Evaluate + manipulate			
• Graphical Reports			
• Data exchange to CAD + NC			

Additional software packages meeting your needs:

MeasurLink:
SPC software with certified AQDEF interface. Allows you to collect data from different vendors and devices. Its database offers collecting and analyzing data from all over the world, analyse your process and create individual reports.

ROUNDPAK-CMM
Special evaluation tool for scanning measurements typically known from form measurement instruments. Topographic views and evaluation of form and position deviations.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Software


MiCAT Planner -The CMM Part Program Generator

The new CMM software generation for an efficient, safe and automatic CMM programming. MiCAT Planner drastically reduces the programming time and thus will make your work much more efficient! Programs will now be made within minutes where it took hours or even days before. MiCAT planner is using PMI (Product Manufacturing Information) tolerance information inside the CAD file and creates the complete part program by considering your individual measurement strategy and your specific CMM. This guarantees a collision-free program in the shortest possible time.


- Reduces programming time significantly
- Collision-free and optimized programs
- Increased availability of the measuring machine
- Flexibility in choosing the measuring machine
- Unified measurement strategies increase data quality
- Speeds up instruction of staff

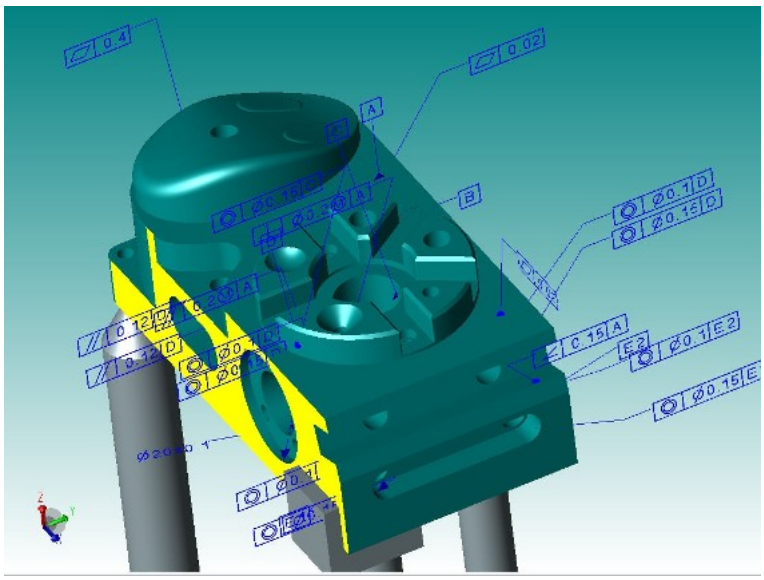


Step 1: Load the CAD model.
• Various CAD transaltors available: ACIS, STEP, CATIA V5, Pro-Engineer/CREO, Siemens NX, SolidWorks
• Add missing tolerance information

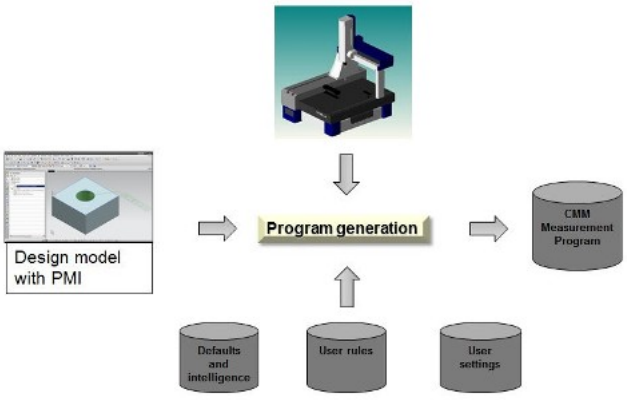


Workflow by MiCAT Planner

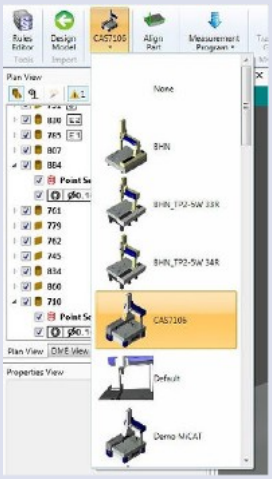

Step 2: Select the CMM



Step 3: Align CAD model



Step 4: Create the part program




Step 5: Transfer to MCOSMOS

Scan the QR Code with your mobile device and watch our product videos on YouTube

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Software




Screen sample from MSURF-S/I

MSURF - Point Cloud Processing Software for Coordinate Measuring Machines

MSURF-S

Calculates point cloud data measured by CNC CMM with SurfaceMeasure. It generates scanning paths by defining the scanning start position, length, and width.


- Scanning paths can be created by simply defining three items : the scanning starting point, the scanning length, and the scanning width
- Scanning paths can be stored as measurement macros
- Point cloud data obtained from scanning can be exported in text or STL format
- MSURF-S can be started from MCOSMOS

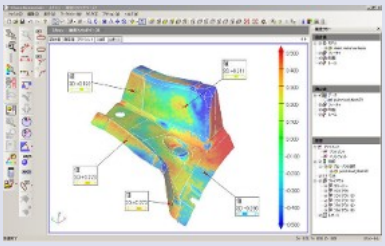

MSURF-I

Conducts analysis or comparison verification of measured point cloud data in reference to nominal data (supporting CAD data import).

- Importing CAD data
- Feature-by-feature comparison
- Comparison of cross-sectional shapes

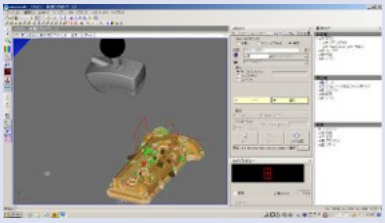



MSURF Planner

is software to automatically create measurement macros (surface form, feature form) for the line laser probe from 3D CAD data.
Optimized data (travel path, number of probe head revolutions, etc.) of a measurement path will contribute to improvements in productivity.

- Automatic scanning path programming.
- Automatic path generation for surface or feature extraction
- Mirroring function





Error colour-coded map



Surface curvature evaluation

MSURF-G

Off-line version for part program generation

- Semi-automatic function for creating measurement paths with optimum probe orientation
- Detection of collision between the probe and the workpiece model
- Generation of simulated data for the point cloud expected to be obtained through scanning
- Displaying measurement movements (scanner movements) in animation

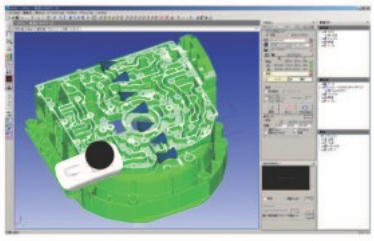
Screen sample from MSURF-G

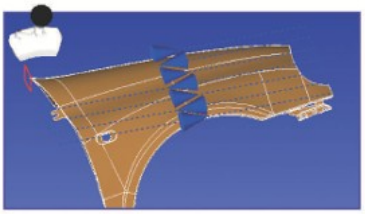
Screen sample from MSURF-G

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Software


MAFIS Express - Rapid Air Foil Inspection Software

Mitutoyo introduces the fastest way for inspecting blades and blisks: MAFIS Express.


- Increases your throughput by time savings up to 90%
- Intuitive programming and easy handling
- For many kinds of airfoils like blades, blisks, gas turbines
- Easy Off-line programming on the CAD model
- Individual setting of the inspection routine: measure all or just some dedicated intersections
- Support of standards set by Rolls-Royce®, P&W, Siemens®, GE®, Honeywell®, SNECMA, Turbomeca® and others
- Ideal with the Revo® or SP25M probe heads

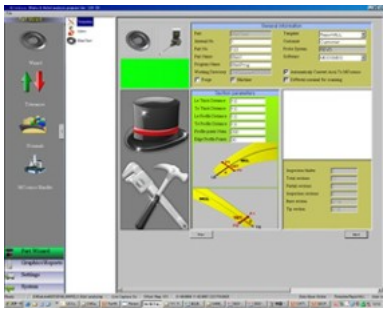


MAFIS Express

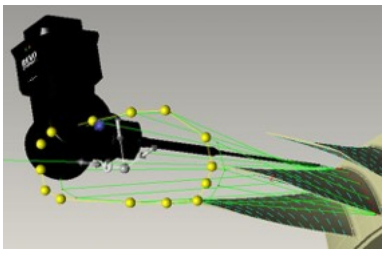


Setting intersections on the CAD model

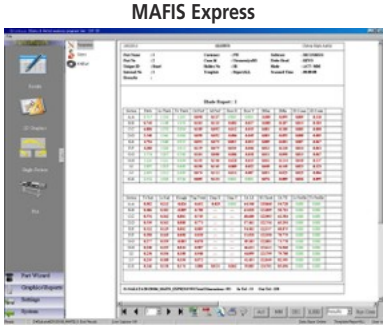

Numerical evaluation

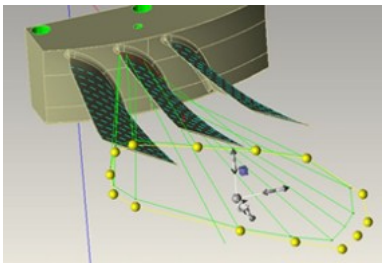


Optimizing the probe path

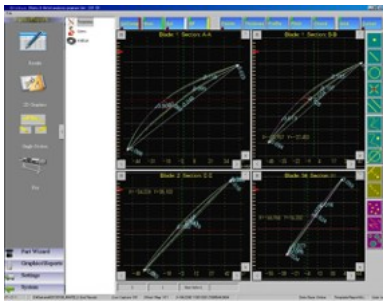


Graphical evaluation


Take a look how quick air foils are inspected by MAFIS Express

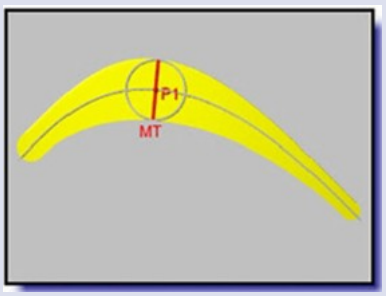


Maximum thickness

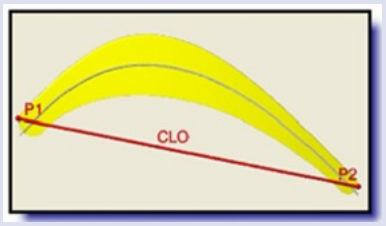


Overall Chord Length

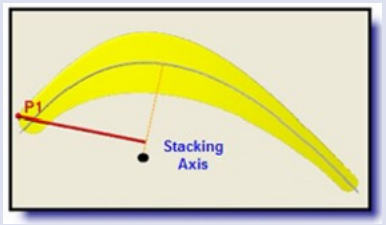

Stacking Axis

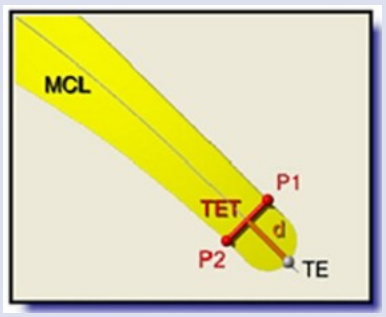

Trailing Edge – thickness on specific distance

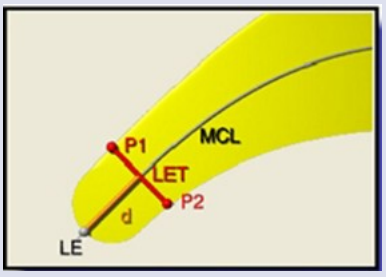

Leading Edge – thickness on specific distance

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Software





GEARPAK-Express


Gear Measurement and Evaluation software for cylindrical gears


Main features:


- A 3D model created from the provided gear specifications enables an easy visual check of the measurement strategy.
- Automatic program creation and on-screen measurement guidance help quick and easy setting of the coordinate system.
- "4-Axis nominal scanning" using an optional rotary table, makes scanning even faster. Depending on the size and accuracy class of the gear, the measurement time can be reduced up to 50% compared to conventional methods.
- The real-time display of the measurement result and tolerance judgment result enables early detection of non-conforming product.
- Performs dimensional measurement and geometrical tolerance evaluation without changing the setup during gear evaluation.



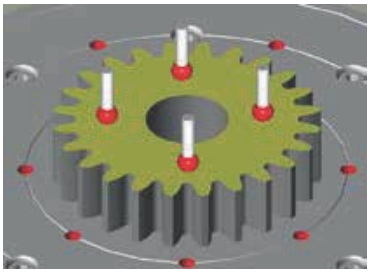

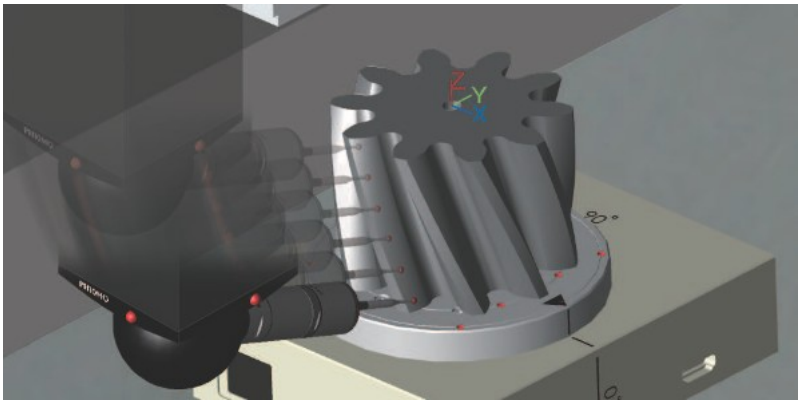

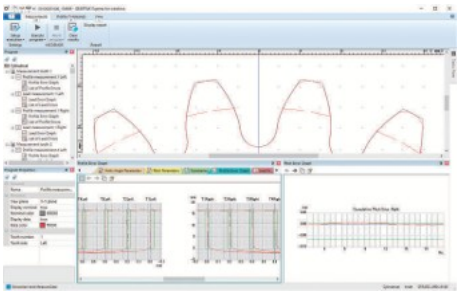



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Enclosures

Protect your investment for contamination, improve reliability of measurements and reduce maintenance costs. Mitutoyo's Inspection Enclosures are designed to help keep your CMMs and instruments free of airborne contamination.

Features and benefits:
- Standard fans create positive pressure inside the enclosure to exclude airborne contaminants, increase reliability of measurements and reduce CMM maintenance costs.
- Air-conditioning option is available to add temperature control to the clean air environment.
- Enclosed volume provides greatly improved working conditions for intricate inspection operations.
- Double doors fold back enabling easy access for part loading.
- Modular Design with removable panels enables easy construction around existing machines, straightforward relocation (if required) and assists in annual CMM servicing.
- Enclosures are robustly built to whitstand the demands of a busy shopfloor manufacturing facility.
- Transparent, polycarbonate, easy-clean panels pass sufficient light for normal use and are shatterproof, tough and durable.
- Clean, functional design enhances the appearance of your CMMs.


Technical details:
- Framework fabricated from extruded aluminium.
- Lower panels made from PVC - available in a variety of colours
- Upper panels in clear polycarbonate.



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Fixtures

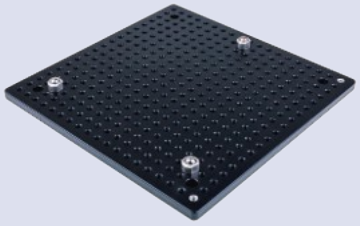



3-point repositiong Pallet Receiver System PRS

Mitutoyo Modular Fixturing Systems

Flexible. Repeatable. Made in Germany.

Accurate measurement begins with reliable fixturing. Mitutoyo Modular Fixturing Systems provide a stable, repeatable, and highly flexible foundation for CMM, form, and optical measurements. Designed for fast setup and long-term precision, all systems are developed and manufactured in Germany to meet the highest quality standards.

The Modular System Concept

Mitutoyo fixturing is built from standardized components that can be freely combined and reused. This modular approach reduces setup time, lowers costs, and ensures reproducible measurement results across single-part and serial inspections.



3-point repositiong Pallet Receiver System PRS

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

CMM Fixtures

Component Types

The separation of our fixture systems in clearly defined component types (base, build-up, positioning, clamping, etc.) creates technical, economic, and operational advantages throughout the entire measurement process.

This results in faster setup, higher repeatability and lower costs.

1. Base Components – The Foundation

- Rigid base plates made of hard-anodized aluminum with M6 grid patterns (12.5 / 25 / 50 mm). Prepared for 3-point positioning and pallet systems, suitable for light to heavy workpieces (**eco-fix / eco-fix^{plus}**).

2. Build-up Components – Height & Orientation

- Location pins, columns, joints, and receiver brackets enable flexible adjustment of height, reach, and angle while maintaining rigidity and repeatability.

3. Positioning Components – Precise Location

- Flat tops, stoppers, backsquares, V-blocks, prisms, cones, and center mounts support the proven 3-2-1 fixturing principle for reproducible positioning.

4. Clamping Components – Secure Fixation

- Spring clips, magnetic receivers, toggle clamps, and vices secure the workpiece safely without deformation, ensuring accurate measurement results.



1. Base Components




2. Build-up Components




3. Positioning Components




4. Clamping Components

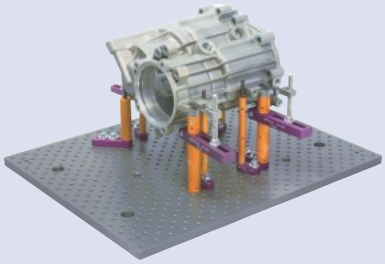

Workpiece set up on eco-fix base plate

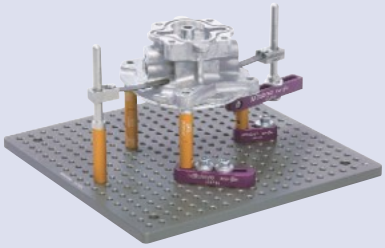



Fixtures catalogue PRE 1403


Mitutoyo Fixtures for measurably better results.

Discover the Mitutoyo online fixtures catalogue or download the PDF.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Fixtures

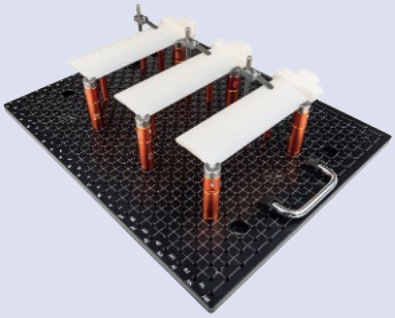

eco-fix base plate with handles for easy handling



Mitutoyo Fixture Product Lines

Mitutoyo modular fixturing systems are organized into complementary product lines, each optimized for specific workpiece sizes, weights, and measurement tasks.
All lines are modular, reusable, and fully compatible within the system concept.


eco-fix

The alround modular fixturing system

- Designed for small to medium-sized, lightweight workpieces
- Components made from hard-anodized aluminum
- Base plates with M6 threaded grid (12.5 mm / 25 mm)
- Fast manual setup with low weight and easy handling

Typical use cases:
Prototyping, single-part inspection, small series, frequent part changes

Key benefit:
Cost-effective, fast, and flexible fixturing for everyday CMM measurement tasks

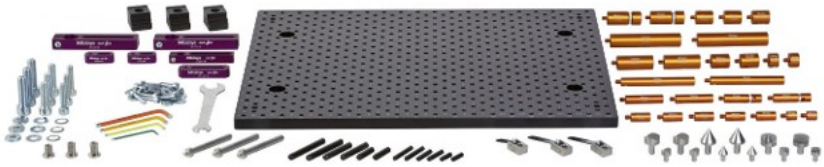

K551549 eco-fix kit


eco-fix^{plus}

The heavy-duty modular fixturing system

- Designed for medium to large and heavy workpieces
- Components made from stainless steel for high rigidity and durability
- M6 threaded grid (25 mm / 50 mm)
- Prepared for manual loading systems (MPS) and higher loads

Typical use cases:
Automotive, aerospace, gearbox, engine, and structural components

Key benefit:
Maximum stability and long service life under demanding conditions

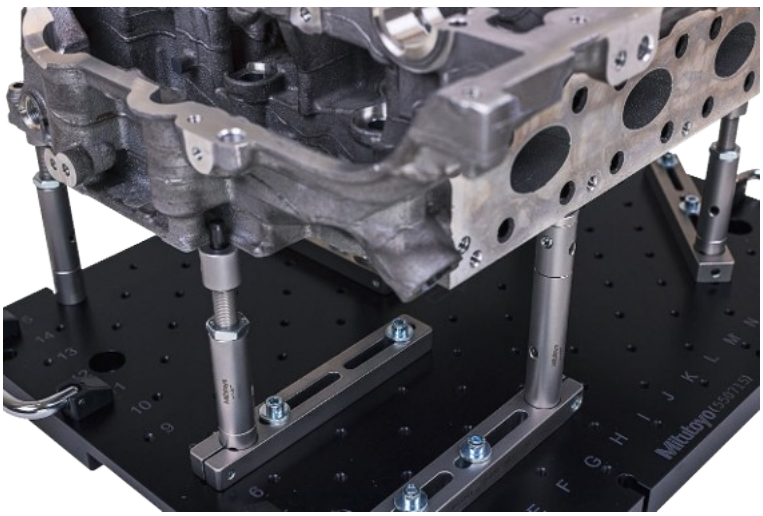

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Fixtures

Mitutoyo Fixture Product Lines

multiflexprofile

The scalable frame and profile system

- Modular aluminum profile system
- Available with optional 50 mm grid for precise alignment
- Enables construction of large, lightweight fixturing frames
- Can be mounted directly on the CMM granite

Typical use cases:
Large and complex shaped workpieces requiring open access


Key benefit:
High flexibility and scalability with excellent accessibility to the part



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Fixtures

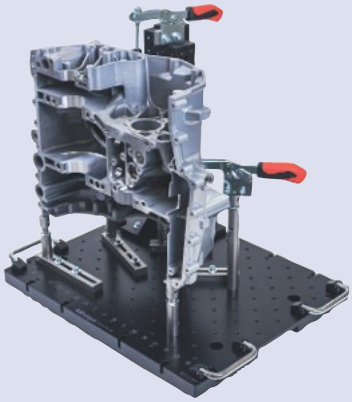







eco-fix^{plus} CMM fixtures Series

A new contestant has entered the modular fixturing world: **eco-fix^{plus}**

- The new fixturing system, made of solid and rigid steel components, is made for heavy and big workpieces.
- It significantly reduces the requirement for custom made solutions due to weight and dimension.
- Repeatable set-up configuration and high durability are only some of the product ranges advantages.
- M6 threading ensures full compatibility with eco-fix components and our **multiflex^{profile}** series.
- The combination with our profile frame series adds utmost flexibility for the fixturing of even bigger components.

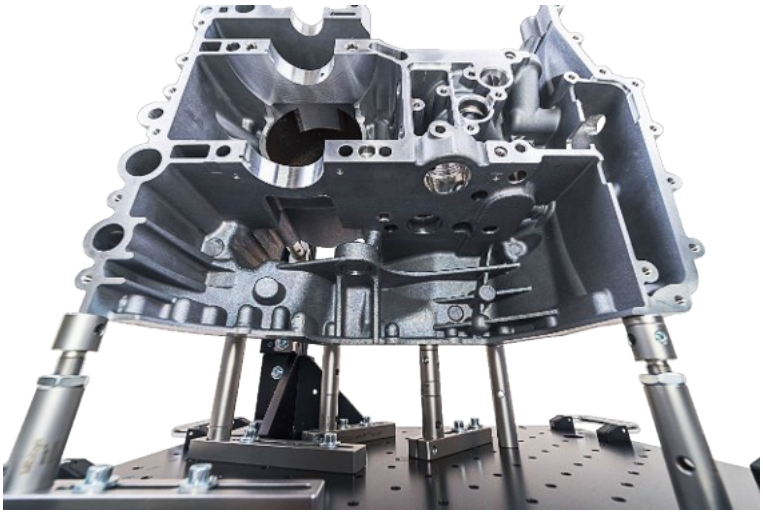

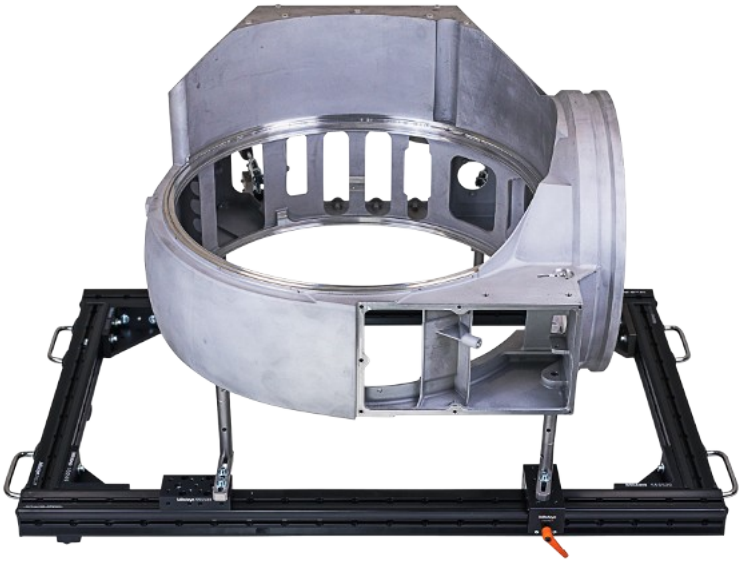

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

CMM Fixtures

FixtureBuilder Software

The free of charge software **FixtureBuilder** enables the user to easily plan and set up his CMM fixture in just a few minutes. Repeatable fixturing has never been easier and at a better price performance ratio. FixtureBuilder is a software tool that allows users to create virtual clamping fixtures quickly and easily. Users can choose whether to set the virtual fixture up manually or to allow the software's "AutoMode" to perform the task.
The interactive "AutoMode" operating mode guides the user step by to step to a finalized clamping fixture. Only very few data need to be input, for example the choice of component to be clamped or the position and type of contact and tensioning points. This data is sufficient to enable **FixtureBuilder** to independently create a complete clamping fixture.

FixtureBuilder advantages

- Fixture building by mouse click
- Ideal for online programming with e.g., MiCAT Planner
- Parts list with material overview
- Documented structure
- Assembly instruction for each column
- Alpha numeric column positioning coordinates according to base plate markings
- Automatic weight determination
- Multiple data formats for file data import and export

FixtureBuilder software allows data to be imported in Acis (*.sat), Iges (*.igs) and Step (*.stp) formats. The export functions it offers include Hoops file (*.hsf), A, 3d PDF (*.pdf) and Acis Files (*.sat).
Available integrated in Mitutoyo's **MCOSMOS** CMM software, or as a free standalone version, FixtureBuilder allows data to be processed in all **MCOSMOS** import formats. The fixture design can be imported into the measuring software, either on its own or complete with component, and thus be used for offline programming of the coordinate measuring machine. The import works too with any compatible 3rd party CMM software.
Online part programming, for e.g., with part program generating software **MiCAT Planner**, is even easier by importing the fixture and part data directly into the software.
A parts list report with assembly instructions is available in various output formats for the assembly of the real fixture created in FixtureBuilder. The 3D function in PDF format is especially practical as it allows limitless variations on the view of the fixture model in the PDF document. The virtual design can therefore be examined from all possible views and positions.

Import data in


- Acis (*.sat) file format
- Iges (*.igs) file format
- Step (*.stp) file format

Save fixture report in


- PDF file format (3D option)
- HTML file format
- CSV file format

Save fixture data in

- HOOPS (.hsf) file format
- 3D PDF (.pdf) file format
- ACIS (.sat) file format

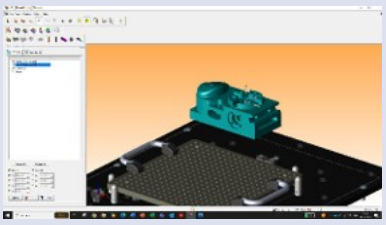


Imported CAD file and choosen base plate

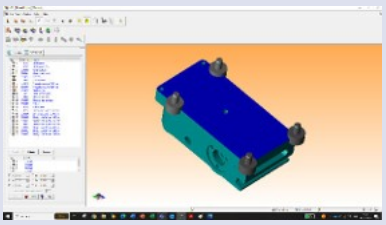


Application of support points



Applied support points and clamps

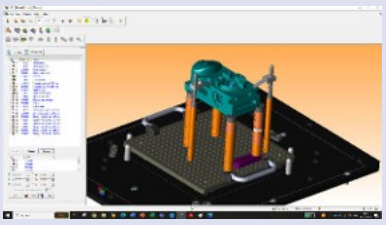

Automatically processed fixture

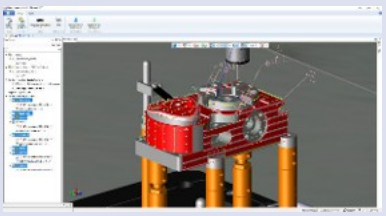


Imported Fixture project in MiCAT PLanner part programming software

FixtureBuilder Software


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

SmartMeasure-AL

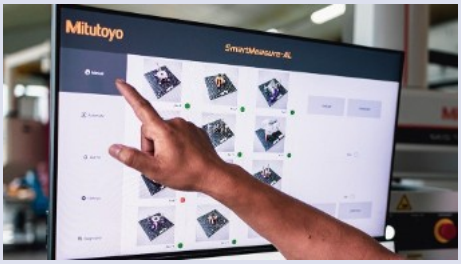

Graphical user interface

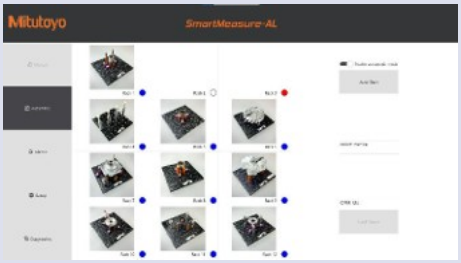

Graphical user interface

Turnkey Solution

Smart Connectivity

Modular Configuration

24/7 Operation

SmartMeasure-AL

The SmartMeasure-AL is an advanced automated measurement system designed to operate seamlessly on Mitutoyo measuring machines. This innovative system revolutionizes industrial measurement processes by delivering precision, reliability, and full automation. The complete system includes a pick-up rack, an I/O station, a storage system, system pallets, a collaborative robot, and a Mitutoyo measuring machine (with a data processing PC).

Features

- **Efficient Measurement**: The system allows for automatic measurements even during nighttime, which not only increases efficiency, but also addresses the shortage of manpower. The operator simply needs to place the workpiece on the pallet, configure some measurement parameters, and let the system run autonomously.
- **Easy to Operate**: With our Space4Win software and an easy and user-friendly GUI, an operator without knowledge of the system can easily run the whole setup.
- **Re-measure**: With help of the user-friendly software, the operator can easily re-measure parts that are NOT OK without having to run the whole sequence again.
- **Result Display**: The measurement result is displayed via an indicator light on the HMI (green light for OK, red light for NOT OK).
- **Program Selection**: The part program can be automatically selected by reading the RFID tag mounted on the pallet and by using the RFID reader mounted on the robot gripper.
- **Flexible Configuration**:The combination of RFID tag and the part program can be modified simply by editing the settings file.
- **Connectivity** : Once measurement is completed, measurement results can be sent to statistical software or even to external software. Moreover, results can be send directly to CNC machines for tool correction with our Space4Win software.



No.	Remarks
K543869	For Mitutoyo measuring machine excluding robot and CMM

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Manual 2D Vision Measuring Machine QM-Fit
Page 569



Manual 2D Vision Measuring Machines Quick Image
Page 570



Manual 2.5D Vision Measuring Machines Quick Scope
Page 572



3D CNC Vision Measuring Machines Quick Vision
Page 574



3D CNC Multisensor Measuring Machines Quick Vision
Page 580




3D CNC Measuring Machines for Micro Geometries
Page 582



Accessories for Vision Machines
Page 584



Software for Quick Vision Machines
Page 587



M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Manual 2D Vision Measuring Machine QM-Fit

Specifications

Image sensor	20-megapixel colour CMOS camera
Illumination	Transmitted illumination: Green LED Ring lighting: 8-segment white LED
Display	15,6-inch touch panel monitor



Refer to the QM-Fit brochure

Manual 2D Vision Measuring Machine QM-Fit

QM-Fit, is a **smart**, **compact** manual vision measuring machine with intuitive touchscreen operation.
It enables automatic geometry recognition based on CAD data and displays measurement results as visual overlay for faster, easier inspection.

Main features:

- Intuitive touch screen operation
- Instant measurement with automatic geometry recognition from CAD data
- Measurement results displayed as overlay on the workpiece image
- Visual guides and auto-suggestions reduce training time and eliminate user errors
- Automatic edge-snap function (caliper function) enables fast and accurate measurements
- Easy to read pass/fail indicators
- Measurement recording function enables automatic repeat measurements
- High resolution telecentric lens with 20 MP colour camera enables up to 100X magnification
- Wide field of view of 115 x75 mm
- Large depth of focus of 36 mm
- Traceable accuracy of +- 10 µm



QM-Fit

Inch/Metric

No.	Measuring range	Accuracy guaranteed range	Optical system depth of focus	Resolution [mm]	Accuracy [µm]	Repeatability	Magnification (optical system)	Max. stage loading	Display	Mass [kg]
359-752-13	115 x 75	90 x 60 mm	36 mm	Selectable: 0,0001/0,001/0,01/0,1/1	±10	2 σ ≤ 4	1 to 100 times	10 kg	15,6-inch touch panel monitor	25

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Quick Image

Quick Image

The ultimate in simple operation with **one click measurement.**
This non-contact 2D vision measuring system brings you a new concept in 2D vision measuring instruments. It offers several unique features to improve the efficiency of your measurements, including:

- Large depth of field and wide field of view.
- Double telecentric optical system.
- 3 megapixels colour camera.
- 4-quadrant LED ring light.
- Motorized stage models provide highest measurement efficiency.



QI-A



QI-C

QI-A models, 0.2x Magnification, Manual stage

No.	Model	Travelling range X-, Y-axis [mm]	Travelling range Z-axis [mm]
361-850A	QI-A1010D	100 x 100	100
361-851A	QI-A2010D	200 x 100	100
361-852A	QI-A2017D	200 x 170	100
361-853A	QI-A3017D	300 x 170	100
361-854A	QI-A4020D	400 x 200	100

QI-C models, 0.2x Magnification, Motorized stage

No.	Model	Travelling range X-, Y-axis [mm]	Travelling range Z-axis [mm]
361-860-11	QI-C2010D	200 x 100	100
361-861-11	QI-C2017D	200 x 170	100
361-862-11	QI-C3017D	300 x 170	100

Specifications

Measuring Mode	High-resolution mode and Normal mode
Optical system working distance	90 mm
Optical system depth of focus	**High-resolution mode** : ±0,6 mm (QI-A, QI-C) **Normal mode** : ±11 mm (QI-A and QI-C)
Accuracy [1]	$E_{1(x,y)}$ = ±(3,5+0,02L) µm **L** = measured length (mm) [1]According to Mitutoyo inspection method
Optical system magnification	**QI-A and QI-C models** : 0,2X
CCD camera	3 megapixels colour CCD camera
Illumination	- Contour: White LED - Coaxial: White LED - 4-quadrant white LED ring light

Optional accessories

No.	Description
12AAJ088.	Reinforced footswitch




Image of a stepped block using the double telecentric objective showing the orthographic view produced.




Image of the same object using a standard objective

Refer to the Quick Image brochure


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Software for Quick Image Systems

Specifications

QIPAK Additional software (optional)	MEASURLINK (refer to the Measurlink page) QS CAD-IMPORT/EXPORT FORMTRACEPAK-AP(1)

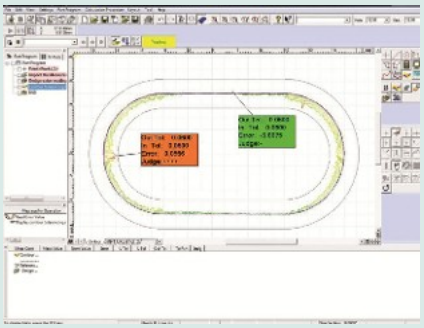

(1) **FORMTRACEPAK-AP**
- Simple and easy-to-use 2D contour analysis.
- Graphic reports (geometry or scanning) edition.
- Allows measurement by comparison.
- For more information refer to FORMTRACEPAK-AP.

Refer to the M3 software for Quick Image series brochure

Software for Quick Image

Mitutoyo offers two software options for operating the Quick Image Vision Measuring Machine.

QI-A models

Mitutoyo QIPAK
or
M3 software for QI-A models


QI-C models

Mitutoyo QIPAK
or
M3 software for QI-C models

No.	Type
QIPAK	Software for Quick Image Systems
63AAA763	M3 Software package for Quick Image QI-A
63AAA771	M3 Software package for Quick Image QI-C



QIPAK screen layout in easy mode

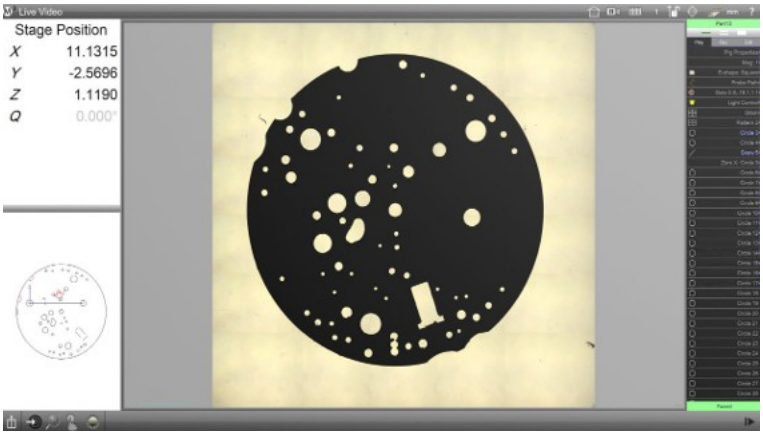

M3 software

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Manual Quick Scope QS-L

Quick Scope

This manual vision measuring system is an excellent surface observation system which you can use on a wide variety of workpieces.
The Quick Scope offers you the following benefits:

- 0,1 µm resolution and 150 mm Z-axis range.
- Power zoom enabling you to change magnification change quickly and easily.
- Fine illumination capability enabling you to change lighting to match your workpiece requirements.
- A quick release system on the stage, so you can switch instantly between coarse and fine movement.
- Quick navigation function allowing you to repeat measurements quickly.
- Motorized Z-axis enables fast and accurate Auto Focus.

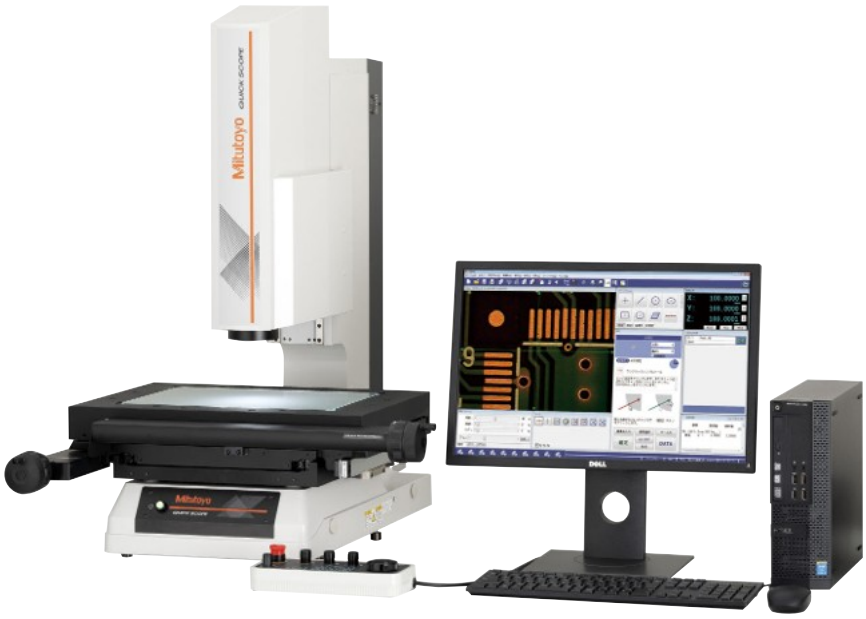

QS-L Z/AFC models

No.	Model	Magnification (optical system)	Max. stage loading	Mass [kg]	Travelling range X-, Y-axis [mm]	Travelling range Z-axis [mm]	Z-axis measurement
359-723-11	QS-L2010Z/AFC	0,75X -> 5,25X with 1,5X objective	10 kg	70	200 x 100	150	Motorized with AF
359-724-11	QS-L3017Z/AFC	0,75X -> 5,25X with 1,5X objective	20 kg	160	300 x 170	150	Motorized with AF
359-725-11	QS-L4020Z/AFC	0,75X -> 5,25X with 1,5X objective	15 kg	167	400 x 200	150	Motorized with AF

Specifications

Accuracy[1]	$E_{1(x,y)}$ =(2,2 + 0,02**L**) µm $E_{1(z)}$ =(4,5 + 6**L**/**1000**) µm **L** =measured length (mm) [1]According to Mitutoyo inspection method
Illumination	- Contour: White LED - Coaxial: White LED - Ring Light: 4-quadrant White LED

Standard accessories

No.	Description
02AVA430	Z-Objective 1.5 X

Optional accessories

No.	Description
937179T	Footswitch for SPC
12AAJ088	Footswitch
02AVA410	Z-Objective 1X
02AVA450	Z-Objective 2X

Refer to the Optical Accessories page for Quick Scope / Quick Vision for more information on calibration charts.



1X, 1.5X and 2X interchangeable lens

Refer to the Quick Scope brochure


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Software for Quick Scope Systems

Specifications

QIPAK Additional software (optional)	MEASURLINK (refer to the Measurlink page) QS CAD-IMPORT/EXPORT FORMTRACEPAK-AP(1)

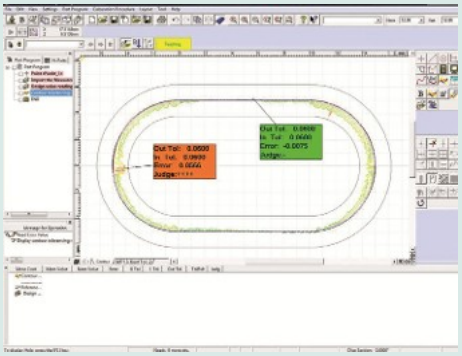


(1) **FORMTRACEPAK-AP**
- Simple and easy-to-use 2D contour analysis.
- Graphic reports (geometry or scanning) edition.
- Allows measurement by comparison.
- For more information refer to FORMTRACEPAK-AP

Refer to the Quick Scope brochure


QSPAK

- Easy to use, single mouse-click edge-detection tools.
- Template tools for comparative analysis.
- Video image capture.
- Stage navigation function for CNC machines giving you improved measurement cycles.


No.	Type
QSPAK	Software for Quick Scope systems

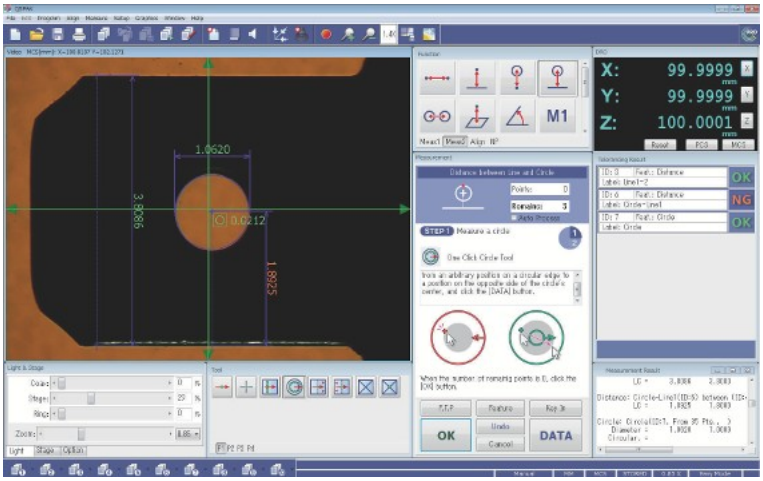

QSPAK Layout: Easy mode

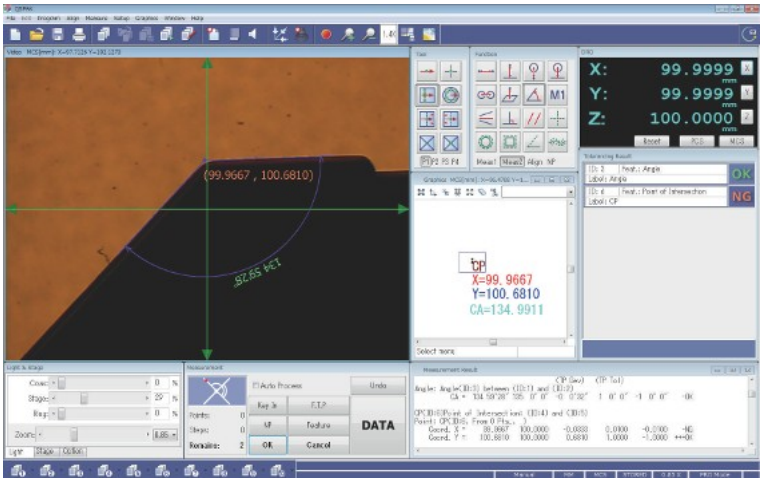

QSPAK Layout: Pro mode

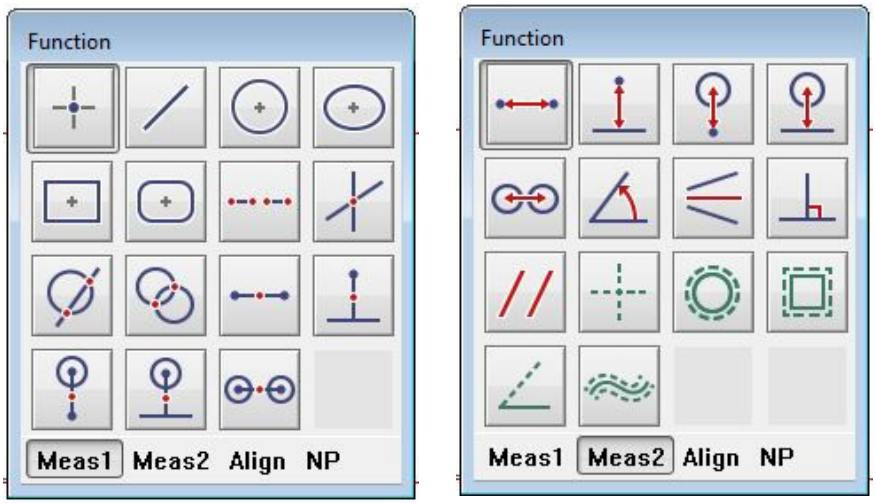

Measurement item commands

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

Quick Vision ACTIVE

Quick Vision ACTIVE

This CNC Vision Measuring System combines the flexibility of a high quality zoom lens with the speed of a state-of-the-art digital colour camera and offers the following benefits:

- Programmable LED stage- and coaxial-light.
- Programmable 4-quadrant LED ring light.
- High-resolution and high-speed CMOS colour camera.
- High-quality 7-step zoom optics with interchangeable lenses.
- Compact design.
- Powerful, user-friendly QVPAK software.
- Touch probe option.



QV ACTIVE 202



QV ACTIVE 404



TP RETROFIT SET FOR ACTIVE 202 (02ATZ397)



TP RETROFIT SET FOR ACTIVE 404 (02ATZ398)

No.	Model	Measuring range (X×Y×Z)	Max. stage loading
363-109-30	QV ACTIVE 202	250x200x150 mm	10 kg
363-110-30	QV ACTIVE 404	400x400x200 mm	20 kg

Specifications

Resolution of scale	0,1 µm
Vision measuring accuracy	E_1X,E_1Y= (2+3L/1000) µm E_1Z= (3+5L/1000) µm E_2= (2,5+4L/1000) µm L = measured length (mm)
Illumination unit	Coaxial light: White LED Stage light: White LED Ring light: Fixed type 4-quadrant White LED
Magnification change system	Zoom optical system with 8 positions + Standard 1,5X magnification lens
Imaging device	High resolution CMOS colour camera
Additional objective lenses	1X and 2X magnification

Optional accessories

No.	Description
02ATN695.	Calibration chart with holder



1,5X interchangeable lens (standard accessory)
1X and 2X interchangeable lens (optional accessory)



TP20 with opti-fix



MCR20 option



Refer to the Quick Vision Active series brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision APEX / HYPER

Quick Vision APEX / HYPER

This CNC Vision Measuring System is a floor-standing vision measuring machine which offers you the following benefits:

- Programmable LED stage- and coaxial-lighting.
- Programmable 4-quadrant LED ring light.
- Pattern focus function.
- Accuracy specifications conforming to ISO 10360-7 standard (on request).
- Temperature compensation as standard feature.
- Touch probe option.

Optional PFF Function (Points From Focus)

- PFF enhances the functionality of standard QV models with 3D topography measurements.
- No additional sensor necessary.
- Large scanning range in Z axis from 2.7 mm up to 40.6 mm in wide range mode depending on the objective used.


Specifications

Magnification change system	Programmable Power Turret (PPT) 1X ; 2X ; 6X
Illumination unit	Coaxial light: White LED Stage light: White LED Ring light: Fixed type 4-quadrant PRL
Factory option	**For QV APEX and QV HYPER:** **- TAF** Tracking Auto Focus Refer to the Quick Vision Accessories page for details
Additional objective lenses	Refer to the Optical Accessories page for Quick Scope / Quick Vision
Imaging device	**QV PRO Models:** High sensitivity CCD B&W camera

Optional accessories

No.	Description
Calibration charts	
02ATN695.	Calibration chart with holder

Refer to the Optical Accessories page for Quick Scope / Quick Vision for more information on calibration charts.

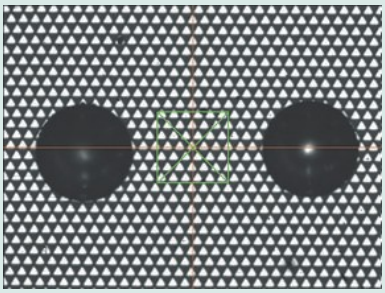


Auto Focus Tool : type Pattern Focus (tool for focusing on difficult surfaces such as mirrors, polished surface clear glass).

Refer to the Quick Vision brochure







Workpiece to be measured with PFF




3D Analysis of PFF measurement



2D Analysis of PFF measurement



Touch Probe option



PRL = Programmable Ring Light
Fine control of angle and direction provides illumination for optimal measurement. You can set the angle in the range from 30° to 80°. This type of illumination is effective for enhancing the edge of inclined surfaces or very small steps. Illumination can be controlled independently from back or front, right or left. Measurement with edge enhancement is possible if you form a shadow by illuminating from only one direction.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision APEX / HYPER

QV APEX Pro

CNC Vision Measuring System

All the **QUICK VISION Pro** models are equipped with a strobe light, and the newly developed vision measuring function "StrobeSnap" delivers measurements with both high throughput and high accuracy. Regardless of the continuity of measuring positions, measuring time can be shortened by about 35 to 45% for most measurement samples when compared with our former system.

The STREAM function provides an amazingly high throughput, due to the non-stop measurement where the camera motion and the strobe light are synchronized. It can shorten measuring time more than StrobeSnap due to the continuous element measurement as shown in the following conceptual image of measurement.

- This is a superior model of QUICK VISION, which is equipped with the StrobeSnap function as standard, enabling high-speed measurement.
- We offer a model with Tracking Auto Focus (TAF) that quickly focuses on the object improving throughput significantly.
- The camera motion and the strobe light are synchronized to make non-stop vision measurements without stopping the stage. This makes it possible to use STREAM to shorten measuring time dramatically.

Touch Trigger Probe

CNC Vision Measuring System equipped with optional touch trigger probe.

- Non-contact measurement and contact measurement can be done solely by one unit. QVTP Pro can perform contact measurement by using the vision measuring function and the touch-trigger probe.
- Three-dimensional workpiece measurements can be performed. Enables 3D measurement of workpieces such as press-molded products, plastic-molded products, and cut products, which until now could not be measured with image processing alone.
- Using the probe module change rack allows switching between vision measurement and touch-trigger probe measurement during an automatic measuring sequence.



QV Apex 302 Pro



QV Apex 404 Pro



QV Apex 606 Pro

No.	Model	Max. stage loading	Measuring range (X×Y×Z)
363-601-10	QV Apex 302 Pro - White LED	20 kg	300 x 200 x 200 mm
363-602-10	QV Apex 302 Pro - Colour LED	20 kg	300 x 200 x 200 mm
363-603-10	QV Apex 302 Pro - White LED - TAF	20 kg	300 x 200 x 200 mm
363-604-10	QV Apex 302 Pro - Colour LED - TAF	20 kg	300 x 200 x 200 mm
363-611-10	QV Apex 404 Pro - White LED	40 kg	400 x 400 x 250 mm
363-612-10	QV Apex 404 Pro - Colour LED	40 kg	400 x 400 x 250 mm
363-613-10	QV Apex 404 Pro - White LED - TAF	40 kg	400 x 400 x 250 mm
363-614-10	QV Apex 404 Pro - Colour LED - TAF	40 kg	400 x 400 x 250 mm
363-621-10	QV Apex 606 Pro - White LED	50 kg	600 x 650 x 250 mm
363-622-10	QV Apex 606 Pro - Colour LED	50 kg	600 x 650 x 250 mm
363-623-10	QV Apex 606 Pro - White LED - TAF	50 kg	600 x 650 x 250 mm
363-624-10	QV Apex 606 Pro - Colour LED - TAF	50 kg	600 x 650 x 250 mm

Refer to the Quick Vision brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision APEX / HYPER

QV HYPER Pro

High-accuracy CNC Vision Measuring System

- The QV HYPER Pro is a highly accurate model that is equipped with a high-resolution/accuracy scale.
- We offer a model with Tracking Auto Focus (TAF) that quickly focuses on the object improving throughput significantly.
- The camera motion and the strobe light are synchronized to make non-stop vision measurements without stopping the stage. This makes it possible to use STREAM to shorten measuring time dramatically.
- There is a general-purpose model with white LED light and an enhanced edge detection model with RGB colour LEDs.
- This model is standard-equipped with automatic temperature compensation that uses a temperature sensor on the main unit of the measuring machine and a temperature sensor for the workpiece.

Touch Trigger Probe

CNC Vision Measuring System equipped with optional touch trigger probe.

- Non-contact measurement and contact measurement can be done solely by one unit. QVTP Pro can perform contact measurement by using the vision measuring function and the touch-trigger probe.
- Three-dimensional workpiece measurements can be performed. Enables 3D measurement of workpieces such as press-molded products, plastic-molded products, and cut products, which until now could not be measured with image processing alone.
- Using the probe module change rack allows switching between vision measurement and touch-trigger probe measurement during an automatic measuring sequence.



QV Hyper 302 Pro



QV Hyper 404 Pro



QV Hyper 606 Pro

No.	Model	Max. stage loading	Measuring range (X×Y×Z)
363-605-10	QV Hyper 302 Pro - White LED	15 kg	300 x 200 x 200 mm
363-606-10	QV Hyper 302 Pro - Colour LED	15 kg	300 x 200 x 200 mm
363-607-10	QV Hyper 302 Pro - White LED - TAF	15 kg	300 x 200 x 200 mm
363-608-10	QV Hyper 302 Pro - Colour LED - TAF	15 kg	300 x 200 x 200 mm
363-615-10	QV Hyper 404 Pro - White LED	30 kg	400 x 400 x 250 mm
363-616-10	QV Hyper 404 Pro - Colour LED	30 kg	400 x 400 x 250 mm
363-617-10	QV Hyper 404 Pro - White LED - TAF	30 kg	400 x 400 x 250 mm
363-618-10	QV Hyper 404 Pro - Colour LED - TAF	30 kg	400 x 400 x 250 mm
363-625-10	QV Hyper 606 Pro - White LED	40 kg	600 x 650 x 250 mm
363-626-10	QV Hyper 606 Pro - Colour LED	40 kg	600 x 650 x 250 mm
363-627-10	QV Hyper 606 Pro - White LED - TAF	40 kg	600 x 650 x 250 mm
363-628-10	QV Hyper 606 Pro - Colour LED - TAF	40 kg	600 x 650 x 250 mm

Refer to the Quick Vision brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision ACCEL

Quick Vision Accel - 3D CNC Vision Measuring System for large work pieces

These CNC camera measuring systems are characterized by a movable bridge structure.

Quick Vision ACCEL instruments offer the following advantages:

- The movable bridge design reduces the need for table movement. This allows for a simpler workpiece clamping design that results in a significant reduction in man-hours required for clamping and inspection of workpieces.
- The system is supplied complete with a stand under the machine.
- 3D topography measurements are possible with the PFF function
- Travel Automatic Focusing (TAF) as a factory supplied option.



No.	Model	Range (X, Y, Z-axis) with Vision Head	Max. drive speed X, Y-axis [mm/s]	Accuracy E1
363-315-20	QV ACCEL 808 PRO	800 x 800 x 150 mm	400	(1,5+3L/1000) µm
363-335-20	QV ACCEL 1010 PRO	1000 x 1000 x 150 mm	400	(1,5+3L/1000) µm


M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Refer to the Quick Vision brochure

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision ULTRA


Additional objective lenses	Refer to Objective page for Quick Scope / Quick Vision



By using FEM (Finite Element Method) analysis of the base design, the placement of stiffening ribs and beams has been determined for the Quick Vision Ultra to provide optimal structural rigidity.



Ultra-precision scale manufacturing facility 11 metres underground



Ultra-high accuracy crystallized glass scale with virtually zero thermal expansion.
The Quick Vision Ultra is equipped with a crystallized glass scale having a resolution of 0.01 µm and linear expansion coefficient of 0.08 x 10^{-6}/K. This virtually zero thermal expansion means the Quick Vision Ultra can minimise accuracy fluctuation due to thermal changes.



Refer to the Quick Vision brochure
Refer to the Quick Vision Ultra brochure

Quick Vision ULTRA

This CNC vision measuring system gives you ultra-high accuracy.
The Quick Vision ULTRA offers you the following benefits:

- Axial translation straightness is maximised through the use of a precision air-bearing linear guide system.
- High resolution (0.01 µm) scales, manufactured at an ultra-precision facility located 11 m underground, are used on all axes.
- The scales are made from glass that has a virtually zero thermal expansion coefficient, so your measuring accuracy has minimal variation in changing temperatures.
- The base structure was designed using Finite Element Method analysis; this gives you the optimal stiffness/weight ratio combined with excellent geometrical stability, in terms of axial straightness / perpendicularity, with changing temperatures.
- Accuracy specification conforming to ISO 10360-7 are available (on request).
- 3D topography measurements are possible with the optional PFF functionality.



Quick Vision ULTRA 404 PRO

No.	Model	Mass [kg]	Factory option	Measuring range (X×Y×Z)
363-520-10	QV-U404P1L-E	2.150	Refer to Quick Vision Accessories page	400 x 400 x 200 mm
363-521-10	QV-U404T1L-E	2.150	**- Tracking Auto Focus (TAF)** Refer to Quick Vision Accessories page	400 x 400 x 200 mm

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision HYBRID Type 4 Series

Quick Vision HYBRID Type 4-CPS

- This dual system with a non-contact displacement sensor has a scanning function that enables measurement of minute height differences and 3D shapes.
- The non-contact displacement sensor (CPS probe) uses the wavelength confocal method.
- The LED used as the light source of the displacement sensor has an auto-brightness control function that enables seamless measurement of materials with different reflectivity.




No.	Model	Measuring range (X×Y×Z)	Non-contact displacement sensor measuring range (X×Y×Z) [mm]	Resolution of scale [µm]
365-601-10	QVH4A-X302P1L-E	300 x 200 x 200 mm	176 x 200 x 200	0,1
365-605-10	QVH4A-H302P1L-E	300 x 200 x 200 mm	176 x 200 x 200	0,02
365-611-10	QVH4A-X404P1L-E	400 x 400 x 250 mm	276 x 400 x 250	0,1
365-615-10	QVH4A-H404P1L-E	400 x 400 x 250 mm	276 x 400 x 250	0,02
365-621-10	QVH4A-X606P1L-E	600 x 650 x 250 mm	476 x 650 x 250	0,1
365-625-10	QVH4A-H606P1L-E	600 x 650 x 250 mm	476 x 650 x 250	0,02

No.	Vision measuring accuracy	Displacement sensor measuring accuracy [µm]	Temperature Compensation Function
365-601-10	EUX/EUY, MPE (1,5 + 3L/1000) µm EUXY, MPE (2 + 4L/1000) µm EUZ, MPE (1,5 + 4L/1000) µm	E1Z (1,5 + 4L/1000)	Manual
365-605-10	EUX/EUY, MPE 0,8 + 2L/1000) µm EUXY, MPE (1,4 + 3L/1000) µm EUZ, MPE (1,5 + 2L/1000) µm	(1,5 + 2L/1000)	Automatic
365-611-10	EUX/EUY, MPE (1,5 + 3L/1000) µm EUXY, MPE (2 + 4L/1000) µm EUZ, MPE (1,5 + 4L/1000) µm	E1Z (1,5 + 4L/1000)	Manual
365-615-10	EUX/EUY, MPE 0,8 + 2L/1000) µm EUXY, MPE (1,4 + 3L/1000) µm EUZ, MPE (1,5 + 2L/1000) µm	(1,5 + 2L/1000)	Automatic
365-621-10	EUX/EUY, MPE (1,5 + 3L/1000) µm EUXY, MPE (2 + 4L/1000) µm EUZ, MPE (1,5 + 4L/1000) µm	E1Z (1,5 + 4L/1000)	Manual
365-625-10	EUX/EUY, MPE 0,8 + 2L/1000) µm EUXY, MPE (1,4 + 3L/1000) µm EUZ, MPE (1,5 + 2L/1000) µm	(1,5 + 2L/1000)	Automatic




Hybrid Type 4 system
The Quick Vision Hybrid Type 4 is a machine which allows vision measurement with a CCD camera and high-speed scanning with a non-contact displacement sensor.
The Hybrid Type 4 CPS sensor is available for Quick Vision Apex/Hyper models.

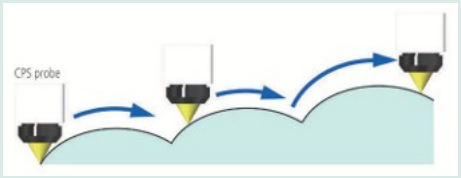


Scanning measurement with automatic movement of the Z-axis




Form analysis of plastic molded parts having a slope.



Solid colour display



Shaped display



Extraction of arbitrary section



Refer to the Quick Vision brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Quick Vision White Light Interferometer

Quick Vision WLI


- Combines non contact measurements with vision system and White Light Interferometer (WLI).
- Easy alignment and positioning with vision sensor.
- Full QVPAK functionality with vision system.
- Enhanced functionality with WLI-system for high resolution topography evaluation such as surface roughness analysis.

Optional accessories


No.	Description
02ALY400	Quick Vision WLI Objective, A-5X
02ALT630	Quick Vision WLI Objective, A-10X
02ALT670	Quick Vision WLI Objective, A-25X
02AWB150	Quick Vision WLI Objective, A-50X



QV WLI Objective lenses
Magnification 5X: Field of View 0,64 x 0,48 mm
Magnification 10X: Field of View 0,32 x 0,24 mm
Magnification 25X: Field of View 0,128 x 0,096 mm

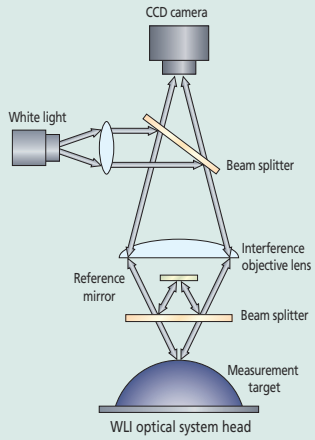

WLI optical system head

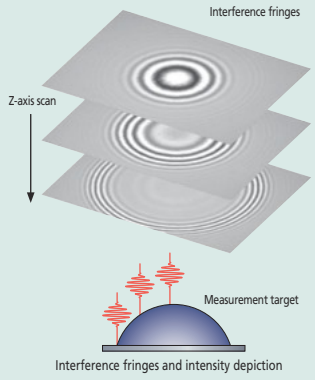


Interference fringes and intensity depiction

Scan QR Code with your mobile device and watch our product videos on YouTube


Refer to the Quick Vision brochure
Refer to the MCubeMap brochure




Quick Vision WLI 404 PRO



Video image of part



3D Analysis of measured part



2D Analysis of measured part

Specifications when using vision sensor are same as Quick Vision HYPER

Model	QVW-H404P1L-D	QVW-H606P1L-D
No.	**363-716-10**	**363-717-10**
Model	Hyper Quick Vision WLI 404	Hyper Quick Vision WLI 606
Range (X, Y, Z-axis) with Vision Head	400 x 400 x 240 mm	600 x 650 x 220 mm
Range with WLI Head	315 x 400 x 240 mm	515 x 650 x 220 mm
Repeatability WLI Head	$2\sigma \leq 0.08\mu m$	$2\sigma \leq 0.08\mu m$
Tube Lens WLI Head	2x	2x
Z-axis measuring range WLI Head	170 µm	170 µm
Max. stage loading	25 kg	35 kg

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo

UMAP Vision System Series

UMAP: Ultrasonic Micro and Accurate Probe

The UMAP (Ultrasonic Micro and Accurate Probe) is a micro-form measuring system
The UMAP offers you the following benefits:

- Dual functions of high-accuracy contact and non-contact measurement in one machine.
- Contact (micro-stylus UMAP probe) and non-contact (vision probe) measuring probes are installed.
- You can measure micro-features of parts previously impossible to reach.
- Several diameters of micro-stylus are available from 15 µm to 300 µm.



UMAP Hyper 302



UMAP Ultra 404

Type	UMAP HYPER 302	UMAP ULTRA 404
No.	**364-714-10**	**364-718-10**
Max. stage loading	15	40
Measuring range using vision sensor	300 x 200 x 200 mm	400 x 400 x 200 mm
Measuring range using scanning probe	185 x 200 x 175 mm	285 x 400 x 175 mm
Measurement accuracy with vision sensor [µm]	$E_{UX,MPE}$/ $E_{UY,MPE}$= (0,8+2L/1000) $E_{UZ,MPE}$= (1,5+2L/1000) $E_{UXY,MPE}$= (1,4+3L/1000)	$E_{UX,MPE}$/ $E_{UY,MPE}$= (0,35+1,3L/1000) $E_{UZ,MPE}$= (1,5+2L/1000) $E_{UXY,MPE}$= (0,5+2L/1000)
Measurement accuracy with scanning probe [µm]	$E_{0,MPE}$= (2,2+4L/1000)	$E_{0,MPE}$= (2,0+4L/1000)
Resolution µm	0,02	0,01






UMAP System





UMAP Probe Unit

UMAP Probes
(ultrasonic micro stylus probes)
Stylus ultrasonic micro-vibration and its amplitude-sensing enable UMAP probe to perform contact measurement of micro-features of parts.
5 choices of stylus tip diameter are available from 15 µm to 300 µm.



UMAP 103
ø30 µm
L = 2 mm



UMAP 107
ø70 µm
L = 5 mm



UMAP 110
ø100 µm
L = 10 mm



UMAP 130
ø300 µm
L = 16 mm




Refer to the UMAP Vision system brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Software for Quick Vision Machines

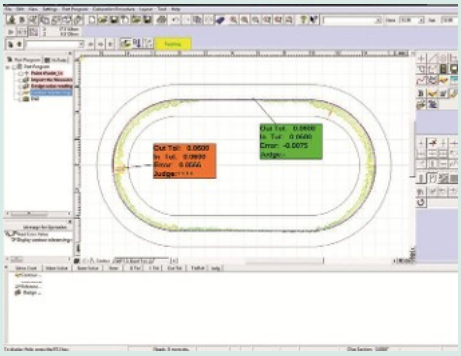

FORMPAK-AP

Simple and easy-to-use 2D contour analysis. Graphic reports (geometry or scanning) edition. Allows measurement by comparison. For more information refer to FORMTRACEPAK-AP.

Vision Measuring Machines brochures on request

QVPAK

- QVPAK controls multiple sensors: Vision sensor, Touch Probe, continuous scanning devices, special UMAP or LNP probes.
- Powerful mathematical algorithms are provided that help you to detect difficult edges via noise filters (similar to morphological filters) and advanced detection tools that take into account the texture of the target surface.
- Partprogramming and editing is made easy with the user friendly Easy Editor.
- 3D graphic display or measuring planes display with the QVClient QVGraphic.
- QVPAK also offers you various QVClients (standard), assistants for users (programming mode) or operators (production mode) such as QVSmartEditor and QVNavigator.

Optional software modules for Quick Vision System


- Formtracepak-AP-QV for 2D contour analysis.
- Formtracepak-Pro for 3D surface analysis.
- QV Part Manager for managing the execution of parts programs of multiple parts.
- Easypag-Pro for offline generation of part programs from 2D CAD data.
- QV3DCAD for online generation of part programs from 3D CAD files.
- MeasurLink for statistical process control (SPC).
- QV3DPAK for 3D topography measurements (see explanation below).
- For more information refer to the Vision Measuring Machines brochures.

Optional PFF Function (Points From Focus)


- PFF enhances the functionality of standard QV models with 3D topography measurements.
- No additional sensor necessary.
- High scanning range in Z axis from 2.7 mm up to 40.6 mm depending on the objective lens in use and in wide range mode.
- PFF is a retro fittable option for Quick Vision APEX/HYPER and Quick Vision ULTRA. Please contact your local Mitutoyo office for more detailed information.




Workpiece to be measured with PFF



3D Analysis of PFF measurement



2D Analysis of PFF measurement

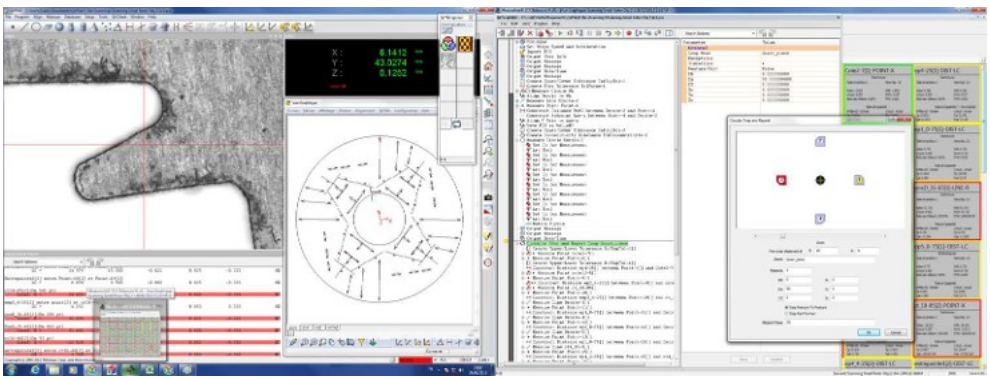

Example of the QVPAK screen layout.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Objective Lenses and Calibration Charts

Quick Vision WLI Objective

No.	Model	Magnification 1*	Total magnification *2	Focal length [mm]	Working distance [mm]	Depth of focus [µm]	Field of View *2 [mm]
02ALY400	QV WLI A-5X	5x	10x	20	13,2	3,5	0,64 x 0,48
02ALT630	QV WLI A-10X	10x	20x	10	12,6	3,5	0,32 x 0,24
02ALT670	QV WLI A-25X	25x	50x	4	4,7	1,1	0,13 x 0,1
02AWB150	QV WLI A-50X	50x	100x	2	2,4	0,6	0,064 x 0,048

*1: Value when the focal length of the tube lens (1x) is 100 mm
*2: Value when the product is mounted to the WLI optical head (when the 2x tube lens and 1/2-inch CCD camera are used)

Remarks

- The monitor magnifications are approximate values.
- QV-10X, QV-25X: Depending on the workpiece the illumination may be insufficient at a turret lens magnification of 2X and 6X for QV models.
- QV-25X: The PRL illumination is restricted in its usable position.


Objective Lenses

1. QV-Objective lens - HR (High Resolution) and SL (Long Working Distance) models

No.	Magnification	Model	Turret lens Mag. QV	Monitor Mag. QV	Working distance [mm]
02AKT199	0,5X	QV-SL0,5X	1X 2X 6X	16X 32X 96X	30,5
02ALA150	1X	QV-SL1X	1X 2X 6X	32X 64X 192X	52,5
02ALA170	2,5X	QV-SL2,5X	1X 2X 6X	80X 160X 480X	60
02ALA420	5X	QV-5X	1X 2X 6X	160x 320X 960X	33,5
02ALG010	10X	QV-SL10X	1X 2X 6X	320X 640X 1920X	30,5
02ALG020	25X	QV-25X	1X 2X 6X	800X 1600X 4800X	13
02AKT250	1X	QV-HR1X	1X 2X 6X	32X 64X 192X	40,6
02AKT300	2,5X	QV-HR2,5X	1X 2X 6X	80X 160X 480X	40,6
02AKT650	10X	QV-HR10X	1X 2X 6X	320X 640X 1920X	20







02ATN695 **02ATN697**
Calibration glass chart & Compensation glass chart with holder
A calibration or compensation chart is used to calibrate or compensate for the pixel size of the CCD and CMOS sensors, autofocus accuracy and the optical axis offset at each magnification of the Programmable Power Turret (PPT) or of the zoom.

QV Index

Rotary Head

Using the QV Index to rotate the workpiece makes it possible to automatically measure multiple surfaces without having to dismount/remount the workpiece.




optional on special request

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Modular Clamping System opti-fix



Transmitted light plate



opti-fix frame & mini-vise



opti-fix set-up for rotationally symmetric parts

Discover the Mitutoyo online fixture system catalogue or download the PDF



Mitutoyo fixtures:
For measurably better results.

Opti-Fix Clamping System

Accuracy, flexibility, and measurement integrity.

opti-fix is Mitutoyo's modular fixturing system engineered specifically for optical and tactile measurement. It allows precise, repeatable positioning of

It allows precise, repeatable positioning of flat, prismatic, and rotationally symmetrical parts while maintaining full access for reflected- and transmitted-light optics and tactile probes. The modular rails, locating elements, and clamping components ensure stable setups without stressing the part or obstructing the measuring volume. This results in higher repeatability, reduced setup variability, and r and reliable re-measurement across inspection cycles.

K551340 opti-set kit 202/302 K551341 opti-set kit 404
K551341 opti-set kit 404

- Optimized specifically for **Mitutoyo VMM stage sizes**
- Reduces setup time versus custom fixtures
- Covers most **daily inspection tasks** on smaller optical CMMs




M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.


Mitutoyo

Modular Clamping System opti-fix

Opti-Fix Clamping System

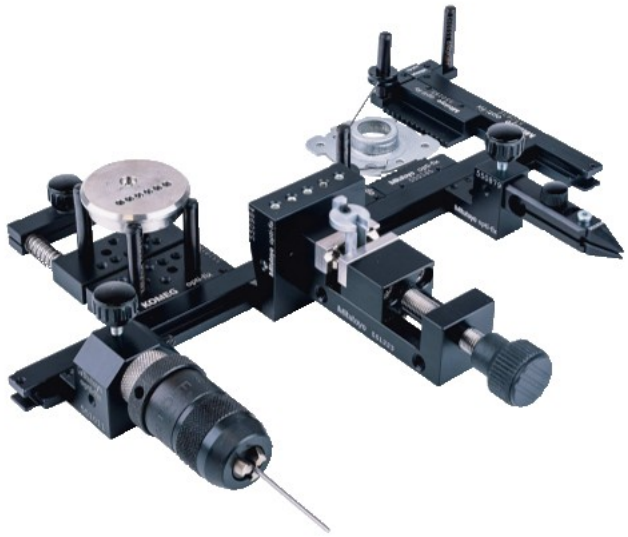

Different options for part clamping by vise, chuck tweezers or springs

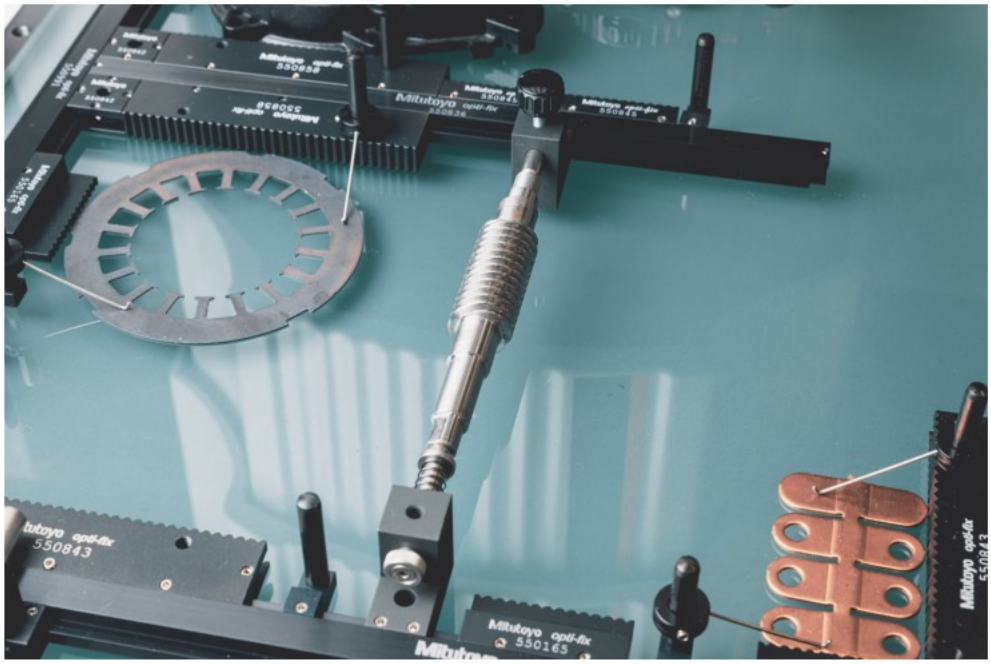

Modular & scalable: A few standardized components cover simple to very complex geometries

Measurement-friendly: Designed not to obstruct optics, illumination, or probing paths

Repeatable results: Built-in locating and positioning elements support consistent re-measurement

Future-proof: Systems can be expanded instead of replaced as measurement needs grow

Refer to the fixturing systems brochure

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.Product illustrations are without obligation. Product descriptions, in particular any and all technical Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
on. Product descriptions,

Accessories for Quick Vision Machines

Touch Probe Option


An optional touch probe (TP) is available for following QV models:
Quick Vision ACTIVE; Quick Vision APEX ; Quick Vision HYPER ; Quick Vision ACCEL.

- The Quick Vision-TP system allows you to carry out both non-contact and contact measurements.
- Compatible with Renishaw Touch Probe TP 20 or TP 200.
- An optional MCR20 rack for storing probe modules enhances functionality even more.





Styli kit M2
Starter

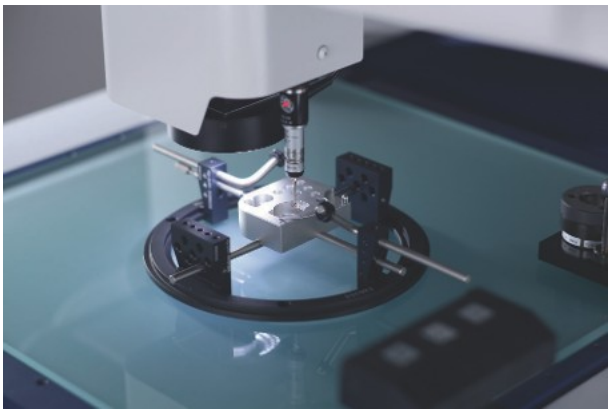

Quick Vision ACTIVE with Touch Probe option



Master ball/ring



CNC Vision Measuring System Equipped with a Touch-Trigger Probe

Refer to the Quick Vision brochure



TP20
Compact stylus change type



TP200
Compact and high accuracy stylus change type

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.



Mitutoyo in Europe

g g g g g sgg g g g gg g ug gg g g g g g g g g g g g g g g g g g g g sg g g g g g g g g sg with (at present) more than 85 offices in 33 European countries.

g g g g g g g g g g g g g g g g g g g








p p p

European Network

Since opening up the European market in the early sixties Mitutoyo has been continuously consolidating its presence in this economically important region.

We have been preparing for the expansion of the European market well in advance before it became reality to this extent. As a result, a close net of production, sales and service facilities in more than 85 establishments with different focal points is available to the customers in 33 European countries.

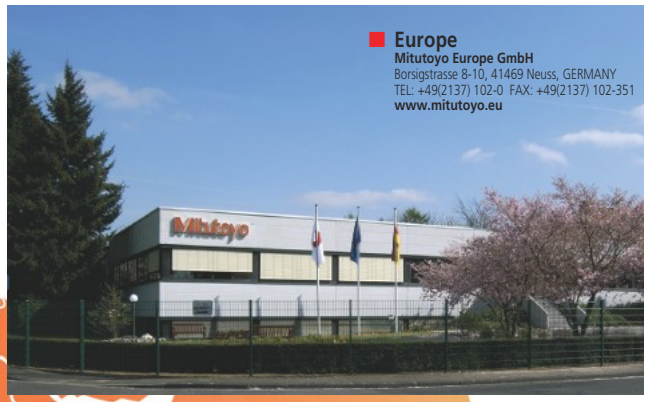

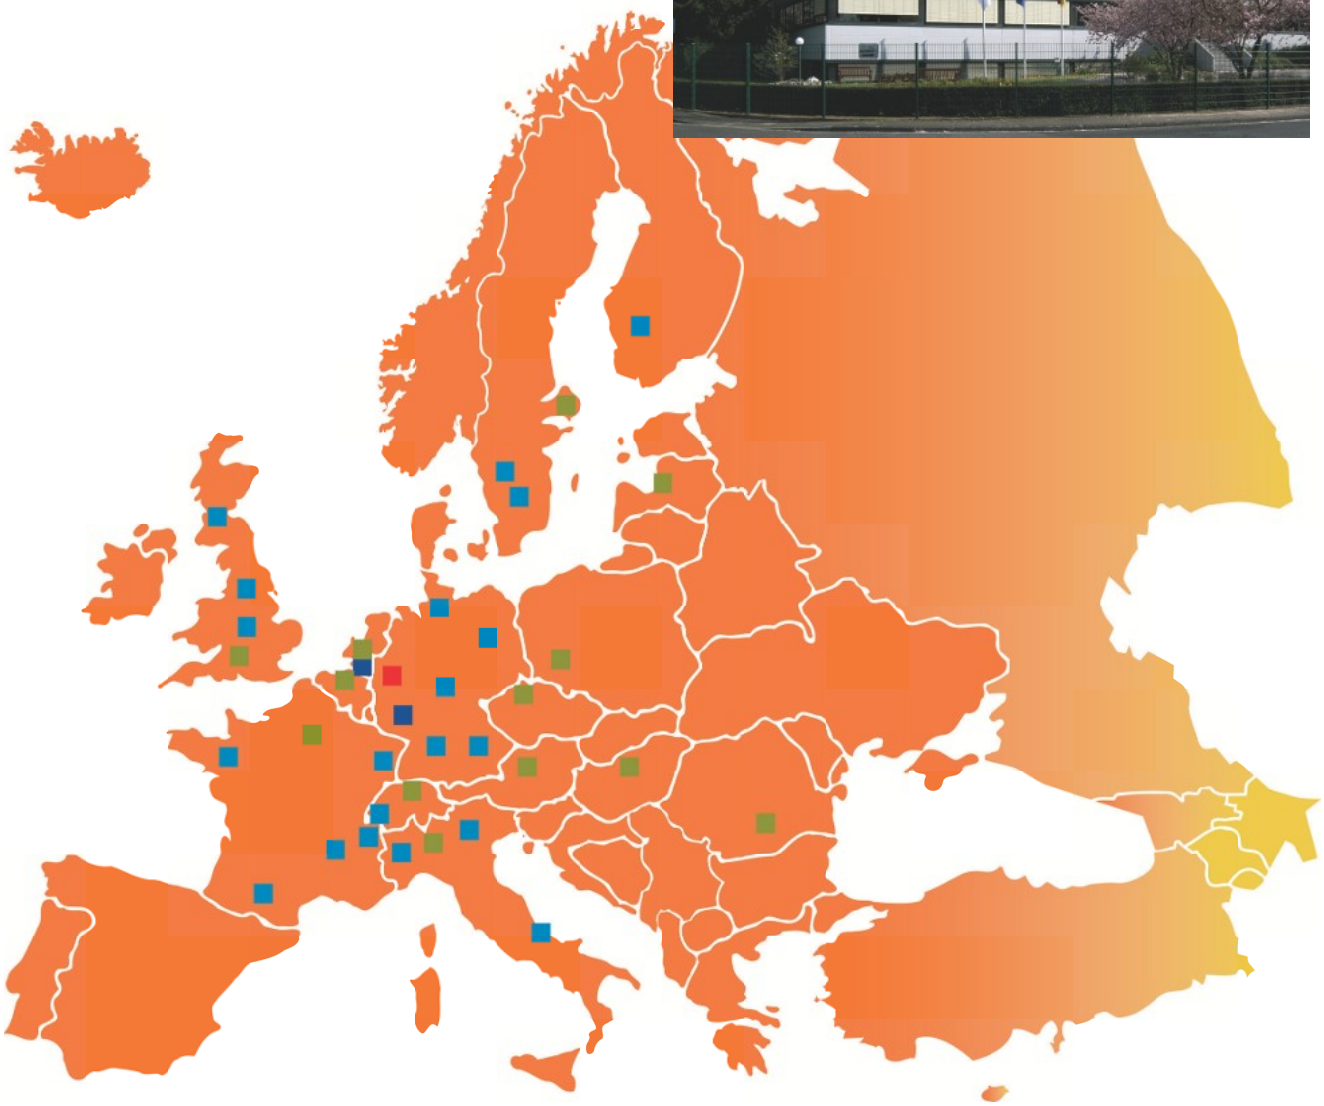

- Headquarter
- Sales Company
- M³ Solution Center
- Research and Development Facility

In January 2010 Mitutoyo synchronised and strengthened the concerted pan-European activities by the establishment of an European headquarters. The location of Mitutoyo Europe GmbH is Neuss in the vicinity of Dusseldorf, Germany.

Mitutoyo Europe GmbH oversees all the activities of Mitutoyo's sales, service and production facilities throughout Europe and adjacent markets, including those of business strategies of such European operations. A Mitutoyo Europe GmbH key objective is to promote coordination amongst its European Group Companies in order to optimise its sales and technical support services in the best interests of customer satisfaction. A strong community for Europe's future.

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.



Mitutoyo Austria GmbH
Salzburger Straße 260 / 2&3
A-4600 Wels
Tel: +43(0) 7242-219 998
e-mail: info@mitutoyo.at
www.mitutoyo.at



Mitutoyo Belgium NV
M³ Solution Center
Schaarbeekstraat 20A bus 1
9120 Beveren-Kruibeke-Zwijndrecht
Tel: +32 3 254 04 44
www.mitutoyo.be



Mitutoyo Česko s.r.o.
Dubská 1635, 415 01 Teplice
Tel: +420 417 514 011
M³ Solution Center MOŠNOV
Mošnov 314, 742 51 Mošnov
Tel: +420 553 607 000
www.mitutoyo.cz

M³ Solution Center Slovensko
Šoltésovej 346/1
017 01 Považská Bystrica
Tel: +421 948 595 590
www.mitutoyo.sk



Mitutoyo Deutschland GmbH
M³ Solution Center Neuss
Borsigstraße 8-10, 41469 Neuss
Tel: +49(0) 2137-102-0
Fax: +49(0) 2137-86 85
e-mail: info@mitutoyo.de
M³ Solution Center Leonberg
Am Längenbühl 3, 71229 Leonberg
Tel: +49(0) 7152-60 80-0
Fax: +49(0) 7152-60 80-60
e-mail: info-leonberg@mitutoyo.de
M³ Solution Center Eisenach
Neue Wiese 4, 99817 Eisenach
Tel: +49(0) 3691-88 90 9-0
Fax: +49(0) 3691-88 90 9-11
e-mail: info-eisenach@mitutoyo.de
M³ Solution Center Ingolstadt
Marie-Curie-Straße 1A, 85055 Ingolstadt
Tel: +49(0) 841-95 49 20
Fax: +49(0) 841-95 49 2-50
e-mail: info-ingolstadt@mitutoyo.de
M³ Solution Center Hamburg
Tempowerkring 9, 21079 Hamburg
Tel: +49(0) 40-79 18 94-0
Fax: +49(0) 40-79 18 94-50
e-mail: info-hamburg@mitutoyo.de
M³ Solution Center Berlin
Ernst-Lau-Str. 6, 12489 Berlin
Tel: +49(0) 30-67 98 87-0
Fax: +49(0) 30-67 98 87 29
e-mail: info-berlin@mitutoyo.de
www.mitutoyo.de

Mitutoyo CTL Germany GmbH
Von-Gunzert-Straße 17, 78727 Oberndorf am Neckar
Tel: +49(0) 7423-87 76-0
e-mail: info@mitutoyo-ctl.de
www.mitutoyo-ctl.de



Mitutoyo Hungária Kft.
Galamb József utca 9.
2000 Szentendre
e-mail:sales@mitutoyo.hu
www.mitutoyo.hu



Mitutoyo Italiana S.r.l.
C.so Europa 7-20045 - Lainate - Milano
Tel: +39 02.93578.1
e-mail:commerciale@mitutoyo.it
M³ Solution Center - Bologna
Via Stalingrado 67 / 22D 40128 Bologna
Tel: +39 02.93578.215
e-mail: tcbologna@mitutoyo.it
M³ Solution Center - Chieti
Contrada Santa Calcagna - Rocca San Giovanni
66020 - Chieti
Tel: + 39 02.93578.280
e-mail: tcchieti@mitutoyo.it
M³ Solution Center - Padova
Via G. Galilei 21/F - 35035 - Mestrino - Padova
Tel: + 39 02.93578.268
e-mail: tcpadova@mitutoyo.it
www.mitutoyo.it



Mitutoyo MNBD Headquarters
Mitutoyo Nederland BV
M³ Solution Center
Storkstraat 30
3905 KX Veenendaal
Tel: +31 318 53 49 11

Mitutoyo Research Center Europe BV
De Rijn 18
5684 PJ Best
Tel: +31 499 320 200
www.mitutoyo.nl



Mitutoyo Polska Sp.z o.o.
ul. Skrzypowa 1, 54-530 Wrocław, POLAND
Tel: +48 71/354-83-50
Fax: +48 71/354-83-55
e-mail: mitutoyo@mitutoyo.pl
www.mitutoyo.pl



Mitutoyo Romania SRL
Strada Drumul Garii Odai Nr. 1A
Showroom, Parter
075100 OTOPENI- ILFOV
Tel: +40(0) 311012088
Fax: +40(0) 311012089
www.mitutoyo.ro



Mitutoyo Scandinavia AB
Släntvägen 6, 194 61 Upplands Väsby, SWEDEN
Tel: +46(0) 8 594 109 50
M³ Solution Center Alingsås
Ängsvaktaregatan 3A, 441 38 Alingsås, SWEDEN
Tel: +46(0) 8 594 109 50
M³ Solution Center Värnamo
Kalkstensvägen 7, 331 44 Värnamo, SWEDEN
Tel: +46(0) 8 594 109 50
www.mitutoyo.se

M³ Solution Center Pirkkala
Autokeskuksentie 16B, 33960 Pirkkala, FINLAND
Tel: +358 (0) 40 355 8498
www.mitutoyo.fi



Mitutoyo (Schweiz) AG
Steinackerstrasse 35, 8902 Urdorf
Tel: +41(0) 44 736 11 50
www.mitutoyo.ch

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro



Mitutoyo (UK) L.td.
Andover HQ
Joule Road, West Point Business Park, Andover,
Hampshire SP10 3UX
TEL: +44(0)1264 353123
M³ Solution Center Coventry
Unit6, Banner Park, Wickmans Drive, Coventry,
Warwickshire CV4 9XA
TEL: +44(0)2476 426300
M³ Solution Center Halifax
Lowfields Business Park, Navigation Close, Elland,
West Yorkshire HX5 9HB
TEL: +44(0)1422 375566
M³ Solution Center East Kilbride
The Baird Bulding, Rankine Avenue, Scottish Enterprise
Technology Park, East Killbride G75 0QF
TEL: +44(0)1355 581170
www.mitutoyo.co.uk



Mitutoyo France
Paris Nord 2-123 rue de la Belle Etoile, BP 59267 ROISSY
EN FRANCE 95957 ROISSY CDG CEDEX
Tel: +33(0) 1 49 38 35 00
M³ Solution Center LYON
Parc Spirit du Progrès, Bâtiment A
94 Avenue du progrès
69680 Chassieu
Tel: +33(0) 1 49 38 35 70
M³ Solution Center STRASBOURG
Parc de la porte Sud, Rue du pont du peage
67118 Geispolsheim
Tel: +33(0) 1 49 38 35 80
M³ Solution Center CLUSES
290 Av des Lacs
74950 Scionzier
Tel: +33(0) 1 49 38 35 90
M³ Solution Center TOULOUSE
Aeroparc Saint Martin – Cellule B08- ZAC de Saint
Martin du Touch, 12 rue de Caulet, 31300 Toulouse
Tel: +33(0) 1 49 38 42 90
M³ Solution Center RENNES
ZAC Mivoie – LE Vallon
35230 Noyal Châtillon sur Seiche
Tel: +33(0) 1 49 38 42 10
www.mitutoyo.fr

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Numerical Index

Series No	Description	PAGE
	0 - 199	
	Opti-Fix Clamping System	586
011	Joint Magnetic Stand	298
011 / 076	Flexible Joint Arm	300
02	Sensorpak	364
02A	Objective Lenses and QV Calibration Charts	584
02A	QV Index Head	584
02AKT	Quick Vision WLI Objective	584
02AZD	U-Wave Bluetooth	24
02AZE	U-Wave Connection Cables and Units	27
05	Calipers Optional Accessories	197
06ADV	DIGIMATIC USB Cables	21
06AG	CMM Rotary Tables	545
1	Dial Indicator - Back Plunger	259
1	Dial Indicator - Metric	242, 243, 244
1	Dial Indicator - One Revolution	245
101	Indicator accessories	266
102	Outside Micrometer	48
102	Ratchet Thimble Micrometers	47
103	Outside Micrometer	49
103	Outside Micrometers	50
104	Outside Micrometers Interchangeable Anvils	53
107	Dial Gauge Micrometers	95
110	Micrometer Heads	124
111	Spline Micrometers	75
112	Point Micrometers	80
112/342	DIGIMATIC Crimp Height Micrometers	81
113	Limit Micrometers	91
114	V-Anvil Micrometers	86
115	Tube Micrometers	78
117	Micrometers Interchangeable Anvil Type	90
118	Sheet Metal Micrometers	55
119	Sheet Metal Micrometers Graduated Dial	56
122	Blade Micrometers	84
123	Disc Micrometers	70
124	Gear Tooth Micrometers	67
124/324	Interchangeable Ball Anvil/Spindle Tip Sets	68
125	Screw Thread Micrometers	64
126	Interchangeable Thread Measuring Anvil/Spindle Tip Sets	63
126	Screw Thread Micrometers	61
128	Depth Micrometer wo. Interchangeable Rods	199
129	Depth Micrometer w. Interchangeable Rods	200
133	2-Point Inside Micrometer	141, 142
136	Indicator Accessories	268
137	2-Point Inside Micrometer	143
140	2-Point Inside Micrometer	144
141	2-Point Inside Micrometer	145
143	Caliper Jaw Micrometers	58
145	Caliper Jaw Inside Micrometers	140
146	Groove Micrometers	97
147	Can Seam Micrometers	87
147	Hub Micrometers	88
148	Micrometer Heads 13 mm	115, 116, 117
148	Micrometer Heads 5/6,5 mm	110, 111
148	Micrometer Heads 6,5/13 mm	112, 113
148	Micrometer Heads 6,5 mm	114
149	Micrometer Heads 15 mm	118
150	Micrometer Heads 25 mm	119
151	Micrometer Heads 25/50 mm	121
152	Micrometer Heads	122, 123
153	Micrometer Heads non-rotating spindle	125, 126
155	Telescopic Gauge Set	157
156	Micrometer Stands	102
157	Optical Parallels	104
158	Optical Flats	105
160	Vernier Caliper Nib Style Jaws	178
164	DIGIMATIC non-rotating head	106
167	Micrometer Setting Standards	98, 99
167	Setting Standards for Screw Thread Micrometers	100
167	Setting Standards for V-Anvil Micrometers	100
169	Disc Micrometers Non-Rotating Spindle Type	73
170	Calibration Testers	325
170	i-Checker Calibration Testers	326
172	Optional Illumination Units for Measuring Projectors	446
172	PH-3515F Measuring Projector	439
172	Workpiece Fixtures for Measuring Projectors and Micro-scopes	445
174	DRO Extension cables	383
174	KA-200 Counter	383
176	Illumination Units for Measuring Microscope	409
176	Manual MF-A/B Models	401
176	Measuring Microscope MF Series Accessories	404
176	Measuring Microscope MF-U Series Accessories	408
176	MF-U Generation D Manual Models	405
176	Motor-Driven Z-axis MF-J Models	403
176	Motor-Driven Z-axis MF-U-J and MF-U-K Models	407
176	Objectives and Eyepieces for TM	400
176	Reticles for TM	400
176	Ring light for TM	400
176	TM Generation B	398, 399
177	Setting Rings	158
178	Formtracer Avant FTA-S3000 with Software	462, 463
178	Optional Accessories for Surftest, Contracer, Formtracer	505, 506
178	Optional Software USB, Communication Tool, App	497
178	Optional Styli for Surftest and Formtracer SV-C series	498, 499, 500, 501, 502
178	SJ-220 and SJ-310 Accessories	454, 455
178	Surftest Extreme SV-3000CNC	464
178	Surftest Extreme SV-M3000CNC	465
178	Surftest SJ-220	450, 451
178	Surftest SJ-220 and SJ-310 - S-Type	453
178	Surftest SJ-310	452
178	Surftest SJ-410	456, 457
178	Surftest SJ-500 and SJ-500P	458, 460
178	Surftest SV-2100 and SV-2100P	459, 461
182	Glass Scales	323, 324
182	Steel Rules	312
184	Thickness/Feeler Gauges	311
187	Bevel Protractors	308
187	Digimatic Protractors	309
191	CRYSTA-APEX EX 1200R Series	534
191	CRYSTA-APEX V1200, 1600 & 2000 Series	533
191	CRYSTA-APEX V PLUS 500, 700, 900 Series	531
192	Dial Height Gauge	214
192	DIGIMATIC Height Gauge	217, 218
193	Digit Outside Micrometer	51
193 / 136	Indicator accessories	268
196	CRYSTA-KM565	538
197	Micrometer Heads non-rotating spindle	126
	200 - 299	
2	Dial Indicator - Back Plunger	260
2	Dial Indicator - Long Stroke	250, 251
2	Dial Indicator - Metric	246, 247, 248, 249
2	Dial Indicator - One Revolution	253, 254, 255
2	Dial Indicator - Special	252
201	Dial Snap Gauges	96
209	Dial Caliper Gauges	286, 288
209	DIGIMATIC Caliper Gauges	287, 289, 290
211	Optional Accessories for Roundtest	496
211	Optional Styli for Roundtest	494, 495
211	Roundtest Extreme RA-2200 PLUS	490
211	Roundtest Extreme RA-H5200 PLUS	491
211	Roundtest RA-10	480
211	Roundtest RA-120 and RA-120P	482, 483
211	Roundtest RA-1600	484
211	Roundtest RA-2200	486
211	Roundtest RA-H5200	488
211	Roundtracer Extreme RTX-0605-A	493
211	Roundtracer Flash	492
215	Gage Stands with granite base	297

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Series No	Description	PAGE
215	Gauge Stands - Precision Bore Gauges	295
215 / 7	Gauge Stand with Square Hardened Steel Anvil	294
218	Contracer CV-2100	466
218	Formtracer Avant FTA-C3000 and FTA-C4000	468, 469, 470
218	Formtracer Avant FTA-D3000 and FTA-D4000	472
218	Optional Styli and Arms for Contracer, Formtracer and SV-C series	503, 504
21AAA	Indicator accessories	264
21AAA	Indicator accessories - Contact Points	261, 262, 263
21AZB	Indicator accessories - Spindle Lifting	267
21CZA	Lever Indicator accessories - Styli	279
227	ABSOLUTE Digimatic Micrometers QuickMike	46
250	Micrometer Heads with counter	109
264	DIGIMATIC mini-processor DP-1VA	20
264	MUX-10F	32
264	QM-Data 200	441
264	USB Input Tool - Keyboard Interface	29
264	U-WAVE and U-WAVE fit	25
293	ABSOLUTE Digimatic Micrometers QuickMike	45
293	DIGIMATIC Micrometers	43
293	DIGIMATIC Micrometers IP65	38, 40, 41
293	DIGIMATIC Micrometers QuantuMike IP65	37
293	DIGIMATIC Micrometers Wide Range	42
293	High-Accuracy Digital Micrometer	36
	300 - 399	
3	Dial Indicator - Large Dial Face	256
302	PJ-PLUS Measuring Projector	434
303	PJ-H30 Measuring Projector	435
304	PV-5110 Measuring Projector	437
313	3-Wire Measuring Process	101
314	DIGIMATIC V-Anvil Micrometers	85
317	DIGIMATIC Micrometers Interchangeable Anvil Type	89
318	Litematic VL-50	365, 366
323	DIGIMATIC Disc Micrometers	69
324	DIGIMATIC Gear Tooth Micrometers	65
326	DIGIMATIC Screw Thread Micrometers	59
329	DIGIMATIC Depth Micrometer	201
331	DIGIMATIC Spline Micrometers	74
332	OPTOEYE Edge Sensor	442
340	DIGIMATIC Micrometers Interchangeable Anvils	52
342	DIGIMATIC Point Micrometers	79
343	DIGIMATIC Caliper Jaw Micrometers	57
345	DIGIMATIC 2-Point Inside Micrometer	139
350	DIGIMATIC Micrometer Head	107, 108
355	MICROCORD STRATO-Apex 3000G Series	543
355	STRATO-Active Series	535
355	STRATO-APEX Series	536
356	LEGEX Series	537
357	MACH-KO-GA-ME Series	539
357	MiSTAR Series	540
359	QM-Fit	569
359	Quick Scope	572
359	Vision Unit	410
360	CARBstrato / CARBapex Series	544
360	MACH Series	541, 542
361	Quick Image	570
363	Quick Vision ACCEL	578
363	Quick Vision ACTIVE	574
363	Quick Vision APEX / HYPER	575, 576, 577
363	Quick Vision ULTRA	579
363	Quick Vision WLI	581
364	Touch Probe Option	587
364	UMAP	582
365	Quick Vision HYBRID Type 4-CPS	580
368	3-Point Inside Micrometer	132, 133, 134, 135
369	DIGIMATIC Disc Micrometers Non-Rotating Spindle Type	71
369/227	ABSOLUTE Digimatic Disc Micrometers Quickmike	72
375	Objectives Lens ML-Series	419
378	Eyepieces for Measuring Microscopes	409
378	Objectives	420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433
378	Video Microscope Unit VMU Series	413, 414
379	Pulsed Light Source for TAGLENS	417
379	TAGLENS	415
379	TAGPAK-E (Optional Software)	416
379	Video Microscope Unit	417
389	DIGIMATIC Sheet Metal Micrometers	54
395	DIGIMATIC Tube Micrometers	76, 77
	400 - 499	
4	Dial Indicator - Extra Large Dial Face	258
406	DIGIMATIC Micrometers Non Rotating Spindle	44
422	DIGIMATIC Blade Micrometers	82, 83
468	DIGIMATIC 3-Point Inside Micrometer	128, 130, 131
	500 - 599	
500	ABSOLUTE Digimatic Caliper	163
500	ABSOLUTE Digimatic Caliper for long range	165
500	ABSOLUTE Digimatic Caliper IP67	161
500	ABSOLUTE Digimatic Carbide Caliper	164
500	ABSOLUTE Digimatic Carbide Caliper IP67	162
505	Dial Caliper	176
510	Indicating Micrometers	92
511	Bore Gauge	150, 153, 156
511	Bore Gauge Accessories	153
511	Bore Gauge for Blind Holes	155
511	Bore Gauge for Small Holes	148
511	Bore Gauge - Short Length Type	154
511	Bore Gauge - Standard Type	149, 151
511	Bore Gauge with Micrometer Head	152
513	Lever Indicator	270, 272, 273, 274, 275, 276, 277, 278
513	Lever Indicator Overview	269
514	Standard Vernier Height Gauge	213
515	Bore Gauge Checker	157
515	CERA Caliper Checker	320
515	Check Master	318
515	Depth Micro Checker	319
515	Height Master	315, 316
515	Height Master Accessories	317
515	Inside Micro Checker	321
515	Universal Height Master	314
516	Caliper Inspection Sets Metric	344
516	Carbide Wear Gauge Block Sets Metric with ISO Inspection Certificate	335
516	CERA Gauge Block - Micrometer Inspection Sets Metric	345
516	CERA Gauge Blocks Grade 0 with Inspection Certificate	340
516	CERA Gauge Blocks Grade 1 with Inspection Certificate	341
516	CERA Gauge Blocks Grade 2 with Inspection Certificate	342
516	Ceramic Metric Gauge Block Sets Overview	339
516	Ceramic Thin Gauge Blocks with ISO Inspection Certificate	343
516	CERA Wear Gauge Block Sets Metric ISO Standard	344
516	Gauge Block Accessories	349
516	Maintenance Kit for Gauge Block	351
516	Micrometer Gauge Block	336
516	Micrometer Inspection Sets Metric	336
516	Steel Gauge Block - Caliper Inspection Sets Metric	335
516	Steel Gauge Blocks Grade 0 with ISO Inspection Certificate	331
516	Steel Gauge Blocks Grade 1 with ISO Inspection Certificate	332
516	Steel Gauge Blocks Grade 2 with ISO Inspection Certificate	333
516	Steel Gauge blocks - Grade K with ISO JCSS Certificate	330
516	Steel Long Gauge Blocks With ISO Inspection Certificate	334
516	Steel Metric Gauge Block Sets Overview	329

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Series No	Description	PAGE
516	Steel Thin Gauge Blocks with ISO Inspection Certificate	334
516	Step master	322
516	With ISO Inspection Certificate	343
518	Digital Height Gauge QM-Height	220
518	Linear Height Gauge LH-600 F/FG	222
518	Optional Accessories for QM-Height	221
518	Optional Accessories Linear Height	224, 225
518	Optional Accessories QM-Height and Linear Height	226
521	Calibration Testers	325
523	Snap Gauges/Micrometers	93, 94
525	Formtracer Avant FTA-D3000 and FTA-D4000	471, 473
525	Formtracer Extreme CS-5000CNC and CS-H5000CNC	478
525	Formtracer FTA-H3000	474
525	Formtracer SV-C4500CNC	475
525	Formtracer SV-C4500CNC Hybrid	477
526	Bore Gauge for Extra Small Holes	146, 147
527	Depth Gauge Hook End Type	210
527	Vernier Depth Gauges	209
528	Knife Edge Straight Edge	312
530	Vernier Caliper	173
530	Vernier Caliper carbide-tipped	174
531	Vernier Caliper with thumb clamp	175
532	Vernier Caliper with fine adjustment	175
533	Vernier Caliper Nib Style and Standard Jaws	177
534	Vernier Caliper with Long jaws	179
536	Carbide Scribing Caliper	182
536	Hook Type Vernier Caliper	196
536	Inside Caliper	194
536	Knife-Edge Calipers	192
536	Swivel Vernier Caliper	186
536	Tube Thickness Caliper	195
536	Vernier Blade Type Caliper	189
536	Vernier Neck Caliper	191
536	Vernier Offset Caliper	184
536	Vernier Offset Centreline Caliper	186
536	Vernier Point Caliper	188
539	Linear Scale AT103	377, 378, 379
539	Linear Scale AT113	380, 381
539	Linear Scale AT211	389
539	Linear Scale AT715	382
539	Overview NC Linear Scale	384
542	EJ-Counter and Interfaces	360
542	Laser Hologauge	358, 359
542	Linear Gauge Applications	353
542	Linear Gauge EC-Counter	363
542	Linear Gauge EH-Counter	362
542	Linear Gauge LG100 Series	354
542	Linear Gauge LG200 Series	355
543	DIGIMATIC Indicator ID-B	238
543	DIGIMATIC Indicator ID-C	230, 232, 233, 235, 236
543	DIGIMATIC Indicator ID-F	240
543	DIGIMATIC Indicator ID-H	239
543	DIGIMATIC Indicator ID-N	237
543	DIGIMATIC Indicator ID-SX	228
544	Laser Scan Micrometer Interface Unit	373
544	Laser Scan Micrometer LSM-02-A	370
544	Laser Scan Micrometer LSM-30-A	371
544	Laser Scan Micrometer LSM-CU-A	372
544	Laser Scan Micrometer Optional Accessories	374
546	Dial Tension Gauges	291
547	ABSOLUTE Digimatic Indicator Depth Gauge	202
547	ABSOLUTE Digimatic Quick Thickness Gauge	281, 282, 283
550	ABSOLUTE Digimatic Caliper with Nib Style Jaws	166
551	ABSOLUTE Digimatic Caliper with Nib Style and Standard Jaws	167
552	ABSOLUTE Digimatic Carbon Fibre Caliper IP66	168
552	ABSOLUTE Digimatic Carbon Fibre Caliper IP66 with Ceramic jaws	169
552	ABSOLUTE Digimatic Carbon Fibre Caliper IP66 with Extra long jaws	170
552	ABSOLUTE Digimatic Carbon Fibre Caliper IP66 with Interchangeable jaws	171, 172
553	Surface Measure	367
554	Interferometer Units	418
565	Gauge Block Comparator GBCS-250	327
565	Gauge Block Comparators GBCD-100A	327
568	DIGIMATIC Inside Micrometer 3-Point BOREMATIC	137, 138
568	DIGIMATIC Inside Micromter 3-Point BOREMATIC	136
570	ABSOLUTE Digimatic Height Gauge	215, 216
571	ABSOLUTE Digimatic Depth Gauge	206, 207
571	ABSOLUTE Digimatic Depth Gauge Hook End Type	208
571	Tyre Tread Depth Gauge	211
572	Horizontal Linear Scale	390, 391, 392, 393
572	Vertical Linear Scale	394, 395, 396
573	ABSOLUTE Digimatic Back-Jaw Centreline Caliper	187
573	ABSOLUTE Digimatic Blade Type Caliper	189
573	ABSOLUTE Digimatic Caliper for tolerance measurement	181
573	ABSOLUTE Digimatic Caliper with constant measuring force	180
573	ABSOLUTE DIGIMATIC Inside Caliper	193
573	ABSOLUTE DIGIMATIC Neck Caliper	190
573	ABSOLUTE DIGIMATIC Offset Caliper	183
573	ABSOLUTE DIGIMATIC Offset Centerline Caliper	185
573	ABSOLUTE DIGIMATIC Point Caliper	188
573	Carbide Scribing Caliper	182
573	Knife-Edge Calipers	192
573	Tube Thickness Caliper	195
575	DIGIMATIC Indicator ID-U	229
575	Linear Gauge LGS Series	356
579	Linear Scale ABS AT1100	388, 389
579	Linear Scale ABS ST1300	388
579	Linear Scale ST36	386
579	Linear Scale ST46-EZA	387
	600 - 699	
6	USB-ITPAK	18
601	Ceraston	351
611	Gauge Block with CTE	347
611	Steel Gauge Block - Individual	337, 338
613	CERA Gauge Block - Individual	346
617	ZERO CERA Block	348
619	Gauge Block Accessories	350
63	DIGIMATIC Extension Cables	23
63	DMX-0-1 / DMX-3-2	31, 33
63	DMX-1	30
63	DMX-16	33
63	DMX-2	30, 31
63	DMX-3	29
63	DMX-8/2	32
63	Timerbox	34
63/939	Switch box	34
63AAA	M2 Software for Measuring Microscopes and Projectors	447
63AAA	M3 Soft-and Hardware for MF-A/B Microscope	411
63AAA	Microscope Cameras, Accessories and Sets	412
64AAB	MeasurLink 10	15, 16, 17
	700 - 799	
7	Dial Indicator - Depth Gauge	203, 205
7	Head Micro jack	109
7	Indicator Accessories - Contact Points	264
7	Joint Magnetic Stand	299
7	Magnetic Stand	301, 302
7	Quick Thickness Gauge	285
7 / 011	Magnetic Base	300
7/519	Gauge Stand with circular hardened steel anvil	293
700	QUICK MINI Thickness Gauge	284
	800 - 899	
810	Hardness HH-V400	526
810	Hardness HR-530	510
810	Hardness Testing Software AVPAK-20	518, 519

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Series No	Description	PAGE
810	HR-600 Series	512
810	HR Rockwell 200/300/400	508, 509
810	Micro-Vickers Hardness HM-210/220	517, 521, 522, 523, 524, 525
810	Vickers Hardness HV-110/120	514, 515, 516
811	Durometers HARDMATIC HH-300	527, 528, 529
	900 - 999	
900	Height Gauges Accessories	219
900	Indicator accessories	265
900	Optional Accessories for Depth Caliper	211
901	Granite Surface Plates	307
901	Lever Indicator accessories	280
902	Cast Iron Surface Plates	306
903	Air Drive Unit	357
905	DIGIMATIC Data Cables	22
912	Gauge Stand	296
913	Gauge Stand Economy Version	295
916	90° Steel Square	310
930	Precision Sine	305
930	Precision vice	303, 304
932	Consumables for Measuring Projectors	446
950	Digital Protractor	310
972	Measuring Angle 90°	306
985	Micrometer colour ratchets/speeders	103
999	Overlay Chart Set	443, 444
	A - Z	
AT1300	Linear Scale ABS AT1300	385
DRO Linear Scales	DRO Linear Scales Selection Guide	376
eco-fix	CMM Fixtures	561, 563, 564, 565
Enclosure	Enclosure	560
K544	Ball attachment	104
K55	Opti-Fix Clamping System	585
K65	CMM Fixtures	562, 566
LOG	CMM Software - GEARPAK-Express	559
LOG	CMM Software - MAFIS Express	558
LOG	CMM Software - MCOSMOS	555
LOG	CMM Software - MiCAT Planner	556
LOG	CMM Software - MSURF	557
LOG	CMM Software - MSURF-G	557
Probe	CMM Probes	546, 547, 548, 549, 550, 551
Racks	CMM Probes	552
SM-AL	SmartMeasure-AL	567
SOFT	QVPAK Vision Software	583
SOFT	Software for Quick Image	571
SOFT	Software Quick Scope QSPAK	573
STYLET	CMM Styli	553
STYLET	Styli Kits	554

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Alphabetical Index

Description	Series No	PAGE
2		
2-Point Inside Micrometer	133	141, 142
2-Point Inside Micrometer	137	143
2-Point Inside Micrometer	140	144
2-Point Inside Micrometer	141	145
3		
3-Point Inside Micrometer	368	132, 133, 134, 135
3-Wire Measuring Process	313	101
9		
90° Steel Square	916	310
A		
ABSOLUTE Digimatic Back-Jaw Centreline Caliper	573	187
ABSOLUTE Digimatic Blade Type Caliper	573	189
ABSOLUTE Digimatic Caliper	500	163
ABSOLUTE Digimatic Caliper for long range	500	165
ABSOLUTE Digimatic Caliper for tolerance measurement	573	181
ABSOLUTE Digimatic Caliper IP67	500	161
ABSOLUTE Digimatic Caliper with constant measuring force	573	180
ABSOLUTE Digimatic Caliper with Nib Style and Standard Jaws	551	167
ABSOLUTE Digimatic Caliper with Nib Style Jaws	550	166
ABSOLUTE Digimatic Carbide Caliper	500	164
ABSOLUTE Digimatic Carbide Caliper IP67	500	162
ABSOLUTE Digimatic Carbon Fibre Caliper IP66	552	168
ABSOLUTE Digimatic Carbon Fibre Caliper IP66 with Ceramic jaws	552	169
ABSOLUTE Digimatic Carbon Fibre Caliper IP66 with Extra long jaws	552	170
ABSOLUTE Digimatic Carbon Fibre Caliper IP66 with Interchangeable jaws	552	171, 172
ABSOLUTE Digimatic Depth Gauge	571	206, 207
ABSOLUTE Digimatic Depth Gauge Hook End Type	571	208
ABSOLUTE Digimatic Disc Micrometers Quickmike	369/227	72
ABSOLUTE Digimatic Height Gauge	570	215, 216
ABSOLUTE Digimatic Indicator Depth Gauge	547	202
ABSOLUTE DIGIMATIC Inside Caliper	573	193
ABSOLUTE Digimatic Micrometers QuickMike	227	46
ABSOLUTE Digimatic Micrometers QuickMike	293	45
ABSOLUTE DIGIMATIC Neck Caliper	573	190
ABSOLUTE DIGIMATIC Offset Caliper	573	183
ABSOLUTE DIGIMATIC Offset Centerline Caliper	573	185
ABSOLUTE DIGIMATIC Point Caliper	573	188
ABSOLUTE Digimatic Quick Thickness Gauge	547	281, 282, 283
Air Drive Unit	903	357
B		
Ball attachment	K544	104
Bevel Protractors	187	308
Blade Micrometers	122	84
Bore Gauge	511	150, 153, 156
Bore Gauge Accessories	511	153
Bore Gauge Checker	515	157
Bore Gauge for Blind Holes	511	155
Bore Gauge for Extra Small Holes	526	146, 147
Bore Gauge for Small Holes	511	148
Bore Gauge - Short Length Type	511	154
Bore Gauge - Standard Type	511	149, 151
Bore Gauge with Micrometer Head	511	152
C		
Calibration Testers	170	325
Calibration Testers	521	325
Caliper Inspection Sets Metric	516	344
Caliper Jaw Inside Micrometers	145	140
Caliper Jaw Micrometers	143	58
Calipers Optional Accessories	05	197
Can Seam Micrometers	147	87
Carbide Scribing Caliper	536	182
Carbide Scribing Caliper	573	182
Carbide Wear Gauge Block Sets Metric with ISO Inspection Certificate	516	335
CARBstrato / CARBapex Series	360	544
Cast Iron Surface Plates	902	306
CERA Caliper Checker	515	320
CERA Gauge Block - Individual	613	346
CERA Gauge Block - Micrometer Inspection Sets Metric	516	345
CERA Gauge Blocks Grade 0 with Inspection Certificate	516	340
CERA Gauge Blocks Grade 1 with Inspection Certificate	516	341
CERA Gauge Blocks Grade 2 with Inspection Certificate	516	342
Ceramic Metric Gauge Block Sets Overview	516	339
Ceramic Thin Gauge Blocks with ISO Inspection Certificate	516	343
Ceraston	601	351
CERA Wear Gauge Block Sets Metric ISO Standard	516	344
Check Master	515	318
CMM Fixtures	eco-fix	561, 563, 564, 565
CMM Fixtures	K65	562, 566
CMM Probes	Probe	546, 547, 548, 549, 550, 551
CMM Probes	Racks	552
CMM Rotary Tables	06AG	545
CMM Software - GEARPAK-Express	LOG	559
CMM Software - MAFIS Express	LOG	558
CMM Software - MCOSMOS	LOG	555
CMM Software - MiCAT Planner	LOG	556
CMM Software - MSURF	LOG	557
CMM Software - MSURF-G	LOG	557
CMM Styli	STYLET	553
Consumables for Measuring Projectors	932	446
Contracer CV-2100	218	466
CRYSTA-APEX EX 1200R Series	191	534
CRYSTA-APEX V1200, 1600 & 2000 Series	191	533
CRYSTA-APEX V PLUS 500, 700, 900 Series	191	531
CRYSTA-KM565	196	538
D		
Depth Gauge Hook End Type	527	210
Depth Micro Checker	515	319
Depth Micrometer w. Interchangeable Rods	129	200
Depth Micrometer wo. Interchangeable Rods	128	199
Dial Caliper	505	176
Dial Caliper Gauges	209	286, 288
Dial Gauge Micrometers	107	95
Dial Height Gauge	192	214
Dial Indicator - Back Plunger	1	259
Dial Indicator - Back Plunger	2	260
Dial Indicator - Depth Gauge	7	203, 205
Dial Indicator - Extra Large Dial Face	4	258
Dial Indicator - Large Dial Face	3	256
Dial Indicator - Long Stroke	2	250, 251
Dial Indicator - Metric	1	242, 243, 244
Dial Indicator - Metric	2	246, 247, 248, 249
Dial Indicator - One Revolution	1	245
Dial Indicator - One Revolution	2	253, 254, 255
Dial Indicator - Special	2	252
Dial Snap Gauges	201	96
Dial Tension Gauges	546	291
DIGIMATIC 2-Point Inside Micrometer	345	139
DIGIMATIC 3-Point Inside Micrometer	468	128, 130, 131
DIGIMATIC Blade Micrometers	422	82, 83
DIGIMATIC Caliper Gauges	209	287, 289, 290
DIGIMATIC Caliper Jaw Micrometers	343	57
DIGIMATIC Crimp Height Micrometers	112/342	81
DIGIMATIC Data Cables	905	22
DIGIMATIC Depth Micrometer	329	201
DIGIMATIC Disc Micrometers	323	69
DIGIMATIC Disc Micrometers Non-Rotating Spindle Type	369	71

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Description	Series No	PAGE
DIGIMATIC Extension Cables	63	23
DIGIMATIC Gear Tooth Micrometers	324	65
DIGIMATIC Height Gauge	192	217, 218
DIGIMATIC Indicator ID-B	543	238
DIGIMATIC Indicator ID-C	543	230, 232, 233, 235, 236
DIGIMATIC Indicator ID-F	543	240
DIGIMATIC Indicator ID-H	543	239
DIGIMATIC Indicator ID-N	543	237
DIGIMATIC Indicator ID-SX	543	228
DIGIMATIC Indicator ID-U	575	229
DIGIMATIC Inside Micrometer 3-Point BOREMATIC	568	137, 138
DIGIMATIC Inside Micromter 3-Point BOREMATIC	568	136
DIGIMATIC Micrometer Head	350	107, 108
DIGIMATIC Micrometers	293	43
DIGIMATIC Micrometers Interchangeable Anvils	340	52
DIGIMATIC Micrometers Interchangeable Anvil Type	317	89
DIGIMATIC Micrometers IP65	293	38, 40, 41
DIGIMATIC Micrometers Non Rotating Spindle	406	44
DIGIMATIC Micrometers QuantuMike IP65	293	37
DIGIMATIC Micrometers Wide Range	293	42
DIGIMATIC mini-processor DP-1VA	264	20
DIGIMATIC non-rotating head	164	106
DIGIMATIC Point Micrometers	342	79
Digimatic Protractors	187	309
DIGIMATIC Screw Thread Micrometers	326	59
DIGIMATIC Sheet Metal Micrometers	389	54
DIGIMATIC Spline Micrometers	331	74
DIGIMATIC Tube Micrometers	395	76, 77
DIGIMATIC USB Cables	06ADV	21
DIGIMATIC V-Anvil Micrometers	314	85
Digital Height Gauge QM-Height	518	220
Digital Protractor	950	310
Digit Outside Micrometer	193	51
Disc Micrometers	123	70
Disc Micrometers Non-Rotating Spindle Type	169	73
DMX-0-1 / DMX-3-2	63	31, 33
DMX-1	63	30
DMX-16	63	33
DMX-2	63	30, 31
DMX-3	63	29
DMX-8/2	63	32
DRO Extension cables	174	383
DRO Linear Scales Selection Guide	DRO Linear Scales	376
Durometers HARDMATIC HH-300	811	527, 528, 529
E		
EJ-Counter and Interfaces	542	360
Enclosure	Enclosure	560
Eyepieces for Measuring Microscopes	378	409
F		
Flexible Joint Arm	011 / 076	300
Formtracer Avant FTA-C3000 and FTA-C4000	218	468, 469, 470
Formtracer Avant FTA-D3000 and FTA-D4000	218	472
Formtracer Avant FTA-D3000 and FTA-D4000	525	471, 473
Formtracer Avant FTA-S3000 with Software	178	462, 463
Formtracer Extreme CS-5000CNC and CS-H5000CNC	525	478
Formtracer FTA-H3000	525	474
Formtracer SV-C4500CNC	525	475
Formtracer SV-C4500CNC Hybrid	525	477
G		
Gage Stands with granite base	215	297
Gauge Block Accessories	516	349
Gauge Block Accessories	619	350
Gauge Block Comparator GBCS-250	565	327
Gauge Block Comparators GBCD-100A	565	327
Gauge Block with CTE	611	347
Gauge Stand	912	296
Gauge Stand Economy Version	913	295
Gauge Stands - Precision Bore Gauges	215	295
Gauge Stand with circular hardened steel anvil	7/519	293
Gauge Stand with Square Hardened Steel Anvil	215 / 7	294
Gear Tooth Micrometers	124	67
Glass Scales	182	323, 324
Granite Surface Plates	901	307
Groove Micrometers	146	97
H		
Hardness HH-V400	810	526
Hardness HR-530	810	510
Hardness Testing Software AVPAK-20	810	518, 519
Head Micro jack	7	109
Height Gauges Accessories	900	219
Height Master	515	315, 316
Height Master Accessories	515	317
High-Accuracy Digital Micrometer	293	36
Hook Type Vernier Caliper	536	196
Horizontal Linear Scale	572	390, 391, 392, 393
HR-600 Series	810	512
HR Rockwell 200/300/400	810	508, 509
Hub Micrometers	147	88
i		
i-Checker Calibration Testers	170	326
I		
Illumination Units for Measuring Microscope	176	409
Indicating Micrometers	510	92
Indicator accessories	101	266
Indicator accessories	193 / 136	268
Indicator accessories	21AAA	264
Indicator accessories	900	265
Indicator Accessories	136	268
Indicator accessories - Contact Points	21AAA	261, 262, 263
Indicator Accessories - Contact Points	7	264
Indicator accessories - Spindle Lifting	21AZB	267
Inside Caliper	536	194
Inside Micro Checker	515	321
Interchangeable Ball Anvil/Spindle Tip Sets	124/324	68
Interchangeable Thread Measuring Anvil/Spindle Tip Sets	126	63
Interferometer Units	554	418
J		
Joint Magnetic Stand	011	298
Joint Magnetic Stand	7	299
K		
KA-200 Counter	174	383
Knife-Edge Calipers	536	192
Knife-Edge Calipers	573	192
Knife Edge Straight Edge	528	312
L		
Laser Hologauge	542	358, 359
Laser Scan Micrometer Interface Unit	544	373
Laser Scan Micrometer LSM-02-A	544	370
Laser Scan Micrometer LSM-30-A	544	371
Laser Scan Micrometer LSM-CU-A	544	372
Laser Scan Micrometer Optional Accessories	544	374
LEGEX Series	356	537
Lever Indicator	513	270, 272, 273, 274, 275, 276, 277, 278
Lever Indicator accessories	901	280
Lever Indicator accessories - Styli	21CZA	279
Lever Indicator Overview	513	269
Limit Micrometers	113	91
Linear Gauge Applications	542	353
Linear Gauge EC-Counter	542	363
Linear Gauge EH-Counter	542	362
Linear Gauge LG100 Series	542	354
Linear Gauge LG200 Series	542	355

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Description	Series No	PAGE
Linear Gauge LGS Series	575	356
Linear Height Gauge LH-600 F/FG	518	222
Linear Scale ABS AT1100	579	388, 389
Linear Scale ABS AT1300	AT1300	385
Linear Scale ABS ST1300	579	388
Linear Scale AT103	539	377, 378, 379
Linear Scale AT113	539	380, 381
Linear Scale AT211	539	389
Linear Scale AT715	539	382
Linear Scale ST36	579	386
Linear Scale ST46-EZA	579	387
Litematic VL-50	318	365, 366
M		
M2 Software for Measuring Microscopes and Projectors	63AAA	447
M3 Soft-and Hardware for MF-A/B Microscope	63AAA	411
MACH-KO-GA-ME Series	357	539
MACH Series	360	541, 542
Magnetic Base	7 / 011	300
Magnetic Stand	7	301, 302
Maintenance Kit for Gauge Block	516	351
Manual MF-A/B Models	176	401
Measuring Angle 90°	972	306
Measuring Microscope MF Series Accessories	176	404
Measuring Microscope MF-U Series Accessories	176	408
MeasurLink 10	64AAB	15, 16, 17
MF-U Generation D Manual Models	176	405
MICROCORD STRATO-Apex 3000G Series	355	543
Micrometer colour ratchets/speeders	985	103
Micrometer Gauge Block	516	336
Micrometer Heads	110	124
Micrometer Heads	152	122, 123
Micrometer Heads 13 mm	148	115, 116, 117
Micrometer Heads 15 mm	149	118
Micrometer Heads 25/50 mm	151	121
Micrometer Heads 25 mm	150	119
Micrometer Heads 5/6,5 mm	148	110, 111
Micrometer Heads 6,5/13 mm	148	112, 113
Micrometer Heads 6,5 mm	148	114
Micrometer Heads non-rotating spindle	153	125, 126
Micrometer Heads non-rotating spindle	197	126
Micrometer Heads with counter	250	109
Micrometer Inspection Sets Metric	516	336
Micrometer Setting Standards	167	98, 99
Micrometers Interchangeable Anvil Type	117	90
Micrometer Stands	156	102
Microscope Cameras, Accessories and Sets	63AAA	412
Micro-Vickers Hardness HM-210/220	810	517, 521, 522, 523, 524, 525
MiSTAR Series	357	540
Motor-Driven Z-axis MF-J Models	176	403
Motor-Driven Z-axis MF-U-J and MF-U-K Models	176	407
MUX-10F	264	32
O		
Objective Lenses and QV Calibration Charts	02A	584
Objectives	378	420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433
Objectives and Eyepieces for TM	176	400
Objectives Lens ML-Series	375	419
Optical Flats	158	105
Optical Parallels	157	104
Opti-Fix Clamping System		586
Opti-Fix Clamping System	K55	585
Optional Accessories for Depth Caliper	900	211
Optional Accessories for QM-Height	518	221
Optional Accessories for Roundtest	211	496
Optional Accessories for Surftest, Contracer, Formtracer	178	505, 506
Optional Accessories Linear Height	518	224, 225

Description	Series No	PAGE
Optional Accessories QM-Height and Linear Height	518	226
Optional Illumination Units for Measuring Projectors	172	446
Optional Software USB, Communication Tool, App	178	497
Optional Styli and Arms for Contracer, Formtracer and SV-C series	218	503, 504
Optional Styli for Roundtest	211	494, 495
Optional Styli for Surftest and Formtracer SV-C series	178	498, 499, 500, 501, 502
OPTOEYE Edge Sensor	332	442
Outside Micrometer	102	48
Outside Micrometer	103	49
Outside Micrometers	103	50
Outside Micrometers Interchangeable Anvils	104	53
Overlay Chart Set	999	443, 444
Overview NC Linear Scale	539	384
P		
PH-3515F Measuring Projector	172	439
PJ-H30 Measuring Projector	303	435
PJ-PLUS Measuring Projector	302	434
Point Micrometers	112	80
Precision Sine	930	305
Precision vice	930	303, 304
Pulsed Light Source for TAGLENS	379	417
PV-5110 Measuring Projector	304	437
Q		
QM-Data 200	264	441
QM-Fit	359	569
Quick Image	361	570
QUICK MINI Thickness Gauge	700	284
Quick Scope	359	572
Quick Thickness Gauge	7	285
Quick Vision ACCEL	363	578
Quick Vision ACTIVE	363	574
Quick Vision APEX / HYPER	363	575, 576, 577
Quick Vision HYBRID Type 4-CPS	365	580
Quick Vision ULTRA	363	579
Quick Vision WLI	363	581
Quick Vision WLI Objective	02AKT	584
QV Index Head	02A	584
QVPAK Vision Software	SOFT	583
R		
Ratchet Thimble Micrometers	102	47
Reticles for TM	176	400
Ring light for TM	176	400
Roundtest Extreme RA-2200 PLUS	211	490
Roundtest Extreme RA-H5200 PLUS	211	491
Roundtest RA-10	211	480
Roundtest RA-120 and RA-120P	211	482, 483
Roundtest RA-1600	211	484
Roundtest RA-2200	211	486
Roundtest RA-H5200	211	488
Roundtracer Extreme RTX-0605-A	211	493
Roundtracer Flash	211	492
S		
Screw Thread Micrometers	125	64
Screw Thread Micrometers	126	61
Sensorpak	02	364
Setting Rings	177	158
Setting Standards for Screw Thread Micrometers	167	100
Setting Standards for V-Anvil Micrometers	167	100
Sheet Metal Micrometers	118	55
Sheet Metal Micrometers Graduated Dial	119	56
SJ-220 and SJ-310 Accessories	178	454, 455
SmartMeasure-AL	SM-AL	567
Snap Gauges/Micrometers	523	93, 94
Software for Quick Image	SOFT	571
Software Quick Scope QSPAK	SOFT	573
Spline Micrometers	111	75
Standard Vernier Height Gauge	514	213

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro


Description	Series No	PAGE
Steel Gauge Block - Caliper Inspection Sets Metric	516	335
Steel Gauge Block - Individual	611	337, 338
Steel Gauge Blocks Grade 0 with ISO Inspection Certificate	516	331
Steel Gauge Blocks Grade 1 with ISO Inspection Certificate	516	332
Steel Gauge Blocks Grade 2 with ISO Inspection Certificate	516	333
Steel Gauge blocks - Grade K with ISO JCSS Certificate	516	330
Steel Long Gauge Blocks With ISO Inspection Certificate	516	334
Steel Metric Gauge Block Sets Overview	516	329
Steel Rules	182	312
Steel Thin Gauge Blocks with ISO Inspection Certificate	516	334
Step master	516	322
STRATO-Active Series	355	535
STRATO-APEX Series	355	536
Styli Kits	STYLET	554
Surface Measure	553	367
Surftest Extreme SV-3000CNC	178	464
Surftest Extreme SV-M3000CNC	178	465
Surftest SJ-220	178	450, 451
Surftest SJ-220 and SJ-310 - S-Type	178	453
Surftest SJ-310	178	452
Surftest SJ-410	178	456, 457
Surftest SJ-500 and SJ-500P	178	458, 460
Surftest SV-2100 and SV-2100P	178	459, 461
Switch box	63/939	34
Swivel Vernier Caliper	536	186
T		
TAGLENS	379	415
TAGPAK-E (Optional Software)	379	416
Telescopic Gauge Set	155	157
Thickness/Feeler Gauges	184	311
Timerbox	63	34
TM Generation B	176	398, 399
Touch Probe Option	364	587
Tube Micrometers	115	78
Tube Thickness Caliper	536	195
Tube Thickness Caliper	573	195
Tyre Tread Depth Gauge	571	211
U		
UMAP	364	582
Universal Height Master	515	314
USB Input Tool - Keyboard Interface	264	29
USB-ITPAK	6	18
U-WAVE and U-WAVE fit	264	25
U-Wave Bluetooth	02AZD	24
U-Wave Connection Cables and Units	02AZE	27
V		
V-Anvil Micrometers	114	86
Vernier Blade Type Caliper	536	189
Vernier Caliper	530	173
Vernier Caliper carbide-tipped	530	174
Vernier Caliper Nib Style and Standard Jaws	533	177
Vernier Caliper Nib Style Jaws	160	178
Vernier Caliper with fine adjustment	532	175
Vernier Caliper with Long jaws	534	179
Vernier Caliper with thumb clamp	531	175
Vernier Depth Gauges	527	209
Vernier Neck Caliper	536	191
Vernier Offset Caliper	536	184
Vernier Offset Centreline Caliper	536	186
Vernier Point Caliper	536	188
Vertical Linear Scale	572	394, 395, 396
Vickers Hardness HV-110/120	810	514, 515, 516
Video Microscope Unit	379	417
Video Microscope Unit VMU Series	378	413, 414
Vision Unit	359	410
W		
With ISO Inspection Certificate	516	343
Workpiece Fixtures for Measuring Projectors and Microscopes	172	445
Z		
ZERO CERA Block	617	348

M & B Calibr, s r.o. | vanzari@mbcalibr.ro | (+4) 0775 291 134 | www.mbcalibr.ro

Mitutoyo partners with manufacturers in countless industries to solve their unique metrology challenges and ensure accurate, reliable production. See how our metrology solutions bring more precise measurements to your industry.


Mitutoyo

For any Industry



Aerospace

Turbine Blade, Bearings, Sheet Metal Parts
and Aluminium Parts Measurement



Automotive

Electric Motor Housing, Hairpins, Battery Foil, Shafts & Bearings,
Gears, Car Body, Gaskets, Wire




Energy

Wind Turbines, Rotor Hubs, Blades, Towers, Solar Cells, Interconnectors,
Solar Glass, Dams, Inverters, Generators, Batteries, Penstocks



Medical

Orthopedic Implants, Dental Implants,
Syringe Needles, Surgical blades



Electronics

Semiconductors / Wafers, Cables / Connectors,
PCB / Soldering Pins / Wire Bonding



General Manufacturing

Cast Molding, Injection Molding, Milling, Turning, Grinding,
3D Printing, EDM, PCB Manufacturing



Original Equipment Manufacturers (OEM)

Optical Measurement Systems, Linear Encoders and DRO Systems, High-Accuracy,
Non-Contact Measurement, Non-Contact Line-Laser Sensors, Linear Gauges,
Ultra-High-SpeedVarifocal Lens, High-Precision Measuring, Feeding & Positioning Devices

© Mitutoyo 04/2026

PRE 1245

Mitutoyo Europe GmbH
Borsigstrasse 8 -10, 41469 Neuss, GERMANY
TEL: +49 (0) 2137-102-0 FAX: +49 (0) 2137-102-351
www.mitutoyo.eu

Mitutoyo (UK) Ltd.
Joule Road, West Point Business Park, Andover,
Hampshire SP10 3UX , UNITED KINGDOM
TEL: +44 (0) 1264 353 123 FAX: +44 (0) 1264 354 883
www.mitutoyo.co.uk

Mitutoyo Austria GmbH
Salzburger Straße 260/2 und 260/3,
A-4600 Wels, AUSTRIA
TEL: +43 7242 219 998
www.mitutoyo.at

Mitutoyo Deutschland GmbH
Borsigstrasse 8-10, 41469 Neuss, GERMANY
TEL: +49 (0) 2137 102-0 FAX: +49 (0) 2137-86 85
www.mitutoyo.de

Mitutoyo Hungária Kft.
Galamb József utca 9.
2000 Szentendre, HUNGARY
TEL: +36 (0) 1 21 41 447 FAX: +36 (0) 1 21 41 448
www.mitutoyo.hu

Mitutoyo Scandinavia AB
Släntvägen 6, 194 61 Upplands Väsby, SWEDEN
TEL: +46 (0) 8 594 109 50 FAX: +46 (0) 8 590 924 10
www.mitutoyo.se

Mitutoyo Belgium NV
Schaarbeekstraat 20A bus 1,
9120 Beveren-Kruibeke-Zwijndrecht
TEL: +32 (0) 3 254 04 44
www.mitutoyo.be

Mitutoyo Italiana S.r.l.
Corso Europa, 7
20045 Lainate (MI), ITALY
TEL: +39 (0) 2 935 781 FAX: +39 (0) 2 93 73 290
www.mitutoyo.it

M^3 Solution Center Pirkkala
Autokeskuksentie 16B, 33960 Pirkkala, FINLAND
Tel: +358 (0) 40 355 8498
www.mitutoyo.fi

Mitutoyo Česko s.r.o.
Dubská 1635, 415 01 Teplice, CZECH REPUBLIC
TEL: +420 417 514 011 FAX: +420 417 579 867
www.mitutoyo.cz

Mitutoyo Nederland B.V.
Storkstraat 30, 3905 KX Veenendaal
THE NETHERLANDS
TEL: +31 (0) 318 53 49 11
www.mitutoyo.nl

Mitutoyo (Schweiz) AG
Steinackerstrasse 35, 8902 Urdorf, SWITZERLAND
TEL: +41 (0) 44 736 11 50 FAX: +41 (0) 44 736 11 51
www.mitutoyo.ch

Mitutoyo France
Paris Nord 2
123 rue de la Belle Etoile, BP 59267 ROISSY EN FRANCE
95957 ROISSY CDG CEDEX, FRANCE
TEL: +33 (1) 49 38 35 00 FAX: +33 (1) 48 63 27 70
www.mitutoyo.fr

Mitutoyo Romania S.R.L.
1A, Drumul Garii Odai Street, Ground Floor
075100 OTOPENI-ILFOV, ROMANIA
TEL: +(40) 311 012 088 FAX: +(40) 311 012 089
www.mitutoyo.ro

Mitutoyo Polska Sp. z o.o.
ul. Skrzypowa 1, 54-530 Wrocław, Poland
TEL: +48 (0) 71 354 83 50 FAX: +48 (0) 71 354 83 55
www.mitutoyo.pl